


COM / COMH
COMMERCIAL SERIES / PTFE LINERS AVAILABLE

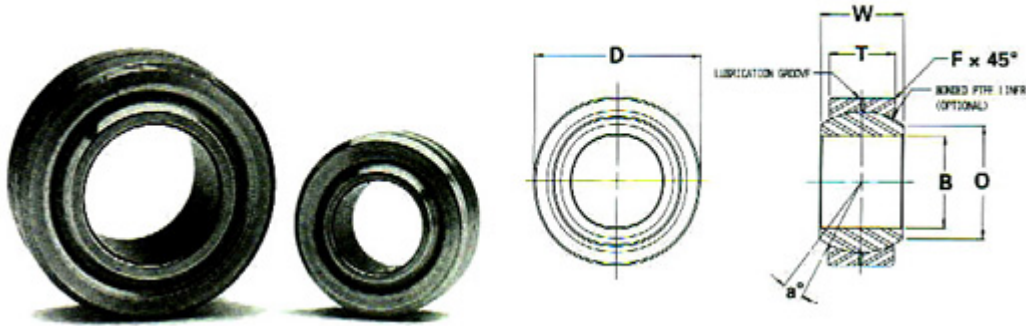

BEARING PART NO.	B DIA.	D DIA.	W WIDTH	T WIDTH	O DIA.	BALL DIA.	F CHAMBER	α MIS. ANGLE	ULT. STATIC RADIAL LOAD (lbs)	APPROX. WEIGHT (lbs)
	+0.010 -0.010	+0.0000 -0.0007	+0.005 -0.005	+0.005 -0.005	REF.	REF.	REF.	REF.		
COM3	.1900	.5625	.281	.218	.293	.406	.015	11	3,250	.014
COM4	.2500	.6562	.343	.250	.364	.500	.022	13.5	4,950	.022
COM5	.3125	.7500	.375	.281	.419	.562	.032	12	6,475	.030
COM6	.3750	.8125	.406	.312	.516	.656	.032	10	8,400	.038
COM7	.4375	.9062	.437	.343	.530	.687	.032	8	9,453	.047
COM8	.5000	1.0000	.500	.390	.600	.781	.032	9.5	13,250	.065
COM8-101	.5000	1.0000	1.000	.390	.600	.781	.032	9.5	13,250	.065
COM9	.5625	1.0937	.562	.437	.671	.875	.032	9.5	16,630	.086
COM10	.6250	1.1875	.625	.500	.739	.968	.032	8.5	21,280	.110
COM12	.7500	1.4375	.750	.593	.920	1.187	.044	9	31,920	.204
COM14	.8750	1.5625	.875	.703	.978	1.312	.044	9.5	41,960	.263
COM16	1.000	1.7500	1.000	.797	1.118	1.500	.044	10	55,200	.386
COMH16*	1.000	2.0000	1.000	.781	1.360	1.687	.032	9	70,820	.553
COMH19*	1.1875	2.3750	1.187	.937	1.610	2.000	.032	8.5	100,730	.895
COMH20*	1.2500	2.3750	1.187	.937	1.610	2.000	.032	8.5	100,730	.895
COMH24*	1.5000	2.7500	1.375	1.094	1.860	2.312	.032	8.5	135,950	1.358
COMH28*	1.7500	3.1250	1.562	1.250	2.110	2.625	.044	8	176,370	1.948
COMH32*	2.0000	3.5000	1.750	1.375	2.360	2.937	.044	8.5	217,060	2.650

* BORE TOLERANCE: +.0025
 -.0025

MATERIALS	
BALL	RACE
52100 STEEL HEAT TREATED & CHROME PLATED ALTERNATIVE MATERIALS AVAILABLE	OIL COATED ALTERNATIVE MATERIALS AVAILABLE

NOTES: 1. LUBRICATION GROOVES IN I.D. & O.D. OF RACE

2. FOR TEFLON LINER ADD "T" TO SUFFIX.

EXAMPLE: COM12T

(UNITS WITH PTFE LINERS HAVE NO LUBRICATION HOLES OR GROOVES IN RACE.)