


JMX/JMXL

3-PIECE, MALE, HIGH STRENGTH ALLOY

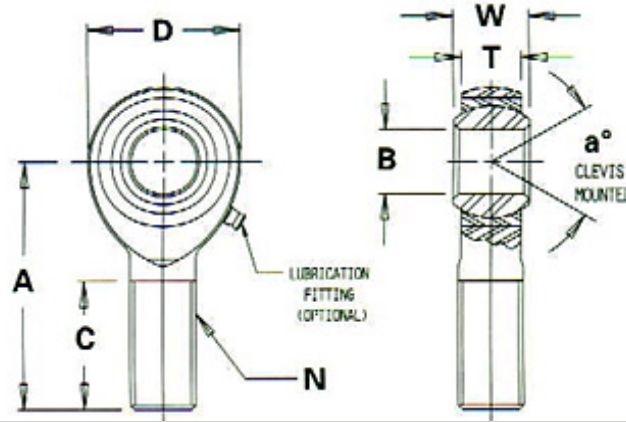

MALE ROD ENDS		B DIA.	D DIA.	W WIDTH	T WIDTH	BALL DIA.	A LGTH	N THD.	C LGTH	a MIS. ANGLE	ULT. STATIC RADIAL LOAD (lbs)	APPROX. WEIGHT (lbs)
RIGHT HAND PART NO.	LEFT HAND PART NO.	+0.0015 -0.0005	+0.010 -0.010	+0.000 -0.005	+0.005 -0.005	REF.	+0.015 -0.015	UNF 3A	+0.062 -0.031	REF.		
JMX3	JMXL3	.1900	.625	.312	.250	.437	1.250	10-32	.750	13	2,855	.03
JMX4	JMXL4	.2500	.750	.375	.281	.500	1.562	1/4-28	1.000	16	5,262	.04
JMX5	JMXL5	.3125	.875	.437	.344	.625	1.875	5/16-24	1.250	14	7,640	.07
JMX6	JMXL6	.3750	1.000	.500	.406	.719	1.938	3/8-24	1.250	12	9,550	.11
JMX7	JMXL7	.4375	1.125	.562	.437	.812	2.125	7/16-20	1.375	14	10,290	.16
JMX8	JMXL8	.5000	1.312	.625	.500	.937	2.438	1/2-20	1.500	12	16,242	.25
JMX10	JMXL10	.6250	1.500	.750	.562	1.125	2.625	5/8-18	1.625	16	17,959	.38
JMX12	JMXL12	.7500	1.750	.875	.687	1.312	2.875	3/4-16	1.750	14	28,090	.60
JMX14	JMXL14	.8750	2.000	.875	.687	1.312	3.375	7/8-14	1.875	12	55,690	.91
JMX16**	JMXL16**	1.000	2.750	1.375	1.000	1.875	4.125	1-14-12	2.125	17	76,205	2.406

MALE ROD END LOAD RATINGS BASED ON NO LUBRICATING FITTING.

**TOLERANCE VARIATIONS: "D", "A" ARE +/- .020

BALL	BODY
52100 Steel Rc 56 MIN. HARD CHROME PLATED	Steel Alloy, Heat Treated, Zinc Plated Chromate Treated
RACE	
STEEL ALLOY, HEAT TREATED ZINC PLATED, CHROMATE TREATED	

NOTES: FOR GREASE FITTINGS ADD "Z" TO SUFFIX

FOR STUDS ADD "Y" TO SUFFIX

FOR TEFLON LINER ADD "T" TO SUFFIX.

EXAMPLE: JMX6Z

EXAMPLE: JMX5Y

EXAMPLE: JFX12T