


PMX-T / PMXL - T
3-PIECE, PERFORMANCE RACING, STAINLESS STEEL RACE, WEAR RESISTANT, SELF LUBRICATING

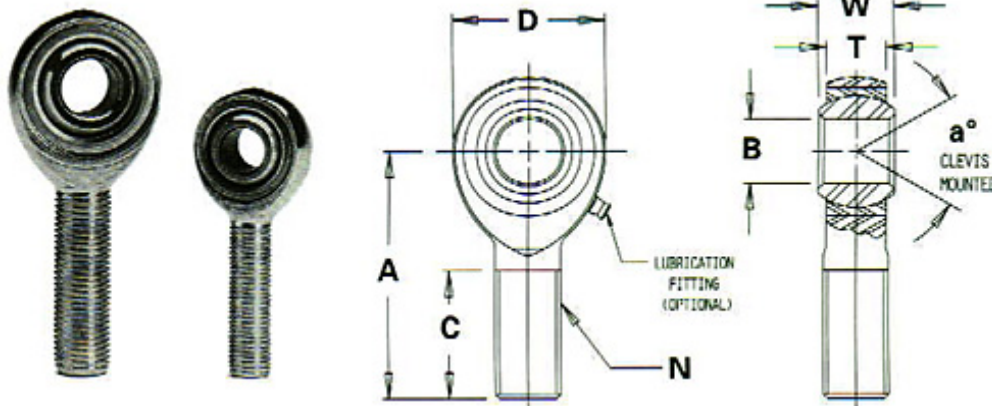

| MALE ROD ENDS | | B DIA. | D DIA. | W WIDTH | T WIDTH | BALL DIA. | A LGTH | N THD. | C LGTH | a MIS. ANGLE | ULT. STATIC RADIAL LOAD (lbs) | APPROX. WEIGHT (lbs) |
|---------------------|--------------------|------------------|----------------|----------------|----------------|-----------|----------------|-----------|----------------|--------------|-------------------------------|----------------------|
| RIGHT HAND PART NO. | LEFT HAND PART NO. | +.0000 -.0005 | +.010 -.010 | +.000 -.002 | +.005 -.005 | REF. | +.010 -.010 | UNF 3A | +.031 -.031 | REF. | | |
| PMX5T** | PMXL5T** | .3125 | .900 | .437 | .327 | .593 | 5/16-24 | 1.187 | 1.187 | 14 | 8,302 | .08 |
| PMX6T | PMXL6T | .3750 | 1.025 | .500 | .416 | .687 | 1.938 | 3/8-24 | 1.187 | 8 | 8,580 | .13 |
| PMX7T | PMXL7T | .4375 | 1.150 | .562 | .452 | .781 | 2.125 | 7/16-20 | 1.281 | 10 | 12,000 | .18 |
| PMX8T | PMXL8T | .5000 | 1.337 | .625 | .515 | .875 | 2.438 | 1/2-20 | 1.468 | 9 | 19,520 | .27 |
| PMX10T | PMXL10T | .6250 | 1.525 | .750 | .577 | 1.062 | 2.625 | 5/8-18 | 1.562 | 12 | 21,920 | .42 |
| PMX12T | PMXL12T | .7500 | 1.775 | .875 | .640 | 1.250 | 2.875 | 3/4-16 | 1.687 | 13 | 29,310 | .63 |

* A trade mark of E.I. Dupont de Nemours & Co., Inc.

** Check for availability.

| BALL | BODY |
|--|--|
| 440C CRES STAINLESS STEEL HEAT TREATED | 17-4PH CRES STAINLESS STEEL HEAT TREATED |
| RACE | LINER |
| STEEL ALLOY, HEAT TREATED ZINC PLATED, CHROMATE TREATED | *TEFLON FABRIC |