


SJM-T / SRSM-T

3-PIECE, PRECISION - STAINLESS STEEL, WEAR RESISTANT, SELF LUBRICATING




SJM-T - STAINLESS STEEL PRECISION

MALE ROD ENDS		B DIA.	D DIA.	W WIDTH	T WIDTH	BALL DIA.	A LGTH	N THD.	C LGTH	a MIS. ANGLE	ULT. STATIC RADIAL LOAD (lbs)	APPROX. WEIGHT (lbs)
RIGHT HAND PART NO.	LEFT HAND PART NO.	+ .0005 - .0005	+ .010 - .010	+ .000 - .002	+ .005 - .005	REF.	+ .010 - .010	UNF 3A	+ .031 - .031	REF.		
SJM6T	SJML6T	.3750	1.025	.500	.416	.687	1.938	3/8-24	1.187	8	8,580	.13
SJM7T	SJML7T	.4375	1.150	.562	.452	.781	2.125	7/16-20	1.281	10	12,000	.18
SJM8T	SJML8T	.5000	1.337	.625	.515	.875	.2438	1/2-20	1.468	9	19,520	.27
SJM10T	SJML10T	.6250	1.525	.750	.577	1.062	2.625	5/8-18	1.562	12	21,920	.42
SJM12T	SJML12T	.7500	1.775	.875	.640	1.250	2.875	3/4-16	1.687	13	29,310	.63

MATERIALS

BALL	BODY
440C CRES STAINLESS STEEL HEAT TREATED	17-4PH CRES STAINLESS STEEL HEAT TREATED
RACE	LINER
17-4PH CRES STAINLESS STEEL HEAT TREATED	*TEFLON FABRIC

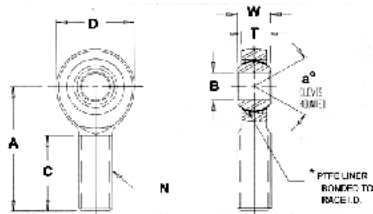

SRSM-T - STAINLESS STEEL - EXTRA HEAVY DUTY SHANK

MALE ROD ENDS		B DIA.	D DIA.	W WIDTH	T WIDTH	BALL DIA.	A LGTH	N THD.	C LGTH	a MIS. ANGLE	ULT. STATIC RADIAL LOAD (lbs)	APPROX. WEIGHT (lbs)
RIGHT HAND PART NO.	LEFT HAND PART NO.	+ .0005 - .0005	+ .010 - .010	+ .000 - .002	+ .005 - .005	REF.	+ .010 - .010	UNF 3A	+ .031 - .031	REF.		
SRSM6T	SRSM6T	.3750	1.125	.562	.452	.781	2.125	7/16-20	1.375	10		.18
SRSM7T	SRSM7T	.4375	1.31	.625	.515	.875	.2438	1/2-20	1.500	9		.27
SRSM8T	SRSM8T	.5000	1.500	.750	.577	1.062	2.625	5/8-18	1.625	12		.42
SRSM10T	SRSM10T	.6250	1.750	.875	.640	1.250	2.875	3/4-16	1.750	13		.63

*A trademark of E.I. Dupont de Nemours & Co., Inc.