

# Plastic Bearings



**iglide®**

Plain Bearings

**DryLin®**

Linear Systems

**igubal®**

Spherical Bearings

**igus.com**  
Plastics for longer life®

**2013**

# Contents

## igus®: Plastics for longer life®

The following pages include application examples, design specifications, and more than 7000 iglide®, 770 igubal®, and 1840 DryLin® parts, which are available from stock. They are indexed to allow quick location.

The most important innovations of this catalog are:

- Larger selection in all product lines
- More accessories
- More solutions and practical tips
- More application examples
- New products

## [www.igus.com](http://www.igus.com)

This catalog by no means covers the entire igus® product range.

Visit our website **www.igus.com** to discover more products, new developments and benefit from our online range – 24 hours a day.



### Legal Information

The information in this catalog, and the data in the Design section in particular, is based on our current knowledge of the products described. No legally binding assurance in respect of characteristics or suitability for a application can be derived from it. igus® is unable to assume liability of any nature for damage, loss or injury resulting from application of the products. We recommend that you always check suitability of the products for a specific intended application in a practically-oriented test. Please consult igus®. For reasons relating to ongoing technical developments, we reserve the right to implement technical modifications and improvement of the products at any time. Subject to printing errors.

The terms "igus", "ReadyChain", "ReadyCable", "Chainflex", "E-Chain", "E-Chain-System", "Energy Chain", "Energy Chain System", "E-Ketten", "E-KettenSysteme", "Flizz", "Easy Chain", "TwisterChain", "igubal", "iglidur", "DryLin", "manus" and "plastics for longer life" are legally protected trademarks for igus® GmbH/Cologne in the Federal Republic of Germany and, where applicable, in some other countries.

# iglide®

## Plastic Plain Bearings



# 1

# xiros®

## Plastic Ball Bearings



# 2

## Additional iglide® Products



# 3

# DryLin®

## Linear Guide Systems



# 4

# DryLin®

## Drive Technology



# 5

# igubal®

## Spherical Bearings



# 6

Maintenance-free and lubrication-free spherical bearings in various designs and configurations. Whether as a rod end, pivot or flange bearing, igubal® suits all requirements and is more economical and lighter than conventional spherical bearings.

# Table of Contents

## iglide® – Materials

	<b>iglide® M250</b> Thick and Robust ► Section 2	<ul style="list-style-type: none"> <li>● Excellent vibration dampening</li> <li>● Resistant to edge loading</li> <li>● High impact resistance</li> </ul>	2
	<b>iglide® R</b> Low Friction, Low Cost ► Section 3	<ul style="list-style-type: none"> <li>● Low friction value</li> <li>● Very low cost</li> </ul>	3
	<b>iglide® J</b> The Fast and Slow Motion Specialist ► Section 4	<ul style="list-style-type: none"> <li>● Low wear against different shaft materials</li> <li>● Low coefficients of friction in dry run</li> <li>● Best performance with soft shaft materials</li> </ul>	4
	<b>iglide® L280</b> The Marathon Runner ► Section 5	<ul style="list-style-type: none"> <li>● For especially long service life</li> <li>● Low coefficient of friction</li> <li>● Also suitable for soft shafts</li> </ul>	5
	<b>iglide® G300</b> The All-Round Performer ► Section 6	<ul style="list-style-type: none"> <li>● For above average loads</li> <li>● Dirt and dust resistant</li> <li>● More than 900 sizes available from stock</li> </ul>	6
	<b>iglide® Q</b> Fit for High Loads ► Section 7	<ul style="list-style-type: none"> <li>● Excellent wear resistance at high loads</li> <li>● Recommended for extreme p x v values</li> <li>● Maintenance-free dry running</li> </ul>	7
	<b>iglide® P</b> Cost-Effective and Maintenance-Free ► Section 8	<ul style="list-style-type: none"> <li>● Low moisture absorption</li> <li>● Low wear rates</li> <li>● Cost-effective</li> </ul>	8
	<b>iglide® Q2</b> Special Applications ► Section 9	<ul style="list-style-type: none"> <li>● Cost-effective</li> <li>● For use in wet environments</li> <li>● Good wear resistance at medium loads</li> </ul>	9
	<b>iglide® H370</b> The Underwater Specialist ► Section 10	<ul style="list-style-type: none"> <li>● Excellent for underwater applications</li> <li>● Wear-resistant</li> <li>● Good chemical resistance</li> </ul>	10
	<b>iglide® A180</b> Food Applications ► Section 11	<ul style="list-style-type: none"> <li>● Complies with the regulations of the FOOD AND DRUG ADMINISTRATION</li> <li>● For wet environments</li> </ul>	11
	<b>iglide® A200</b> Food Applications ► Section 12	<ul style="list-style-type: none"> <li>● Complies with the regulations of the FOOD AND DRUG ADMINISTRATION</li> <li>● For low speeds</li> </ul>	12



# Table of Contents

## iglide® – Materials

	<b>iglide® A350</b> Food Applications ► <a href="#">Section 13</a>	<ul style="list-style-type: none"> <li>● Complies with the regulations of the FOOD AND DRUG ADMINISTRATION</li> <li>● Quiet operation</li> <li>● Good wear resistance at high loads</li> </ul>	13
	<b>iglide® T500</b> The High-Tech Problem Solver ► <a href="#">Section 14</a>	<ul style="list-style-type: none"> <li>● Temperature resistant from -148°F to +482°F</li> <li>● Universal resistance to chemicals</li> <li>● Very low moisture absorption</li> </ul>	14
	<b>iglide® X6</b> The new Nano Material ► <a href="#">Section 15</a>	<ul style="list-style-type: none"> <li>● High compressive strength</li> <li>● High temperature resistance up to +482°F</li> <li>● PTFE-free</li> <li>● Excellent chemical resistance</li> </ul>	15
	<b>iglide® Z</b> The High Temperature Material ► <a href="#">Section 16</a>	<ul style="list-style-type: none"> <li>● For high temperature applications</li> <li>● High thermal resistance</li> <li>● For extreme loads</li> </ul>	16
	<b>iglide® GLW</b> General Purpose ► <a href="#">Section 17</a>	<ul style="list-style-type: none"> <li>● Low cost</li> <li>● Applications with static loads</li> <li>● For large quantities</li> </ul>	17
	<b>iglide® K</b> General Purpose ► <a href="#">Section 18</a>	<ul style="list-style-type: none"> <li>● Cost-effective</li> <li>● For wet environments</li> <li>● Good wear resistance at medium loads</li> </ul>	18
	<b>iglide® J200</b> Long Distance Runners ► <a href="#">Section 19</a>	<ul style="list-style-type: none"> <li>● Low coefficients of friction</li> <li>● Low wear rates</li> <li>● For low to medium loads</li> </ul>	19
	<b>iglide® J260</b> Long Distance Runners ► <a href="#">Section 20</a>	<ul style="list-style-type: none"> <li>● Lubrication- and maintenance-free</li> <li>● Good liquid media resistance</li> <li>● Good wear resistance at medium loads</li> </ul>	20
	<b>iglide® J3</b> Long Distance Runners ► <a href="#">Section 21</a>	<ul style="list-style-type: none"> <li>● Low coefficients of friction</li> <li>● Good liquid media resistance</li> <li>● Low moisture absorption</li> </ul>	21
	<b>iglide® J350</b> Long Distance Runners ► <a href="#">Section 22</a>	<ul style="list-style-type: none"> <li>● For medium and high loads</li> <li>● High temperature resistance</li> <li>● Cost-effective</li> </ul>	22
	<b>iglide® L250</b> Long Distance Runners ► <a href="#">Section 23</a>	<ul style="list-style-type: none"> <li>● Very low coefficients of friction</li> <li>● Excellent wear resistance</li> <li>● For rotating applications at high speed</li> </ul>	23

# Table of Contents

## iglide® – Materials

	<b>iglide® D</b> Long Distance Runners ► Section 24	<ul style="list-style-type: none"><li>● Vibration dampening</li><li>● Very low moisture absorption</li><li>● Extremely cost-effective</li></ul>	24
	<b>iglide® H</b> Media Resistance ► Section 25	<ul style="list-style-type: none"><li>● Maintenance-free</li><li>● For high temperatures</li><li>● Resistant to chemicals</li></ul>	25
	<b>iglide® H1</b> Media Resistance ► Section 26	<ul style="list-style-type: none"><li>● High resistance to temperature and chemicals</li><li>● Very low coefficient of friction</li><li>● For automotive use in the engine compartment</li></ul>	26
	<b>iglide® H2</b> Media Resistance ► Section 27	<ul style="list-style-type: none"><li>● Cost-effective</li><li>● Resistant to chemicals</li><li>● For high temperatures</li></ul>	27
	<b>iglide® A500</b> Food Applications ► Section 28	<ul style="list-style-type: none"><li>● Lubrication- and maintenance-free</li><li>● Complies with the regulations of the FOOD AND DRUG ADMINISTRATION</li><li>● High chemical resistance</li></ul>	28
	<b>iglide® A290</b> Food Applications ► Section 29	<ul style="list-style-type: none"><li>● Good abrasion resistance</li><li>● For low noise operation</li><li>● Suited for direct contact with food</li></ul>	29
	<b>iglide® T220</b> Food Applications ► Section 30	<ul style="list-style-type: none"><li>● For use in the tobacco industry</li></ul>	30
	<b>iglide® F</b> Special Applications ► Section 31	<ul style="list-style-type: none"><li>● Electrically conductive</li><li>● High compressive strength</li><li>● High pv value</li></ul>	31
	<b>iglide® H4</b> Special Applications ► Section 32	<ul style="list-style-type: none"><li>● Low coefficients of friction</li><li>● Good abrasion resistance</li><li>● High chemical resistance</li></ul>	32
	<b>iglide® N54</b> Special Applications ► Section 33	<ul style="list-style-type: none"><li>● For applications with infrequent movements</li><li>● For low to medium loads</li><li>● Environmentally friendly</li></ul>	33
	<b>iglide® UW</b> Special Applications ► Section 34	<ul style="list-style-type: none"><li>● For underwater applications</li><li>● For fast constant motion</li><li>● Long service life</li></ul>	34

# Table of Contents

## iglide® – Special iglide® Products

	<b>xiros® ball bearings</b> Polymer Ball Bearings ► Section 35	<ul style="list-style-type: none"><li>● Free from maintenance and lubrication</li><li>● High corrosion-resistance</li><li>● For temperatures up to 302°F</li></ul>	35
	<b>iglide® PRT</b> Slewing Ring Bearing ► Section 36	<ul style="list-style-type: none"><li>● Maintenance-free</li><li>● Low coefficients of friction</li><li>● High rigidity</li><li>● Cost-effective</li><li>● Robust</li></ul>	36

## iglide® – Additional iglide® Products

	<b>iglide® Clip Bearings</b> ► Section 37	<ul style="list-style-type: none"><li>● Secured with the double flange design</li><li>● Maintenance-free and self-lubricating</li><li>● Good wear resistance</li><li>● Smooth operation</li><li>● Material: iglide® M250</li></ul>	37
	<b>iglide® Clip2</b> Suitable for High Loads ► Section 38	<ul style="list-style-type: none"><li>● Low bearing clearance, very precise</li><li>● Easy installation due to angled slit</li><li>● Material: iglide® M250</li><li>● Maintenance-free and predictable service life</li></ul>	38
	<b>iglide® JV</b> Pre-tensioned, No Clearance ► Section 39	<ul style="list-style-type: none"><li>● Zero clearance, even under no load</li><li>● Material: iglide® J</li><li>● Maintenance-free</li><li>● Predictable service life</li></ul>	39
	<b>iglide® Piston Rings</b> ► Section 40	<ul style="list-style-type: none"><li>● Free from maintenance and lubrication</li><li>● High corrosion-resistance</li><li>● For temperatures up to 482°F</li></ul>	40
	<b>iglide® Barstock</b> Design Freedom ► Section 41	<ul style="list-style-type: none"><li>● iglide® materials as round stock bar or mechanically finished special parts</li></ul>	41
	<b>Rollers</b> Precise Deflection ► Section 42	<ul style="list-style-type: none"><li>● Tight deflection radii</li><li>● Low driving power</li><li>● Cost-effective</li></ul>	42
	<b>iglide® Flange Bearings</b> ► Section 43	<ul style="list-style-type: none"><li>● Maintenance-free</li><li>● Very good wear resistance</li><li>● Material: iglide® G300, J, T500 or A180</li></ul>	43
	<b>Polysorb</b> Polymer Disc Springs ► Section 44	<ul style="list-style-type: none"><li>● Compensation of axial clearances and manufacturing tolerances</li><li>● Vibration dampening</li><li>● Noise reduction</li><li>● Corrosion resistant</li><li>● Lightweight</li></ul>	44


# Table of Contents

## DryLin® – Products


	<b>DryLin® N</b> Low profile guide system ► Section 46	<ul style="list-style-type: none"><li>● Low profile</li><li>● Lightweight</li><li>● Simple, low-cost design</li></ul>	46
	<b>DryLin® W</b> Modular linear guide system ► Section 47	<ul style="list-style-type: none"><li>● Flexible, modular linear system</li><li>● Great blend of cost and performance</li><li>● Easy to assemble</li></ul>	47
	<b>DryLin® T</b> Profile rail guides ► Section 48	<ul style="list-style-type: none"><li>● Maintenance and oil-free</li><li>● Low-cost alternative to ball bearing systems</li><li>● Dimensionally interchangeable with many ball bearing systems</li><li>● Adjustable clearance</li></ul>	48
	<b>DryLin® R</b> Linear bearings ► Section 49	<ul style="list-style-type: none"><li>● Maintenance and oil-free</li><li>● Low-cost alternative to ball bearing systems</li><li>● Dimensionally interchangeable with many ball bearing systems</li></ul>	49
	<b>DryLin® Shafting</b> ► Section 49	<ul style="list-style-type: none"><li>● Available in Aluminum, Steel, Stainless, and Chrome-plated materials</li><li>● 6mm to 50mm diameters</li><li>● Supports and other accessories available</li></ul>	49
	<b>DryLin® Slide Tables</b> Belt and lead screw assemblies ► Section 50	<ul style="list-style-type: none"><li>● Pre-assembled belt and lead screw systems</li><li>● Reduces purchasing, engineering, and assembly costs</li><li>● Maintenance-free operation</li></ul>	50
	<b>DryLin® Lead Screws</b> ► Section 51	<ul style="list-style-type: none"><li>● Oil-free</li><li>● Corrosion-resistant</li><li>● Anti-backlash available</li></ul>	51
	<b>DryLin® Stainless</b> Stainless steel products ► Section 52	<ul style="list-style-type: none"><li>● 304/316/440 Shafting</li><li>● Lead screw tables</li><li>● Complete 316 guide systems</li><li>● Stainless shaft supports</li></ul>	52
	<b>DryLin® Specialists</b> Outside the box ideas ► Section 53	<ul style="list-style-type: none"><li>● Hybrid sliding/rolling systems</li><li>● Telescoping systems</li><li>● Dimensionally interchangeable with many ball bearing systems</li><li>● Adjustable clearance</li></ul>	53

# Table of Contents

## igubal® – Products

	<b>igubal® Rod Ends</b>	<ul style="list-style-type: none"><li>● Maintenance-free</li><li>● Compensate for misalignment and edge loads</li><li>● Lightweight</li></ul>	<b>55</b>
	<b>igubal® Clevis Joints</b>	<ul style="list-style-type: none"><li>● Vibration dampening</li><li>● Lubrication-free</li><li>● Lightweight</li></ul>	<b>56</b>
	<b>igubal® Pillow Block</b>	<ul style="list-style-type: none"><li>● Maintenance-free</li><li>● Self-lubricating</li><li>● Compensate for misalignment and edge loads</li><li>● Lightweight</li></ul>	<b>57</b>
	<b>igubal® Flange</b>	<ul style="list-style-type: none"><li>● Maintenance-free</li><li>● Self-lubricating</li><li>● Compensate for misalignment and edge loads</li><li>● Sturdy</li></ul>	<b>58</b>
	<b>igubal® Pressfit</b>	<ul style="list-style-type: none"><li>● Easy to install</li><li>● Cost-effective</li><li>● Resistant to chemicals</li><li>● Lightweight and durable</li></ul>	<b>59</b>
	<b>igubal® Spherical Balls</b>	<ul style="list-style-type: none"><li>● Different material balls are available for varying application requirements</li></ul>	<b>60</b>

plastics  
for longer

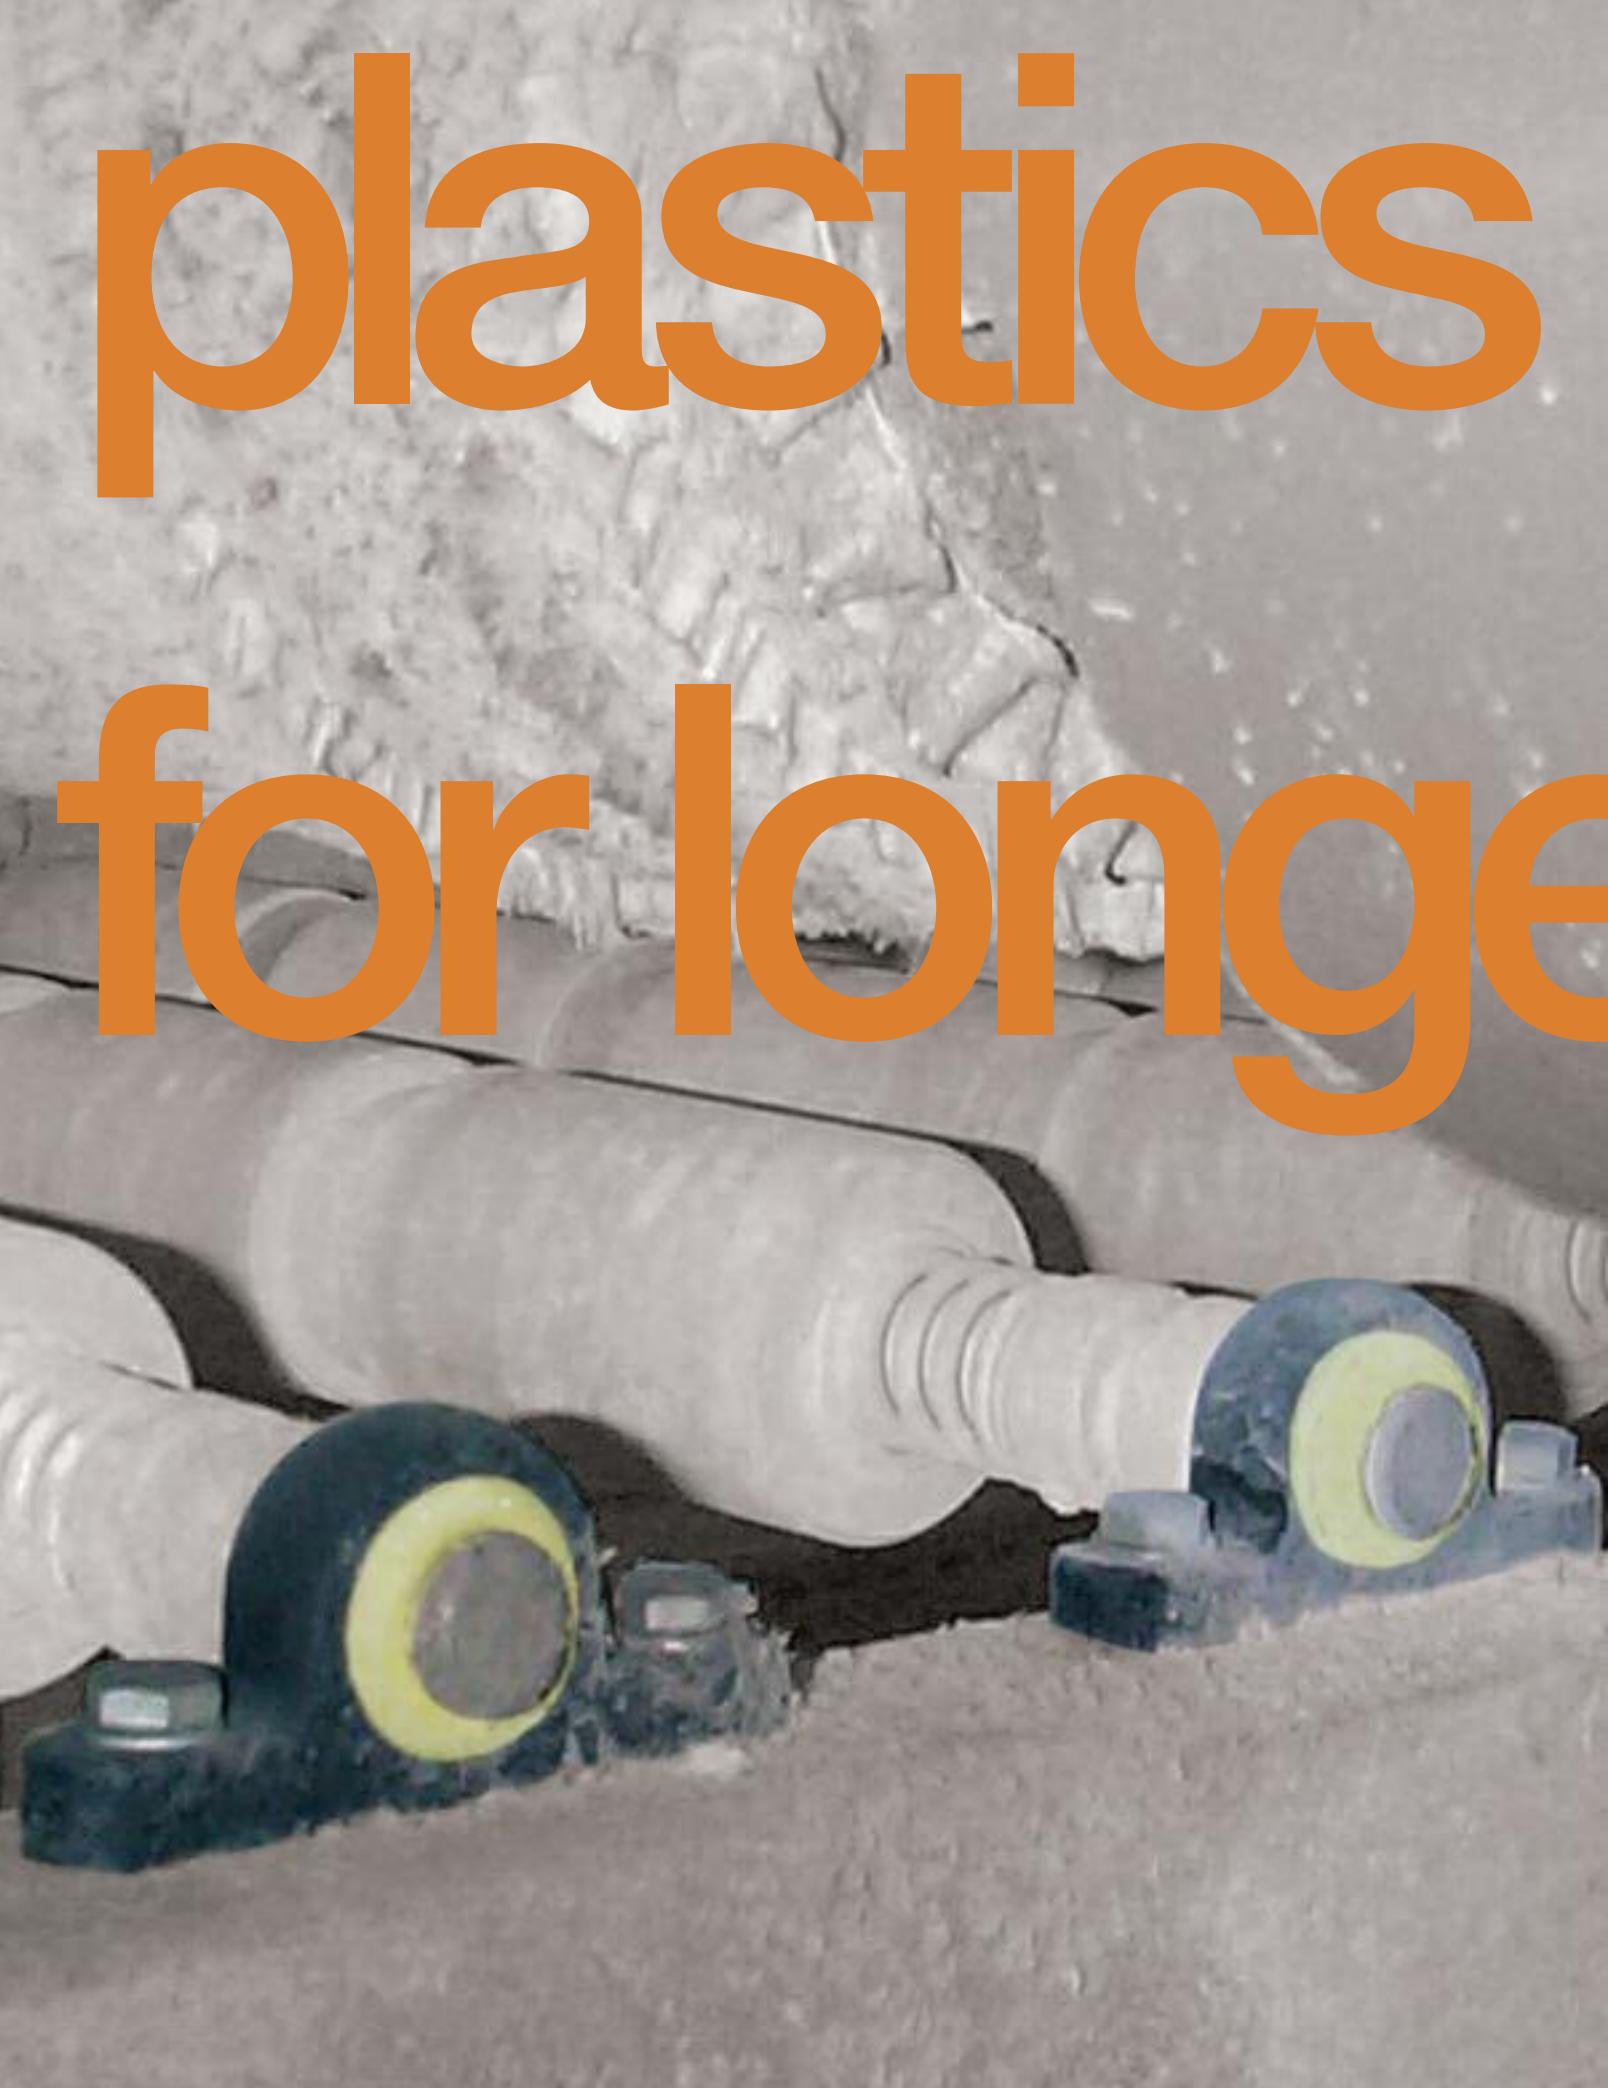

## **Plastics for longer life® – make your machines more durable with plastics**


No lubrication, less maintenance, lower costs, longer life cycles, always available from stock – these key principles apply to all igus® products, systems and services.

Tried and tested in terms of durability, friction properties and stability, igus® plastics are the technological core of the igus® range. This catalog lists more than 9,600 plastic bearing products available from stock from the smallest batch size upward.

We are looking forward to your phone call or e-mail.

# er life

igus® inc.  
P.O. Box 14349  
East Providence, RI 02914  
401-438-2200  
888-803-1895  
[sales@igus.com](mailto:sales@igus.com)  
[www.igus.com](http://www.igus.com)

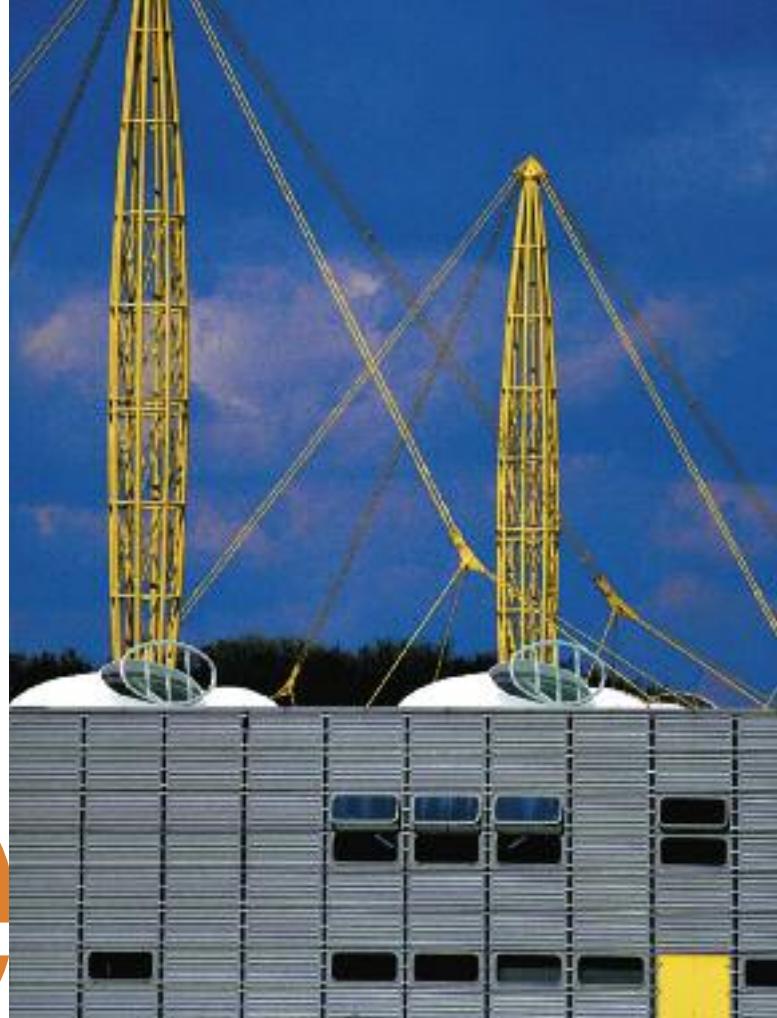

**igus® headquarters in Cologne, Germany –  
research, development and production  
from a single location.**

**igus® is certified to ISO 9001:2008**

**Orders can be placed until 8:00 Eastern standard time.  
Phone: 888-803-1895**

**No minimum order quantity, no surcharges.  
9,600 plastic bearings from stock.**

**No lubrication. No maintenance. No downtime.**

**No lubrication. No maintenance. No downtime.**

**Call for free samples and technical support or visit [www.igus.com](http://www.igus.com)**

# Longer life cycles, lower costs

## Innovations with high-performance plastics

igus® plastic plain bearings® constitute the step from a simple plastic bearing to a tested, predictable and available machine component.

Our research is based on specific bearing properties – especially life cycle – achieved by continuous advancements in materials.

## Predictable life cycle – no lubrication necessary

Lubrication-free operation is something every designer strives for.

igus® plastic plain bearings make this dream a reality. Decades of research and testing now permit precise calculations of a plastic plain bearing's life cycle.


## Fit and forget – matching solutions from stock

- Innovative, quickly assembled and economical products
- Delivery from stock – lower inventory costs
- Large product selection – find the right solution for your application
- Time-saving tools on the Internet
- We deliver customized, ready-to-fit units
- Quick reaction customer service with many local representatives in United States, Canada, Mexico and worldwide.

igus® maintenance-free plastic plain bearings help improve your products and reduce costs at the same time.



Many sample applications can be found at:  
[www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)

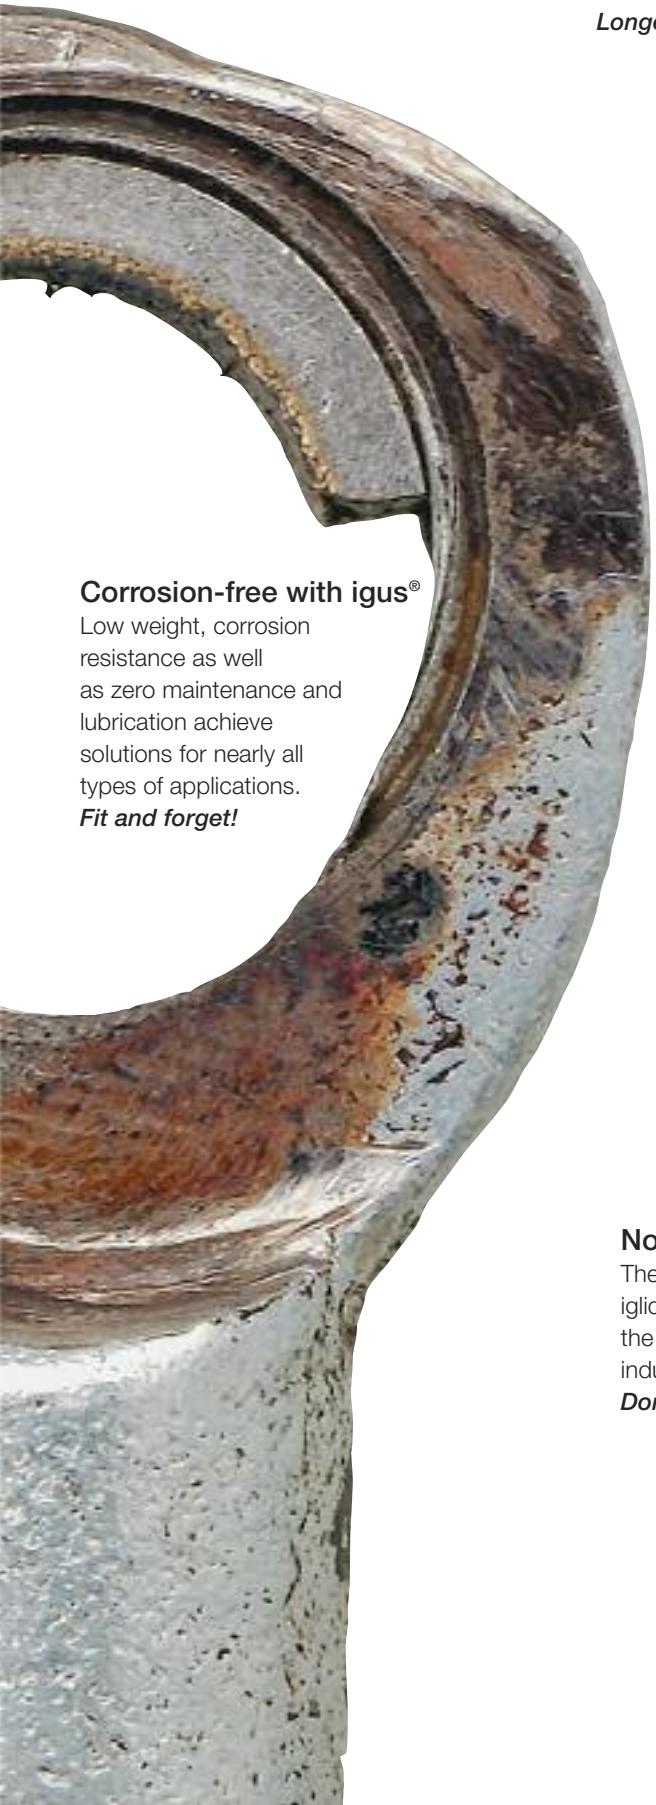

### Corrosion-free with igus®

Low weight, corrosion resistance as well as zero maintenance and lubrication achieve solutions for nearly all types of applications.

*Fit and forget!*

### Resistant to dirt with igus®

Zero-maintenance and high dirt resistance are not the only advantages of DryLin®.

*Longer life cycles – lower costs!*



### No maintenance with igus®

Various iglide® materials for a wide variety of operating conditions. Large program of dimensions compatible with nearly all environments.

*Predictable life cycle!*



### No lubrication with igus®

The lubrication-free design of iglide® also permits its use in the food and pharmaceutical industries.

*Don't wait any longer!*



# iglide® plain bearings

Excellent plastics, improved through precise additions of reinforcements and solid lubricants, tested thousands of times, and proven millions of times – that is iglide®.

Every year, igus® engineers develop more than 100 new plastic compounds and conduct more than 5,000 tests on maintenance-free plain bearings. Over the years, this has made it possible to establish a large database of plastics' tribological properties.

In addition to their general properties, every iglide® bearing material possesses a number of special features making it suitable for particular applications and requirements.



Part number:  
iglide® J  
Plain bearings

Maximum static  
surface pressure (68°F)  
**5,075 psi**

Application  
temperature  
**-58 °F / +194 °F**


Color  
**yellow**

Coefficient of dynamic  
sliding friction against  
steel ( $\mu$ )  
**0.06-0.18**

## Practical example

igus® bearings and linear sliding films made of iglide® material, which meets all demands of aseptic filling, are used here.

Low adhesion and friction factors against different kinds of stainless steel, negligible moisture absorption, very good stability against PES-cleaners, lubricant-free, all of that means no contamination of products of the aseptic atmosphere.

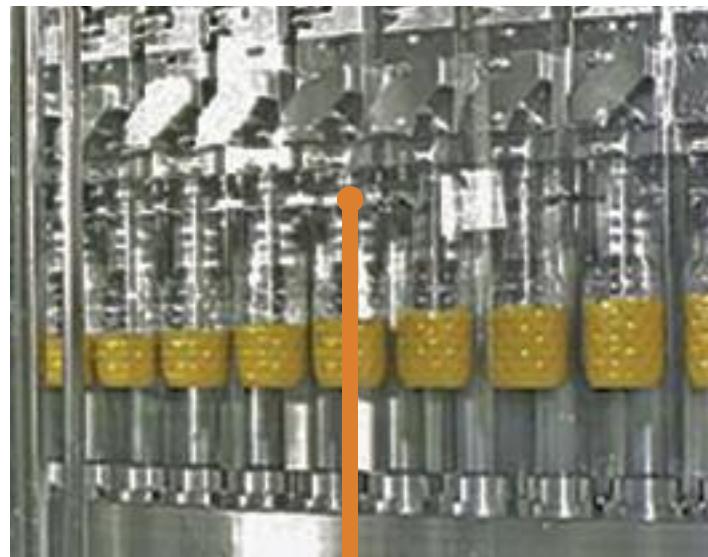

Lifetime calculation online:  
[www.igus.com](http://www.igus.com)

Exciting applications can be viewed online at:  
[www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)

# Application examples: iglide®

Exciting applications can be viewed online ► [www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)



Sleeve bearing



Thrust washer



Clip1 bearing



Plastic ball bearing



Flange bearing



PRT slewing ring



Clip 2 bearing



Custom part

## Roller coaster


Using iglide® Z bearings eliminated maintenance by 95% and reduced costs by 54%.





### Spreaders

Using a special bearing design on this centrifugal arm significantly reduced manufacturing costs. iglide® is also maintenance-free and delivers high wear resistance.

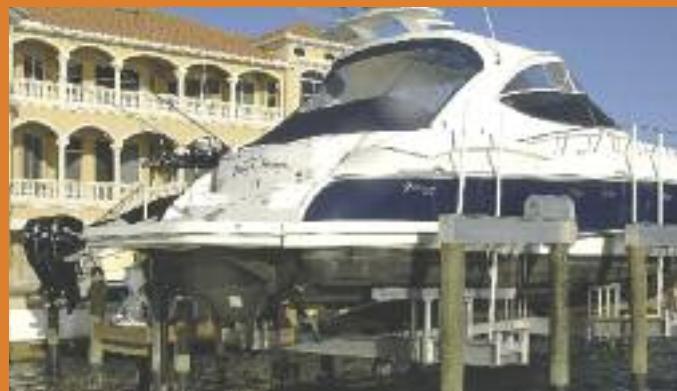

### Boat lifts

Unlike metal or bronze bearings, iglide® plastic bearings do not corrode in this underwater application. The self-lubricating bearings handle loads from 4,500 up to 66,000 pounds and also do not contaminate the water with grease, making it an environmentally-friendly solution.



### Welding machine

PRT in this automatic welding machine enables rotation in the horizontal plane of the chuck



### Tool changer machines

iglide® D offered an enormous cost savings when compared to metallic rolled bearings. iglide® D also has a low coefficient of friction and high wear resistance.



### Farming equipment

A manufacturer of agricultural machinery replaced bronze bearings with iglide® J plastic bearings to eliminate corrosion and increase lifespan on its potato planter. Service life increased by 600% and iglide® costs the company 70-80% less than bronze.



### Tubular bag machines

iglide® Z is used in the arms of this packaging machine. The bearings withstand operating temperatures of more than 320 degrees Fahrenheit and are wear-resistant.

# DryLin® linear plain bearings and Lead screw tables

DryLin® linear plain bearings are an ideal alternative to traditional re-circulating ball bearing systems. These sliding plain bearings are made of high-performance polymers from igus® iglide® series. DryLin® linear bearings can be used if dirt, dust or moisture is present, for short stroke applications, or if a lubrication-free solution is needed.

DryLin® linear slide tables are also designed for dry running. As a result, dust and dirt will not cling to the bearing surfaces. DryLin® linear bearings also have no minimum stroke-length restrictions, unlike re-circulating ball bearings. They deliver quiet operation and are corrosion-resistant.

igus® also offers flat, compact lead screw linear tables for variable formats and handling tasks. The linear table is extremely rigid due to the hard-anodized aluminum shaft and is also made of igus®, high-performance iglide® polymers.



Part number:


HTS-12-AWM

Maximum static surface pressure

630 lbf

Operating temperature

-40°F/+194°F

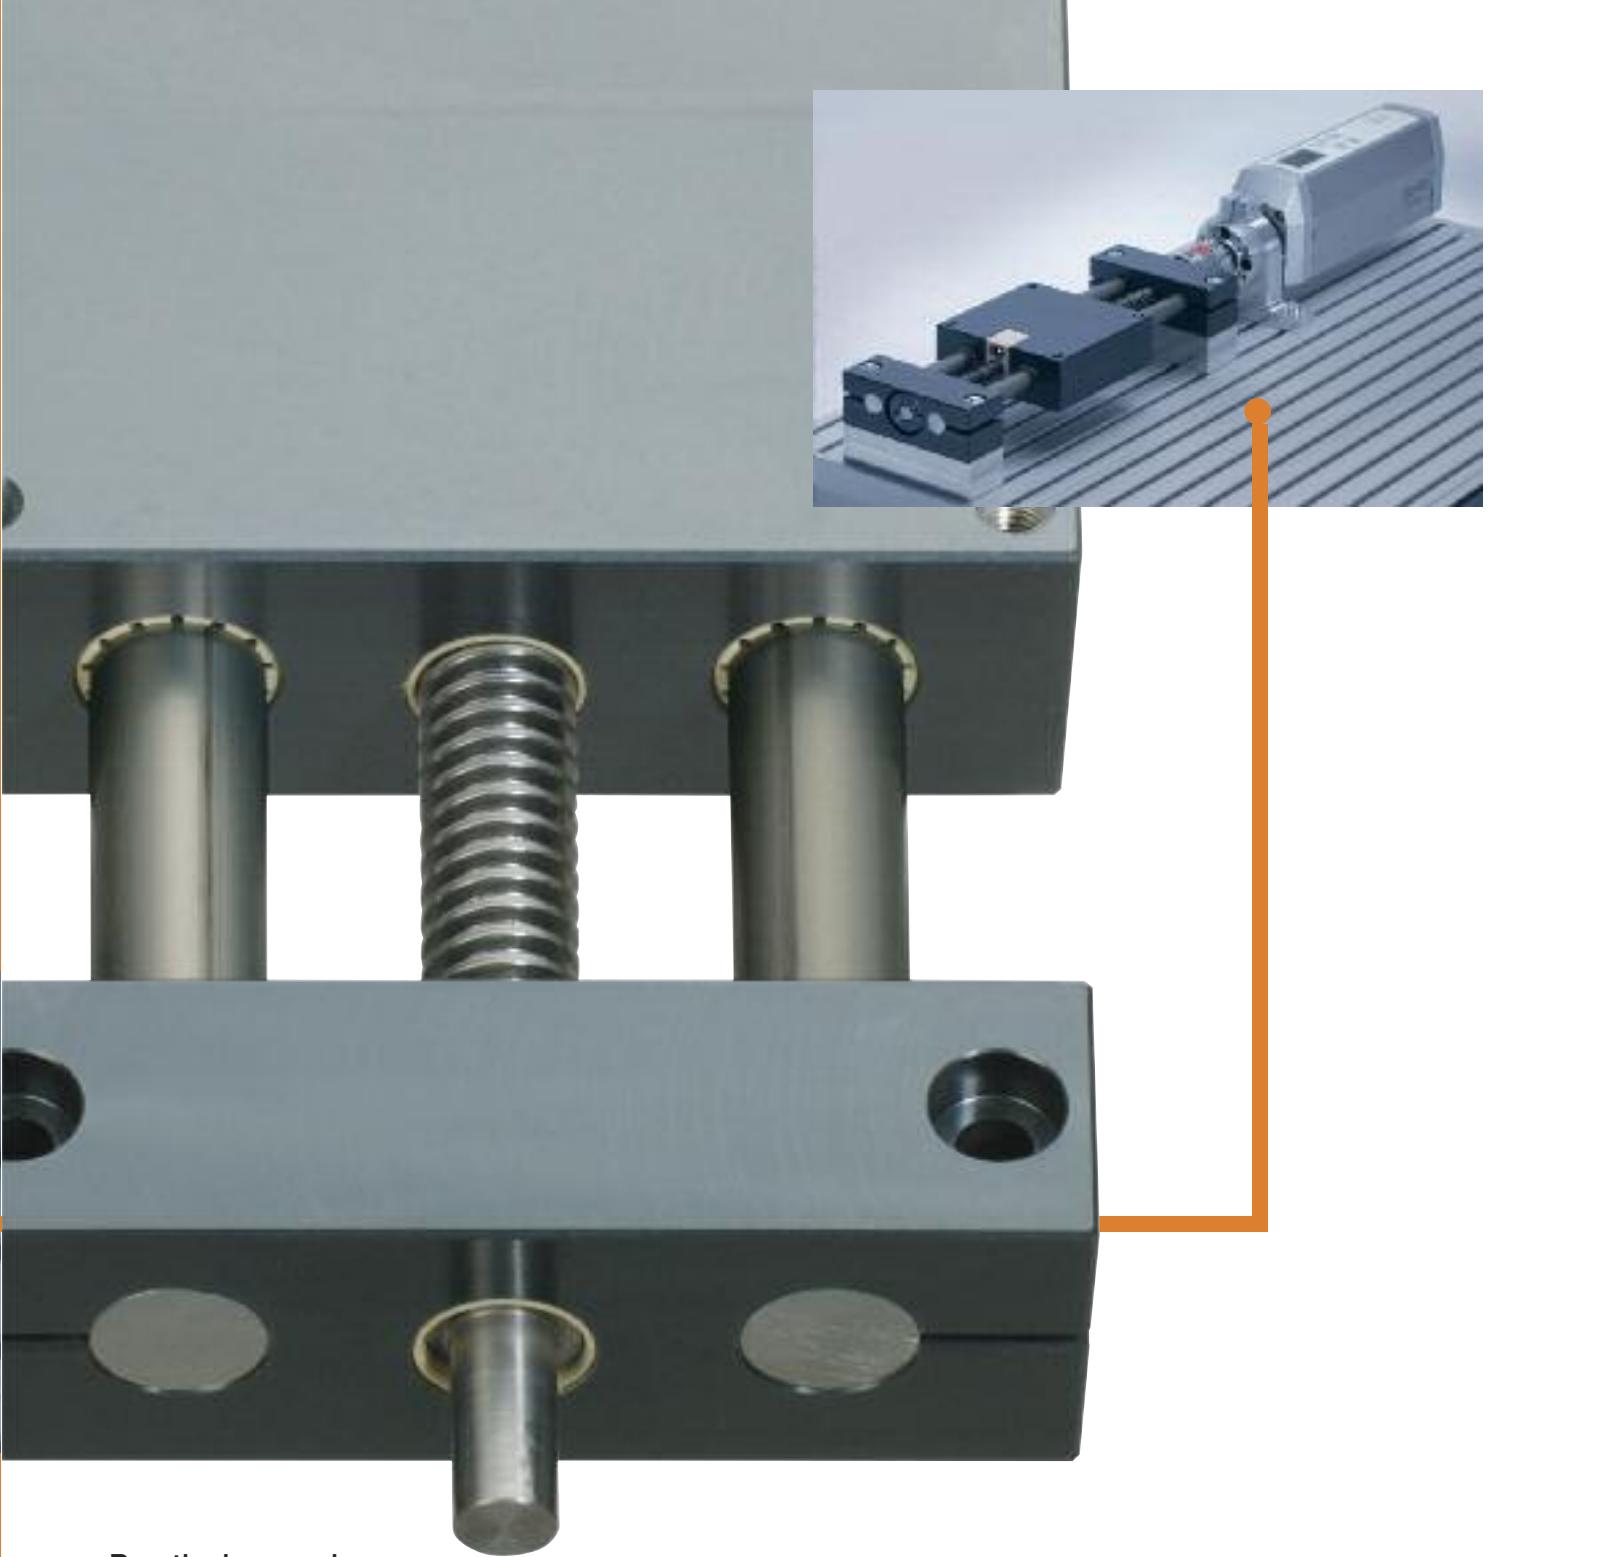

### Practical example

#### Electrical Servo Drives

For a wide variety of formats in printing, paper, packaging, transmission and wood processing systems, Festo demonstrates the use of the HTS DryLin® Lead screw linear table in conjunction with its electrical servo drive.



reddot design award  
winner 2006



Lifetime calculation online:  
[www.igus.com](http://www.igus.com)

Exciting applications can be viewed online at:  
[www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)

# Application examples: DryLin® ---

Exciting applications can be viewed online ► [www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)



DryLin® N




DryLin® W



DryLin® T



DryLin® R

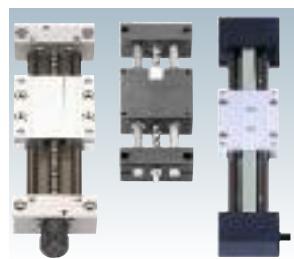

DryLin® slide tables

## Packaging technology: Label feeding system

DryLin® T linear guides are dimensionally interchangeable with traditional re-circulating ball guides, but without the high costs. A further advantage is the availability of a manual clamping mechanism.





### Bottle sealing machines

This machine seals champagne bottles with corks, aluminum caps and wire braid. DryLin® R linear bearings are lubrication-free, which is important in the food industry. DryLin® R is also impervious to the frequent cleaning and chemicals seen by the machine.



### Form/fill/seal machines

DryLin® linear bearings are used to guide the tools of this form, fill and seal machine. The bearings are exposed to temperatures reaching 248 degrees Fahrenheit and are self-lubricating. The bearings are also resistant to the machine's corrosive cleaning agents, which minimizes downtime.



### Machine tool technology: Door adjustment

DryLin® R linear bearings are used to guide the doors of this machine. The bearings are a huge cost savings and because they require no lubrication, flying chips do not cause downtime by getting stuck in the machine.



### Packaging equipment

These packaging machines use DryLin® R sleeve bearings to reduce installation time. They are resistant to dust, dirt and water. DryLin® R is also maintenance-free and can reduce replacement part costs up to 90%.



### Medical devices

DryLin® linear guide systems and DryLin® R linear bearings are used on this medical machine, which performs non-invasive treatment of chronic heel pain. With DryLin® linear bearings and guides, the company eliminated costly maintenance and the need for messy lubricants.



### Aluminum window manufacturing

This machine manufactures aluminum window frames. A DryLin® HTS linear slide table is used to position the machine's milling heads. DryLin® HTS is lubrication-free, which prevents aluminum dust and chips from building up and causing downtime.

# igubal® spherical bearings

igubal® spherical bearings are self-aligning components made entirely of high-performance plastics.

The igubal® series provides designers with a complete system of self aligning bearings: Rod ends, clevis joints, flange bearings, pivot bearings and pillow blocks. Self-adjusting bearings are easy to fit, adaptable to wide angular ranges and have been used to replace special housings in many cases.

igubal® offers all the advantages of high-performance plastics, including dry-running capability combined with very good vibration dampening.

igubal® spherical bearings are insensitive to dirt, liquids, chemicals and fully corrosion-proof.

Bearings from the igubal® range are very light, compact and economical on two fronts:

- Low purchase price
- Low maintenance and installation costs



Part number:  KBRM-08	Maximum static tensile load <b>470 lbf</b>	Maximum transverse load <b>157 lbf</b>	Minimum screw-in depth <b>.43 in.</b>	Maximum tightening torque for internal thread <b>88 lbf · inch</b>	Maximum tightening torque for spherical ball <b>106 lbf · inch</b>
-----------------------------	---	---	--	---	---



### Practical example

The reclining wheel's curve inclination is realized by means of rod ends in the journal link.  
The high top speed and rapid acceleration are partly due to the rod ends' low weight.  
The bearing points do not require any elaborate sealing measures.

Lifetime calculation online:  
[www.igus.com](http://www.igus.com)



Exciting applications can be viewed online at:  
[www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)

# Application examples: igubal®

Exciting applications can be viewed online ► [www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)



igubal® rod ends



igubal® clevis joints



igubal® pillow blocks



igubal® flange



igubal® spherical

## Curtain wall louvers for stadiums

igubal® spherical bearings are used on the main assembly of these wall louvers. The bearings enable the slats, which are part of the wall louver, to swivel so airflow can be regulated inside the stadium. igubal® is maintenance-free and corrosion-resistant.





### Research telescopes

igubal® spherical bearings are used to facilitate the movement of mirrors on this telescope. Smooth motion is achieved and magnetic interference is completely eliminated thanks to igubal® plastic bearings.



### Basketball shooter

Students from Iowa State University used igubal® spherical bearings on a basketball shooter for children with Cerebral Palsy. The shooter uses igubal® flange and pillow blocks to enable the shooting mechanism to be pulled back with radial loads of 250 pounds.



### Packaging machines

igubal® spherical bearings perform a high number of cycles without maintenance or lubrication. igubal® is also dirt- and dust-resistant and will not contaminate food handled by the machines.



### Recreational vehicle steps

igubal® rod ends are used in the steps of this RV. They are maintenance-free and vibration-dampening.



### Textile machinery

Self-aligning igubal® clevis joints are used to support the thread guide unit on this textile machine. Shock loads are no longer an issue and vibration is drastically reduced when compared to metal bearings.




### Baking machinery


igubal® spherical bearings do not contaminate the chocolate processed by this machine because they are lubrication-free. igubal® is also corrosion-resistant and can be used in wash-down applications or anywhere moisture is present.

# Quality from the igus® laboratory: Tested thousands of times, proven millions of times.


igus® has more than 40 years of experience in providing customers with plastic bearing solutions. Every year, igus® engineers develop more than 100 new plastic compounds and conduct more than 5,000 tests on its maintenance-free plastic plain bearings. Over the years, this has made it possible to establish a large database of plastics' tribological properties. In addition to their general properties, every iglide® bearing material possesses special features that make it suitable for particular applications and requirements. igus® bearings constitute the step from a simple plastic bearing to a tested, predictable and available machine component.

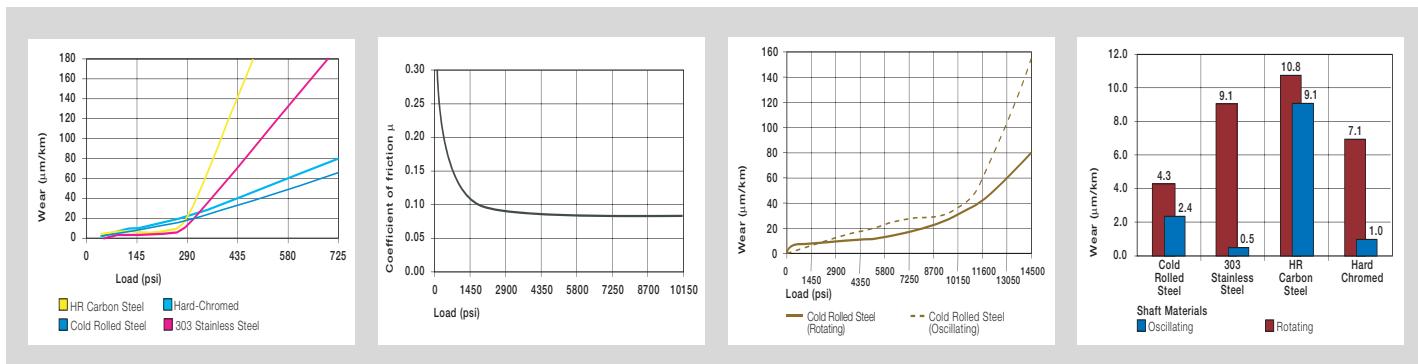

The results of more than 5,000 tests are added to our database annually.

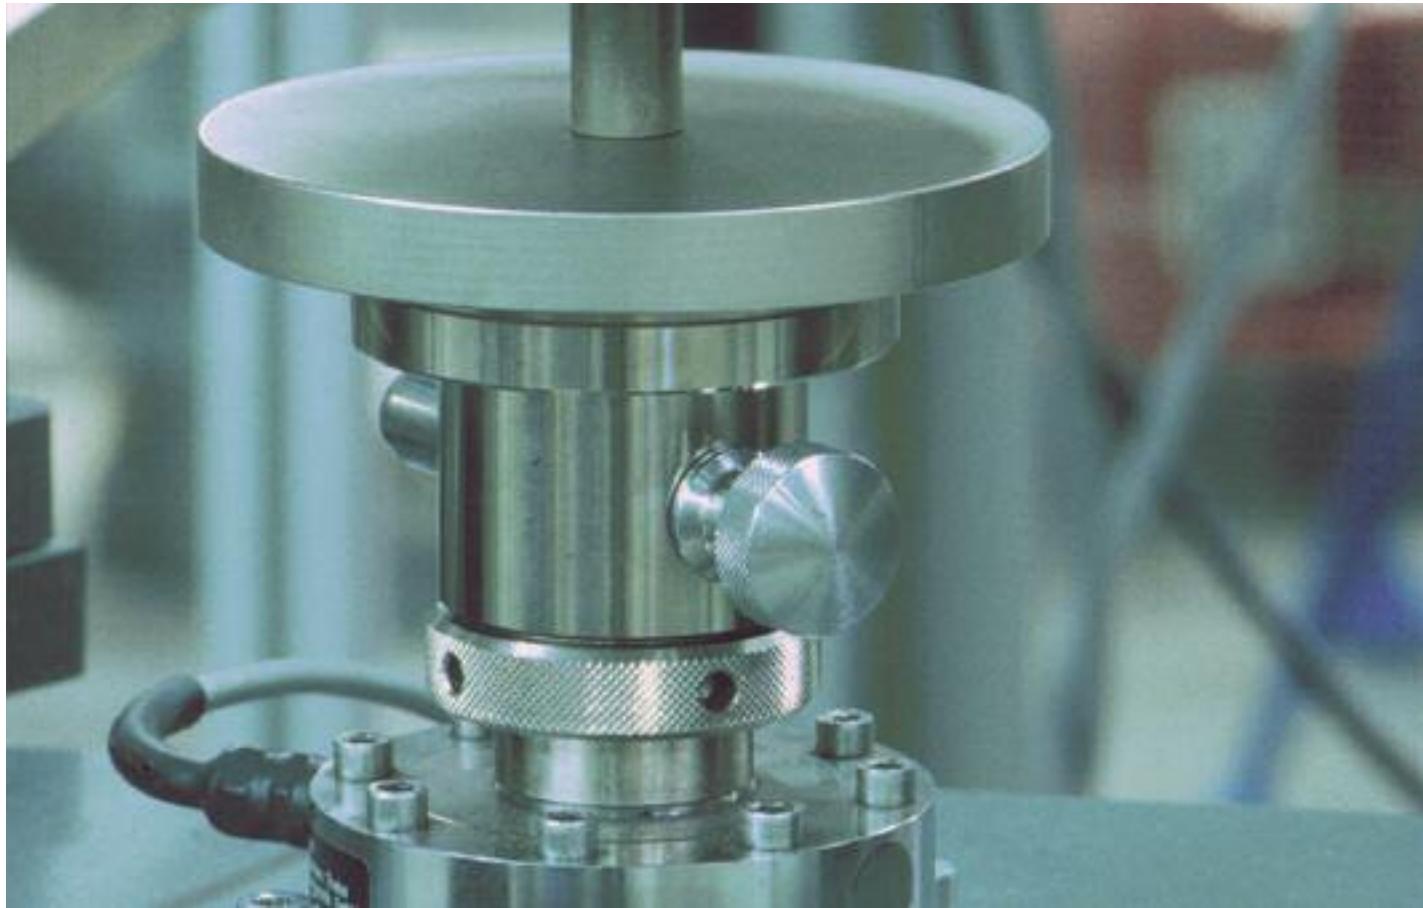

# Product testing in action

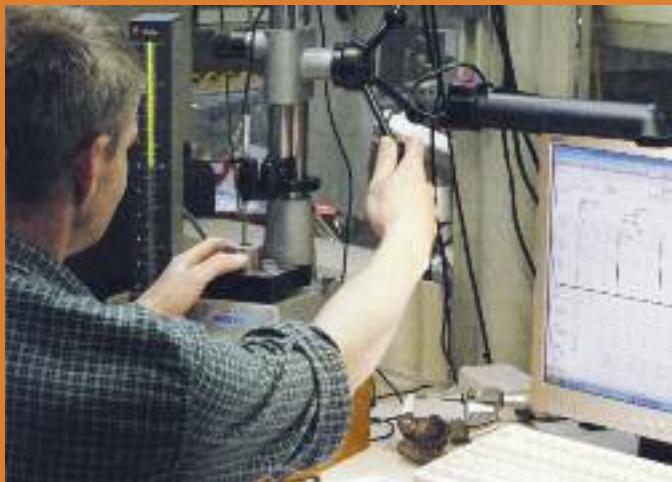

igus® is committed to quality assurance.



Above is a test to determine the maximum running speed of an igubal® pillow block bearing.



This is an example of friction and abrasion measurement in a rotation test.



Pictured is a bench test for loads up to 21,755 psi and temperatures up to 482 degrees Fahrenheit.

## The Application Corner

In addition to all the applications you have read about in this brochure, more examples and an extensive video library can be found in igus®' Application Corner at [www.igus.com/bearings-applications](http://www.igus.com/bearings-applications).

igus® Inc. is proudly certified by the National Quality Assurance (NQA) against the provisions of ISO 9001:2008. All products are tested and available from a single source.

Examples of test certificates and quality seals for igus® products:



... more by request.

# Lubrication-free with igus® good for the environment and the wallet

## Plastic bearings offer environmental benefits

Tribologically optimized iglide® plastic plain bearings from igus® require neither oil nor grease. They are lubrication-free, so no contaminants escape into the environment.

One billion gallons of industrial lubricants are consumed annually in the United States, of which an estimated 40 percent is released into the environment. This is becoming increasingly environmentally unacceptable and there is a growing need to find 'green' substitutes.

Due to continually advancing bearing technology, igus® is able to supply metal plain and rolling bearing alternatives more in line with environmental considerations for an increasing number of applications. The amount of oil used in plastics manufacturing is also very positive in comparison with aluminum and steel production. Whereas the energy from 16 quarts of oil is necessary to produce 1 quart of aluminum, and 1 quart of steel requires 12 quarts of oil, to produce 1 quart of plastic only needs an average of 1.9 quarts of oil. The production of plastics only makes up 4 percent of annual oil requirements globally.

## Lubricant-free and light

The solid lubricants contained within iglide® polymer plain bearings are not the only ecologically valuable benefit. The lightweight bearings can also help to reduce fuel consumption and carbon dioxide output in vehicles or aircrafts, for example. The reduced weight leads to lower masses and subsequently lower energy consumption.


The high chemical resistance of plastic bearings is another positive ecological aspect because metals are often coated to achieve this effect. This takes place in environmentally unfriendly, high-energy zinc galvanizing baths.



In contrast to metallic plain and rolling bearings, iglide® plastic plain bearings from igus® require no oil or grease



A study has found that nearly half of all machine lubricants used in Germany seep into soil, water or evaporate into the atmosphere. iglide® bearings require no lubrication, which would aid in solving this problem.

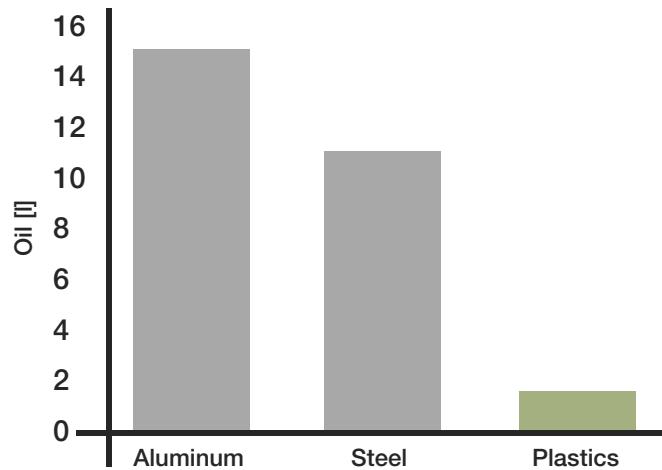

The energy required to produce one volume liter of material (converted to liters of oil). Source: Clausthal University of Technology



Lifetime calculation online:  
[www.igus.com](http://www.igus.com)

Exciting applications can be viewed online at:  
[www.igus.com/bearings-applications](http://www.igus.com/bearings-applications)


# Choosing the perfect iglide® bearing for your application.

## Plastics for longer life

High performance iglide® bearings are a viable, cost-effective alternative to metal, ball bearings, and bronze. They are fast becoming a standard choice for design engineers. Engineers are realizing that advanced synthetic compounds provide more design opportunities than traditional materials. Based on customer applications and requirements the igus® research and development team is continually developing new materials to meet these challenges. All iglide® maintenance-free bearings deliver superior performance, even in severe environments.

Very few basic materials can be modified and adapted, as well as thermoplastics. Thermoplastics can be produced with lubricants, they can be reinforced mechanically by the addition of technical fibers, or they can be varied by additional filling materials, especially in regard to friction and wear behavior.

The solid lubricants used in iglide® bearings are, as microscopic particles, embedded in millions of tiny chambers of the mostly fiber-reinforced material. From these chambers, the plain bearings release tiny amounts of solid lubricants during movement. The solid lubricants help to lower the coefficient of friction of the iglide® bearing. Since they are embedded in the tiny chambers, they cannot be pressed out. They are always there as soon as the bearing or the shaft is set in motion. Because iglide bearings are self-lubricating, an external lubricant is not necessary.

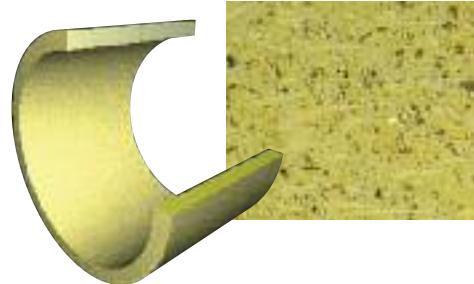

## Predictable

Each year, igus® engineers develop more than one hundred new plastic compounds and test maintenance-free plain bearings in more than 5,000 experiments. Through many years of research and testing, igus has been able to make its bearings predictable. In recent years igus has compiled an extensive database of the tribological properties of plastics. This database makes it possible for us to better assess the overwhelming number of applications in advance, to calculate the expected service life, and provide our customers with confidence during use.

What design engineers need more than ever is predictability, reliability and speed. With the help of igus' online Expert System, in just a few minutes engineers can reliably determine which bearing best suits their application and receive a service life analysis based on empirical test results.

## From start to finish, igus® is here for you

igus design technicians are ready to assist you with every step from design to production. Our highly trained experts are available by phone or e-mail and free on-site demonstrations and evaluations are always encouraged. Please visit our Web site at [www.igus.com](http://www.igus.com) for detailed technical information, 3D CAD drawings ready for download and to use our Predictability Expert Systems.

Send us a request for free test samples, then place your order from over 9,600 standard dimensions or special parts.



Visit [www.igus.com](http://www.igus.com)  
and click on the Predictability  
Calculator for a direct link to  
the iglide® Expert System



# Selection According to Industry

iglide® plastic plain bearings are designed to meet a variety of application parameters so they can be used in many different industries and applications. Use the chart below as a guideline for getting started. To speak with an igus® sales engineer, call 1-888-803-1895

iglide®	M250	R	J	L280	G300	Q	P	Q2	H370	A180	A200	A350	T500	X6	Z
Agriculture	●	●	●		●		●	●							
Bicycle			●	●	●		●								
Automation				●	●	●	●	●	●						
Automotive	●				●										
Construction					●		●	●					●	●	●
Cylinders/ Pneumatic			●	●					●	●					
Fitness Equipment	●	●	●	●											
Food Mfg Preparation										●	●	●			
Home Appliances	●	●	●							●	●	●	●	●	●
Lifting Equipment				●	●	●	●								
Marine			●		●		●		●				●		
Medical	●	●	●		●					●	●	●			
Office Furniture	●	●	●												
Packaging	●	●	●							●	●	●			
Printing & Copy Machines				●	●	●									
Pumps / Valves													●	●	●
Recreational vehicles	●	●					●	●						●	


# Selection According to Main Criteria

Standard materials available from stock


iglide®	M250	R	J	L280	G300	Q	P	Q2	H370	A180	A200	A350	T500	X6	Z
	●	●	●	●	●	●	●	●		●			●	●	●
long life dry running															
					●	●							●	●	●
for high loads													●		●
									●				●	●	●
for high temperatures															
	●	●	●	●	●	●			●	●	●	●	●	●	●
low friction/ high speed															
	●			●	●		●	●			●				
dirt resistant															
									●				●	●	●
chemical resistant															
	●	●							●	●			●	●	●
low water absorption															
food suitable										●	●	●			
	●									●	●				
vibrations dampening															
	●	●	●	●	●				●	●	●	●			●
edge pressure															
										●			●	●	
for under water use															
	●	●	●	●	●				●	●					
economic															

**Special Bearing Materials - Call for lead time**

# Selection According To Four Main Criteria

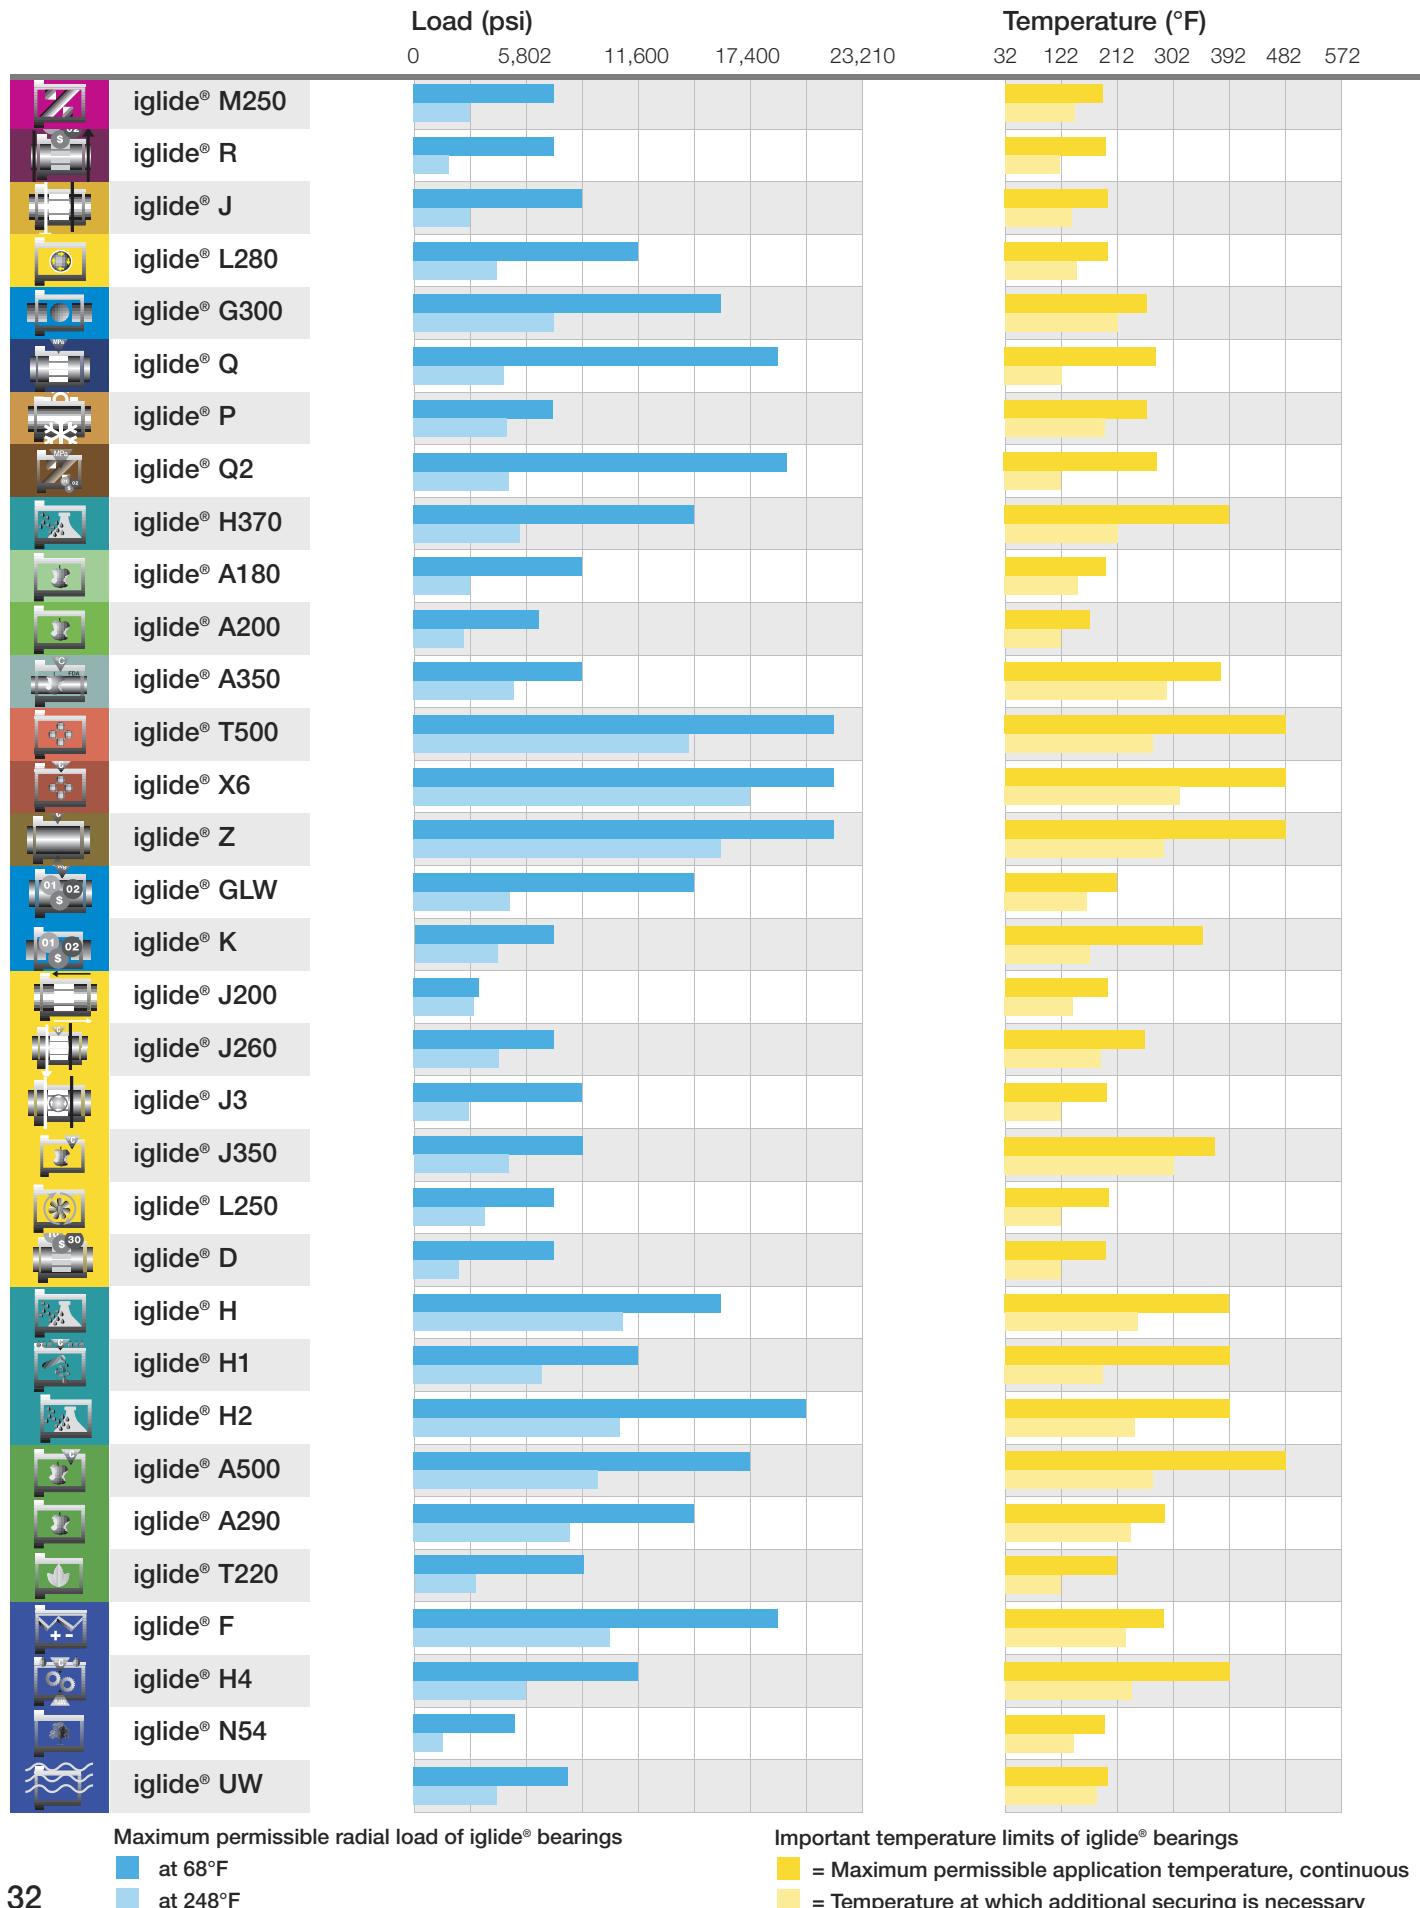

# Selection According To Four Main Criteria

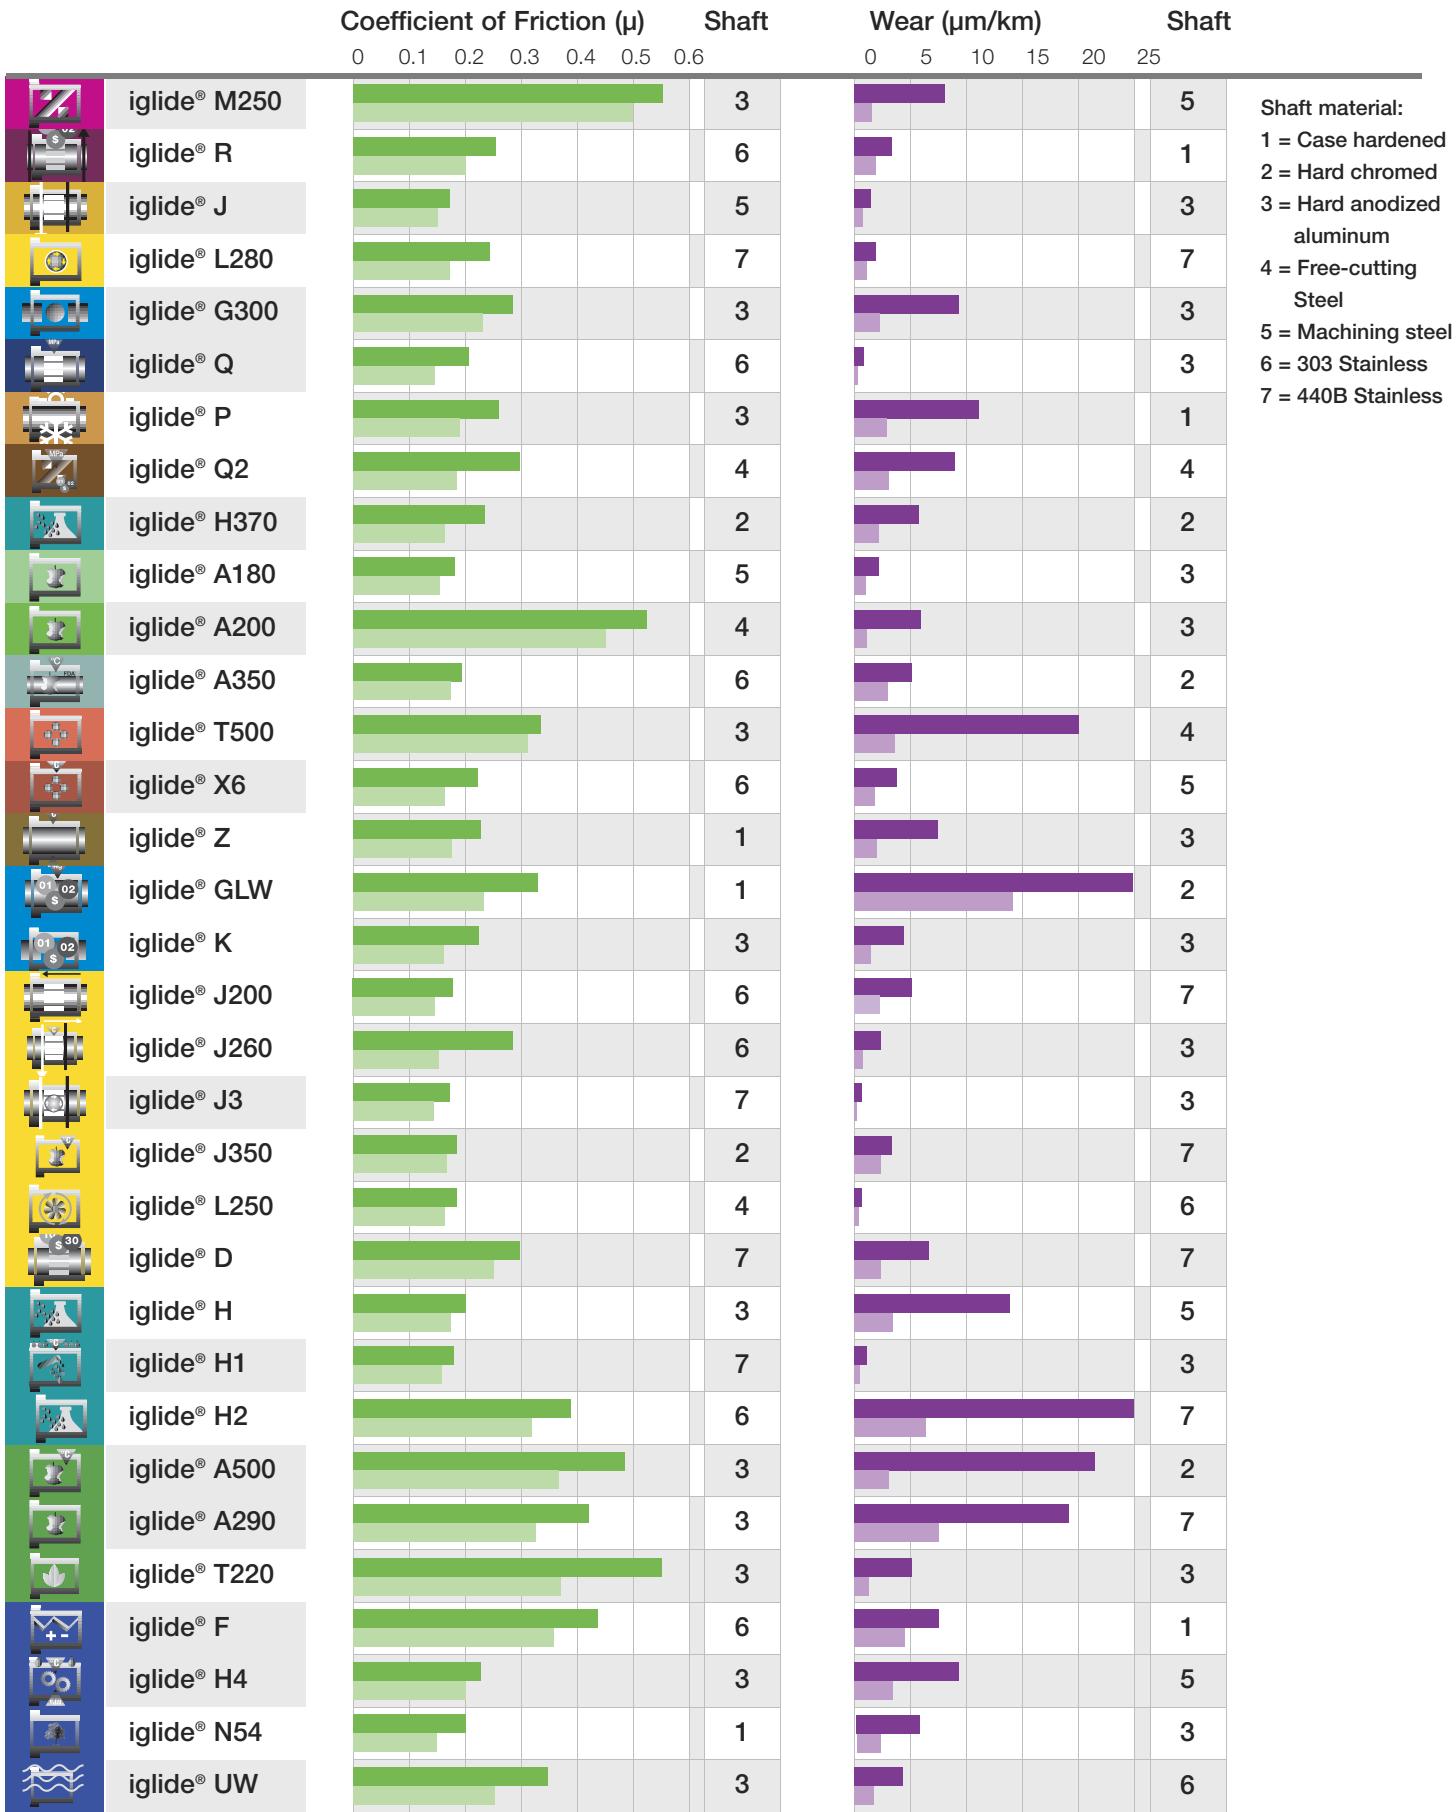

Coefficients of friction of iglide® bearings sliding against steel,  $p = 174 \text{ psi}$ ,  $v = 59.06 \text{ fpm}$

 Average coefficient of all the seven sliding combinations tested

 Coefficient of friction of best combination

Wear of iglide® bearings sliding against steel,  $p = 145 \text{ psi}$

 Average wear of all the seven sliding combinations tested

 Wear of best combination

# Selection Guide 1

## Standard Materials

### General Properties

	iglide® M250 standard from stock	iglide® R standard from stock	iglide® J standard from stock	iglide® L280 standard from stock	iglide® G300 standard from stock	iglide® Q standard from stock
Density g/cm³	1.14	1.39	1.49	1.24	1.46	1.40
Color	Charcoal	Dark Red	Yellow	Yellow	Dark gray	Black
Max. moisture absorption at 73°F / 50% r.h. % weight	1.4	0.2	0.3	1.3	0.7	0.9
Max. moisture absorption % weight	7.6	1.1	1.3	6.5	4.0	4.9
Coefficient of sliding friction, dynamic against steel $\mu$	0.18 - 0.40	0.09 - 0.25	0.06 - 0.18	0.08 - 0.23	0.08 - 0.15	0.05 - 0.15
p x v-value, max. (dry) psi x fpm	3,400	8,700	9,700	6,600	12,000	16,000

### Mechanical Properties

Modulus of elasticity psi	391,600	282,800	348,100	507,600	1,131,000	652,700
Tensile strength at 68°F psi	16,240	10,150	10,590	18,130	30,460	17,400
Compressive strength psi	7,542	9,863	8,702	8,847	11,310	12,910
Max. permissible static surface pressure (68°F) psi	2,901	3,336	5,076	8,702	11,600	14,500
Shore D-hardness	79	77	74	77	81	83

### Physical and Thermal Properties

Max. long-term application temperature °F	176	194	194	194	266	275
Max. short-term application temperature °F	338	230	248	356	428	311
Min. application temperature °F	- 40	- 58	- 58	- 40	- 40	- 40
Thermal conductivity (W/m x K)	0.24	0.25	0.25	0.24	0.24	0.23
Coefficient of thermal expansion (at 23°C) (K⁻¹ x 10⁻⁵)	10	11	10	9	9	5

### Electrical Properties

Specific volume resistance Ωcm	> 10¹³	> 10¹²	> 10¹³	> 10¹³	> 10¹³	< 10¹⁵
Surface resistance Ω	> 10¹¹	> 10¹²	> 10¹²	> 10¹²	> 10¹¹	< 10¹²

iglide® P standard from stock	iglide® Q2 standard from stock	iglide® H370 standard from stock	iglide® A180 standard from stock	iglide® A200 standard from stock	iglide® A350	iglide® T500 standard from stock	iglide® X6 standard from stock	iglide® Z standard from stock
1.58	1.46	1.66	1.46	1.14	1.42	1.44	1.53	1.40
Black	Beige-brown	Gray	White	White	Light Blue	Black	Blue Gray	Brown
0.2	1.1	0.1	0.2	1.5	0.6	0.1	0.1	0.3
0.4	4.6	0.1	1.3	7.6	1.9	0.5	0.5	1.1
0.06 - 0.21	0.22 - 0.42	0.07 - 0.17	0.05 - 0.23	0.10 - 0.40	0.10 - 0.20	0.09 - 0.27	0.09 - 0.25	0.06 - 0.14
11,000	19,500	21,000	8,750	2,900	11,500	37,700	38,350	24,000
768,700	1,214,000	1,610,000	333,600	362,600	290,100	1,174,800	2,320,600	348,100
17,400	34,810	19,580	12,760	16,820	15,950	24,660	42,060	13,775
9,572	18,850	11,460	11,310	7,832	11,310	14,500	27,557	9,425
7,252	17,400	10,880	4,060	2,611	8,702	21,760	21,755	21,750
75	80	82	76	81	76	85	89	81
266	266	392	194	176	356	482	482	482
392	392	464	230	338	410	599	599	590
- 40	- 40	- 40	- 58	- 40	- 148	- 148	- 148	- 148
0.25	0.24	0.5	0.25	0.24	0.24	0.6	0.55	0.62
4	8	5	11	10	8	5	1.1	4
> 10 <sup>13</sup>	< 10 <sup>13</sup>	< 10 <sup>5</sup>	> 10 <sup>12</sup>	> 10 <sup>13</sup>	> 10 <sup>11</sup>	< 10 <sup>5</sup>	< 10 <sup>5</sup>	> 10 <sup>11</sup>
> 10 <sup>12</sup>	< 10 <sup>11</sup>	< 10 <sup>5</sup>	> 10 <sup>11</sup>	> 10 <sup>12</sup>	> 10 <sup>11</sup>	< 10 <sup>3</sup>	< 10 <sup>5</sup>	> 10 <sup>11</sup>
SECTION 8	SECTION 9	SECTION 10	SECTION 11	SECTION 12	SECTION 13	SECTION 14	SECTION 15	SECTION 16

# Selection Guide 2

## Special Materials

The following list of materials is available upon request Please call your iglide® Sales technician for more information 1-888-803-1895

General Properties	iglide® GLW standard from stock	iglide® K standard from stock	iglide® J200	iglide® J260	iglide® J3
Density g/cm³	1.36	1.52	1.72	1.35	1.42
Color	Black	Yellow-Beige	Dark Gray	Yellow	Yellow
Max. moisture absorption at 73°F / 50% r.h. % weight	1.3	0.1	0.2	0.2	0.3
Max. moisture absorption % weight	5.5	0.6	0.7	0.4	1.3
Coefficient of sliding friction, dynamic against steel $\mu$	0.10 - 0.24	0.06 - 0.20	0.11 - 0.17	0.06 - 0.20	0.06 - 0.20
p x v-value, max. (dry) psi x fpm	8,600	8,600	8,600	10,000	14,000
Mechanical Properties					
Modulus of elasticity psi	1,116,500	507,600	406,100	319,100	391,600
Tensile strength at 68°F psi	34,075	11,600	8,412	8,702	10,150
Compressive strength psi	10,730	8,702	6,237	7,252	8,702
Max. permissible static surface pressure (68°F) psi	11,600	8,702	3,336	5,802	6,527
Shore D-hardness	78	72	70	77	73
Physical and Thermal Properties					
Max. long-term application temperature °F	212	338	194	248	194
Max. short-term application temperature °F	320	464	248	284	248
Min. application temperature °F	- 40	- 40	- 58	-148	-58
Thermal conductivity (W/m x K)	0.24	0.25	0.24	0.24	0.25
Coefficient of thermal expansion (at 23°C) (K⁻¹ x 10⁻⁵)	17	3	8	13	13
Electrical Properties					
Specific volume resistance Ωcm	> 10¹¹	> 10¹²	> 10⁸	> 10¹²	> 10¹²
Surface resistance Ω	> 10¹¹	> 10¹²	> 10⁸	> 10¹⁰	> 10¹²
	SECTION 17	SECTION 18	SECTION 19	SECTION 20	SECTION 21

SECTION 22		SECTION 23		SECTION 24		SECTION 25		SECTION 26		SECTION 27		SECTION 28		SECTION 29		SECTION 30	
iglide® J350		iglide® L250		iglide® D		iglide® H		iglide® H1		iglide® H2		iglide® A500		iglide® A290		iglide® T220	
1.44	1.50	1.40		1.71		1.53		1.72		1.28		1.41		1.28			
Yellow	Beige	Green		Gray		Cream		Brown		Brown		White		White			
0.3	0.7	0.3		< 0.1		0.1		0.1		0.3		1.7		0.3			
1.6	3.9	1.1		0.3		0.3		0.2		0.5		7.3		0.5			
0.10 - 0.20	0.08 - 0.19	0.08 - 0.26		0.07 - 0.20		0.06 - 0.20		0.07 - 0.30		0.26 - 0.41		0.13 - 0.40		0.20 - 0.32			
13,000	11,500	8,700		39,000		22,800		16,500		8,000		6,600		8,000			
290,100	282,800	290,100		1,813,000		406,100		1,494,000		522,100		1,276,000		261,100			
7,977	9,718	10,440		25,380		7,977		30,460		20,310		36,260		9,427			
8,702	6,817	10,150		11,750		11,310		15,810		17,110		13,200		7,977			
8,702	6,527	3,336		13,050		11,600		15,950		17,400		10,150		5,802			
80	68	78		87		77		88		83		88		76			
356	194	194		392		392		392		482		284		212			
428	356	230		464		464		464		572		356		320			
-148	- 40	- 58		- 40		- 40		- 40		- 148		-40		-40			
0.24	0.24	0.25		0.60		0.24		0.24		0.24		0.24		0.24			
7	10	11		4		6		4		8		7		11			
> 10 <sup>13</sup>	> 10 <sup>10</sup>	> 10 <sup>14</sup>		> 10 <sup>5</sup>		< 10 <sup>12</sup>		> 10 <sup>15</sup>		> 10 <sup>11</sup>		> 10 <sup>11</sup>		> 10 <sup>10</sup>			
> 10 <sup>10</sup>	> 10 <sup>11</sup>	> 10 <sup>14</sup>		> 10 <sup>2</sup>		< 10 <sup>11</sup>		> 10 <sup>14</sup>		> 10 <sup>11</sup>		> 10 <sup>11</sup>		> 10 <sup>10</sup>			

# Selection Guide 2

## Special Materials

The following list of materials is available upon request Please call your iglide® Sales technician for more information 1-888-803-1895

### General Properties

	iglide® F	iglide® H4	iglide® N54	iglide® UW
Density g/cm³	1.25	1.79	1.79	1.52
Color	Black	Brown	Brown	Black
Max. moisture absorption at 73°F / 50% r.h. % weight	1.8	0.1	0.1	0.2
Max. moisture absorption % weight	8.4	0.2	0.2	0.8
Coefficient of sliding friction, dynamic against steel $\mu$	0.10 - 0.39	0.08 - 0.25	0.08 - 0.25	0.22 - 0.5
p x v-value, max. (dry) psi x fpm	9,700	9,400	9,400	8,600

### Mechanical Properties

Modulus of elasticity psi	1,682,400	1,087,700	1,087,700	1,392,362
Tensile strength at 68°F psi	37,700	17,400	17,400	13,000
Compressive strength psi	14,200	7,250	7,250	10,150.
Max. permissible static surface pressure (68°F) psi	15,200	9,400	9,400	5,800
Shore D-hardness	84	80	80	78

### Physical and Thermal Properties

Max. long-term application temperature °F	284	392	392	194
Max. short-term application temperature °F	356	464	464	230
Min. application temperature °F	- 40	- 40	- 40	- 58
Thermal conductivity (W/m x K)	0.65	0.24	0.24	0.60
Coefficient of thermal expansion (at 23°C) (K⁻¹ x 10⁻⁵)	12	5	5	6

### Electrical Properties

Specific volume resistance Ωcm	< 10³	< 10¹³	< 10¹³	> 10⁵
Surface resistance Ω	< 10²	< 10¹¹	< 10¹¹	> 10⁶

# iglide® Custom Bearings

## Yes, we do.

Well over a billion iglide® plastic plain bearings have already been supplied by igus®. The majority are standard sizes, but that does not solve every application. We also produce special solutions with lifetime calculation and with iglide® advantages:



YOUR  
BEARING  
HERE

- Maintenance-free
- Self-lubricating
- Low Friction
- Wear resistant




Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

# Y.E.S.

## Young Engineers Support Program



The Y.E.S. Program is designed to foster the mechanical design ideas of students and to educate them on the merits and benefits of plastic components. Through Y.E.S. igus® has reached out to students, competitions and engineering programs from across the United States, Canada and Mexico.

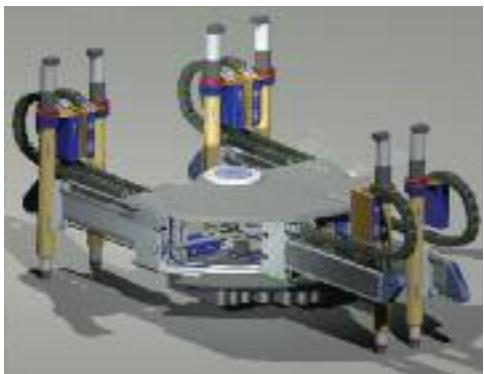

A team from Canada used Energy Chain® while building a walking robot.

### Through the Y.E.S. Program, igus®:

- ✓ offers free product donations to students, engineers and professors for use in various design competitions, school projects and engineering curriculums;
- ✓ supports the visions of various engineering competitions by donating products, technical support and other resources;
- ✓ revitalizes students' interest in engineering; and
- ✓ aids in making the unique design ideas of students and engineers a reality.

### Y.E.S. Facts

- ✓ The Y.E.S. Program is open to students of all ages and grade levels, as well as teams and engineers competing in robotic competitions.
- ✓ The Y.E.S. Program sponsors competitions such as FIRST®, BEST™, Botball® and the SAE Collegiate Design Series.
- ✓ The Y.E.S. Program offers lecture engagements presented by bearings and cable carrier experts at schools and universities across the United States, Canada and Mexico.
- ✓ Students have the opportunity to see their accomplishments featured on the Y.E.S. website by submitting information about the unique application, how they used igus® products and pictures.



For this FIRST® Robotics team, DryLin® linear guides and iglide® plastic bearings were a lightweight alternative to metal or bronze bearings and facilitated movement for the robot's forklift.



A PhD student from the Worcester Polytechnic Institute used DryLin® linear bearings and iglide® plastic bearings to facilitate motion on this MRI-guided robot, which will revolutionize the way prostate cancer is detected and treated.



Igus® brought together a panel of experts in science and engineering to uncover and honor the top engineering designs using plastic bearings in new and ingenious ways. The winning applications were chosen from more than 60 entries based on creativity, technical advancement and economic impact. See more applications online at [www.igus.com/manus](http://www.igus.com/manus)



### Six Flags Theme Parks Rollercoaster

The world's only 4th dimensional rollercoaster needed a lubrication-free, maintenance-free bearing due to tight space restrictions. High loads were also a factor, as well as high flexibility to provide the high level of vibration dampening essential for optimal performance. Iglide® Z not only met these requirements, but significantly reduced costs by more than 50 percent and virtually eliminated maintenance.



### Harriston Industries Agricultural Machinery

Iglide® J replaced bronze bearings on the company's potato planter, which continually experienced high wear and premature failure due to very abrasive conditions. High salt content in the air was also causing corrosion and seizure. Iglide® J eliminated corrosion and increased lifespan by 500-600 percent at a cost 70-80 percent lower.




### Nova Biomedical Medical Device

The company chose to use DryLin® R bearings on its two-axis tray and both DryLin® R and DryLin® N linear slides on its three-axis probe. Repetitive motion, saltwater contamination, high temperatures and the crucial need for accurate positioning prompted Nova to try DryLin®. The bearings also needed to be lubrication-free to prevent contamination. DryLin's low-cost and ease-of-use were the determining factors.



igus®

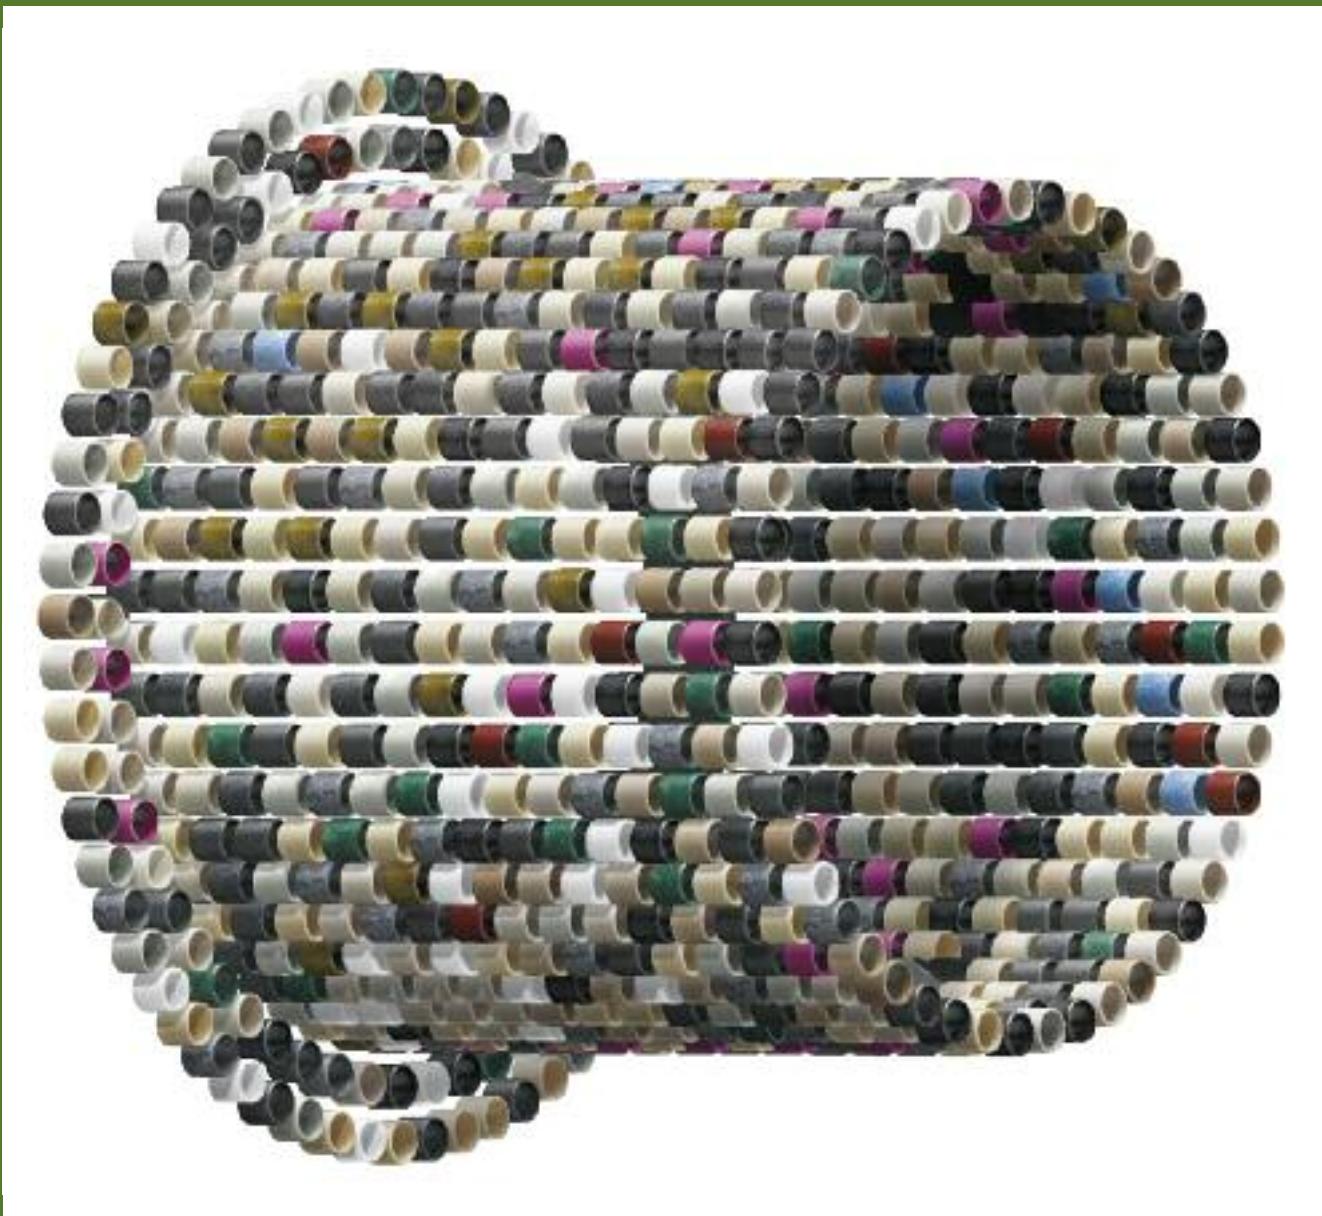

# iglide® Design Guide



- High dimensional accuracy
- High compressive strength
- Good heat dissipation
- Low heat relaxation
- Maintenance-free
- High dirt resistance
- Corrosion resistance
- High vibration dampening
- Very low tendency to creep

## Plain Bearings Last a Long Time at Low Cost

igus® develops materials that are well-suited to the different requirements of maintenance-free plain bearings:

1. Plain bearings must be able to handle high loads over an extended period of time.
2. Maintenance-free plain bearings should have low coefficients of friction.
3. Plain bearings should have low wear rates to increase life span.

Both in material development as well as in the construction of bearings, former disadvantages of plastics are greatly reduced. Thus, iglide® plain bearings are thin walled and some materials have especially high thermal conductivity. Both features function to rapidly dissipate heat and thus directly increase the load capacity of the bearing.




**Every designer's dream:** A plain bearing made of high-performance plastics that's lifetime is predicted by real world testing.

---

## The Traditional Solution is:

Hard shells with soft coating. Each lubricated bearing works according to this principle, and likewise a number of maintenance-free bearings, that are equipped with special slide layers. However, this soft slide layer is not strong enough. For high loads, compression across edges or oscillations, it becomes removed.

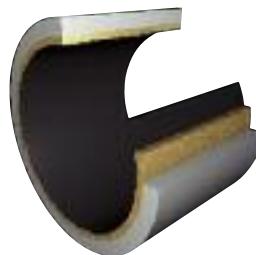

**The traditional solution,** bearing shells made of layers with lubricants and/or coating.

---

## iglide® Plain Bearings Function Differently

One component of the iglide® materials acts for each function of the bearing:


- The **base plastics** are responsible for the resistance to wear
- **Fibers and filling materials** reinforce the bearing so that high forces or edge loads are possible
- **Solid lubricants**, lubricate the bearing independently and prevent friction of the system



**iglide® plain bearings:**  
Exactly the right bearing for every application

## Base Plastics and Technical Fibers

The radial pressure, with which the bearings are loaded, is received by the plastic base material. In the contact area, this material provides shaft support. The plastic base material ensures the lubricants do not receive a surface pressure that is too high. The base material is also reinforced by technical fibers or filling materials. These additional materials stabilize the bearing especially for cases of continuous stress.

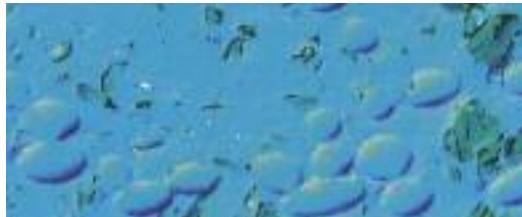


Base plastics with fibers and solid lubricants, magnified 200 times, dyed



Base plastics without reinforcing materials with solid lubricants, magnified 200 times, dyed.

## The Start-up Phase

During the initial start-up phase, the shaft and the iglide® plain bearing become mated to one another. During this phase, the surfaces of both the shaft and the bearing are fitted to each other. The specific loading of the system drops since the contact surfaces of the shaft and bearing expand during the start-up. At the same time, the rate of wear decreases and approaches a linear curve. In this phase, the coefficients of friction continue to change, until finally assuming a value that is for the most part constant.

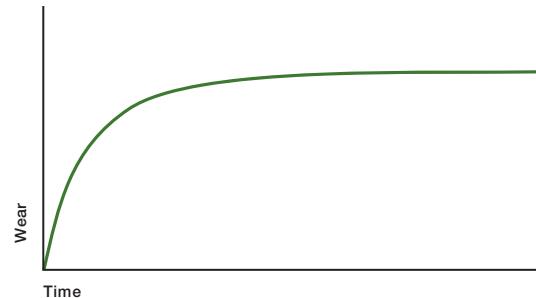

During the start-up phase, the rate of wear drops greatly.

## Compressive Strength

The load of a plain bearing is expressed by the surface pressure (psi). For this purpose, the radial load is determined on the projected surface of the bearing.

Radial bearing:

$$p = F / (d_1 \times b_1)$$

For thrust bearings, the load is produced accordingly.

Axial bearing:

$$p = F / (d_2^2 - d_1^2) \times \pi / 4$$


in this process:

**F** load in lbs

**d<sub>1</sub>** bearing inner diameter in inches

**b<sub>1</sub>** bearing length in inches

**d<sub>2</sub>** Outer diameter of the bearing in inches

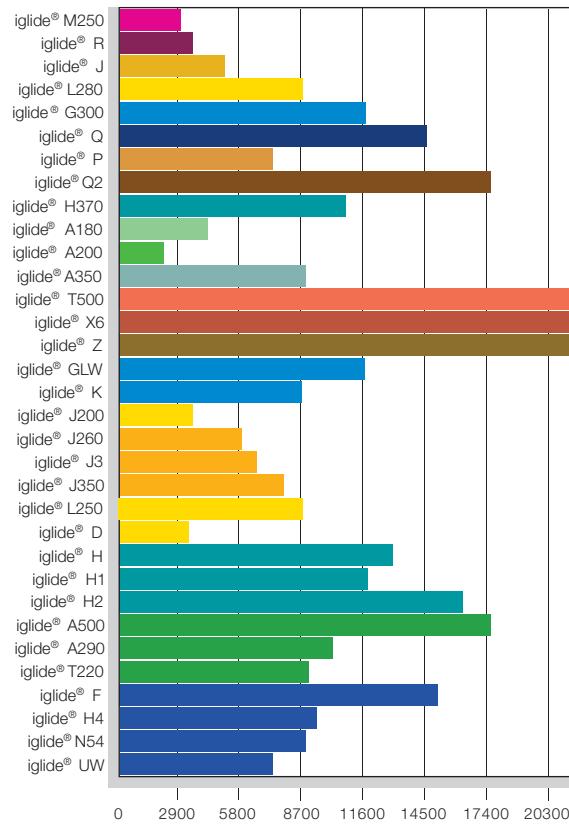

Permissible average static surface pressure at 68°F

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

i

## Permissible Average Surface Pressure

A comparative value of the iglide® material is the permissible average static surface pressure (p) at 68°F. The values of the individual iglide® plain bearings differ greatly on this point. The value (p) indicates the limit of the load of a plain bearing. The plain bearing can carry this load permanently without damage. The given value applies to static operation, only very slow speeds up to 1.97 fpm are tolerated under this load. Higher loads than those indicated are possible if the duration of the load is short. For a few minutes, the load can be more than doubled, depending on the material. Please call us if you have questions.


## Pressure and Temperature

The graph to the right shows the permissible static surface pressure ( $p$ ) of the iglide® plain bearing versus the temperature.

When using the plain bearing, the bearing temperature can be higher than the ambient temperature, due to friction. Take advantage of the opportunity presented by the predictability of the iglide® plain bearing to record these effects in advance, or determine the effective temperatures in the test.



Testing of the compressive strength of iglide® plain bearings

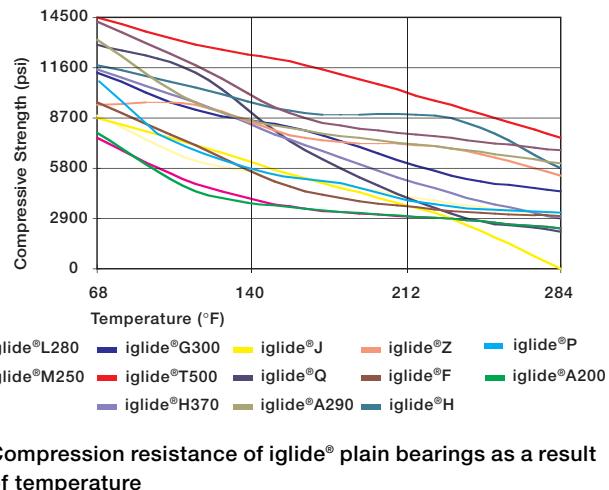

## Pressure and Speed

With decreasing radial load on the plain bearing, the permissible surface speed increases. The product of the load ( $p$ ) and the speed ( $v$ ) can be understood as a measurement for the frictional heat of the bearing. This relationship is shown by the  $p \times v$ -graph that is the first in the respective chapter for each iglide® material.


## Pressure and Wear

The load of the plain bearing has an effect on the wear of the bearing. The following graphs show the wear behavior of the iglide® bearing materials. It is easily recognized that for each load, there is an optimal plain bearing available.


## Pressure and Coefficient of Friction

With increasing load, the coefficient of friction of the plain bearing typically decreases. In this context, shaft materials and surfaces are also significant.

► Coefficients of Friction, Page 1.17

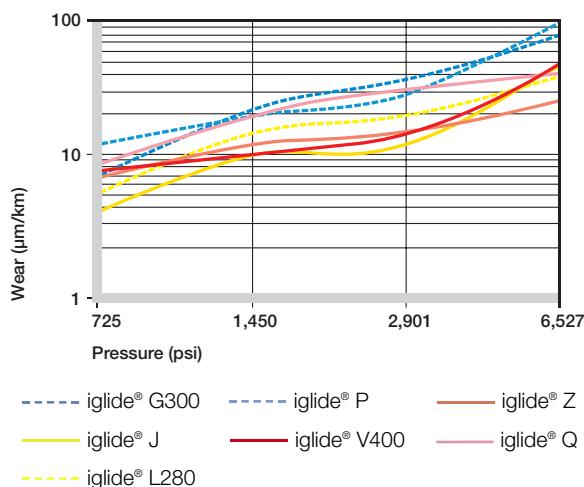

Wear of iglide® plain bearings under medium and high loads

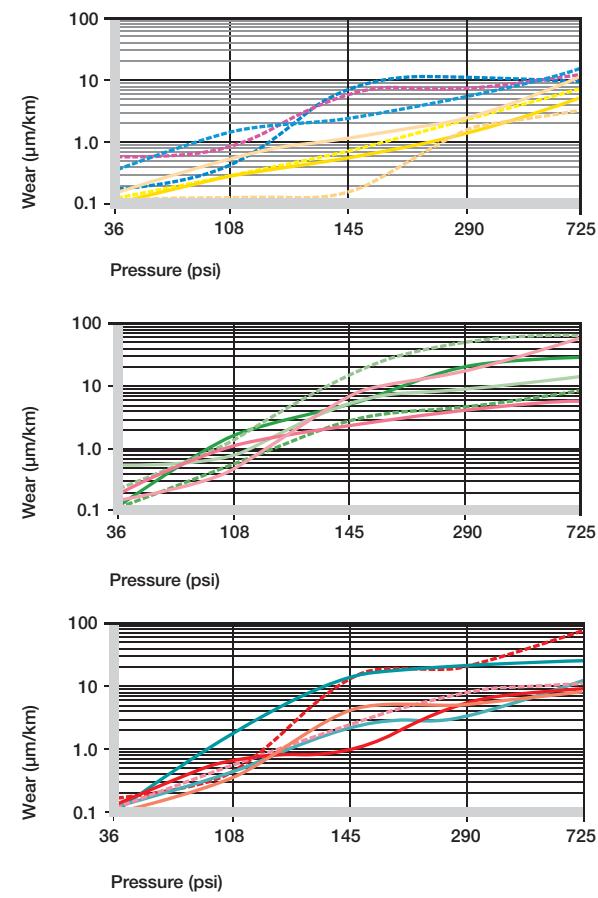

Wear of iglide® plain bearings under low loads

## Surface Speed

For plain bearings, the revolution speeds always matter. The absolute rotational speed is not decisive, instead it's the relative speed between the shaft and the bearing.

The surface speed is expressed in feet per minute (fpm) and calculated from the rotational speed with the adjacent formula.

### Rotations:

$$v = \frac{\text{rpm} \times d_1 \times 3.14}{12} = \text{fpm}$$

### Oscillating movements:

$$v = \frac{2ab}{360} \times \frac{3.14d}{12} = \text{fpm}$$

### in the process:

a= Angle of motion either side of the mean position in degrees

d1= Shaft diameter in inches, if mm convert to inches prior to calculation

b= Frequency in cycle per minute

d= Inner diameter in inches, if mm convert to inches prior to calculation

## Permissible Surface Speeds

iglide® plain bearings were primarily developed for low to average running speeds in continuous operation.

The table shows the permissible surface speed of iglide® plain bearings for rotating, oscillating, and linear movements.

These surface speeds are limit values assuming minimum pressure loading of the bearing. In practice, these limit values are rarely reached due to an inverse relationship between load and speed. Each increase of the pressure load leads unavoidably to a reduction of the allowable surface speeds and vice versa.

The limit of the speed is measured by the bearing temperature. This is also the reason why different running speeds can occur for the different movement types. For linear movements, more heat can be dissipated via the shaft, since the bearing uses a longer surface area on the shaft.


Material	Rotating		Oscillating		Linear		Material	Rotating		Oscillating		Linear	
	Long	Short	Long	Short	Long	Short		Long	Short	Long	Short	Long	Short
iglide® M250	157	393	118	275	492	984	iglide® K	197	393	137	275	591	787
iglide® R	157	236	118	197	689	984	iglide® J200	197	295	137	216	1969	2953
iglide® J	295	590	216	413	1574	1969	iglide® J260	197	393	137	275	591	787
iglide® L280	196	492	138	354	787	1181	iglide® J3	295	591	216	413	1575	1969
iglide® G300	196	393	138	275	787	1043	iglide® J350	256	591	197	453	787	1575
iglide® Q	196	393	137	275	984	1181	iglide® L250	197	295	137	216	393	591
iglide® P	196	393	137	275	590	787	iglide® D	295	590	216	413	1574	1969
iglide® Q2	197	393	137	275	787	984	iglide® H	196	295	137	216	590	787
iglide® H370	236	295	157	216	787	984	iglide® H1	393	492	196	295	984	1378
iglide® A180	157	236	118	197	689	984	iglide® H2	177	196	118	137	492	590
iglide® A200	157	295	118	216	393	590	iglide® A500	118	196	78	137	196	393
iglide® A350	196	236	157	177	492	590	iglide® A290	196	393	137	275	590	787
iglide® T500	295	689	216	492	984	1969	iglide® T220	78	196	59	137	196	393
iglide® X6	295	689	216	492	1062	1969	iglide® F	157	295	118	216	590	984
iglide® Z	295	689	216	492	984	1181	iglide® H4	197	295	138	216	197	393
iglide® GLW	157	196	118	137	492	590	iglide® N54	157	295	118	216	197	393
							iglide® UW	98	295	78	216	393	590

## Surface Speed and Wear

Considerations about the permissible surface speeds should also include the wear resistance of the plain bearing. High running speeds automatically bring correspondingly high wear rates with them.

## Surface Speed and Coefficient of Friction

The coefficient of friction of plain bearings is a result of the surface speed in practice. High surface speeds have a higher coefficient of friction, than low surface speeds. The graph to the right shows this relationship in the example of a Cold Rolled Steel shaft with a load of 102 psi with 30 and 59 fpm.

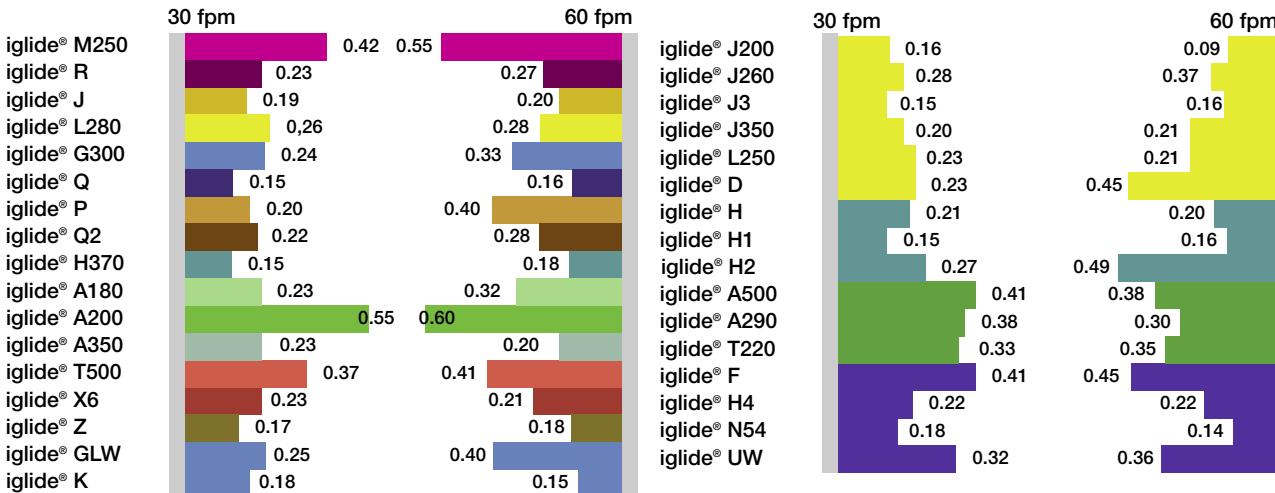

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

i

## P x V-value

For plain bearings, the product is given a new value depending on the specific load (p) and the surface speed (v).

The p x v value can be considered a measure of the frictional heat and can be used as an analytical tool to answer questions concerning the proper application of a plain bearing. For this purpose, the actual p x v value is a function of the shaft material of the ambient temperature and the operating time.

Material	Thermal Conductivity (W/m x k)
Steel	46
Aluminum	204
Gray cast iron	58
303 Stainless	16
Ceramics	1.4
Plastics	0.24

Table 1.2: Heat conductivity values of shaft or housing materials


$$p \times v = \left( \frac{(K_1 \times \pi \times \lambda_k \times \Delta T)}{\mu \times s} + \frac{(K_2 \times \pi \times \lambda_s \times \Delta T)}{\mu \times b_1 \times 2} \right) \times 10^{-3}$$

Where:

$K_1, K_2$  = constant for heat dissipation ( $K_1 = 0.5, K_2 = 0.042$ )  
 $s$  = bearing wall thickness in mm  
 $b_1$  = bearing length in mm  
 $\mu$  = coefficient of friction  
 $\lambda_s$  = thermal conductivity of the shaft  
 $\lambda_k$  = thermal conductivity of the bearing  
 $\Delta T$  =  $(T_a - T_u)$   
 $T_u$  = ambient temperature  
 $T_a$  = Maximum application temperature

## Correction Factor

The tolerated p x v value can be increased in intermittent operation if the bearing temperature never reaches the maximum limit because of the short operating time. Tests have shown that this is true for operating times below 10 minutes. An important qualifier here is the ratio of the operating time and pause intervals. It is known that long pauses make a greater contribution to re-cooling. The different curves of graph 1.9 represent different ratios (3x means that the pause lasts three times longer than the operating time).

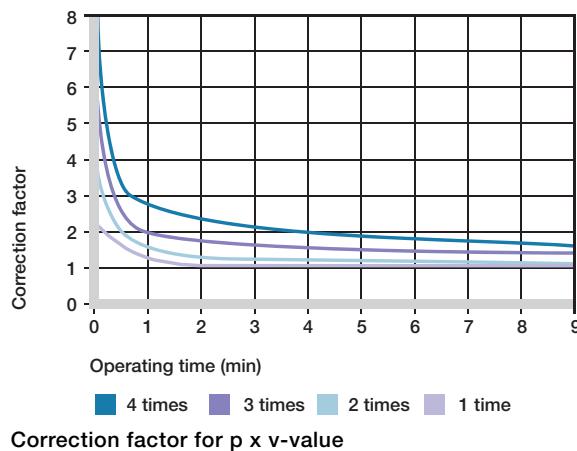

## Lubrication

Although iglide® plain bearings are designed to run dry, they are quite compatible with customary oils and greases. A single lubrication during the installation improves the start-up behavior and the coefficient of friction, thus reducing the frictional heat. Due to this effect, the permissible loads for plain bearings can be increased by lubrication. Numerous results from lubricated applications are available from experiments. Please contact us if necessary.

The table below shows the correction factors for p x v value using lubrication.

Lubrication	Correction factor
Dry run	1
During installation	1.3
Continuous, grease	2
Continuous, water	4
Continuous, oil	5

Correction of the tolerated p x v-value by lubrication



Testing the properties of plastic bearings

## Temperature

Plain bearings made of high-performance plastics are usually underestimated at higher temperatures. Who would believe that bearings made of plastic could be used up to over 572°F? Data is often found in the literature about the continuous use temperature. The continuous use temperature is the highest temperature, which the plastic can withstand for a period of time without a reduction in the tensile strength of the material above or below a prespecified value. Please note, these standardized test results have limited application, since bearings are almost always under load.


The material wear limits, based on application temperature are made informative.

## Application Temperatures

The minimum application temperature is the temperature below which the material is so rigid and hard that it becomes too brittle for standard applications. The maximum continuous application temperature is the temperature which the material can endure without the properties changing considerably. The maximum, short-term application temperature is the temperature above which the material becomes so soft, that it can only withstand small external loads. "Short-term" is defined as a time period of a few minutes. If the plain bearings are moved axially or axial forces occur, there is more opportunity for the bearing to lose pressfit. In these cases, axial securing of the bearing is necessary in addition to being pressfit.

The tables below show the maximum ambient temperatures to which the plain bearings can be exposed for a short-term. If these temperatures are realized, the bearings may not be additionally loaded. In fact, a relaxation of the bearings can occur at these temperatures, even without an additional load. Thus it is necessary to ensure that the bearing cannot slide out of the bore. This is achieved by changing the bore construction or additionally securing the bearing.


Material	Minimum Temperature (°F)	Additional securing required (°F)	Max. Long-term ambient temperature (°F)	Max. Short-term ambient temperature (°F)
iglide® M250	- 40	140	176	338
iglide® R	- 58	122	194	230
iglide® J	- 58	140	194	248
iglide® L280	- 40	140	194	356
iglide® G300	- 40	212	266	428
iglide® Q	- 40	122	275	311
iglide® P	- 40	194	266	392
iglide® Q2	- 40	176	266	392
iglide® H370	- 40	212	392	464
iglide® A180	- 58	140	194	230
iglide® A200	- 40	122	176	338
iglide® A350	-148	284	356	410
iglide® T500	-148	275	482	599
iglide® X6	-148	329	482	599
iglide® Z	-148	293	482	590
iglide® GLW	- 40	176	212	320
iglide® K	- 40	158	338	464
iglide® J200	- 58	140	194	248
iglide® J260	-148	176	248	284
iglide® J3	- 58	140	194	248
iglide® J350	-148	302	356	428
iglide® L250	- 40	131	194	356
iglide® D	- 58	122	194	230
iglide® H	- 40	248	392	464
iglide® H1	- 40	176	392	464
iglide® H2	- 40	230	392	464
iglide® A500	-148	266	482	572
iglide® A290	- 40	230	284	356
iglide® T220	- 40	122	212	320
iglide® F	- 40	221	284	356
iglide® H4	- 40	230	392	464
iglide® N54	- 40	140	176	248
iglide® UW	- 58	176	194	230

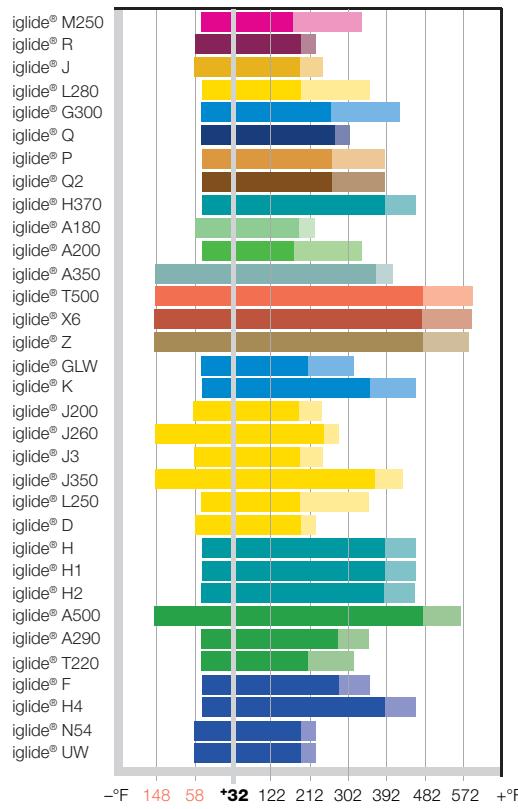

Comparison of the continuous and short-term upper application temperatures

## Temperature and Load

The compressive strength of plain bearings decreases as temperature increases. During this process, the materials react very differently from another, iglide® T500, for example, still accepts loads of 10,150 psi even at temperatures of 392°F.

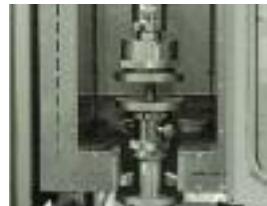


Material tests are possible up to 482°F

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



## Coefficient of Thermal Expansion

The thermal expansion of plastics is approximately 10 to 20 times higher when compared to metals. In addition to this, it also acts non-linearly in plastics. The coefficient of thermal expansion of the iglide® plain bearing is a significant reason for the required play in the bearing. At the given application temperature, seizing of the bearing to the shaft does not occur at high temperatures. The coefficient of thermal expansion of iglide® plain bearings were examined for significant temperature ranges and the results are given in the individual materials tables, at the start of each chapter.

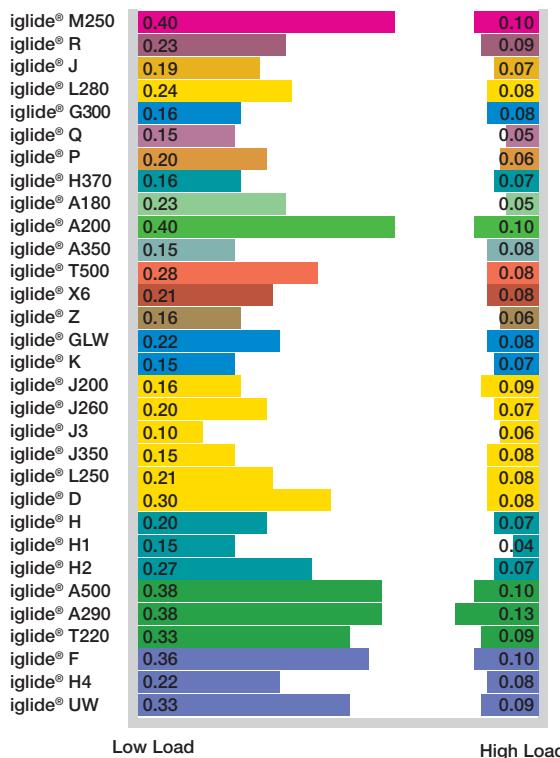


Frictional values of iglide® materials under different loads

## Coefficient of Friction

iglide® plain bearings are self-lubricating by the addition of solid lubricants. The solid lubricants lower the coefficient of friction of the plain bearings and thus increase the wear resistance. The coefficient of friction measurement

$$F_R = \mu \times F$$

Depending on whether an application is starting from a stopped position or the movement is in progress and needs to be maintained. A choice is made between static friction coefficient and the dynamic friction coefficient.

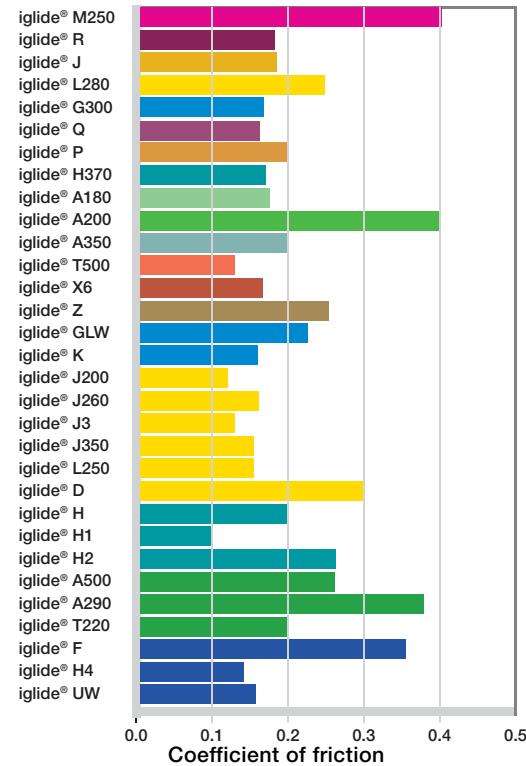

Coefficients of friction of the iglide® plain bearings for the recommended surface roughness and low load,  $p = 108.75$  psi

## Coefficients of Friction and Surfaces

At study here is the relationship between coefficients of friction and surface roughness of shaft materials. It is clearly shown that the amount of friction is composed of different factors. If the shaft is too rough, abrasion levels play an important role. Small areas of unevenness that can interlock with each other must be worn off the surface.

When the surfaces are too smooth, however, higher adhesion results, i.e. the surfaces adhere to each other. Higher forces are necessary to overcome the adhesion, which results from an increased coefficient of friction. Stick-slip can be the result of a large difference between static and dynamic friction and of a higher adhesive tendency of mating surfaces. Stick-slip also occurs due to intermittent running behavior and can result in loud squeaking. Stick-slip thus represents a cause for malfunction of plain bearings. Over and over again, it is observed that these noises do not occur or can be eliminated with rough shafts. Thus for applications that have a great potential for stick-slip - slow movements, large resonance of the housings - attention must be paid to the optimal roughness of the shafts.




Friction experiments in the igus® laboratory

## Wear Resistance


Due to the fact that the wear of machine parts is a function of so many different influences, it is difficult to make general statements about the wear behavior. Therefore, in numerous experiments, the wear is of primary importance as a measurement parameter. In testing, it has become clear what variances are possible between different material pairings. For given loads and surface speeds, the wear resistance can easily vary by a factor of 10 between materials pairings that run well together.

► Shaft materials, Page 1.11

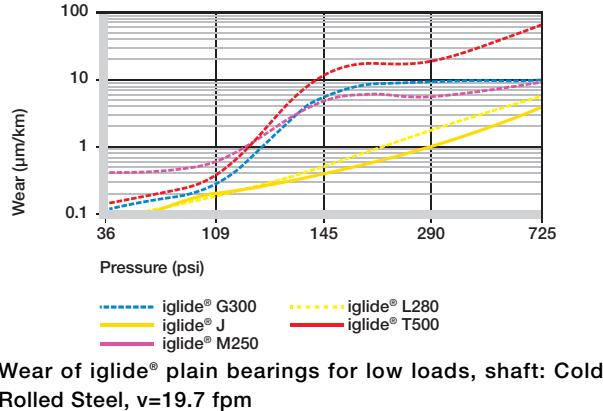

## Wear and Load

Different loads greatly influence the bearing wear. Among the iglide® plain bearings, certain materials are specialized for low loads. While others are better suited for high or extremely high loads. With a hardened, ground shaft, iglide® J can be characterized as the most wear-resistant bearing material for low loads. iglide® Q, on the other hand, is specialized for extreme loads.

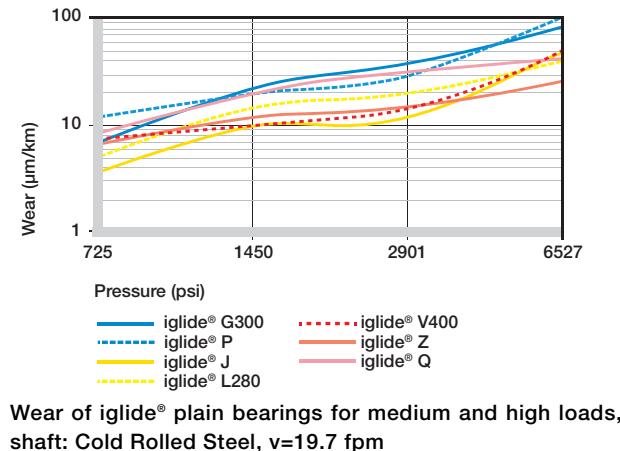

## Wear and Temperature

Within wide temperature ranges, the wear resistance of the iglide® plain bearings shows little change. In the maximum temperature range, however, the temperature increases and the wear of the plain bearing increases exponentially. The table at the right compares the wear limits.

One particular exception is represented by iglide® T500. The wear resistance of iglide® T500 increases greatly as temperature increases and reaches the optimum wear resistance at a temperature of 320°F. Then resistance decreases again, gradually.

Material	Wear Limit (°F)	Material	Wear Limit (°F)	Material	Wear Limit (°F)
iglide® M250	176	iglide® A350	248	iglide® D	128
iglide® R	158	iglide® T500	410	iglide® H	248
iglide® J	158	iglide® X6	410	iglide® H1	338
iglide® L280	248	iglide® Z	392	iglide® H2	248
iglide® G300	248	iglide® GLW	212	iglide® A500	374
iglide® Q	176	iglide® K	194	iglide® A290	248
iglide® P	212	iglide® J200	158	iglide® T220	194
iglide® Q2	248	iglide® J260	176	iglide® F	266
iglide® H370	302	iglide® J3	158	iglide® H4	248
iglide® A180	158	iglide® J350	284	iglide® N54	176
iglide® A200	176	iglide® L250	248	iglide® UW	158

Wear limits of iglide® plain bearings

## Wear During Abrasive Dirt Accumulation

Special wear problems frequently occur if abrasive dirt particles get into the bearing. iglide® plain bearings can clearly improve the operating time of machines and systems in these situations. The high wear resistance of the materials and the self-lubrication process provide for the highest service lifetime. Because no oil or grease is on the bearing, dirt particles can not penetrate as easily into the bearing. The largest portion simply falls away from the bearing thus limiting potential damage. If however, a hard particle penetrates into the bearing area, then an iglide® plain bearing can absorb this particle. The foreign body becomes embedded in the wall of the bearing. Up to a certain point, operation can be maintained at optimal levels even when there is extreme dirt accumulation.

However, it's not just hard particles that can damage bearings and shafts. Soft dirt particles such as, for example, textile or paper fibers, are frequently the cause for increased wear. In this instance, the dry running capability and the dust resistance of the iglide® plain bearings go into action. In the past, they were able to help save costs in numerous applications.



High wear resistance: plain bearing in contact with sand

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

## Wear and Surfaces

Shaft surfaces are important for the wear of bearing systems. Similar to the considerations for coefficients of friction, a shaft can be too rough in regard to the bearing wear, but it can also be too smooth. A shaft that is too rough acts like a file and during movement separates small particles from the bearing surface. For shafts that are too smooth, however, higher wear can also occur. An extreme increase in friction results due to adhesion. The forces that act on the surfaces of the sliding partner can be so large that regular material blow-outs occur.

It is significant to note that wear by erosion is non-linear. Moreover, it is subject to chance and can not be accurately predicted in advance.

## Shaft Materials

The shaft is, next to the plain bearing itself, the most important parameter in a bearing system. It is in direct contact with the bearing, and like the bearing, it is affected by relative motion. Fundamentally, the shaft is also worn, however, modern bearing systems are designed so that the wear of the shafts is so small that it can not be detected with traditional methods of measurement technology.

Shafts can be distinguished and classified according to their hardness and according to the surface roughness. The effect of the surface is described on the preceding pages:





- Coefficients of friction, Page 1.8
- Wear resistance, Page 1.9



Erosion damage due to shafts that are too smooth



Wear experiments with aluminum shafts

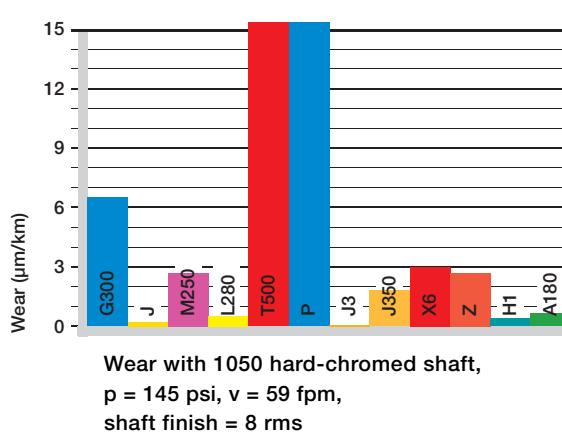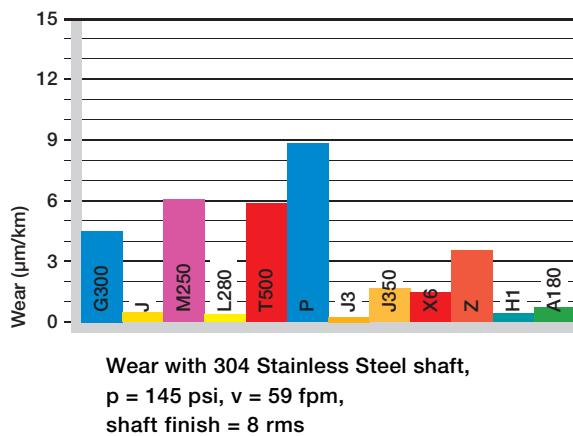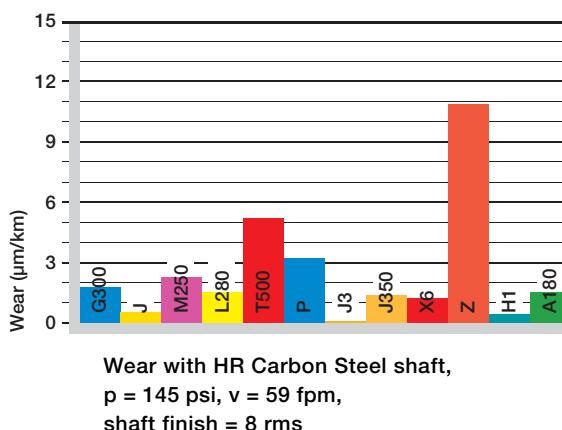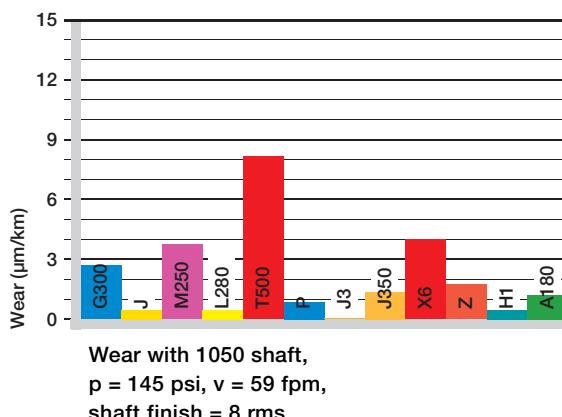

## Shaft Materials (Continued)

The hardness of the shaft also plays an important role. When the shafts are less hard, the shaft is smoothed during the break-in phase. Abrasive points are worn off and the surface is rebuilt. For some materials, this effect has positive influences, and the wear resistance of the plastic bearing increases.

In the following graphs, the most common shaft materials are listed and the iglide® materials that are best suited are compared. For easier understanding, the scaling of the wear axis is the same in all graphs.

Especially impressive is the small wear results of the systems with hard-chromed shafts. This very hard, but also smooth shaft acts beneficially on the wear behavior in many bearing pairs. The wear of many iglide® plain bearings is lower on this shaft than on any other shafting partner tested. However, it should be pointed out that because of the typically small surface roughness, the danger of stick-slip on hard-chromed shafts is especially high.


Such an overwhelmingly positive influence is not as readily available in the other shaft materials.

For example, with shafts made of 303 Stainless with low loads, good to very good values can be obtained with the right bearing material. However, it must also be stated that no other shaft material produces a larger variance in wear among the bearing materials. For materials such as 303 Stainless Steel, therefore, the selection of suitable bearing materials is especially important.


Other soft shaft materials, obtain a slightly different view with different bearing materials. With machining steel, the wear values of the seven best iglide® bearing materials are in a narrow range between 0.6 and 1.8. For many other shafts, the influence of the shaft materials is much larger, resulting in a difference, up to 10 times, between the best and the worst of the bearings tested.

If the shaft that you have chosen for your application is missing in this overview, please call us. The test results give only a sample of the existing data. All of the results given were obtained under the same loads and speeds:


All of the results shown were made with the loads  $p = 108.75$  psi and  $v = 98$  fpm. You can call us for the data for other  $p \times v$  combinations.

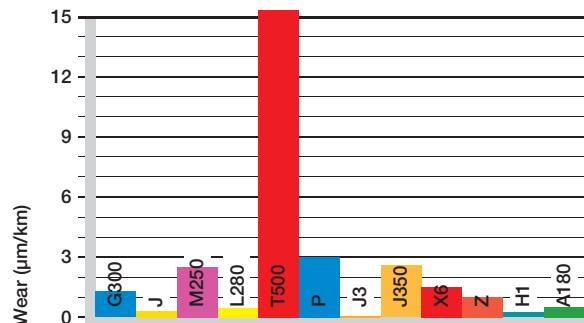

Wear with a hard anodized aluminum shaft,  
 $p = 145$  psi,  $v = 59$  fpm,  
shaft finish = 8 rms

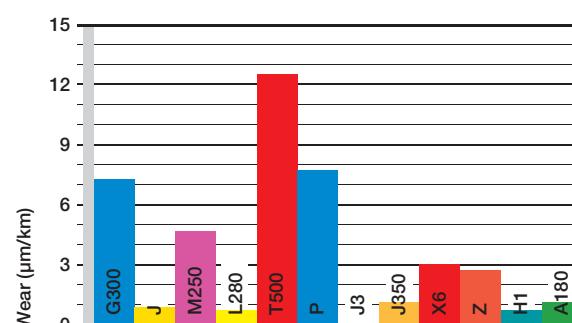

Wear with a 440B shaft,  
 $p = 145$  psi,  $v = 59$  fpm,  
shaft finish = 8 rms

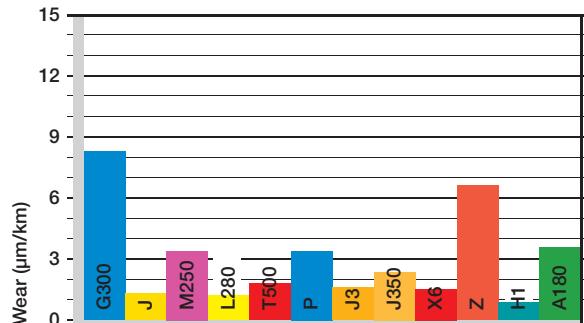

Wear with an automatic screw steel shaft,  
 $p = 145$  psi,  $v = 59$  fpm,  
shaft finish = 8 rms

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

## Chemical Resistance

iglide® plain bearings can come into contact with many chemicals during their use. This contact can lead to changes of the structural properties. The behavior of plastics toward a certain chemical is dependent on the temperature, the length of exposure, and the type and amount of the mechanical loading. If iglide® plain bearings are resistant against a chemical, they can be used in these media. Sometimes, the surrounding media can even take on the role of a lubricant.

With the most resistant iglide® material, the iglide® T500, the medium can even be hydrochloric acid. All iglide® plain bearings can be used in greatly diluted acids and diluted lyes. Differences can result at higher concentrations or higher temperatures.

For all iglide® plain bearings, their resistance against traditional lubricants applies in the same way. Therefore plain bearings may also be used lubricated. However, in dirty environments, a traditional lubricant can decrease the wear resistance when compared to running dry.

The following overview should quickly assist you:  
If it is not completely clear in a design application which of the different chemicals can occur or in which concentration, plain bearings made out of iglide® T500 should be used. They have the best resistance and are only attacked by a few concentrated acids. You'll find a detailed list of chemical resistances in the rear of the catalog

- Chemical resistance, Page 1.16



Rotational testing stand for underwater and/or chemicals

Material	Hydro-carbon	Greases, oils without additives	Weak acids	Weak alkaline
iglide® M250	+	+	0 to -	+
iglide® R	+	+	0 to -	+
iglide® J	+	+	0 to -	+
iglide® L280	+	+	0 to -	+
iglide® G300	+	+	0 to -	+
iglide® Q	+	+	0 to -	+
iglide® P	-	+	0	-
iglide® Q2	+	+	-	+
iglide® H370	+	+	0 to +	+
iglide® A180	+	+	0 to -	+
iglide® A200	+	+	0 to -	+
iglide® A350	+ to 0	+	+	+
iglide® T500	+	+	+	+
iglide® X6	+	+	+	+
iglide® Z	+	+	+	+
iglide® GLW	+	+	0 to -	+
iglide® K	+	+	0 to -	+
iglide® J200	+	+	0 to -	+
iglide® J260	+	0 to -	-	+ to 0
iglide® J3	+	+	0 to -	+
iglide® J350	+ to 0	+	+	+
iglide® L250	+	+	0 to -	+
iglide® D	+	+	0 to -	+
iglide® H	+	+	+ to 0	+
iglide® H1	+	+	+ to 0	+
iglide® H2	+	+	+ to 0	+
iglide® A500	+	+	+	+
iglide® A290	+	+	0 to -	+
iglide® T220	-	+	0	-
iglide® F	+	+	0 to -	+
iglide® H4	+	+	+ to 0	+
iglide® N54	+	+	0 to -	+
iglide® UW	+	+	0 to -	+

### Chemical resistance

+ resistant; o conditionally resistant; - not resistant

## Use in the Food Industry

For the special requirements made of machines and systems for producing food and pharmaceuticals, the iglide® product line offers four specially developed bearing materials. iglide® A180, A200, A350 and A500 are all FDA compliant materials.

For all other iglide® plain bearings, direct contact with food should be avoided.

## High-Energy Radiation

A comparison of the resistance to radioactive radiation is shown in the adjacent graph. By a wide margin, iglide® T500 and iglide® Z are the most resistant material.

### Material

### Radiation resistance

iglide® T500, Z	$1 \times 10^5$ Gy
iglide® X6, A500	$2 \times 10^5$ Gy
iglide® M250, A200, J3, N54	$1 \times 10^4$ Gy
iglide® L250	$3 \times 10^4$ Gy
iglide® P, K	$5 \times 10^2$ Gy
iglide® G300, J, L280, J260, J200	$3 \times 10^2$ Gy
iglide® R, D, A180, A290, T220, F,	$3 \times 10^2$ Gy
iglide® Q, Q2, UW, GLW	$3 \times 10^2$ Gy
iglide® H, H1, H2, H370, H4	$2 \times 10^2$ Gy
iglide® J350, A350	$2 \times 10^2$ Gy

Comparison of the radiation resistance of iglide® plain bearings

## UV Resistance

Plain bearings can be exposed to constant weathering when they are used outside. The UV resistance is an important measure and indicates whether a material is attacked by UV radiation. The effects can extend from slight changes in color to brittleness of the material. A comparison of the materials to each other is shown in the following table. The results show that iglide® plain bearings are suitable for outside use. Only for a few iglide® materials are any changes expected.

Material	UV Resistance	Material	UV Resistance
iglide® M250	++++	iglide® J200	+++
iglide® R	++++	iglide® J260	+
iglide® J	+++	iglide® J3	+++
iglide® L280	+++	iglide® J350	++
iglide® G300	+++++	iglide® L250	+++
iglide® Q	++	iglide® D	+++++
iglide® P	+++++	iglide® H	++
iglide® Q2	+++++	iglide® H1	++
iglide® H370	+++++	iglide® H2	+
iglide® A180	+++	iglide® A500	+++
iglide® A200	++++	iglide® A290	++++
iglide® A350	++++	iglide® T220	++
iglide® T500	+++++	iglide® F	+++++
iglide® X6	+++++	iglide® H4	+
iglide® Z	+++	iglide® N54	++++
iglide® GLW	+++++	iglide® UW	+++
iglide® K	++++		

UV resistance of iglide® plain bearings

## Vacuum

iglide® plain bearings can be used in a vacuum to a limited extent. Only a small amount of outgassing takes place. In most iglide® plain bearings, the outgassing does not change the material properties.

## Electrical Properties

In the product line of the maintenance-free, self-lubricating iglide® plain bearings, there are both insulating as well as electrically conductive materials. The most important electrical properties are given in detail in the individual material descriptions. The adjacent table compares the most important electrical properties of iglide® plain bearings.

The iglide® plain bearings not mentioned here are electrically insulating. Please observe that for some materials the properties can be changed by the material's absorption of moisture. In experiments, it should be tested whether the desired properties are also stable when the conditions are changing.

Material	Surface resistance ( $\Omega$ )
iglide® T500	$< 10^3$
iglide® X6	$< 10^5$
iglide® H	$< 10^2$
iglide® H370	$< 10^5$
iglide® F	$< 10^2$
iglide® UW	$< 10^5$

Electrical properties of conductive iglide® plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



## Tolerances and Measurement System

The installation dimensions and tolerances of the iglide® plain bearings are a function of the material and wall thicknesses. For each material, the moisture absorption and the thermal expansion are imperative. Plain bearings with low moisture absorption can be obstructed when there is a minimal amount of tolerance. For wall thickness, the rule is: The thicker the bearings are, the larger the tolerances must be.

Thus, different tolerance classes exist for iglide® plain bearings:

Within these tolerances, iglide® plain bearings can operate in the permissible temperature range and in humidity conditions up to 70% according to the installation recommendations. Should higher air moisture levels be present, or the bearing is operated under water, our application advice is available to help you use your bearings correctly.

### Dimensions in Microns (1000ths of a mm)

Dimensions	mm	1 / =3	>3 / =6	>6 / =10	>10 / =18	>18 / =30	>30 / =50	>50 / =80
H 7	mm	+0 +10	+0 +12	+0 +15	+0 +18	+0 +21	+0 +25	+0 +30
E 10	mm	+14 +54	+20 +68	+25 +83	+32 +102	+40 +124	+50 +150	+60 +180
F 10	mm	+6 +46	+10 +58	+13 +71	+16 +86	+20 +104	+25 +125	+30 +150
D 11	mm	+20 +80	+30 +105	+40 +130	+50 +160	+65 +195	+80 +240	+100 +290
f 6	mm	-6 -12	-10 -18	-13 -22	-16 -27	-20 -33	-25 -41	-30 -49
d 13	mm	-20 -160	-30 -210	-40 -260	-50 -320	-65 -395	-80 -470	-100 -560
h 6	mm	-0 -6	-0 -8	-0 -9	-0 -11	-0 -13	-0 -16	-0 -19
h 7	mm	-0 -10	-0 -12	-0 -15	-0 -18	-0 -21	-0 -25	-0 -30
h 9	mm	-0 -25	-0 -30	-0 -36	-0 -43	-0 -52	-0 -62	-0 -74
h 13	mm	-0 -140	-0 -180	-0 -220	-0 -270	-0 -330	-0 -390	-0 -460

### Dimensions in inches

Dimensions	inch	0.0393"/=.1181"	>0.1181"/=0.23622"	>0.2362"/=0.3937"	>0.3937"/=.7086"
H 7	inch	+0.0000 +0.0004	+0.0000 +0.0005	+0.0000 +0.0006	+0.0000 +0.0007
E 10	inch	+0.0006 +0.0021	+0.0008 +0.0027	+0.0010 +0.0033	+0.0013 +0.0040
F 10	inch	+0.0002 +0.0018	+0.0004 +0.0023	+0.0005 +0.0028	+0.0006 +0.0034
D 11	inch	+0.0008 +0.0031	+0.0012 +0.0041	+0.0016 +0.0051	+0.0020 +0.0063
f 6	inch	-0.0002 -0.0005	-0.0004 -0.0007	-0.0005 -0.0009	-0.0006 -0.0011
d 13	inch	-0.0008 -0.0063	-0.0012 -0.0083	-0.0016 -0.0102	-0.0020 -0.0126
h 6	inch	-0.0000 -0.0002	-0.0000 -0.0003	-0.0000 -0.0004	-0.0000 -0.0004
h 7	inch	-0.0000 -0.0004	-0.0000 -0.0005	-0.0000 -0.0006	-0.0000 -0.0007
h 9	inch	-0.0000 -0.0010	-0.0000 -0.0012	-0.0000 -0.0014	-0.0000 -0.0017
h 13	inch	-0.0000 -0.0055	-0.0000 -0.0071	-0.0000 -0.0087	-0.0000 -0.0106

Dimensions	inch	> 0.7086"/=1.18111"	>1.1811"/=1.9685"	>1.9685"/=3.1496"
H 7	inch	+0.0000 +0.0008	+0.0000 +0.0010	+0.0000 +0.0012
E 10	inch	+0.0016 +0.0049	+0.0020 +0.0059	+0.0024 +0.0071
F 10	inch	+0.0008 +0.0041	+0.0010 +0.0049	+0.0012 +0.0059
D 11	inch	+0.0026 +0.0077	+0.0031 +0.0094	+0.0000 +0.0000
f 6	inch	-0.0008 -0.0013	-0.0010 -0.0016	-0.0012 -0.0019
d 13	inch	-0.0026 -0.0156	-0.0031 -0.0185	0.0000 0.0000
h 6	inch	-0.0000 -0.0005	-0.0000 -0.0006	-0.0000 -0.0007
h 7	inch	-0.0000 -0.0008	-0.0000 -0.0010	-0.0000 -0.0012
h 9	inch	-0.0000 -0.0020	-0.0000 -0.0024	-0.0000 -0.0029
h 13	inch	-0.0000 -0.0130	-0.0000 -0.0154	-0.0000 -0.0181

## Testing Methods

iglide® plain bearings are pressfit bearings for bores set to our recommendations. This pressfitting of the bearing affixes the bearing in the housing, and the inner diameter of the plain bearing is also formed upon pressfit.

The bearing test is performed when the bearing is installed in a bore with the minimum specified dimension; both using an indicating caliper and a Go No-Go gauge.

- the “Go-Side” of the Go-No-Go gauge, pressfit into the bore, must pass easily through the bearing
- With the 3 point probe, the inner diameter of the bearing after pressfit must lie within the prescribed tolerance on the measurement plane, See Figure 1.

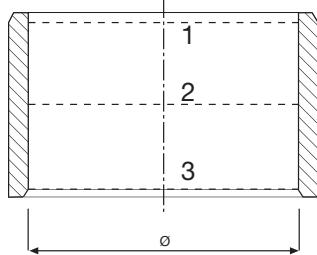


Figure 1: The position of the measurement planes ( $x=.02$  inches)



Measurement of the inner diameter of a pressfit plain bearing

## Machining

iglide® plain bearings are delivered ready-to-install. The extensive product line makes it possible to use a standard dimension in most cases. If for some reason, a subsequent machining of the plain bearing is necessary, the table above left shows the machining standard values.

The subsequent machining of the bearing surfaces is to be avoided if possible. Higher wear rate is most often the result. An exception is the iglide® M250, which is very suitable for secondary machining. In other iglide® plain bearings, disadvantages of a sliding surface machining can be counteracted by lubrication during installation.

Process	Turning	Boring	Milling
Cutting material	SS	SS	SS
Forward feed (mm)	0.1...0.5	0.1...0.5	to 0.5
Tool orthogonal clearance	5...15	10...12	
Tool orthogonal rake	0...10	3...5	
Cutting speed (m/min)	656...1640	164...328	to 3281

### Guidelines for machining

## Installation


iglide® plain bearings are oversized before press-fit. The inner diameter adjusts only after being pressfit in the proper housing bore with the recommended tolerances listed in the catalog. Axial or radial shifts in the housing are also prevented.

Provided the recommended housing bore tolerances are met (as listed next to each part number), the ID after press-fit as indicated will be met. We recommend a metal housing bore preferably steel, with a smooth ID and lead-in chamfer

The installation is done using an arbor press. The use of centering or calibrating pins can cause damage to the bearing and create a larger amount of clearance.



The installation

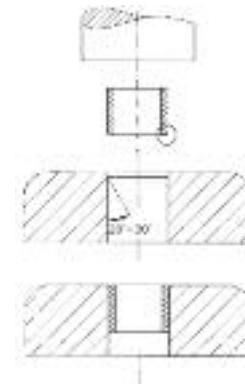

Section view: pressfit of the bearing

## Adhesion

Adhering of the bearing is normally not necessary. If the pressfit of the bearing could be lost due to high temperatures, the use of a plain bearing having a higher temperature resistance is recommended.

If however, the securing of the bearing by adhesives is planned, individual tests are necessary in each case. The transfer of successful results to other application cases is not possible.

# iglide® Plain Bearings

## Chemical Resistance Chart

Chemicals, iglide®	A180, J200, R, UW, B180	A200, G300, GLW, M250, L280, L250, C, L100, igumid G	A350	A500, UW500, T500, X6, A500	A290, F	J, J3, J4	J260	J350	H, H2, H370, H4	P, P210, K	Q	Z	D
Acetaldehyde (aqueous), 40 %	+	○	X	+	○	+	-	X	X	-	○	X	+
Acetamide (aqueous), 50 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	-	X	X	X	+ <sup>1</sup>	X	+
Acetic acid, 2 %	+	-	+	+	-	+	+	+	+	+	○	+	+
Acetic acid, 10 %	+	-	+	+	-	+	+	+	+	+	+	+	+
Acetic acid, 90 %	-	-	+	○	-	-	-	X	+	-	-	+	-
Acetone	+	+	-	+	○	+	-	-	+	-	+	+	○
Acetyl chloride	-	-	X	X	-	-	X	X	X	X	-	X	-
Acrylnitrile	○	+	X	+	+	○	-	X	X	-	+	X	○
Air, liquid	○	○	X	X	○	○	X	X	X	○	○	X	○
Allyl alcohol	+	○	X	+	○	+	X	X	+	+	+	+	+
Aluminum chloride (aq.), 10 %	○	○	X	+	○	○	○	X	+	○	○	X	○
Aluminum cleaner	-	-	X	○	-	-	X	X	○	X	-	X	-
Aluminum salt from mineral acid, 20 %	○	○	X	X	○	○	X	X	X	○	○	X	○
Aluminum sulphate (aq.), 10 %	○	○	X	+	○	○	+	X	+	○	○	+	○
Ammonium carbonate (aqueous), 10 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	○	X	+	+	+ <sup>1</sup>	+	+
Ammonium chloride (aq.), 10 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+
Amyl acetate, 100 %	-	-	X	+	-	-	-	X	+	○	+	+	○
Amyl alcohol	+	+	X	+	+	+	+	X	+	○	+	O	+
Aniline (aqueous), sat'd solution	○	○	X	+	○	○	-	X	+	○	○	X	○
Anisole	○	+	X	+	+	○	-	X	+	X	+	O	○
Anodized liquor (HNO <sub>3</sub> -30 %/ H <sub>2</sub> SO <sub>4</sub> -10 %)	-	○	X	X	○	-	X	X	X	○	○	X	-
Aromatics	+	+	+	X	+	+	X	X	X	○	X	X	X
Barium chloride (aqueous), 10 %	+	○	X	+	○	+	+	X	+	+	+ <sup>1</sup>	+	+
Barium salt from mineral acid	+	○	X	X	○	○	X	X	X	○	○	X	○
Barium sulphate (aqueous), 10 %	+	○	X	+	○	+	○	X	+	+	+ <sup>1</sup>	+	+
Benzaldehyde	+	○	X	+	○	○	-	X	O	-	O	X	O
Benzoic acid (aqueous), 20 %	○	○	X	+	○	○	-	X	X	+	O	+	O
Benzyl alcohol	+	+	+	+	+	○	-	+	X	X	O	O	O
Biphenyl	+	+	X	X	+	+	X	X	X	-	X	X	X
Bitumen, DIN 51567	+	○	-	+	○	○	+	X	X	○	O	+	O
Bleaching solution	-	-	X	+	-	-	X	X	X	-	O	+	-
Bleaching solution (aqueous), 10 %	-	-	X	+	-	-	X	X	+	O	O	+	-
Blue vitriol, saturated solution	○	○	+	+	○	○	X	X	+	X	O	+	O
Blue vitriol, 0,5 %	+	○	+	+	○	+	X	X	+	X	O	+	+
Boric acid (aqueous), 10 %	+	○	+	+	○	+	+	X	X	-	+ <sup>1</sup>	+	-
Boring oils	+	+	+	X	+	+	X	X	X	+	X	X	X
Brandy vinegar	○	○	X	+	○	○	X	X	+	O	O	+	O
Bromine (aqueous), 25 %	-	-	X	+	-	-	-	X	-	-	-	O	-
Bromine vapors	-	-	X	X	-	-	X	X	X	-	-	X	-
Butanol	+	+	+	+	+	+	O	X	+	+	+	O	O
Butter	+	+	X	+	+	+	+	X	+	+	+	+	+
Butylacetate	+	+	O	+	O	O	X	X	+	O	O	+	O

Resistance classification: + resistant; ○ conditionally resistant; - not resistant; X no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

# iglide® Plain Bearings

## Chemical Resistance Chart

iglide®

Chemicals, iglide®	A180, J200, R, UW, B180	A200, G300, GLW, M250,	A350	A500, UW500, T500, X6, A500	A290, F	J, J3, J4	J260	J350	H, H2, H370, H4	P, P210, K	Q	Z	D
Butylglycol	+	+	-	+	+	+	O	X	+	+	+	+	+
Butylglycolat	+	+	X	X	+	+	X	X	X	+	X	X	X
Butyl phthalate	+	+	X	X	+	+	X	X	X	+	X	X	X
Butyric acid	O	O	X	+	O	-	-	X	+	O	-	+	-
Calcium chloride, sat'd solution	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+
Calcium hydroxide (aqueous)	+	+	+	X	+	+	X	X	X	+	X	X	X
Calcium hypochlorite	+	+	X	X	+	+	X	X	X	O	X	X	X
Camphor	+	+	X	+	+	+	O	X	+	X	+	+	+
Carbonated ammonia (aqueous), 10 %	+	+	X	+	+	+	X	X	+	X	X	+	+
Carbon dioxide gas	+	+	X	+	+	+	+	X	+	+	X	X	+
Carbon disulphide	+	+	X	+	+	+	X	X	+	X	+	X	+
Catechol (aqueous), 6 %	-	-	X	+	-	-	-	X	X	-	O	O	-
Caustic natron (aqueous), 50 %	O	O	X	+	O	O	X	X	X	X	X	+	O
Caustic potash, 10 %	O	+ <sup>1</sup>	+	X	+ <sup>1</sup>	O	X	X	X	-	X	X	O
Caustic potash, 20 %	-	O	+	+	O	-	-	X	+	-	X	+	-
Caustic potash (aqueous), 40 %	+	+	X	+	+	+	X	X	X	X	X	+	+
Caustic potash, 50 %	-	O	+	X	O	-	X	X	X	-	O	X	-
Caustic soda (aqueous), 10 %	+	-	+	+	-	O	X	X	+	-	O	+	-
Caustic soda (aqueous), 50 %	+	+	+	X	+	+	X	X	X	-	X	X	X
Cellulose paint	+	+	X	X	X	+	X	X	X	X	X	X	+
Chlor, chlorine water	-	-	X	X	-	-	X	X	X	-	-	X	-
Chloramine	X	-	X	X	-	-	X	X	X	-	-	X	-
Chlor bromine methane, 98 %	X	O	X	+	O	X	X	X	X	O	O	X	X
Chlorethanal	-	-	X	X	-	-	X	X	X	-	-	-	X
Chloric gas	-	-	X	-	-	-	-	X	-	-	-	-	-
Chlorine hydrogen gas	-	-	X	X	-	-	-	X	X	-	-	-	X
Chlorine sulfone acid (aqueous)	-	-	X	-	O	-	-	X	-	-	-	-	+
Chlorine water, sat'd solution	-	-	X	+	-	-	O	X	X	-	O	O	-
Chloroacetic acid (aq.), 10 %	-	-	X	+	-	-	-	X	X	-	-	-	-
Chloroform	-	-	-	+	O	-	-	-	O	-	-	O	-
Chromic acid (aqueous), 1 %	O	-	X	+	-	O	O	X	-	O	O	O	O
Chromic acid (aqueous), 10 %	-	-	X	+	-	-	-	X	-	-	-	O	-
Citric acid, concentrate dilution	O	O	X	+	O	O	+	X	O	X	-	+	O
Citric acid (aqueous), 10 %	+	+ <sup>1</sup>	+	+	+ <sup>1</sup>	+	+	X	+	+	O	+	+
Citrus fruits	+	+	X	X	+	+	X	X	X	+	X	X	X
Cobalt salt (aqueous)	+	+	X	X	+	+	X	X	X	+	X	X	X
Cooking fats, 100 %	+	+	+	+	+	+	X	X	+	+	+	+	+
Cooking oils	+	+	+	+	+	+	X	X	+	+	+	+	+
Cresol	-	-	X	+	-	-	-	X	+	-	-	+	-
Cyclohexane	+	+	+	+	+	+	O	X	+	-	+	+	-
Decahydronaphthaline	+	+	-	+	+	+	X	X	+	-	+	+	-
Dibutyl ether	+	+	X	X	+	+	X	X	X	+	X	X	X
Dibutyl phthalate	+	+	X	+	+	+	-	X	+	+	+	+	+
Dichlor benzene	-	+	X	+	+	-	X	X	+	-	+	O	-
Dichlor ethene	-	+	X	+	+	-	X	X	+	-	+	O	-

Resistance classification: + resistant; O conditionally resistant; - not resistant; X no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

# iglide® Plain Bearings

## Chemical Resistance Chart

Chemicals, iglide®	A180, J200,	A200, G300, GLW,	A350	A500, UW500,	A290, F	J, J3,	J260	J350	H, H2, H370,	P, P210, K	Q	Z	D
	R, UW, B180	M250, L280, L250, C, L100, igumid G		T500, X6, A500		J4			H4				
Dichlor ethylene	—	—	X	+	—	—	—	X	+	—	—	+	—
Diethylether	O	O	+	+	+	+	—	X	X	+	+	+	O
Dimethylformamide	O	+	+	+	+	+	—	X	+	+	+	+	+
Diocyl phthalate	+	+	+	+	+	+	X	X	+	O	+	+	O
Dioxane	O	+	X	+	+	O	—	X	+	+	+	+	O
Dioxygen gas, +23 °C, depressurized	+	+	X	+	+	+	+	X	+	+	X	X	+
Ethanal (aqueous), 40 %	+	O	X	X	O	O	X	X	O	O	X	O	
Ethanol (aqueous), 96 %	+	O	+	+	O	O	+	X	+	—	O	O	+
Ethyl acetate	+	+	—	+	+	+	—	X	+	—	+	+	+
Ethylene	+	+	X	X	+	+	X	X	+	X	X	X	
Ethylene chloride	+	+	—	+	+	+	—	X	+	—	+	+	+
Ethylene diamine (1,2-Ethane diamine)	+	+	X	+	+	+	O	X	O	+	+	+	O
Ethylene glycole (aqueous), 95 %	+	O	X	+	O	+	O	X	+	+	O	+	+
Ethylene oxide (1,2-Epoxy ethane)	+	O	+	X	O	O	X	X	O	O	X	O	
Fat, cooking fat	+	+	X	+	+	+	O	X	+	+	+	+	+
Ferric chlorid, saturated solution	+	O	X	X	O	+	X	X	+	X	O	+	+
Ferric chlorid, 2,5 %	+	O	X	X	O	+	X	X	+	X	O	+	+
Ferric chlorid, 5 %	—	O	X	O	O	—	O	X	+	X	O	+	—
Ferric-III-chloride (aqueous), neutral, 10 %	O	+ <sup>1</sup>	X	O	O	O	+	X	+	X	O	+	O
Ferric-III-chloride (aqueous), sour, 10 %	—	—	X	+	+	—	—	X	+	—	O	+	—
Fluorinated hydrocarbons	O	+	X	+	O	+	O	X	+	O	+	O	O
Fluorine	—	—	+	X	—	—	X	X	X	—	—	X	—
Formaldehyde (aqueous), 30 %	+	O	+	+	O	+	+	+	+	+	+ <sup>1</sup>	+	+
Formamide	+	O	—	+	O	+	O	X	X	X	O	+	O
Formic acid (aqueous), 2 %	O	—	X	O	—	—	+	X	+	O	—	O	—
Formic acid, 10 %	—	—	X	—	—	—	X	X	O	—	—	—	—
Formic acid, 90 %	—	—	X	—	—	—	—	X	O	—	—	—	—
Fruit juices	+	+	—	X	+	+	X	X	X	+	X	X	X
Fuming sulfuric acid	—	—	—	—	—	—	—	—	—	—	—	—	—
Furfurol	+	O	X	+	O	+	O	X	+	+	+	+	+
Glycerine	—	+	+	+	+	+	O	X	+	+	+	+	+
Glycol	+	O	+	+	O	O	X	X	+	+	O	+	O
Heptane	+	+	+	+	+	+	+	X	+	O	+	+	—
Hexa chlorine ethane	+	+	X	+	+	+	X	X	X	X	+	O	—
Hexachlorobenzene	+	—	X	+	—	—	X	X	X	X	—	O	—
Hexamethylphosphoracidtriamid	+	—	X	X	—	—	X	X	X	—	—	X	—
Hexane	+	+	+	+	+	+	+	X	+	—	+	+	—
Humic acid	O	O	X	X	O	O	X	X	X	O	O	X	O
Hydrobromic acid (aqueous), 10 %	—	—	X	+	—	—	—	X	O	—	—	+	—
Hydrochloric acid, L20	—	—	+	X	—	—	X	—	X	O	—	X	—
Hydrochloric acid, 2 %	—	—	+	+	—	—	+	X	—	—	O	+	—
Hydrochloric acid, 10 %	—	—	+	+	—	—	—	O	—	—	—	+	—

Resistance classification: + resistant; O conditionally resistant; — not resistant; X no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

# iglide® Plain Bearings

## Chemical Resistance Chart

iglide®

 iglide®  
Plain Bearings

 PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

Chemicals, iglide®	A180, J200, R, UW, B180	A200, G300, GLW, M250, L280, L250, C, L100, igumid G	A350	A500, UW500, T500, X6, A500	A290, F	J, J3, J4	J260	J350	H, H2, H370, H4	P, P210, K	Q	Z	D
Hydrofluoric acid (aqueous), 4 %	-	-	-	+	-	-	-	x	-	-	-	-	-
Hydrogen peroxide, 0,5 %	+	+	+	+	+	+	+	o	+	+	+	+	+
Hydrogen peroxide, 30 %	-	-	+	+	-	-	-	-	-	-	-	-	-
Hydrogen sulphide (aqueous)	+	o	x	x	o	+	x	x	x	o	o	x	-
Hydrogen sulphide (dry)	+	+	+	+	o	x	+	x	+	+	+	+	x
Hydroquinone (aqueous), 5 %	o	-	x	+	-	o	o	x	x	o	-	+	o
Ink, dye, Color	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	x	+	+	+ <sup>1</sup>	+	+
Iodine tincture, 3 %	o	-	-	+	-	o	-	x	+	x	o	+	o
Isooctane, 80 %	+	+	+	+	+	+	+	x	+	o	+	+	-
Isopropanol	+	+	+	+	+	+	+	x	+	+	o	o	+
Isopropyl ether	+	+	x	+	+	+	-	x	x	o	+	+	+
Ketone (aliphatic)	+	o	+	x	o	o	x	x	x	-	o	x	o
"Königswasser" HCl/HNO3 (75/50 vol.)	-	-	x	x	-	-	x	x	x	-	-	x	-
Lead acetate (diluted), 10 %	+	o	x	+	o	+	+	x	x	o	o	+	+
Lead stearate	+	+	x	+	+	+	+	x	+	+	+	+	+
Linseed oil	+	+	+	+	+	+	+	x	+	+	+	+	+
Lithium bromide/chloride/salts (aqueous), 50 %	+	o	x	+	o	+	+	x	x	o	o	+	+
Lithium chloride in alcohol, 20 %	+	-	x	x	-	-	x	x	x	x	-	x	-
Lubricating oil, mineral	+	+	+	+	+	+	+	x	+	o	+	+	+
Lubricating oil, synthetic	o	o	x	+	o	o	o	x	+	-	+	+	o
Magnesium chloride (aq.), 10 %	+	+ <sup>1</sup>	x	+	+ <sup>1</sup>	+	+	x	+	+	+ <sup>1</sup>	+	+
Magnesium hydroxyde (aqueous)	+	+ <sup>1</sup>	x	+	+ <sup>1</sup>	+	+	x	+	+	+	+	+
Maleic acid, concentrate solution	o	-	x	+	-	o	o	x	+	x	o	+	o
Maleic acid (aqueous), 10 %	-	o	x	x	o	-	x	x	x	-	o	x	-
Malt	+	+	x	x	+	+	x	x	x	+	x	x	x
Manganese sulphate (aq.), 10 %	+	o	x	+	o	+	x	x	+	x	+	+	+
Mercurous chloride, 6 %	-	-	x	+	-	-	+	x	o	o	-	x	-
Mercury	+	+	x	+	+	+	+	x	+	+	+	+	+
Methane	+	+	+	+	+	+	+	+	+	+	x	x	+
Methanol	+	+	+	x	+	+	x	+	x	+	x	x	x
Methanol, +20 % CaCl2 or LiCl	+	-	x	o	o	o	-	x	o	+	o	o	+
Methyl acetate	o	+	x	+	+	o	x	x	+	o	+	+	o
Methylamine	+	+	x	x	+	+	x	x	x	+	x	x	x
Methylene chloride	o	-	-	x	-	-	x	-	+	-	-	o	-
Methyl ethyl ketone	o	+	-	+	+	o	-	-	+	-	+	+	o
Milk	+	+ <sup>1</sup>	+	+	+ <sup>1</sup>	+	+	x	+	+	+ <sup>1</sup>	+	+
Milk acid (lactic acid), 10 %	+	+	+	+	+	+	+	x	+	+	o	+	o
Milk acid (lactic acid), 90 %	+	o	o	+	o	o	+	x	+	o	o	+	o
Molasses	+	+	+	x	+	+	x	+	x	+	x	x	x
Molykote lubricating grease	+	+	x	+	+	+	x	x	+	x	+	+	+
Mortar, cement, chalk	+	+	x	x	+	+	x	x	x	+	x	x	x
Naphthalene	+	+	x	+	+	+	o	x	+	+	+	+	+
Naphthalene sulfone acid	-	-	x	x	-	-	x	x	x	x	-	x	-

Resistance classification: + resistant; o conditionally resistant; - not resistant; x no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

# iglide® Plain Bearings

## Chemical Resistance Chart

Chemicals, iglide®	A180, J200, R, UW, B180	A200, G300, GLW, M250, L280, L250, C, L100, igumid G	A350	A500, UW500, T500, X6, A500	A290, F	J, J3, J4	J260	J350	H, H2, H370, H4	P, P210, K	Q	Z	D
Natrium oleate	+	+	X	X	+	+	X	X	X	+	X	X	X
Natrium sulphate, 10 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+
Natrium sulphite, neutral, 2 %	O	+ <sup>1</sup>	X	+	+ <sup>1</sup>	O	O	X	+	O	+ <sup>1</sup>	+	O
Natrium thiosulphate, 10 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+
Nickelsalt (aqueous), 10 %	+	O	X	X	O	+	X	X	X	X	O	X	-
Nitric acid (aqueous), L50	-	-	X	X	-	-	X	X	X	-	-	X	-
Nitric acid (aqueous), 2 %	-	-	+	+	-	-	O	+	-	-	-	+	-
Nitric acid (aqueous), 5 %	-	-	X	+	-	-	-	X	-	-	-	+	-
Nitrio acetic acid	+	+	X	X	+	+	X	X	X	+	X	X	X
Nitrobenzene	O	-	-	+	-	O	-	X	O	-	O	-	-
Nitrogases	-	O	X	X	O	-	X	X	X	X	O	X	-
Nitromethane	-	O	X	+	O	-	X	X	O	-	X	+	-
Nitro paints, danger class A I	+	O	X	X	O	+	X	X	X	O	O	X	-
Nitro paints, danger class A II	+	+	X	X	+	+	X	X	X	O	X	X	X
Nitrotoluene	O	O	X	X	O	O	X	X	X	-	O	X	O
Nitrous gases (dry)	-	O	X	X	O	-	X	X	X	O	O	X	-
Noble gases (argon, helium, neon)	+	+	X	X	+	+	X	X	X	+	X	X	X
Octane	X	+	?	X	+	+	X	X	X	+	X	X	X
Oleic acid	+	+	X	+	+	+	+	X	+	+	+	+	+
Oxalic acid (aqueous), 10 %	X	O	+	+	O	X	+	X	X	+	O	+	X
Ozon	-	-	-	+	-	-	+	X	-	-	-	+	-
Palmitic acid	+	+	X	X	+	+	X	X	X	+	X	X	X
Paraffin	+	+	X	X	+	+	X	X	X	+	X	X	X
Paraffin oil	+	+	+	+	+	+	+	X	+	-	+	+	-
Pebble hydrofluoric acid (aqueous), 30 %	X	-	X	X	-	-	X	X	X	-	-	X	-
Perchlorethane	-	-	-	+	-	-	-	-	X	-	-	+	-
Perchloric acid, 10 %	-	-	X	+	-	-	-	X	X	-	-	+	-
Perfume	+	+	X	X	+	+	X	X	X	+	X	X	X
Phenol (aqueous), 6 %	-	-	-	X	-	-	-	X	+	-	-	+	-
Phenol (aqueous), 70 %	-	-	X	O	-	-	-	X	+	-	-	+	-
Phenol (aqueous), 88 %	-	-	-	X	-	-	-	X	X	X	-	X	-
Phosphoric acid (aqueous), 0,3 %	+	O	X	+	O	+	+	X	O	-	O	+	-
Phosphoric acid (aqueous), 3 %	+	O	X	+	-	O	+	X	O	-	O	+	-
Phosphoric acid (aqueous), 10 %	-	-	-	+	-	-	O	X	-	-	-	+	-
Phthalic acid, saturated solution	+	O	X	+	O	+	O	X	O	+	O	+	+
Polyester resin (with styrene)	O	+	X	+	+	+	-	X	+	O	+	+	O
Porpenoic acid	O	-	X	X	-	-	X	X	X	-	-	X	-
Potassium bromide (aq.), 10 %	+	O	X	+	O	O	+	X	+	O	+ <sup>1</sup>	+	+
Potassium carbonate (aq.), 60 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	O	+ <sup>1</sup>	+	+
Potassium chloride (aq.), 10 %	+	+ <sup>1</sup>	X	X	+ <sup>1</sup>	+	X	X	X	+	X	X	X
Potassium chloride (aq.), 90 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+
Potassium dichromate (aq.), 5 %	+	O	-	+	O	O	+	X	+	O	O	+	+
Potassium nitrate (aq.), 10 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+

Resistance classification: + resistant; O conditionally resistant; - not resistant; X no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

# iglide® Plain Bearings Chemical Resistance Chart

iglide®

 iglide®  
Plain Bearings

 PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

Chemicals, iglide®	A180, J200, R, UW, B180	A200, G300, GLW, M250,	A350	A500, UW500, T500, X6, A500	A290, F	J, J3, J4	J260	J350	H, H2, H370, H4	P, P210, K	Q	Z	D	
Potassium permanganate (aqueous), 1 %	+	-	-	+	-	+	+	X	-	+	O	+	+	+
Potassium sulphate, sat'd solution	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	O	+ <sup>1</sup>	+	+	+
Propane, Propene	+	+	X	+	+	+	-	X	+	+	+	+	+	+
Propanol	+	+	-	+	+	+	+	X	O	+	+	O	+	+
Pyridine	O	+	-	+	+	O	-	X	+	X	+	+	+	O
Pyruvic acid (aqueous), 10 %	X	O	X	X	O	X	X	X	O	O	O	X	-	
Resorcin (1,3-Dihydroxybenzol), 50 %	X	-	X	X	-	-	X	X	X	-	-	X	-	
Salicyl acid	-	+	-	+	+	-	+	X	+	-	+	+	-	
Seawater	+	+	+	X	+	+	X	+	X	+	X	X	X	
Sebum	+	+	X	+	+	+	+	X	+	+	+	+	+	
Silikon oils	+	+	+	+	+	+	+	X	+	+	+	+	+	
Silver nitrate	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	O	+ <sup>1</sup>	+	+	
Soap solutions	+	+ <sup>1</sup>	+	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Soda solution, 10 %	+	+ <sup>1</sup>	+	+	+ <sup>1</sup>	+	X	X	+	+	+ <sup>1</sup>	+	+	
Sodium acetate (aqueous), 10 %	+	-	X	+	+ <sup>1</sup>	+	+	X	+	O	+	+	+	
Sodium bisuphite (aqueous), 10 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	O	X	+	+	+ <sup>1</sup>	+	+	
Sodium bromide (aqueous), 10 %	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Sodium carbonate, 5 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Sodium carbonate (aqueous), 21,5 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Sodium carbonate (aqueous), 50 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Sodium chlorate (aqueous), 10 %	+	O	X	X	O	O	X	X	O	O	X	O		
Sodium chloride, sat'd solution	+	+ <sup>1</sup>	X	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Sodium dichromate (aq.), 10 %	X	O	X	X	O	X	X	X	O	O	X	-		
Sodium dodecylbenzolsulfonat	+	+	X	X	+	+	X	X	X	+	X	X	X	
Sodium hypochlorite (aq.), 10 %	-	-	X	+	-	-	O	X	O	O	O	X	O	
Sodium hypophosphite (aqueous), 10 %	+	+	X	X	+	+	X	X	X	+	X	X	X	
Sodium nitrate (aqueous), 10 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	X	+	+	+ <sup>1</sup>	+	+	
Sodium nitrilotriacetate (aqueous), 10 %	+	+	X	X	+	+	X	X	X	+	X	X	X	
Sodium salts, 10 %	+	+	X	X	+	+	X	X	X	+	X	X	X	
Soldering fluid	-	-	X	X	-	-	X	X	X	-	-	X	-	
Spirit, white	+	+	X	+	+	+	O	X	+	+	+	+	+	
Steam	X	-	O	+	-	X	O	X	+	-	O	O	X	
Styrene	O	+	X	+	+	O	-	X	+	-	+	+	-	
Sulphur	+	+	X	+	+	+	+	X	+	+	+	+	+	
Sulphur acid, 2 %	-	-	+	O	-	-	O	+	O	-	-	+	-	
Sulphur acid, 10 %	-	-	+	O	-	-	O	O	-	-	-	-	+	-
Sulphuric acid (concentrate), 98 %	-	-	-	-	-	-	-	X	-	-	-	O	-	
Tar	+	+	+	+	+	+	+	O	X	+	+	+	+	

Resistance classification: + resistant; O conditionally resistant; - not resistant; X no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

# iglide® Plain Bearings

## Chemical Resistance Chart

Chemicals, iglide®	A180, J200, R, B180	A200, G300, GLW, M250, L280,	A350	A500, UW500, T500, X6, A500	A290, F	J, J3, J4	J260	J350	H, H2, H370, H4	P, P210, K	Q	Z	D	
Tetrahydrofurane (solvent)	o	+	-	+	+	o	-	x	+	+	+	+	o	
Tetraline	+	+	x	+	+	+	x	x	+	-	+	+	-	
Thionyl chloride	o	o	-	+	o	o	-	x	x	x	o	x	o	
Toluene	o	+	o	+	+	o	-	o	+	-	+	+	-	
Transformer oil	+	+	+	+	+	+	o	x	+	+	+	+	+	
Trichloroacetic acid (aq.), 50 %	-	-	x	x	-	-	x	x	x	-	-	x	-	
Trichloroethanoic	-	o	x	+	o	-	x	x	+	-	o	o	-	
Trichloroethylene	-	-	-	+	-	-	-	-	o	-	-	+	-	
Triethanolamine, 90 %	+	+ <sup>1</sup>	-	+	+ <sup>1</sup>	+	+	x	+	+	+ <sup>1</sup>	+	+	
Trisodiumphosphate, 90 %	+	+	x	+	+	+	+	x	+	+	+	+	+	
Uranium fluoride	-	-	x	x	-	-	x	x	x	-	-	x	-	
Urea	+	+	x	+	+	+	+	x	+	+	+	+	+	
Uric acid (aqueous), 10 %	+	+	+	x	+	+	x	x	x	+	x	x	x	
Urine	+	+	+	+	+	+	+	+	+	+	+	+	+	
Vaseline	o	o	+	+	+	+	o	x	+	o	+	+	o	
Violet oil	+	+	x	+	+	+	x	x	+	x	+	+	+	
"Washing machine cleaner"														
(phosphoric and nitric acid)	+	o	x	+	o	-	x	x	+	+	o	+	-	
Water glasses (Sodium silicate)	+	+ <sup>1</sup>	x	+	+ <sup>1</sup>	+	+	x	+	+	+ <sup>1</sup>	+	+	
Wax, molten	+	+	+	+	+	+	+	+	+	+	+	+	+	
Wine acid	o	o	+	+	o	+	+	x	+	x	+ <sup>1</sup>	+	o	
Xylene	o	o	+	+	+	o	-	x	+	-	+	+	-	
Zinc chloride (aqueous), 10 %	+	o	+	+	o	+	+	x	+	x	-	+	+	
Zinc oxide	+	+	x	+	+	+	+	x	+	+	+	+	+	
Zinc sulphate (aqueous), 10 %	+	+ <sup>1</sup>	x	+	+ <sup>1</sup>	+	+	x	+	+	+ <sup>1</sup>	+	+	

Resistance classification: + resistant; o conditionally resistant; - not resistant; x no data available

<sup>1</sup> The bearings are not chemically attacked by these substances. However, there may be a dimensional change due to moisture absorption.

The data was determined using laboratory specimens or based on comparisons with similar chemicals. Therefore, this data can only act as a reference. The chemical resistance of actual parts should be tested under application conditions. All data given concerns the chemical resistance at room temperature. Other temperatures may lead to different classifications of the chemical resistance. The data is based on our current knowledge. Future discoveries may lead to changes in the classification of the chemical resistance.

## Troubleshooting

In spite of careful manufacturing and assembly of the bearings, variances and questions regarding the recommended installation dimensions and tolerances can result.

For this reason, we have compiled a list of the most frequent reasons for variance. In many cases, with this troubleshooter, the reasons for the variances can be found quickly.

Symptom	Action/Solution
Bearing is oversized before pressfit	Check dimensions only after pressfit
Removal of material when pressed into housing	Add chamfer to housing bore, check bore size
Bearing is over/under sized after pressfit	Check housing bore dimension, check housing bore material Softer bore materials (plastic, aluminum can expand upon pressfit)
Operating Clearances are too large/small	Check ID of bearing after press, housing bore, shaft diameter
Bearing noise/squeak	Check shaft surface finish/ Possibly roughen shaft
Bearing wears, material deposits on shaft	Operating clearance may be too small/ Increase clearance
Chattering noise	Operating clearance too large, excessive speed/Reduce speed and operating clearance
Shaft wear	Shaft material too soft/ Change shaft material or hardness, switch to alternative iglide material
Bearing seizes on shaft	Operating clearances too small, temperature or moisture may be causing material expansion
Loss of pressfit	Bearings overheated/ Axial secure bearing into housing or select alternative material grade

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

iglide®



## iglide® Plain Bearings

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

1.24

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide®  
Plain Bearings

igus®



iglide® M250

# iglide® Plain Bearings M250 - Technical Data


## Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 2-3/4 in.  
Metric sizes from 1 - 75 mm

## Part Number Structure

### Part Number Structure

**M S I-02 03-03**

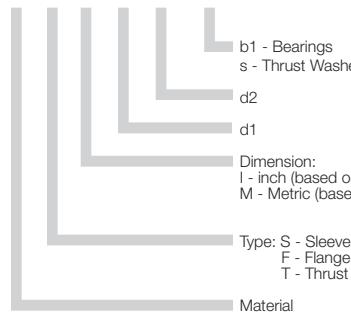

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	393
Oscillating	118	275
Linear	492	984

## Usage Guidelines



- When the bearings are exposed to high amounts of dirt
- When high vibration dampening is necessary
- For low to average speeds
- For edge loads
- When mechanical reaming of the ID is necessary



- When very high precision is necessary
  - iglide® P
- For very smooth shafts
  - iglide® J
- When high moisture is present
  - iglide® R



## Material Table

General Properties	Unit	iglide® M250	Testing Method
Density	g/cm³	1.14	
Color		charcoal	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.4	DIN 53495
Max. moisture absorption	% weight	7.6	
Coefficient of friction, dynamic against steel	μ	0.18 - 0.40	
p x v value, max. (dry)	psi x fpm	3,400	

## Mechanical Properties

Modulus of elasticity	psi	391,600	DIN 53457
Tensile strength at 68°F	psi	16,240	DIN 53452
Compressive strength	psi	7,542	
Permissible static surface pressure (68°F)	psi	2,901	
Shore D-hardness		79	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	176	
Max. application temperature, short-term	°F	338	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	10	DIN 53752

## Electrical Properties

Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹¹	DIN 53482



Permissible p x v value for iglide® M250 running dry against a steel shaft, at 68°F


Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

The self-lubricating plain bearings made of iglide® M250 are defined by their impact strength, vibration dampening, and wear resistant properties. They excel in applications in which vibration dampening is necessary, for example, in fitness and packaging machines. Since they are additionally able to absorb dirt, they are also suited for agricultural machines and garden appliances.

## Compressive Strength

iglide® M250 plain bearings can withstand radial loads of a maximum 2900 psi. The material deformation is below 2% at room temperature. Compared with other iglide® materials, iglide® M250 bearings are highly elastic. By this elasticity, they are able to yield very well, but retain their original shape again. Plastic deformation is minimal up to the permissible surface pressure.

► Compressive Strength, Page 1.3

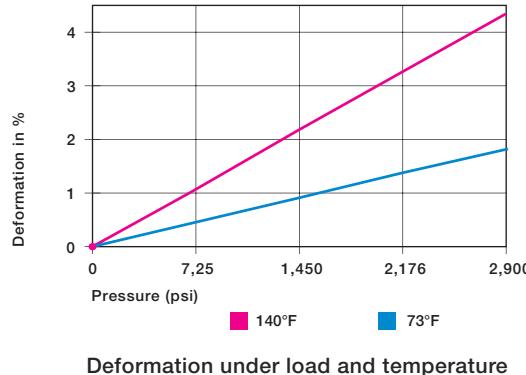

## Permissible Surface Speeds

iglide® M250 is manufactured standard as a thick walled bearing. iglide® M250 is best suited for low to medium surface speeds. The maximum permissible continuous speed for dry running applications is 157 fpm (rotating) or 492 fpm (linear).

► Surface Speed, Page 1.5  
► P x V value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	157	393
Oscillating	118	275
Linear	492	984

Maximum surface speeds

## Temperatures

The maximum permissible short-term temperature is 338°F. However, iglide® M250 plain bearings may only be exposed to this temperature without any additional load. The long-term permissible application temperature is 176°F. This is also the location of the wear limit, i.e. the temperature at which the wear increases exponentially.

► Applications Temperatures, Page 1.7

iglide® M250	Application Temperature
Minimum	- 40°F
Max. long-term	+176°F
Max. short-term	+338°F
Additional axial securing	+140°F



Temperature limits for iglide® M250



Recommended maximum permissible static surface pressure of iglide® M250 as a result of the temperature

iglide® M250


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

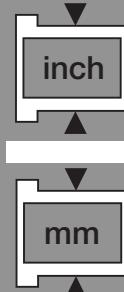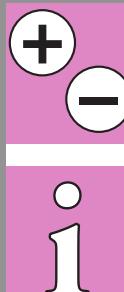

## Installation Tolerances

iglide® M250 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

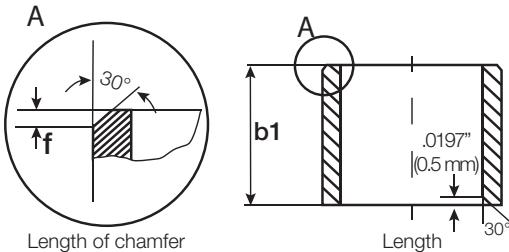

For Inch Size Bearings		
Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

For Metric Size Bearings		
Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The coefficient of friction  $\mu$  of a plain bearing is among other things, influenced by the surface speed and the load. If the load stays constant, then the coefficient of friction increases with increasing speed.

On the other hand, an increase in the load at constant speed can result in a reduction in the coefficient of friction.

Friction and wear are also greatly dependent on the surface of the shaft. For iglide® M250 a ground surface with an average roughness of 24 rms is recommended for the shaft.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9




Coefficient of friction of iglide® M250 as a result of the surface speed; p = 108 psi


### iglide® M250      Coefficient of Friction

Dry	0.18 - 0.40
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction iglide® M250 against steel (Shaft finish = 40 rms, 50 HRC)

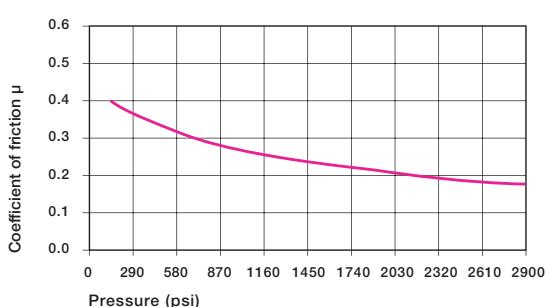

Coefficient of friction of iglide® M250 as a result of the pressure, v = 1.97 fpm

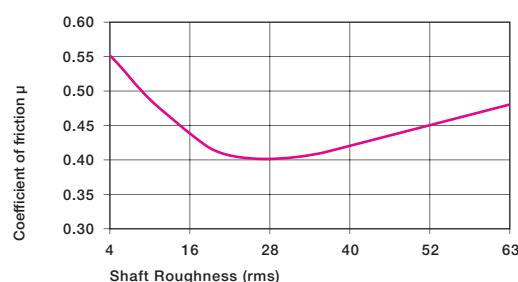

Coefficient of friction for iglide® M250 as a result of the shaft surface (shaft Cold Rolled Steel)

## Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® M250.

Up to loads of 290 psi, the shaft material plays a relatively small role for rotational movements. The graph below best illustrates which shaft materials are best suited for smaller loads.


If the load increases, the wear of a bearing clearly increases. Therefore, a suitable shaft material must be considered for higher loads. These are hardened shafts, such as, for example, Cold Rolled Steel or hard-chromed shafts.

The graph makes it clear that iglide® M250 is considerably better for rotational than for oscillating operation. However, it must be mentioned that in oscillating movements, often the vibrations that act on the bearings are especially high. Here, iglide® M250 can utilize its special dampening properties. In our test, these vibrations are excluded so that the comparison between rotation and oscillating operation is captured first.


► Shaft Materials, Page 1.11

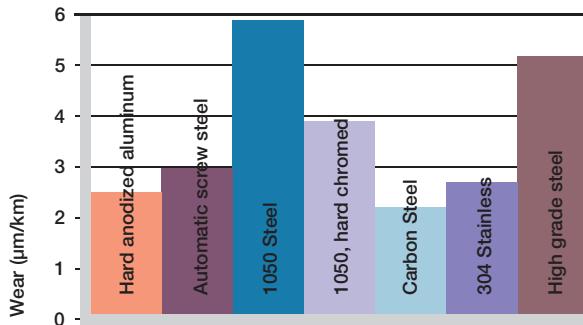

Wear for iglide® M250, rotating with different shaft materials,  
 $p = 108 \text{ psi}$ ,  $v = 98 \text{ fpm}$

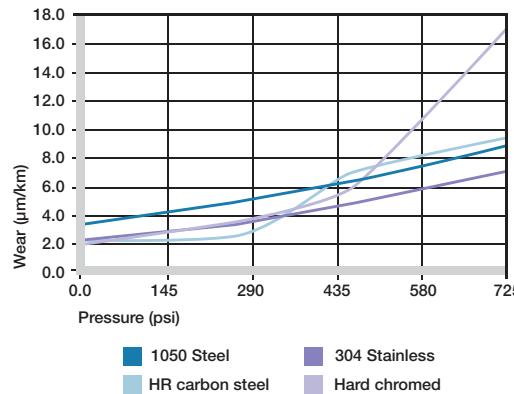

Wear of iglide® M250 with different shaft materials in  
rotational operation

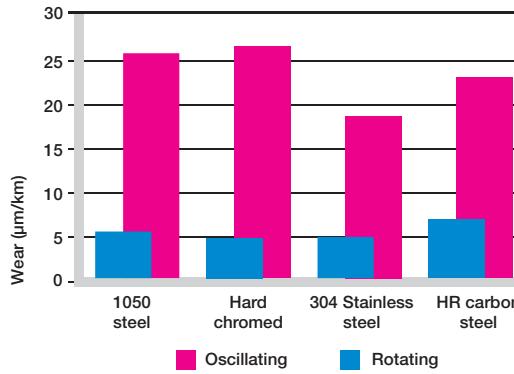

Wear for oscillating and rotating applications with  
different shaft materials at  $p = 290 \text{ psi}$

## Chemical & Moisture Resistance

iglide® M250 plain bearings have a good resistance to chemicals. They are resistant to most lubricants. They are not affected by most weak organic and inorganic acids


The moisture absorption of iglide® M250 plain bearings is approximately 1.4% in standard atmosphere. The saturation limit in water is 7.5%. This must be taken into account along with other applicable conditions.

► Chemical Resistance, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbon, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	0
+ resistant, 0 conditionally resistant, - not resistant	

### Chemical resistance of iglide® M250

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

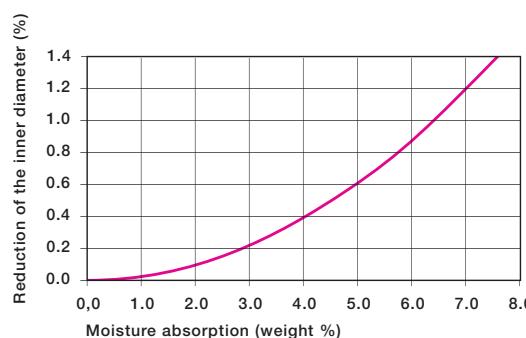

Effect of moisture absorption on iglide® M250 plain  
bearings

## Radiation Resistance

Plain bearings made from iglide® M250 can be used conditionally under radioactive radiation. They are resistant to radiation up to a radiation intensity of 1000 Gy.

## UV Resistance

iglide® M250 plain bearings are permanently resistant to UV radiation.

## Vacuum

In a vacuum environment, the iglide® M250 plain bearing releases moisture as vapor. The relatively high moisture absorption of the bearing allows only limited use in the vacuum.

## Electrical Properties


iglide® M250 plain bearings are electrically insulating.

### iglide® M250

Specific volume resistance	> $10^{13}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® M250

## Application Examples

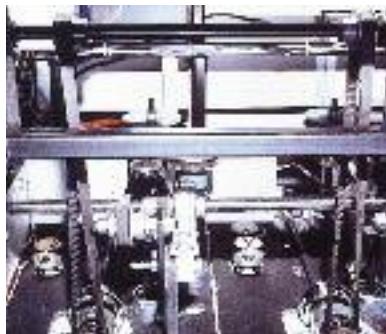

Paper dust in this mail sorting device always led to an early malfunction of the previous bearings used. Problem solved.



Precision mechanical gears need plain bearings with especially universal properties




In this analytical pump, sewage water is tested with chemicals and floating particles

# iglide® Plain Bearings

## M250 - Sleeve Bearing, Inch

**igus®**

M250

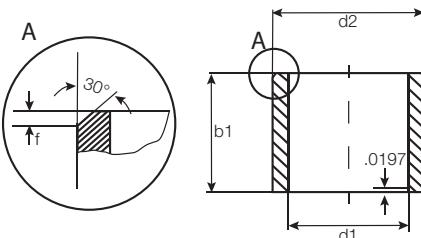

For tolerance values  
please refer to page 2.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
MSI-0203-02	1/8	3/16	1/8	.1280	.1262	.1880	.1875	.1250	.1241
MSI-0203-04	1/8	3/16	1/4	.1280	.1262	.1880	.1875	.1250	.1241
MSI-0204-02	1/8	1/4	1/8	.1280	.1262	.2515	.2510	.1250	.1241
MSI-0204-03	1/8	1/4	3/16	.1280	.1262	.2515	.2510	.1250	.1241
MSI-0204-04	1/8	1/4	1/4	.1280	.1262	.2515	.2510	.1250	.1241
MSI-0204-06	1/8	1/4	3/8	.1280	.1262	.2515	.2510	.1250	.1241
MSI-0304-04	3/16	1/4	1/4	.1905	.1887	.2515	.2510	.1875	.1866
MSI-0304-06	3/16	1/4	3/8	.1905	.1887	.2515	.2510	.1875	.1866
MSI-0304-08	3/16	1/4	1/2	.1905	.1887	.2515	.2510	.1875	.1866
MSI-0305-02	3/16	5/16	1/8	.1905	.1887	.3140	.3135	.1875	.1866
MSI-0305-03	3/16	5/16	3/16	.1905	.1887	.3140	.3135	.1875	.1866
MSI-0305-04	3/16	5/16	1/4	.1905	.1887	.3140	.3135	.1875	.1866
MSI-0305-05	3/16	5/16	5/16	.1905	.1887	.3140	.3135	.1875	.1866
MSI-0305-06	3/16	5/16	3/8	.1905	.1887	.3140	.3135	.1875	.1866
MSI-0305-08	3/16	5/16	1/2	.1905	.1887	.3140	.3135	.1875	.1866
MSI-0405-03	1/4	5/16	3/16	.2539	.2516	.3140	.3135	.2500	.2491
MSI-0405-04	1/4	5/16	1/4	.2539	.2516	.3140	.3135	.2500	.2491
MSI-0405-06	1/4	5/16	3/8	.2539	.2516	.3140	.3135	.2500	.2491
MSI-0405-08	1/4	5/16	1/2	.2539	.2516	.3140	.3135	.2500	.2491
MSI-0406-02	1/4	3/8	1/8	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-03	1/4	3/8	3/16	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-04	1/4	3/8	1/4	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-05	1/4	3/8	5/16	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-06	1/4	3/8	3/8	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-08	1/4	3/8	1/2	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-10	1/4	3/8	5/8	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0406-12	1/4	3/8	3/4	.2539	.2516	.3765	.3760	.2500	.2491
MSI-0506-03	5/16	3/8	3/16	.3164	.3141	.3765	.3760	.3125	.3116
MSI-0506-04	5/16	3/8	1/4	.3164	.3141	.3765	.3760	.3125	.3116
MSI-0506-06	5/16	3/8	3/8	.3164	.3141	.3765	.3760	.3125	.3116
MSI-0506-08	5/16	3/8	1/2	.3164	.3141	.3765	.3760	.3125	.3116
MSI-0507-03	5/16	7/16	3/16	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0507-04	5/16	7/16	1/4	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0507-05	5/16	7/16	5/16	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0507-06	5/16	7/16	3/8	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0507-08	5/16	7/16	1/2	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0507-10	5/16	7/16	5/8	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0507-12	5/16	7/16	3/4	.3164	.3141	.4390	.4385	.3125	.3116
MSI-0607-04	3/8	7/16	1/4	.3789	.3766	.4390	.4385	.3750	.3741
MSI-0607-06	3/8	7/16	3/8	.3789	.3766	.4390	.4385	.3750	.3741
MSI-0607-08	3/8	7/16	1/2	.3789	.3766	.4390	.4385	.3750	.3741

iglide® M250  
Sleeve - Inch


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch




mm

# iglide® Plain Bearings

## M250 - Sleeve Bearing, Inch

iglide® M250

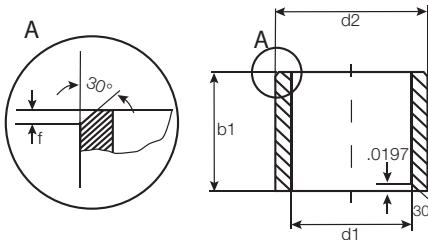


For tolerance values  
please refer to page 2.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
MSI-0608-03	.375	.500	.375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-04	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-05	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-06	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-08	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-10	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-12	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0608-16	.375	.500	.4375	.3789	.3766	.5015	.5010	.3750	.3741
MSI-0709-06	.4375	.5625	.4375	.4422	.4395	.5635	.5625	.4375	.4365
MSI-0709-08	.4375	.5625	.4375	.4422	.4395	.5635	.5625	.4375	.4365
MSI-0810-04	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-0810-05	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-0810-06	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-0810-08	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-0810-10	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-0810-12	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-0810-16	.4990	.6250	.4990	.5047	.5020	.6260	.6250	.5000	.4990
MSI-1012-04	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1012-06	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1012-08	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1012-10	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1012-12	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1012-16	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1012-26	.6240	.7510	.6240	.6297	.6270	.7510	.7500	.6250	.6240
MSI-1013-06	.6240	.8135	.6240	.6297	.6270	.8135	.8125	.6250	.6240
MSI-1013-08	.6240	.8135	.6240	.6297	.6270	.8135	.8125	.6250	.6240
MSI-1013-10	.6240	.8135	.6240	.6297	.6270	.8135	.8125	.6250	.6240
MSI-1013-12	.6240	.8135	.6240	.6297	.6270	.8135	.8125	.6250	.6240
MSI-1013-16	.6240	.8135	.6240	.6297	.6270	.8135	.8125	.6250	.6240
MSI-1113-12	.6865	.8125	.6865	.6921	.6894	.8135	.8125	.6875	.6865
MSI-1113-14	.6865	.8125	.6865	.6921	.6894	.8135	.8125	.6875	.6865
MSI-1113-16	.6865	.8125	.6865	.6921	.6894	.8135	.8125	.6875	.6865
MSI-1214-06	.7490	.8760	.7490	.7559	.7525	.8760	.8750	.7500	.7490
MSI-1214-12	.7490	.8760	.7490	.7559	.7525	.8760	.8750	.7500	.7490
MSI-1214-16	.7490	.8760	.7490	.7559	.7525	.8760	.8750	.7500	.7490
MSI-1214-24	.7490	.8760	.7490	.7559	.7525	.8760	.8750	.7500	.7490
MSI-1216-06	.7490	1.0010	1.0000	.7559	.7525	1.0010	1.0000	.7500	.7490
MSI-1216-08	.7490	1.0010	1.0000	.7559	.7525	1.0010	1.0000	.7500	.7490
MSI-1216-10	.7490	1.0010	1.0000	.7559	.7525	1.0010	1.0000	.7500	.7490
MSI-1216-12	.7490	1.0010	1.0000	.7559	.7525	1.0010	1.0000	.7500	.7490
MSI-1216-16	.7490	1.0010	1.0000	.7559	.7525	1.0010	1.0000	.7500	.7490
MSI-1216-20	.7490	1.0010	1.0000	.7559	.7525	1.0010	1.0000	.7500	.7490

# iglide® Plain Bearings

## M250 - Sleeve Bearing, Inch

**igus®**

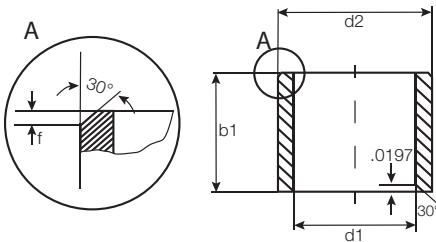

For tolerance values  
please refer to page 2.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
MSI-1216-24	3/4	1	1 1/2	.7559	.7525	1.0010	1.0000	.7500	.7490
MSI-1316-08	13/16	1	1/2	.8184	.8151	1.0010	1.0000	.8126	.8116
MSI-1416-12	7/8	1	3/4	.8809	.8775	1.0010	1.0000	.8750	.8740
MSI-1416-16	7/8	1	1	.8809	.8775	1.0010	1.0000	.8750	.8740
MSI-1416-24	7/8	1	1 1/2	.8809	.8775	1.0010	1.0000	.8750	.8740
MSI-1418-08	7/8	1 1/8	1/2	.8809	.8775	1.1260	1.1250	.8750	.8740
MSI-1418-12	7/8	1 1/8	3/4	.8809	.8775	1.1260	1.1250	.8750	.8740
MSI-1418-16	7/8	1 1/8	1	.8809	.8775	1.1260	1.1250	.8750	.8740
MSI-1418-24	7/8	1 1/8	1 1/2	.8809	.8775	1.1260	1.1250	.8750	.8740
MSI-1618-12	1	1 1/8	3/4	1.0059	1.0025	1.1260	1.1250	1.0000	.9990
MSI-1618-16	1	1 1/8	1	1.0059	1.0025	1.1260	1.1250	1.0000	.9990
MSI-1618-24	1	1 1/8	1 1/2	1.0059	1.0025	1.1260	1.1250	1.0000	.9990
MSI-1620-08	1	1 1/4	1/2	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
MSI-1620-10	1	1 1/4	5/8	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
MSI-1620-12	1	1 1/4	3/4	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
MSI-1620-16	1	1 1/4	1	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
MSI-1620-24	1	1 1/4	1 1/2	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
MSI-1620-32	1	1 1/4	2	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
MSI-1822-16	1 1/8	1 3/8	1	1.1309	1.1275	1.3760	1.3750	1.1250	1.1240
MSI-1822-24	1 1/8	1 3/8	1 1/2	1.1309	1.1275	1.3760	1.3750	1.1250	1.1240
MSI-2024-12	1 1/4	1 1/2	3/4	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
MSI-2024-16	1 1/4	1 1/2	1	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
MSI-2024-22	1 1/4	1 1/2	1 3/8	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
MSI-2024-24	1 1/4	1 1/2	1 1/2	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
MSI-2024-40	1 1/4	1 1/2	2 1/2	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
MSI-2226-16	1 3/8	1 5/8	1	1.3844	1.3782	1.6255	1.6245	1.3750	1.3740
MSI-2428-12	1 1/2	1 3/4	3/4	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
MSI-2428-16	1 1/2	1 3/4	1	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
MSI-2428-24	1 1/2	1 3/4	1 1/2	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
MSI-2428-40	1 1/2	1 3/4	2 1/2	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
MSI-2630-16	1 5/8	1 7/8	1	1.6350	1.6282	1.8755	1.8745	1.6250	1.6240
MSI-2832-08	1 3/4	2	1/2	1.7594	1.7531	2.0005	1.9995	1.7500	1.7490
MSI-2832-12	1 3/4	2	3/4	1.7594	1.7531	2.0005	1.9995	1.7500	1.7490
MSI-2832-16	1 3/4	2	1	1.7594	1.7531	2.0005	1.9995	1.7500	1.7490
MSI-2832-24	1 3/4	2	1 1/2	1.7594	1.7531	2.0005	1.9995	1.7500	1.7490
MSI-2832-40	1 3/4	2	2 1/2	1.7594	1.7531	2.0005	1.9995	1.7500	1.7490
MSI-3236-16	2	2 1/4	1	2.0100	2.0032	2.2505	2.2495	2.0000	1.9990
MSI-3236-24	2	2 1/4	1 1/2	2.0100	2.0032	2.2505	2.2495	2.0000	1.9990
MSI-3236-32	2	2 1/4	2	2.0100	2.0032	2.2505	2.2495	2.0000	1.9990
MSI-3236-40	2	2 1/4	2 1/2	2.0100	2.0032	2.2505	2.2495	2.0000	1.9990
MSI-4852-16	3	3 1/4	1	3.0114	3.0039	3.2505	3.2495	3.0000	2.9990

iglide® M250  
Sleeve - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1



inch

mm

# iglide® Plain Bearings

## M250 - Flange Bearing, Inch

iglide® M250  
Flange - Inch



For tolerance values  
please refer to page 2.4

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>


Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
MFI-0203-02	1/8	3/16	1/8	.3125	.032	.1280	.1262	.1885	.1880	.1250	.1241
MFI-0203-04	1/8	3/16	1/4	.3125	.032	.1280	.1262	.1885	.1880	.1250	.1241
MFI-0204-02	1/8	1/4	1/8	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
MFI-0204-03	1/8	1/4	3/16	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
MFI-0204-04	1/8	1/4	1/4	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
MFI-0204-06	1/8	1/4	3/8	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
MFI-0204-12	1/8	1/4	3/4	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
MFI-0304-04	3/16	1/4	1/4	.375	.032	.1905	.1887	.2515	.2510	.1875	.1866
MFI-0304-06	3/16	1/4	3/8	.375	.032	.1905	.1887	.2515	.2510	.1875	.1866
MFI-0304-08	3/16	1/4	1/2	.375	.032	.1905	.1887	.2515	.2510	.1875	.1866
MFI-0305-03	3/16	5/16	3/16	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
MFI-0305-04	3/16	5/16	1/4	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
MFI-0305-05	3/16	5/16	5/16	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
MFI-0305-06	3/16	5/16	3/8	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
MFI-0305-08	3/16	5/16	1/2	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
MFI-0405-02	1/4	5/16	1/8	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0405-03	1/4	5/16	3/16	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0405-04	1/4	5/16	1/4	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0405-06	1/4	5/16	3/8	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0405-07	1/4	5/16	7/16	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0405-08	1/4	5/16	1/2	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0405-12	1/4	5/16	3/4	.4375	.032	.2539	.2516	.3140	.3135	.2500	.2491
MFI-0406-02	1/4	3/8	1/8	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-03	1/4	3/8	3/16	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-04	1/4	3/8	1/4	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-05	1/4	3/8	5/16	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-06	1/4	3/8	3/8	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-08	1/4	3/8	1/2	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-10	1/4	3/8	5/8	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0406-12	1/4	3/8	3/4	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
MFI-0506-02	5/16	3/8	1/8	.500	.032	.3164	.3141	.3765	.3760	.3125	.3116
MFI-0506-04	5/16	3/8	1/4	.500	.032	.3164	.3141	.3765	.3760	.3125	.3116
MFI-0506-06	5/16	3/8	3/8	.500	.032	.3164	.3141	.3765	.3760	.3125	.3116
MFI-0506-08	5/16	3/8	1/2	.500	.032	.3164	.3141	.3765	.3760	.3125	.3116
MFI-0506-15	5/16	3/8	15/16	.500	.062	.3164	.3141	.3765	.3760	.3125	.3116
MFI-0507-03	5/16	7/16	3/16	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
MFI-0507-04	5/16	7/16	1/4	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
MFI-0507-05	5/16	7/16	5/16	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
MFI-0507-06	5/16	7/16	3/8	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
MFI-0507-08	5/16	7/16	1/2	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
MFI-0507-10	5/16	7/16	5/8	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
MFI-0507-12	5/16	7/16	3/4	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116

# iglide® Plain Bearings


## M250 - Flange Bearing, Inch

**igus®**

M250



r = max. .0197

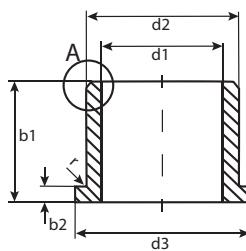

For tolerance values  
please refer to page 2.4

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
MFI-0607-04	3/8	7/16	1/4	.5625	.032	.3789	.3766	.4390	.4385	.3750	.3741
MFI-0607-06	3/8	7/16	3/8	.5625	.032	.3789	.3766	.4390	.4385	.3750	.3741
MFI-0607-08	3/8	7/16	1/2	.5625	.032	.3789	.3766	.4390	.4385	.3750	.3741
MFI-0608-02	3/8	1/2	1/8	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-03	3/8	1/2	3/16	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-04	3/8	1/2	1/4	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-05	3/8	1/2	5/16	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-06	3/8	1/2	3/8	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-08	3/8	1/2	1/2	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-10	3/8	1/2	5/8	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-12	3/8	1/2	3/4	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-16	3/8	1/2	1	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0608-17.5	3/8	1/2	1 3/32	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
MFI-0709-06	7/16	9/16	3/8	.687	.062	.4422	.4395	.5635	.5625	.4375	.4365
MFI-0709-08	7/16	9/16	1/2	.687	.062	.4422	.4395	.5635	.5625	.4375	.4365
MFI-0810-02	1/2	5/8	1/8	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-04	1/2	5/8	1/4	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-05	1/2	5/8	5/16	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-06	1/2	5/8	3/8	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-08	1/2	5/8	1/2	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-10	1/2	5/8	5/8	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-12	1/2	5/8	3/4	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-0810-16	1/2	5/8	1	.875	.062	.5047	.5020	.6260	.6250	.5000	.4990
MFI-1012-06	5/8	3/4	3/8	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
MFI-1012-08	5/8	3/4	1/2	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
MFI-1012-10	5/8	3/4	5/8	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
MFI-1012-12	5/8	3/4	3/4	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
MFI-1012-16	5/8	3/4	1	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
MFI-1012-24	5/8	3/4	1 1/2	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
MFI-1013-08	5/8	13/16	1/2	1.063	.156	.6297	.6270	.8135	.8125	.6250	.6240
MFI-1013-10	5/8	13/16	5/8	1.063	.156	.6297	.6270	.8135	.8125	.6250	.6240
MFI-1013-12	5/8	13/16	3/4	1.063	.156	.6297	.6270	.8135	.8125	.6250	.6240
MFI-1013-16	5/8	13/16	1	1.063	.156	.6297	.6270	.8135	.8125	.6250	.6240
MFI-1214-06	3/4	7/8	3/8	1.125	.062	.7559	.7525	.8760	.8750	.7500	.7490
MFI-1214-08	3/4	7/8	1/2	1.125	.062	.7559	.7525	.8760	.8750	.7500	.7490
MFI-1214-12	3/4	7/8	3/4	1.125	.062	.7559	.7525	.8760	.8750	.7500	.7490
MFI-1214-16	3/4	7/8	1	1.125	.062	.7559	.7525	.8760	.8750	.7500	.7490
MFI-1214-24	3/4	7/8	1 1/2	1.125	.062	.7559	.7525	.8760	.8750	.7500	.7490
MFI-1216-08	3/4	1	1/2	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
MFI-1216-10	3/4	1	5/8	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
MFI-1216-12	3/4	1	3/4	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
MFI-1216-16	3/4	1	1	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490

iglide® M250  
Flange - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch


mm

M250

igus®

# iglide® Plain Bearings


## M250 - Flange Bearing, Inch

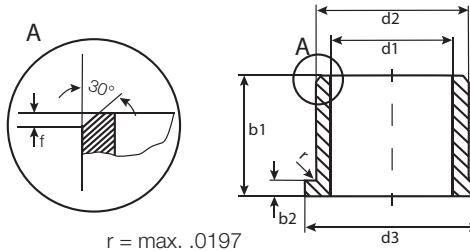iglide® M250  
Flange - Inch

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit	Housing Bore	Shaft Size
<b>MFI-1216-24</b>	3/4	1	1 1/2	1.250	.156	.7559	.7525	1.0010 1.0000 .7500 .7490
<b>MFI-1216-32</b>	3/4	1	2	1.250	.156	.7559	.7525	1.0010 1.0000 .7500 .7490
<b>MFI-1416-12</b>	7/8	1	3/4	1.250	.062	.8809	.8775	1.0010 1.0000 .8750 .8740
<b>MFI-1416-16</b>	7/8	1	1	1.250	.062	.8809	.8775	1.0010 1.0000 .8750 .8740
<b>MFI-1416-24</b>	7/8	1	1 1/2	1.250	.062	.8809	.8775	1.0010 1.0000 .8750 .8740
<b>MFI-1418-08</b>	7/8	1 1/8	1/2	1.375	.156	.8809	.8775	1.1260 1.1250 .8750 .8740
<b>MFI-1418-12</b>	7/8	1 1/8	3/4	1.375	.156	.8809	.8775	1.1260 1.1250 .8750 .8740
<b>MFI-1418-16</b>	7/8	1 1/8	1	1.375	.156	.8809	.8775	1.1260 1.1250 .8750 .8740
<b>MFI-1418-24</b>	7/8	1 1/8	1 1/2	1.375	.156	.8809	.8775	1.1260 1.1250 .8750 .8740
<b>MFI-1618-03</b>	1	1 1/8	3/16	1.375	.062	1.0059	1.0025	1.1260 1.1250 1.0000 .9990
<b>MFI-1618-12</b>	1	1 1/8	3/4	1.375	.062	1.0059	1.0025	1.1260 1.1250 1.0000 .9990
<b>MFI-1618-16</b>	1	1 1/8	1	1.375	.062	1.0059	1.0025	1.1260 1.1250 1.0000 .9990
<b>MFI-1618-24</b>	1	1 1/8	1 1/2	1.375	.062	1.0059	1.0025	1.1260 1.1250 1.0000 .9990
<b>MFI-1620-08</b>	1	1 1/4	1/2	1.500	.188	1.0059	1.0025	1.2510 1.2500 1.0000 .9990
<b>MFI-1620-10</b>	1	1 1/4	5/8	1.500	.188	1.0059	1.0025	1.2510 1.2500 1.0000 .9990
<b>MFI-1620-12</b>	1	1 1/4	3/4	1.500	.188	1.0059	1.0025	1.2510 1.2500 1.0000 .9990
<b>MFI-1620-16</b>	1	1 1/4	1	1.500	.188	1.0059	1.0025	1.2510 1.2500 1.0000 .9990
<b>MFI-1620-24</b>	1	1 1/4	1 1/2	1.500	.188	1.0059	1.0025	1.2510 1.2500 1.0000 .9990
<b>MFI-2024-07</b>	1 1/4	1 1/2	7/16	1.750	.200	1.2600	1.2531	1.5005 1.4995 1.2500 1.2490
<b>MFI-2024-12</b>	1 1/4	1 1/2	3/4	1.750	.200	1.2600	1.2531	1.5005 1.4995 1.2500 1.2490
<b>MFI-2024-16</b>	1 1/4	1 1/2	1	1.750	.200	1.2600	1.2531	1.5005 1.4995 1.2500 1.2490
<b>MFI-2024-24</b>	1 1/4	1 1/2	1 1/2	1.750	.200	1.2600	1.2531	1.5005 1.4995 1.2500 1.2490
<b>MFI-2226-12</b>	1 3/8	1 5/8	3/4	1.875	.125	1.3781	1.3759	1.6255 1.6245 1.3750 1.3740
<b>MFI-2226-16</b>	1 3/8	1 5/8	1	1.875	.125	1.3781	1.3759	1.6255 1.6245 1.3750 1.3740
<b>MFI-2428-12</b>	1 1/2	1 3/4	3/4	2.000	.125	1.5100	1.5032	1.7505 1.7495 1.5000 1.4990
<b>MFI-2428-16</b>	1 1/2	1 3/4	1	2.000	.125	1.5100	1.5032	1.7505 1.7495 1.5000 1.4990
<b>MFI-2428-24</b>	1 1/2	1 3/4	1 1/2	2.000	.125	1.5100	1.5032	1.7505 1.7495 1.5000 1.4990
<b>MFI-2630-16</b>	1 5/8	1 7/8	1	2.125	.125	1.6350	1.6282	1.8755 1.8745 1.6250 1.6240
<b>MFI-2832-12</b>	1 3/4	2	3/4	2.250	.125	1.7595	1.7531	2.0005 1.9995 1.7500 1.7490
<b>MFI-2832-16</b>	1 3/4	2	1	2.250	.125	1.7595	1.7531	2.0005 1.9995 1.7500 1.7490
<b>MFI-2832-24</b>	1 3/4	2	1 1/2	2.250	.125	1.7595	1.7531	2.0005 1.9995 1.7500 1.7490
<b>MFI-3236-16</b>	2	2 1/4	1	2.500	.125	2.0100	2.0032	2.2512 2.2500 2.0000 1.9990
<b>MFI-3236-24</b>	2	2 1/4	1 1/2	2.500	.125	2.0100	2.0032	2.2512 2.2500 2.0000 1.9990
<b>MFI-3236-32</b>	2	2 1/4	2	2.500	.125	2.0100	2.0032	2.2512 2.2500 2.0000 1.9990

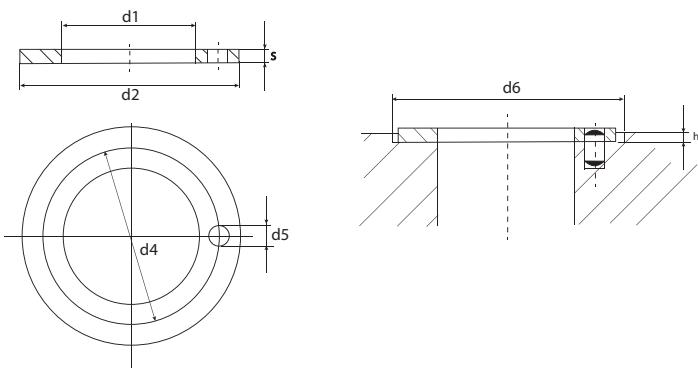

Part Number	d1(nominal)	d1		d2		s
		Max.	Min.	Max.	Min.	
MTI-04	1/4	.2609	.2550	.6200	.6094	.0900
MTI-05	5/16	.3271	.3189	.6874	.6767	.0900
MTI-06	3/8	.3850	.3780	.7409	.7394	.0900
MTI-08	1/2	.5101	.5030	.8200	.8070	.0900
MTI-10	5/8	.6371	.6300	1.0000	.9870	.0940
MTI-12	3/4	.7675	.7600	1.0630	1.0500	.0940
MTI-16	1	1.0200	1.0100	1.5000	1.4843	.1250
MTI-20	1 1/4	1.2998	1.2900	2.1400	2.1220	.0980
MTI-24	1 1/2	1.6000	1.5500	2.6000	2.5500	.1250

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0 + 1.0


inch

mm

# iglide® Plain Bearings

## M250 - Sleeve Bearing - MM


iglide® M250  
Sleeve - MM

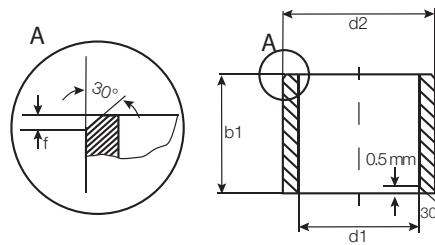

For tolerance values  
please refer to page 2.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
MSM-0103-02	1.0	+0.020 +0.080	3.0	2.0	1.080	1.020	3.080	3.000
MSM-0104-02	1.5	+0.020 +0.080	4.0	2.0	1.580	1.520	4.012	4.000
MSM-0205-01	2.0	+0.020 +0.080	5.0	1.0	2.080	2.020	5.012	5.000
MSM-0205-02	2.0	+0.020 +0.080	5.0	2.0	2.080	2.020	5.012	5.000
MSM-0205-03	2.0	+0.020 +0.080	5.0	3.0	2.080	2.020	5.012	5.000
MSM-0206-03	2.5	+0.020 +0.080	6.0	3.0	2.580	2.520	6.012	6.000
MSM-0305-03	3.0	+0.020 +0.080	5.0	3.0	3.080	3.020	5.012	5.000
MSM-0305-04	3.0	+0.020 +0.080	5.0	4.0	3.080	3.020	5.012	5.000
MSM-0306-03	3.0	+0.020 +0.080	6.0	3.0	3.080	3.020	6.012	6.000
MSM-0306-04	3.0	+0.020 +0.080	6.0	4.0	3.080	3.020	6.012	6.000
MSM-0407-03	4.0	+0.030 +0.105	7.0	3.0	4.105	4.030	7.015	7.000
MSM-0407-04	4.0	+0.030 +0.105	7.0	4.0	4.105	4.030	7.015	7.000
MSM-0407-06	4.0	+0.030 +0.105	7.0	6.0	4.105	4.030	7.015	7.000
MSM-0408-04	4.0	+0.030 +0.105	8.0	4.0	4.105	4.030	8.015	8.000
MSM-0408-06	4.0	+0.030 +0.105	8.0	6.0	4.105	4.030	8.015	8.000
MSM-0508-04	5.0	+0.030 +0.105	8.0	4.0	5.105	5.030	8.015	8.000
MSM-0508-05	5.0	+0.030 +0.105	8.0	5.0	5.105	5.030	8.015	8.000
MSM-0508-08	5.0	+0.030 +0.105	8.0	8.0	5.105	5.030	8.015	8.000
MSM-0509-05	5.0	+0.030 +0.105	9.0	5.0	5.105	5.030	9.015	9.000
MSM-0509-08	5.0	+0.030 +0.105	9.0	8.0	5.105	5.030	9.015	9.000
MSM-0608-10	6.0	+0.030 +0.105	8.0	10.0	6.105	6.030	8.015	8.000
MSM-0609-06	6.0	+0.030 +0.105	9.0	6.0	6.105	6.030	9.015	9.000
MSM-0610-02	6.0	+0.030 +0.105	10.0	2.0	6.105	6.030	10.015	10.000
MSM-0610-04	6.0	+0.030 +0.105	10.0	4.0	6.105	6.030	10.015	10.000
MSM-0610-06	6.0	+0.030 +0.105	10.0	6.0	6.105	6.030	10.015	10.000
MSM-0610-08	6.0	+0.030 +0.105	10.0	8.0	6.105	6.030	10.015	10.000
MSM-0610-10	6.0	+0.030 +0.105	10.0	10.0	6.105	6.030	10.015	10.000
MSM-0611-04	6.0	+0.030 +0.105	11.0	4.0	6.105	6.030	11.018	11.000
MSM-0612-06	6.0	+0.030 +0.105	12.0	6.0	6.105	6.030	12.018	12.000
MSM-0612-10	6.0	+0.030 +0.105	12.0	10.0	6.105	6.030	12.018	12.000
MSM-0710-05	7.0	+0.040 +0.130	10.0	5.0	7.130	7.040	10.015	10.000
MSM-0710-08	7.0	+0.040 +0.130	10.0	8.0	7.130	7.040	10.015	10.000
MSM-0710-10	7.0	+0.040 +0.130	10.0	10.0	7.130	7.040	10.015	10.000
MSM-0711-16	7.0	+0.040 +0.130	11.0	16.0	7.130	7.040	11.018	11.000
MSM-0810-06	8.0	+0.040 +0.130	10.0	6.0	8.130	8.040	10.015	10.000
MSM-0810-08	8.0	+0.040 +0.130	10.0	8.0	8.130	8.040	10.015	10.000
MSM-0810-10	8.0	+0.040 +0.130	10.0	10.0	8.130	8.040	10.015	10.000
MSM-0811-06	8.0	+0.040 +0.130	11.0	6.0	8.130	8.040	11.018	11.000
MSM-0811-08	8.0	+0.040 +0.130	11.0	8.0	8.130	8.040	11.018	11.000
MSM-0811-12	8.0	+0.040 +0.130	11.0	12.0	8.130	8.040	11.018	11.000
MSM-0812-04	8.0	+0.040 +0.130	12.0	4.0	8.130	8.040	12.018	12.000
MSM-0812-06	8.0	+0.040 +0.130	12.0	6.0	8.130	8.040	12.018	12.000

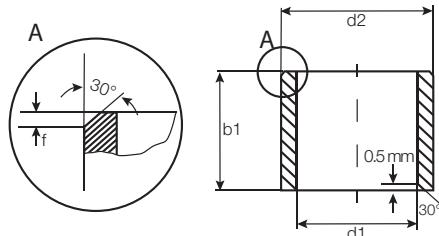

For tolerance values  
please refer to page 2.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	$d_1$	$d_1$ -Tolerance	$d_2$	$b_1$	I.D. After Pressfit	Housing Bore		Shaft Size		
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	
MSM-0812-08	8.0	+0.040 +0.130	12.0	8.0	8.130	8.040	12.018	12.000	8.000	7.964
MSM-0812-10	8.0	+0.040 +0.130	12.0	10.0	8.130	8.040	12.018	12.000	8.000	7.964
MSM-0812-12	8.0	+0.040 +0.130	12.0	12.0	8.130	8.040	12.018	12.000	8.000	7.964
MSM-0814-06	8.0	+0.040 +0.130	14.0	6.0	8.130	8.040	14.018	14.000	8.000	7.964
MSM-0814-10	8.0	+0.040 +0.130	14.0	10.0	8.130	8.040	14.018	14.000	8.000	7.964
MSM-0912-14	9.0	+0.040 +0.130	12.0	14.0	9.130	9.040	12.018	12.000	9.000	8.964
MSM-1014-06	10.0	+0.040 +0.130	14.0	6.0	10.130	10.040	14.018	14.000	10.000	9.964
MSM-1014-08	10.0	+0.040 +0.130	14.0	8.0	10.130	10.040	14.018	14.000	10.000	9.964
MSM-1014-10	10.0	+0.040 +0.130	14.0	10.0	10.130	10.040	14.018	14.000	10.000	9.964
MSM-1014-16	10.0	+0.040 +0.130	14.0	16.0	10.130	10.040	14.018	14.000	10.000	9.964
MSM-1016-06	10.0	+0.040 +0.130	16.0	6.0	10.130	10.040	16.018	16.000	10.000	9.964
MSM-1016-08	10.0	+0.040 +0.130	16.0	8.0	10.130	10.040	16.018	16.000	10.000	9.964
MSM-1016-10	10.0	+0.040 +0.130	16.0	10.0	10.130	10.040	16.018	16.000	10.000	9.964
MSM-1016-16	10.0	+0.040 +0.130	16.0	16.0	10.130	10.040	16.018	16.000	10.000	9.964
MSM-1016-50	10.0	+0.040 +0.130	16.0	50.0	10.130	10.040	16.018	16.000	10.000	9.964
MSM-1214-15	12.0	+0.050 +0.160	14.0	15.0	12.160	12.050	14.018	14.000	12.000	11.957
MSM-1214-20	12.0	+0.050 +0.160	14.0	20.0	12.160	12.050	14.018	14.000	12.000	11.957
MSM-1216-15	12.0	+0.050 +0.160	16.0	15.0	12.160	12.050	16.018	16.000	12.000	11.957
MSM-1216-20	12.0	+0.050 +0.160	16.0	20.0	12.160	12.050	16.018	16.000	12.000	11.957
MSM-1218-08	12.0	+0.050 +0.160	18.0	8.0	12.160	12.050	18.018	18.000	12.000	11.957
MSM-1218-10	12.0	+0.050 +0.160	18.0	10.0	12.160	12.050	18.018	18.000	12.000	11.957
MSM-1218-15	12.0	+0.050 +0.160	18.0	15.0	12.160	12.050	18.018	18.000	12.000	11.957
MSM-1218-20	12.0	+0.050 +0.160	18.0	20.0	12.160	12.050	18.018	18.000	12.000	11.957
MSM-1416-085	14.0	+0.050 +0.160	16.0	8.5	14.160	14.050	16.018	16.000	14.000	13.957
MSM-1416-10	14.0	+0.050 +0.160	16.0	10.0	14.160	14.050	16.018	16.000	14.000	13.957
MSM-1416-15	14.0	+0.050 +0.160	16.0	15.0	14.160	14.050	16.018	16.000	14.000	13.957
MSM-1416-20	14.0	+0.050 +0.160	16.0	20.0	14.160	14.050	16.018	16.000	14.000	13.957
MSM-1416-29	14.0	+0.050 +0.160	16.0	29.0	14.160	14.050	16.018	16.000	14.000	13.957
MSM-1418-20	14.0	+0.050 +0.160	18.0	20.0	14.160	14.050	18.018	18.000	14.000	13.957
MSM-1420-10	14.0	+0.050 +0.160	20.0	10.0	14.160	14.050	20.021	20.000	14.000	13.957
MSM-1420-15	14.0	+0.050 +0.160	20.0	15.0	14.160	14.050	20.021	20.000	14.000	13.957
MSM-1420-20	14.0	+0.050 +0.160	20.0	20.0	14.160	14.050	20.021	20.000	14.000	13.957
MSM-1517-10	15.0	+0.050 +0.160	17.0	10.0	15.160	15.050	17.018	17.000	15.000	14.957
MSM-1517-15	15.0	+0.050 +0.160	17.0	15.0	15.160	15.050	17.018	17.000	15.000	14.957
MSM-1521-10	15.0	+0.050 +0.160	21.0	10.0	15.160	15.050	21.021	21.000	15.000	14.957
MSM-1521-15	15.0	+0.050 +0.160	21.0	15.0	15.160	15.050	21.021	21.000	15.000	14.957
MSM-1521-20	15.0	+0.050 +0.160	21.0	20.0	15.160	15.050	21.021	21.000	15.000	14.957
MSM-1521-23	15.0	+0.050 +0.160	21.0	23.0	15.160	15.050	21.021	21.000	15.000	14.957
MSM-1618-12	16.0	+0.050 +0.160	18.0	12.0	16.160	16.050	18.018	18.000	16.000	15.957
MSM-1618-20	16.0	+0.050 +0.160	18.0	20.0	16.160	16.050	18.018	18.000	16.000	15.957
MSM-1620-20	16.0	+0.050 +0.160	20.0	20.0	16.160	16.050	20.021	20.000	16.000	15.957
MSM-1620-25	16.0	+0.050 +0.160	20.0	25.0	16.160	16.050	20.021	20.000	16.000	15.957

iglide® M250  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)


inch

mm

# iglide® Plain Bearings

## M250 - Sleeve Bearing - MM


iglide® M250  
Sleeve - MM

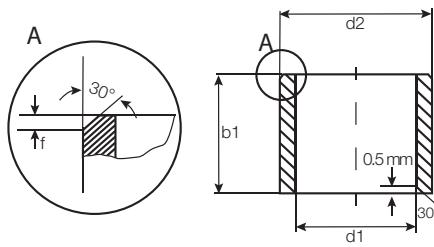

For tolerance values  
please refer to page 2.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
MSM-1620-30	16.0	+0.050 +0.160	20.0	30.0	16.160	16.050	20.021	20.000	16.000	15.957
MSM-1622-12	16.0	+0.050 +0.160	22.0	12.0	16.160	16.050	22.021	22.000	16.000	15.957
MSM-1622-15	16.0	+0.050 +0.160	22.0	15.0	16.160	16.050	22.021	22.000	16.000	15.957
MSM-1622-16	16.0	+0.050 +0.160	22.0	16.0	16.160	16.050	22.021	22.000	16.000	15.957
MSM-1622-20	16.0	+0.050 +0.160	22.0	20.0	16.160	16.050	22.021	22.000	16.000	15.957
MSM-1622-25	16.0	+0.050 +0.160	22.0	25.0	16.160	16.050	22.021	22.000	16.000	15.957
MSM-1824-12	18.0	+0.050 +0.160	24.0	12.0	18.160	18.050	24.021	24.000	18.000	17.957
MSM-1824-20	18.0	+0.050 +0.160	24.0	20.0	18.160	18.050	24.021	24.000	18.000	17.957
MSM-1824-30	18.0	+0.050 +0.160	24.0	30.0	18.160	18.050	24.021	24.000	18.000	17.957
MSM-2023-15	20.0	+0.065 +0.195	23.0	15.0	20.195	20.065	23.021	23.000	20.000	19.948
MSM-2023-20	20.0	+0.065 +0.195	23.0	20.0	20.195	20.065	23.021	23.000	20.000	19.948
MSM-2025-14	20.0	+0.065 +0.195	25.0	14.0	20.195	20.065	25.021	25.000	20.000	19.948
MSM-2025-20	20.0	+0.065 +0.195	25.0	20.0	20.195	20.065	25.021	25.000	20.000	19.948
MSM-2025-30	20.0	+0.065 +0.195	25.0	30.0	20.195	20.065	25.021	25.000	20.000	19.948
MSM-2026-12	20.0	+0.065 +0.195	26.0	12.0	20.195	20.065	26.021	26.000	20.000	19.948
MSM-2026-15	20.0	+0.065 +0.195	26.0	15.0	20.195	20.065	26.021	26.000	20.000	19.948
MSM-2026-20	20.0	+0.065 +0.195	26.0	20.0	20.195	20.065	26.021	26.000	20.000	19.948
MSM-2026-30	20.0	+0.065 +0.195	26.0	30.0	20.195	20.065	26.021	26.000	20.000	19.948
MSM-2226-15	22.0	+0.065 +0.195	26.0	15.0	22.195	22.065	26.021	26.000	22.000	21.948
MSM-2228-10	22.0	+0.065 +0.195	28.0	10.0	22.195	22.065	28.021	28.000	22.000	21.948
MSM-2228-15	22.0	+0.065 +0.195	28.0	15.0	22.195	22.065	28.021	28.000	22.000	21.948
MSM-2228-20	22.0	+0.065 +0.195	28.0	20.0	22.195	22.065	28.021	28.000	22.000	21.948
MSM-2228-30	22.0	+0.065 +0.195	28.0	30.0	22.195	22.065	28.021	28.000	22.000	21.948
MSM-2430-15	24.0	+0.065 +0.195	30.0	15.0	24.195	24.065	30.025	30.000	24.000	23.948
MSM-2430-20	24.0	+0.065 +0.195	30.0	20.0	24.195	24.065	30.025	30.000	24.000	23.948
MSM-2430-30	24.0	+0.065 +0.195	30.0	30.0	24.195	24.065	30.025	30.000	24.000	23.948
MSM-2528-12	25.0	+0.065 +0.195	28.0	12.0	25.195	25.065	28.021	28.000	25.000	24.948
MSM-2528-20	25.0	+0.065 +0.195	28.0	20.0	25.195	25.065	28.021	28.000	25.000	24.948
MSM-2530-20	25.0	+0.065 +0.195	30.0	20.0	25.195	25.065	30.025	30.000	25.000	24.948
MSM-2530-30	25.0	+0.065 +0.195	30.0	30.0	25.195	25.065	30.025	30.000	25.000	24.948
MSM-2530-40	25.0	+0.065 +0.195	30.0	40.0	25.195	25.065	30.025	30.000	25.000	24.948
MSM-2532-12	25.0	+0.065 +0.195	32.0	12.0	25.195	25.065	32.025	32.000	25.000	24.948
MSM-2532-20	25.0	+0.065 +0.195	32.0	20.0	25.195	25.065	32.025	32.000	25.000	24.948
MSM-2532-30	25.0	+0.065 +0.195	32.0	30.0	25.195	25.065	32.025	32.000	25.000	24.948
MSM-2532-35	25.0	+0.065 +0.195	32.0	35.0	25.195	25.065	32.025	32.000	25.000	24.948
MSM-2532-40	25.0	+0.065 +0.195	32.0	40.0	25.195	25.065	32.025	32.000	25.000	24.948
MSM-2630-20	26.0	+0.065 +0.195	30.0	20.0	26.195	26.065	30.025	30.000	26.000	25.948
MSM-2632-30	26.0	+0.065 +0.195	32.0	30.0	26.195	26.065	32.025	32.000	26.000	25.948
MSM-2734-20	27.0	+0.065 +0.195	34.0	20.0	27.195	27.065	34.025	34.000	27.000	26.948
MSM-2734-30	27.0	+0.065 +0.195	34.0	30.0	27.195	27.065	34.025	34.000	27.000	26.948

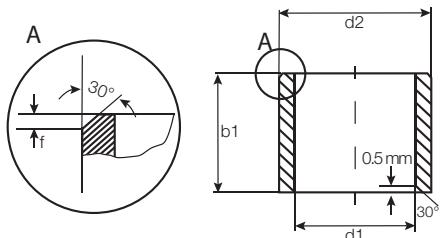


For tolerance values  
please refer to page 2.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
MSM-2734-40	27.0	+0.065 +0.195	34.0	40.0	27.195	27.065	34.025	34.000	27.000	26.948
MSM-2833-20	28.0	+0.065 +0.195	33.0	20.0	28.195	28.065	33.025	33.000	28.000	27.948
MSM-2836-20	28.0	+0.065 +0.195	36.0	20.0	28.195	28.065	36.025	36.000	28.000	27.948
MSM-2836-30	28.0	+0.065 +0.195	36.0	30.0	28.195	28.065	36.025	36.000	28.000	27.948
MSM-2836-40	28.0	+0.065 +0.195	36.0	40.0	28.195	28.065	36.025	36.000	28.000	27.948
MSM-3035-20	30.0	+0.065 +0.195	35.0	20.0	30.195	30.065	35.025	35.000	30.000	29.948
MSM-3035-40	30.0	+0.065 +0.195	35.0	40.0	30.195	30.065	35.025	35.000	30.000	29.948
MSM-3038-20	30.0	+0.065 +0.195	38.0	20.0	30.195	30.065	38.025	38.000	30.000	29.948
MSM-3038-30	30.0	+0.065 +0.195	38.0	30.0	30.195	30.065	38.025	38.000	30.000	29.948
MSM-3038-40	30.0	+0.065 +0.195	38.0	40.0	30.195	30.065	38.025	38.000	30.000	29.948
MSM-3040-40	30.0	+0.065 +0.195	40.0	40.0	30.195	30.065	40.025	40.000	30.000	29.948
MSM-3240-20	32.0	+0.080 +0.240	40.0	20.0	32.240	32.080	40.025	40.000	32.000	31.948
MSM-3240-30	32.0	+0.080 +0.240	40.0	30.0	32.240	32.080	40.025	40.000	32.000	31.948
MSM-3240-40	32.0	+0.080 +0.240	40.0	40.0	32.240	32.080	40.025	40.000	32.000	31.948
MSM-3542-50	35.0	+0.080 +0.240	42.0	50.0	35.240	35.080	42.025	42.000	35.000	34.948
MSM-7580-60	75.0	+0.100 +0.290	80.0	60.0	75.290	75.100	80.030	80.000	75.000	74.926

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





inch

mm

# iglide® Plain Bearings

## M250 - Flange Bearing, MM

iglide® M250  
Flange - MM





For tolerance values  
please refer to page 2.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.	
MFM-0103-02	1.0	+0.020 +0.080	3.0	5.0	2.0	1.00	1.080	1.020	3.080 3.000	1.000 .975
MFM-0104-02	1.5	+0.020 +0.080	4.0	6.0	2.0	1.00	1.580	1.520	4.012 4.000	1.500 1.475
MFM-0205-03	2.0	+0.020 +0.080	5.0	8.0	3.0	1.50	2.080	2.020	5.012 5.000	2.000 1.975
MFM-0206-03	2.5	+0.020 +0.080	6.0	9.0	3.0	1.50	2.580	2.520	6.012 6.000	2.500 2.475
MFM-0306-04	3.0	+0.020 +0.080	6.0	9.0	4.0	1.50	3.080	3.020	6.012 6.000	3.000 2.975
MFM-0408-04	4.0	+0.030 +0.105	8.0	12.0	4.0	2.0	4.105	4.030	8.015 8.000	4.000 3.970
MFM-0408-06	4.0	+0.030 +0.105	8.0	12.0	6.0	2.0	4.105	4.030	8.015 8.000	4.000 3.970
MFM-0408-08	4.0	+0.030 +0.105	8.0	12.0	8.0	2.0	4.105	4.030	8.015 8.000	4.000 3.970
MFM-0509-05	5.0	+0.030 +0.105	9.0	13.0	5.0	2.0	5.105	5.030	9.015 9.000	5.000 4.970
MFM-0509-06	5.0	+0.030 +0.105	9.0	13.0	6.0	2.0	5.105	5.030	9.015 9.000	5.000 4.970
MFM-0509-08	5.0	+0.030 +0.105	9.0	13.0	8.0	2.0	5.105	5.030	9.015 9.000	5.000 4.970
MFM-0610-04	6.0	+0.030 +0.105	10.0	14.0	4.0	2.0	6.105	6.030	10.015 10.000	6.000 5.970
MFM-0610-06	6.0	+0.030 +0.105	10.0	14.0	6.0	2.0	6.105	6.030	10.015 10.000	6.000 5.970
MFM-0610-10	6.0	+0.030 +0.105	10.0	14.0	10.0	2.0	6.105	6.030	10.015 10.000	6.000 5.970
MFM-0611-04	6.0	+0.030 +0.105	11.0	14.0	4.0	2.5	6.105	6.030	11.018 11.000	6.000 5.970
MFM-0612-06	6.0	+0.030 +0.105	12.0	14.0	6.0	3.0	6.105	6.030	12.018 12.000	6.000 5.970
MFM-0612-10	6.0	+0.030 +0.105	12.0	14.0	10.0	3.0	6.105	6.030	12.018 12.000	6.000 5.970
MFM-0711-08	7.0	+0.040 +0.130	11.0	15.0	8.0	2.0	7.130	7.040	11.018 11.000	7.000 6.964
MFM-0811-05	8.0	+0.040 +0.130	11.0	13.0	5.0	2.0	8.130	8.040	11.018 11.000	8.000 7.964
MFM-0811-08	8.0	+0.040 +0.130	11.0	13.0	8.0	2.0	8.130	8.040	11.018 11.000	8.000 7.964
MFM-0812-06	8.0	+0.040 +0.130	12.0	16.0	6.0	2.0	8.130	8.040	12.018 12.000	8.000 7.964
MFM-0812-08	8.0	+0.040 +0.130	12.0	16.0	8.0	2.0	8.130	8.040	12.018 12.000	8.000 7.964
MFM-0812-12	8.0	+0.040 +0.130	12.0	16.0	12.0	2.0	8.130	8.040	12.018 12.000	8.000 7.964
MFM-0814-06	8.0	+0.040 +0.130	14.0	18.0	6.0	3.0	8.130	8.040	14.018 14.000	8.000 7.964
MFM-0814-10	8.0	+0.040 +0.130	14.0	18.0	10.0	3.0	8.130	8.040	14.018 14.000	8.000 7.964
MFM-081416-06	8.0	+0.040 +0.130	14.0	16.0	6.0	3.0	8.130	8.040	14.018 14.000	8.000 7.964
MFM-081416-10	8.0	+0.040 +0.130	14.0	16.0	10.0	3.0	8.130	8.040	14.018 14.000	8.000 7.984
MFM-0914-06	9.0	+0.040 +0.130	14.0	19.0	6.0	2.0	9.130	9.040	14.018 14.000	9.000 8.964
MFM-0914-10	9.0	+0.040 +0.130	14.0	19.0	10.0	2.0	9.130	9.040	14.018 14.000	9.000 8.964
MFM-0914-14	9.0	+0.040 +0.130	14.0	19.0	14.0	2.0	9.130	9.040	14.018 14.000	9.000 8.964
MFM-1014-10	10.0	+0.040 +0.130	14.0	19.0	10.0	2.0	10.130	10.040	14.018 14.000	10.000 9.964
MFM-1014-14	10.0	+0.040 +0.130	14.0	17.5	14.0	1.0	10.130	10.040	14.018 14.000	10.000 9.964
MFM-1014-19	10.0	+0.040 +0.130	14.0	17.5	19.0	1.0	10.130	10.040	14.018 14.000	10.000 9.964
MFM-1014-24	10.0	+0.040 +0.130	14.0	17.5	24.0	1.0	10.130	10.040	14.018 14.000	10.000 9.964
MFM-1014-34	10.0	+0.040 +0.130	14.0	17.5	34.0	1.0	10.130	10.040	14.018 14.000	10.000 9.964
MFM-101420-12	10.0	+0.040 +0.130	14.0	20.0	12.0	2.0	10.130	10.040	14.018 14.000	10.000 9.964
MFM-1016-08	10.0	+0.040 +0.130	16.0	22.0	8.0	3.0	10.130	10.040	16.018 16.000	10.000 9.964
MFM-1016-10	10.0	+0.040 +0.130	16.0	22.0	10.0	3.0	10.130	10.040	16.018 16.000	10.000 9.964
MFM-1016-16	10.0	+0.040 +0.130	16.0	22.0	16.0	3.0	10.130	10.040	16.018 16.000	10.000 9.964
MFM-101620-06	10.0	+0.040 +0.130	16.0	20.0	6.0	3.0	10.130	10.040	16.018 16.000	10.000 9.964
MFM-101620-10	10.0	+0.040 +0.130	16.0	20.0	10.0	3.0	10.130	10.040	16.018 16.000	10.000 9.964
MFM-1216-10	12.0	+0.050 +0.160	16.0	22.0	10.0	2.0	12.160	12.050	16.018 16.000	12.000 11.957

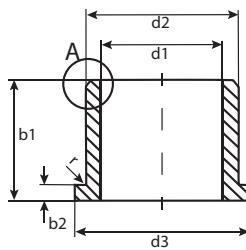

For tolerance values  
please refer to page 2.4

$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size
	After Pressfit in Ø H7			d13	h13	-0.14	Max. Min.	Max. Min.	Max. Min.
MFM-1216-20	12.0	+0.050 +0.160	16.0	22.0	20.0	2.0	12.160 12.050	16.018 16.000	12.000 11.957
MFM-1218-08	12.0	+0.050 +0.160	18.0	24.0	8.0	3.0	12.160 12.050	18.018 18.000	12.000 11.957
MFM-1218-10	12.0	+0.050 +0.160	18.0	22.0	10.0	3.0	12.160 12.050	18.018 18.000	12.000 11.957
MFM-1218-12	12.0	+0.050 +0.160	18.0	24.0	12.0	3.0	12.160 12.050	18.018 18.000	12.000 11.957
MFM-1218-15	12.0	+0.050 +0.160	18.0	22.0	15.0	3.0	12.160 12.050	18.018 18.000	12.000 11.957
MFM-1218-20	12.0	+0.050 +0.160	18.0	22.0	20.0	3.0	12.160 12.050	18.018 18.000	12.000 11.957
MFM-1420-07	14.0	+0.050 +0.160	20.0	25.0	7.0	3.0	14.160 14.050	20.021 20.000	14.000 13.957
MFM-1420-10	14.0	+0.050 +0.160	20.0	25.0	10.0	3.0	14.160 14.050	20.021 20.000	14.000 13.957
MFM-1420-15	14.0	+0.050 +0.160	20.0	25.0	15.0	3.0	14.160 14.050	20.021 20.000	14.000 13.957
MFM-1420-20	14.0	+0.050 +0.160	20.0	25.0	20.0	3.0	14.160 14.050	20.021 20.000	14.000 13.957
MFM-1521-10	15.0	+0.050 +0.160	21.0	27.0	10.0	3.0	15.160 15.050	21.021 21.000	15.000 14.957
MFM-1521-15	15.0	+0.050 +0.160	21.0	27.0	15.0	3.0	15.160 15.050	21.021 21.000	15.000 14.957
MFM-1521-20	15.0	+0.050 +0.160	21.0	27.0	20.0	3.0	15.160 15.050	21.021 21.000	15.000 14.957
MFM-1521-25	15.0	+0.050 +0.160	21.0	27.0	25.0	3.0	15.160 15.050	21.021 21.000	15.000 14.957
MFM-1618-12	16.0	+0.050 +0.160	18.0	24.0	12.0	1.0	16.160 16.050	18.021 18.000	16.000 15.957
MFM-1622-12	16.0	+0.050 +0.160	22.0	28.0	12.0	3.0	16.160 16.050	22.021 22.000	16.000 15.957
MFM-1622-15	16.0	+0.050 +0.160	22.0	28.0	15.0	3.0	16.160 16.050	22.021 22.000	16.000 15.957
MFM-1622-20	16.0	+0.050 +0.160	22.0	28.0	20.0	3.0	16.160 16.050	22.021 22.000	16.000 15.957
MFM-1622-25	16.0	+0.050 +0.160	22.0	28.0	25.0	3.0	16.160 16.050	22.021 22.000	16.000 15.957
MFM-1824-08	18.0	+0.050 +0.160	24.0	30.0	8.0	3.0	18.160 18.050	24.021 24.000	18.000 17.957
MFM-1824-12	18.0	+0.050 +0.160	24.0	30.0	12.0	3.0	18.160 18.050	24.021 24.000	18.000 17.957
MFM-1824-18	18.0	+0.050 +0.160	24.0	30.0	18.0	3.0	18.160 18.050	24.021 24.000	18.000 17.957
MFM-1824-20	18.0	+0.050 +0.160	24.0	30.0	20.0	3.0	18.160 18.050	24.021 24.000	18.000 17.957
MFM-1824-30	18.0	+0.050 +0.160	24.0	30.0	30.0	3.0	18.160 18.050	24.021 24.000	18.000 17.957
MFM-202628-12	20.0	+0.060 +0.195	26.0	28.0	12.0	3.0	20.195 20.065	26.021 26.000	20.000 19.948
MFM-2026-15	20.0	+0.060 +0.195	26.0	32.0	15.0	3.0	20.195 20.065	26.021 26.000	20.000 19.948
MFM-2026-20	20.0	+0.060 +0.195	26.0	32.0	20.0	3.0	20.195 20.065	26.021 26.000	20.000 19.948
MFM-2026-30	20.0	+0.060 +0.195	26.0	32.0	30.0	3.0	20.195 20.065	26.021 26.000	20.000 19.948
MFM-2228-15	22.0	+0.060 +0.195	28.0	34.0	15.0	3.0	22.195 22.065	28.021 28.000	22.000 21.948
MFM-2228-20	22.0	+0.060 +0.195	28.0	34.0	20.0	3.0	22.195 22.065	28.021 28.000	22.000 21.948
MFM-2228-30	22.0	+0.060 +0.195	28.0	34.0	30.0	3.0	22.195 22.065	28.021 28.000	22.000 21.948
MFM-2430-15	24.0	+0.065 +0.195	30.0	36.0	15.0	3.0	24.195 24.065	30.025 30.000	24.000 23.948
MFM-2430-20	24.0	+0.065 +0.195	30.0	36.0	20.0	3.0	24.195 24.065	30.025 30.000	24.000 23.948
MFM-2430-30	24.0	+0.065 +0.195	30.0	36.0	30.0	3.0	24.195 24.065	30.025 30.000	24.000 23.948
MFM-2532-12	25.0	+0.065 +0.195	32.0	38.0	12.0	4.0	25.195 25.065	32.025 32.000	25.000 24.948
MFM-2532-15	25.0	+0.065 +0.195	32.0	38.0	15.0	4.0	25.195 25.065	32.025 32.000	25.000 24.948
MFM-2532-20	25.0	+0.065 +0.195	32.0	38.0	20.0	4.0	25.195 25.065	32.025 32.000	25.000 24.948
MFM-2532-30	25.0	+0.065 +0.195	32.0	38.0	30.0	4.0	25.195 25.065	32.025 32.000	25.000 24.948
MFM-2532-40	25.0	+0.065 +0.195	32.0	38.0	40.0	4.0	25.195 25.065	32.025 32.000	25.000 24.948
MFM-2734-20	27.0	+0.065 +0.195	34.0	40.0	20.0	4.0	27.195 27.065	34.025 34.000	27.000 26.948
MFM-2734-30	27.0	+0.065 +0.195	34.0	40.0	30.0	4.0	27.195 27.065	34.025 34.000	27.000 26.948

iglide® M250  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch  
mm



M250

igus®

# iglide® Plain Bearings

## M250 - Flange Bearing, MM

iglide® M250  
Flange - MM



For tolerance values  
please refer to page 2.4

$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup> After Pressfit in Ø H7	d1-Tolerance	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit Max.      Min.	Housing Bore Max.      Min.	Shaft Size Max.      Min.
MFM-2734-40	27.0	+0.065 +0.195	34.0	40.0	40.0	4.0	27.195 27.065	34.025 34.000	27.000 26.948
MFM-2836-20	28.0	+0.065 +0.195	36.0	42.0	20.0	4.0	28.195 28.065	36.025 36.000	28.000 27.948
MFM-2836-30	28.0	+0.065 +0.195	36.0	42.0	30.0	4.0	28.195 28.065	36.025 36.000	28.000 27.948
MFM-2836-40	28.0	+0.065 +0.195	36.0	42.0	40.0	4.0	28.195 28.065	36.025 36.000	28.000 27.948
MFM-3035-20	30.0	+0.065 +0.195	35.0	44.0	20.0	4.0	30.195 30.060	35.025 35.000	30.000 29.948
MFM-3038-20	30.0	+0.065 +0.195	38.0	44.0	20.0	4.0	30.195 30.065	38.025 38.000	30.000 29.948
MFM-3038-30	30.0	+0.065 +0.195	38.0	44.0	30.0	4.0	30.195 30.065	38.025 38.000	30.000 29.948
MFM-3038-40	30.0	+0.065 +0.195	38.0	44.0	40.0	4.0	30.195 30.065	38.025 38.000	30.000 29.948
MFM-3240-20	32.0	+0.080 +0.240	40.0	46.0	20.0	4.0	32.240 32.080	40.025 40.000	32.000 31.938
MFM-3240-30	32.0	+0.080 +0.240	40.0	46.0	30.0	4.0	32.240 32.080	40.025 40.000	32.000 31.938
MFM-3240-40	32.0	+0.080 +0.240	40.0	46.0	40.0	4.0	32.240 32.080	40.025 40.000	32.000 31.938

iglide® M250

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0 + -

inch

mm



**igus®**

## iglide® Plain Bearings M250 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

2.22


Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® M250

igus®



iglide® R




### Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch Sizes from 3/16 - 2 in.  
Metric sizes from 6 - 20 mm

### Part Number Structure

#### Part Number Structure

**R S I - 02 03 - 03**

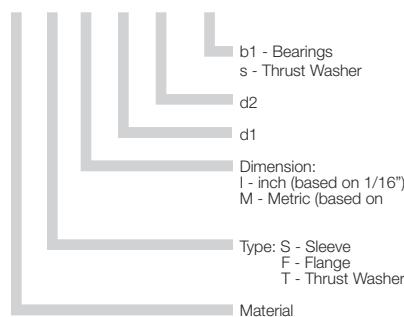

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	236
Oscillating	118	196
Linear	689	984

### Usage Guidelines



- If high wear resistance at low load is required
- If low friction at dry operation is needed
- If a highly cost-effective bearing is desired
- If edge loads occur
- If you are looking for low water absorption
- If PTFE and silicone are prohibited in the application



- When high pressure loads occur
  - iglide® G300
- When temperatures occur that are constantly greater than 194°F
  - iglide® G300
  - iglide® P
- When best wear resistance is required
  - iglide® J



### Material Table

General Properties	Unit	iglide® R	Testing Method
Density	g/cm³	1.39	
Color		Dark Red	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	1.1	
Coefficient of friction, dynamic against steel	$\mu$	0.08 - 0.26	
p x v value, max. (dry)	psi x fpm	8,700	

### Mechanical Properties


Modulus of elasticity	psi	282,800	DIN 53457
Tensile strength at 68°F	psi	10,150	DIN 53452
Compressive strength	psi	9,863	
Permissible static surface pressure (68°F)	psi	3,336	
Shore D-hardness		77	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. application temperature, short-term	°F	230	
Min. application temperature	°F	-58	
Thermal conductivity	W/m x K	.25	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	11	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10¹²	DIN IEC 93
Surface resistance	Ω	> 10¹²	DIN 53482

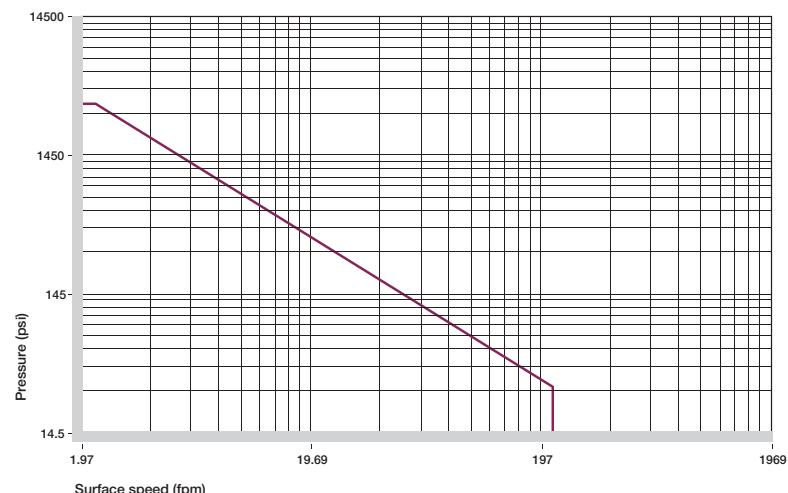

Permissible p x v value for iglide® R running dry against a steel shaft, at 68°F


Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

In the development of iglide® R as a bearing material, high performance and a very low price were the top requirements. In particular, low coefficients of friction were needed at high speeds in the dry run. Plain bearings made of iglide® R are designed with support from a combination of solid lubricants. The iglide® R material achieves excellent low coefficients of friction while running dry, and it runs for the most part stick-slip free.

### Compressive Strength

iglide® R plain bearings were developed mainly for low to average radial loads. The graph shows the elastic deformation of iglide® R for radial loads. At the maximum permissible load of 3335 psi, the deformation is approximately 3%. Plastic deformation is not detectable up to this value. However, it is also a result of the cycle time.

- Compressive Strength, Page 1.3

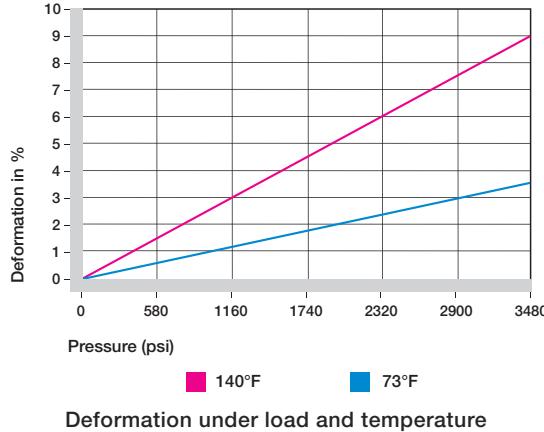

### Permissible Surface Speeds

iglide® R plain bearings are used at high surface speeds. For linear movements, short-term speeds up to 32.8 ft/s are permissible. Please note that the given maximum values can only be achieved at the lowest pressure loads. These values show the speed at which friction causes a temperature increase to the continued use temperature limit.



- Surface Speed, Page 1.5
- p x v value, Page 1.6

#### Continuous      Short Term

	Continuous fpm	Short Term fpm
Rotating	157	236
Oscillating	118	196
Linear	689	984

#### Maximum surface speeds

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

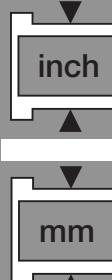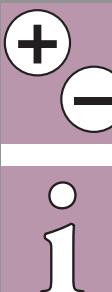


### Temperatures

The maximum permissible short-term temperature is 230°F, and the long-term application temperature is 194°F. With increasing temperatures, the compression resistance of iglide® R plain bearings decreases. The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear. With increasing temperatures, the wear increases.

- Application Temperatures, Page 1.7

iglide® R	Application Temperature
Minimum	- 58°F
Max. long-term	+ 194°F
Max. short-term	+ 230°F
Additional axial securing	+122°F

#### Temperature limits for iglide® R


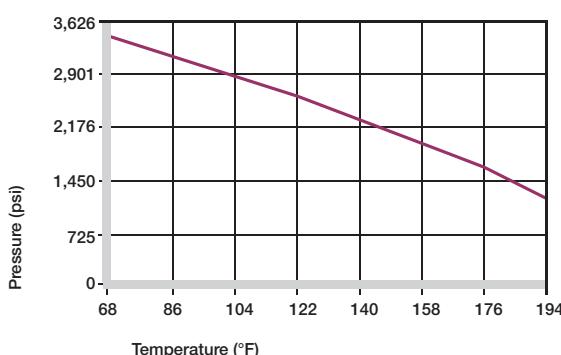


Recommended maximum permissible static surface pressure of iglide® R as a result of the temperature

## Installation Tolerances

iglide® R plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

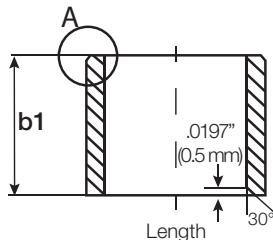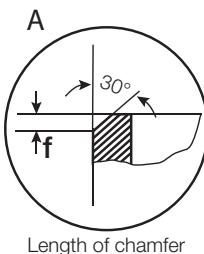


For Inch Size Bearings		
Length Tolerance (b1)	Tolerance (h13)	Length of Chamfer (f) Based on d1
Length (inches)	(inches)	
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

For Metric Size Bearings		
Length Tolerance (b1)	Tolerance (h13)	Length of Chamfer (f) Based on d1
Length (mm)	(μm)	
1 to 3	-0/-140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0/-180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0/-220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
>10 to 18	-0/-270	f = 1.2 → d <sub>1</sub> > 30 mm
>18 to 30	-0/-330	
>30 to 50	-0/-390	
>50 to 80	-0/-460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction decreases with increasing load. In contrast, higher speeds have little effect on the coefficient of friction of iglide® R plain bearings. iglide® R is especially suited for applications in which high p x v values are predominantly caused by the high speed, and not as much by the surface pressure. The coefficient of friction of iglide® R plain bearings depends greatly on the shaft roughness. In the roughness range between 16-24 rms, the coefficient of friction reaches its optimal value. For values above and below this range, the friction of the bearing system increases quickly. Other shaft materials can be used without a large loss. Even with non metallic shafts, good results were obtained in tests. Ceramic and plastic shafts can also be used.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

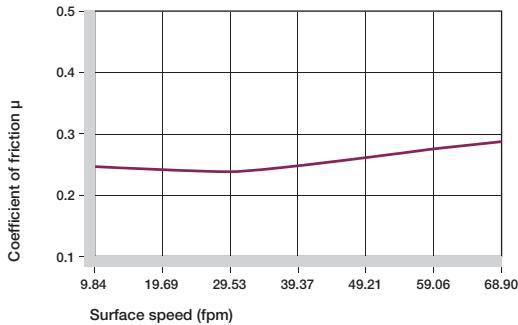


Coefficient of friction of iglide® R as a result of the surface speed; p = 108 psi

iglide® R	Coefficient of Friction
Dry	0.06 - 0.25
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction iglide® R against steel (Shaft finish = 40 rms, 50 HRC)

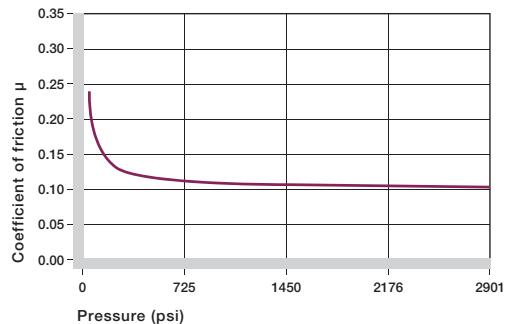

Coefficient of friction of iglide® R as a result of the load, v = 1.97 fpm

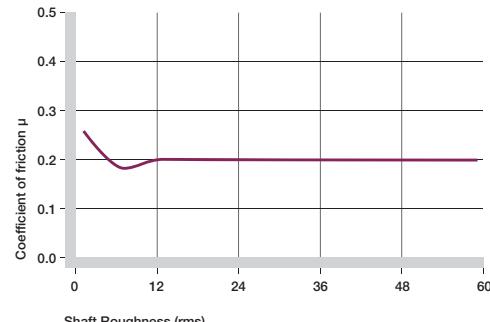


Coefficient of friction for iglide® R as a result of the shaft surface (shaft Cold Rolled Steel)

### Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® R.

In the low load range, the 440B, hard anodized aluminum, 1050 case hardened steel, free cutting and hard chromed shafts are the most suitable shafting partners for iglide® R plain bearings. At higher loads, the hardened shafts such as 440B and 1050 case hardened steel are recommended.


► Shaft Materials, Page 1.11

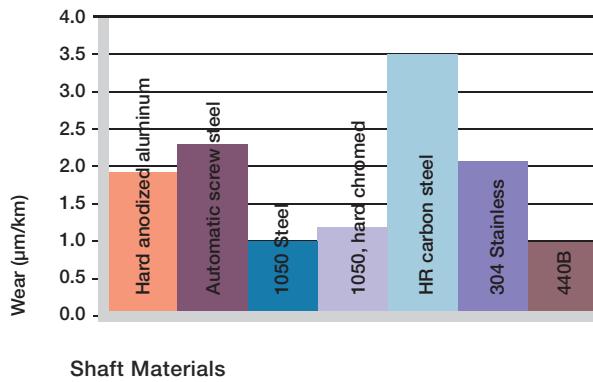

Wear for iglide® R, rotating with different shaft materials,  $p = 108 \text{ psi}$ ,  $v = 98 \text{ fpm}$

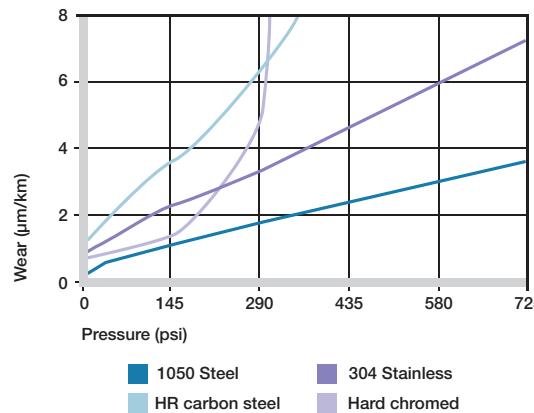

Wear of iglide® R with different shaft materials in rotational operation

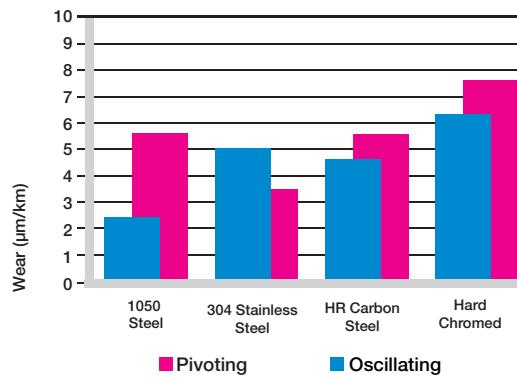

Wear for oscillating and rotating applications with different shaft materials at  $p = 290 \text{ psi}$

### Chemical & Moisture Resistance

iglide® R plain bearings are resistant to very weak acids, diluted lyes, fuels and all types of lubricants.

The moisture absorption of iglide® R plain bearings is approximately 0.2% in standard atmosphere. The saturation limit in water is 1%. This low moisture absorption allows for design in wet environments.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbon, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	+ to 0


+ resistant, 0 conditionally resistant, - not resistant

#### Chemical resistance of iglide® R

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

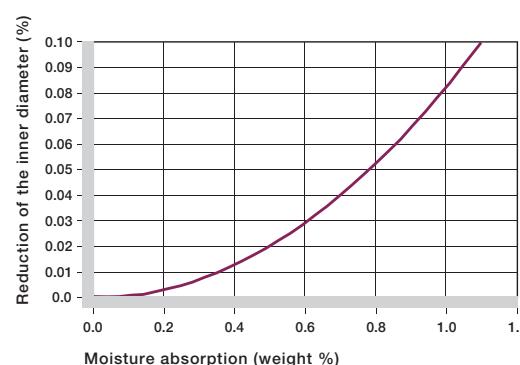

Effect of moisture absorption on iglide® R plain bearings



## Radiation Resistance

Plain bearings made from iglide® R are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

## UV Resistance

iglide® R plain bearings are resistant to UV radiation, but the tribological properties are lessened with permanent exposure.

## Vacuum

In a vacuum environment, iglide® R plain bearings release gases. It is only possible to use iglide® R in vacuum to a limited extent.


## Electrical Properties

iglide® R plain bearings are electrically insulating

### iglide® R

Specific volume resistance	> $10^{12}$ $\Omega$ cm
Surface resistance	> $10^{12}$ $\Omega$

### Electrical properties of iglide® R

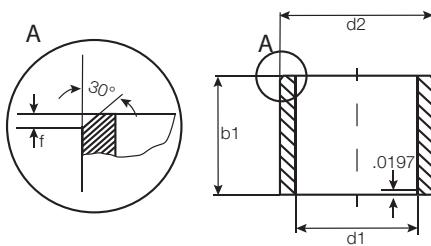

For tolerance values  
please refer to page 3.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
RSI-0305-03	.375	.5625	.375	.915	.1886	.3128	.3122	.1874	.1862
RSI-0305-04	.375	.5625	.75	.915	.1886	.3128	.3122	.1874	.1862
RSI-0305-06	.375	.5625	.915	.1886	.3128	.3122	.1874	.1862	
RSI-0305-08	.375	.5625	.75	.915	.1886	.3128	.3122	.1874	.1862
RSI-0406-04	.75	.375	.75	.2551	.2516	.3766	.3760	.2500	.2486
RSI-0406-05	.75	.375	.2551	.2516	.3766	.3760	.2500	.2486	
RSI-0406-06	.75	.375	.2551	.2516	.3766	.3760	.2500	.2486	
RSI-0406-10	.75	.375	.625	.2551	.2516	.3766	.3760	.2500	.2486
RSI-0406-12	.75	.375	.75	.2551	.2516	.3766	.3760	.2500	.2486
RSI-0507-04	.75	.1875	.75	.3177	.3142	.4393	.4386	.3126	.3112
RSI-0507-05	.75	.1875	.375	.3177	.3142	.4393	.4386	.3126	.3112
RSI-0507-06	.75	.1875	.375	.3177	.3142	.4393	.4386	.3126	.3112
RSI-0507-08	.75	.1875	.75	.3177	.3142	.4393	.4386	.3126	.3112
RSI-0507-10	.75	.1875	.625	.3177	.3142	.4393	.4386	.3126	.3112
RSI-0507-12	.75	.1875	.75	.3177	.3142	.4393	.4386	.3126	.3112
RSI-0608-04	.375	.5	.75	.3799	.3764	.5017	.5010	.3748	.3734
RSI-0608-06	.375	.5	.375	.3799	.3764	.5017	.5010	.3748	.3734
RSI-0608-08	.375	.5	.75	.3799	.3764	.5017	.5010	.3748	.3734
RSI-0608-10	.375	.5	.625	.3799	.3764	.5017	.5010	.3748	.3734
RSI-0608-12	.375	.5	.75	.3799	.3764	.5017	.5010	.3748	.3734
RSI-0608-16	.375	.5	1	.3799	.3764	.5017	.5010	.3748	.3734
RSI-0810-06	.75	.375	.375	.5063	.5020	.6257	.6250	.5000	.4983
RSI-0810-08	.75	.375	.75	.5063	.5020	.6257	.6250	.5000	.4983
RSI-0810-10	.75	.375	.625	.5063	.5020	.6257	.6250	.5000	.4983
RSI-0810-12	.75	.375	.75	.5063	.5020	.6257	.6250	.5000	.4983
RSI-0810-16	.75	.375	1	.5063	.5020	.6257	.6250	.5000	.4983
RSI-1012-06	.625	.375	.375	.6311	.6268	.7508	.7500	.6248	.6231
RSI-1012-08	.625	.375	.75	.6311	.6268	.7508	.7500	.6248	.6231
RSI-1012-10	.625	.375	.625	.6311	.6268	.7508	.7500	.6248	.6231
RSI-1012-12	.625	.375	.75	.6311	.6268	.7508	.7500	.6248	.6231
RSI-1012-16	.625	.375	1	.6311	.6268	.7508	.7500	.6248	.6231
RSI-1214-06	.75	.1875	.375	.7577	.7526	.8756	.8748	.7500	.7480
RLCSI-1214-16	.75	.1875	1	.7549	.7516	.8756	.8748	.7500	.7480
RSI-1216-12	.75	1	.75	.7577	.7526	1.0008	1.0000	.7500	.7480
RSI-1216-16	.75	1	1	.7577	.7526	1.0008	1.0000	.7500	.7480
RSI-1216-20	.75	1	1 1/4	.7577	.7526	1.0008	1.0000	.7500	.7480
RSI-1216-24	.75	1	1 1/2	.7577	.7526	1.0008	1.0000	.7500	.7480
RSI-1416-12	.875	1	.75	.8799	.8766	1.0008	1.0000	.8750	.8730
RSI-1416-16	.875	1	1	.8799	.8766	1.0008	1.0000	.8750	.8730
RSI-1416-24	.875	1	1 1/2	.8799	.8766	1.0008	1.0000	.8750	.8730

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




inch



mm






**igus®**

## iglide® Plain Bearings R - Sleeve Bearing, Inch

iglide® R  
Sleeve - Inch

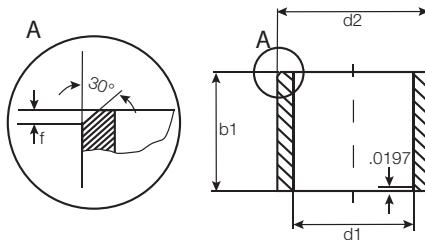

For tolerance values  
please refer to page 3.4

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>




Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
RSI-1418-10	7/8	1 1/8	5/8	.8825	.8774	1.1295	1.1287	.8748	.8728
RSI-1418-12	7/8	1 1/8	3/4	.8825	.8774	1.1295	1.1287	.8748	.8728
RSI-1418-16	7/8	1 1/8	1	.8825	.8774	1.1295	1.1287	.8748	.8728
RSI-1418-24	7/8	1 1/8	1 1/2	.8825	.8774	1.1295	1.1287	.8748	.8728
RSI-1618-12	1	1 1/8	3/4	1.0077	1.0026	1.1295	1.1287	1.0000	.9980
RSI-1618-22	1	1 1/8	1 3/8	1.0077	1.0026	1.1295	1.1287	1.0000	.9980
RSI-1620-10	1	1 1/4	5/8	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RSI-1620-12	1	1 1/4	3/4	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RSI-1620-16	1	1 1/4	1	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RSI-1620-20	1	1 1/4	1 1/4	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RSI-1620-24	1	1 1/4	1 1/2	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RSI-2024-16	1 1/4	1 1/2	1	1.2594	1.2531	1.5010	1.5000	1.2500	1.2476
RSI-3236-16	2	2 1/4	1	2.0114	2.0039	2.2512	2.2500	2.0000	1.9971
RSI-3236-32	2	2 1/4	2	2.0114	2.0039	2.2512	2.2500	2.0000	1.9971

Part number RLCSI indicates a low clearance bearing

# iglide® Plain Bearings

## R - Flange Bearing, Inch

**igus®**

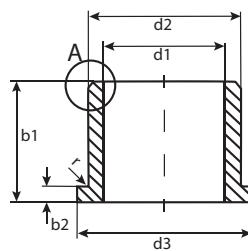

For tolerance values  
please refer to page 3.4

r = max. .0197

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
						Max.	Min.	Max.	Min.
<b>RFI-0305-03</b>	3/16	5/16	3/16	.370	.047	.1915	.1886	.3131	.3125
<b>RFI-0305-04</b>	3/16	5/16	1/4	.370	.047	.1915	.1886	.3131	.3125
<b>RFI-0305-06</b>	3/16	5/16	3/8	.370	.047	.1915	.1886	.3131	.3125
<b>RFI-0305-08</b>	3/16	5/16	1/2	.370	.047	.1915	.1886	.3131	.3125
<b>RFI-0406-04</b>	1/4	3/8	1/4	.560	.047	.2551	.2516	.3756	.3750
<b>RFI-0406-05</b>	1/4	3/8	5/16	.560	.047	.2551	.2516	.3756	.3750
<b>RFI-0406-06</b>	1/4	3/8	3/8	.560	.047	.2551	.2516	.3756	.3750
<b>RFI-0406-08</b>	1/4	3/8	1/2	.560	.047	.2551	.2516	.3756	.3750
<b>RFI-0406-10</b>	1/4	3/8	5/8	.560	.047	.2551	.2516	.3756	.3750
<b>RFI-0406-12</b>	1/4	3/8	3/4	.560	.047	.2551	.2516	.3756	.3750
<b>RFI-0507-04</b>	5/16	7/16	1/4	.560	.062	.3177	.3142	.4381	.4374
<b>RFI-0507-05</b>	5/16	7/16	5/16	.560	.062	.3177	.3142	.4381	.4374
<b>RFI-0507-06</b>	5/16	7/16	3/8	.560	.062	.3177	.3142	.4381	.4374
<b>RFI-0507-08</b>	5/16	7/16	1/2	.560	.062	.3177	.3142	.4381	.4374
<b>RFI-0507-10</b>	5/16	7/16	5/8	.560	.062	.3177	.3142	.4381	.4374
<b>RFI-0507-12</b>	5/16	7/16	3/4	.560	.062	.3177	.3142	.4381	.4374
<b>RFI-0607-04</b>	3/8	15/32	1/4	.687	.046	.3801	.3766	.4694	.4687
<b>RFI-0608-04</b>	3/8	1/2	1/4	.625	.062	.3801	.3766	.5017	.5010
<b>RFI-0608-06</b>	3/8	1/2	3/8	.625	.062	.3801	.3766	.5017	.5010
<b>RFI-0608-08</b>	3/8	1/2	1/2	.625	.062	.3801	.3766	.5017	.5010
<b>RFI-0608-10</b>	3/8	1/2	5/8	.625	.062	.3801	.3766	.5017	.5010
<b>RFI-0608-12</b>	3/8	1/2	3/4	.625	.062	.3801	.3766	.5017	.5010
<b>RFI-0608-16</b>	3/8	1/2	1	.625	.062	.3801	.3766	.5017	.5010
<b>RFI-0708-04</b>	7/16	17/32	1/4	.750	.046	.4429	.4386	.5316	.5309
<b>RFI-0708-08</b>	7/16	17/32	1/2	.750	.046	.4429	.4386	.5316	.5309
<b>RFI-0809-03</b>	1/2	19/32	3/16	.875	.046	.5063	.5020	.5944	.5937
<b>RFI-0809-04</b>	1/2	19/32	1/4	.875	.046	.5063	.5020	.5944	.5937
<b>RFI-0809-08</b>	1/2	19/32	1/2	.875	.046	.5063	.5020	.5944	.5937
<b>RFI-0810-04</b>	1/2	5/8	1/4	.875	.062	.5063	.5020	.6257	.6250
<b>RFI-0810-06</b>	1/2	5/8	3/8	.875	.062	.5063	.5020	.6257	.6250
<b>RFI-0810-08</b>	1/2	5/8	1/2	.875	.062	.5063	.5020	.6257	.6250
<b>RFI-0810-10</b>	1/2	5/8	5/8	.875	.062	.5063	.5020	.6257	.6250
<b>RFI-0810-12</b>	1/2	5/8	3/4	.875	.062	.5063	.5020	.6257	.6250
<b>RFI-0810-16</b>	1/2	5/8	1	.875	.062	.5063	.5020	.6257	.6250
<b>RFI-0812-0210</b>	1/2	3/4	7/32	1.000	.125	.5047	.5020	.7508	.7500
<b>RFI-0812-08</b>	1/2	3/4	1/2	1.000	.125	.5047	.5020	.7508	.7500
<b>RFI-0812-12</b>	1/2	3/4	3/4	1.000	.125	.5047	.5020	.7508	.7500
<b>RFI-0812-16</b>	1/2	3/4	1	1.000	.125	.5047	.5020	.7508	.7500

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm



# iglide® Plain Bearings

## R - Flange Bearing, Inch

iglide® R  
Flange - Inch

Telephone 1-800-521-2747  
1-401-438-7270  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>




For tolerance values  
please refer to page 3.4

r = max. .0197

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
RFI-1012-06	5/8	3/4	3/8	1.000	.062	.6313	.6270	.7508	.7500	.6250	.6233
RFI-1012-08	5/8	3/4	1/2	1.000	.062	.6313	.6270	.7508	.7500	.6250	.6233
RFI-1012-10	5/8	3/4	5/8	1.000	.062	.6313	.6270	.7508	.7500	.6250	.6233
RFI-1012-12	5/8	3/4	3/4	1.000	.062	.6313	.6270	.7508	.7500	.6250	.6233
RFI-1012-16	5/8	3/4	1	1.000	.062	.6313	.6270	.7508	.7500	.6250	.6233
RLCFI-1214-07	3/4	7/8	7/16	1.125	.062	.7549	.7516	.8756	.8748	.7500	.7480
RLCFI-1214-08	3/4	7/8	7/16	1.125	.062	.7549	.7516	.8756	.8748	.7500	.7480
RLCFI-1214-12	3/4	7/8	7/16	1.125	.062	.7549	.7516	.8756	.8748	.7500	.7480
RLCFI-1214-16	3/4	7/8	7/16	1.125	.062	.7549	.7516	.8756	.8748	.7500	.7480
RFI-1216-08	3/4	1	1/2	1.250	.156	.7577	.7526	1.0008	1.0000	.7500	.7480
RFI-1216-12	3/4	1	3/4	1.250	.156	.7577	.7526	1.0008	1.0000	.7500	.7480
RFI-1216-16	3/4	1	1	1.250	.156	.7577	.7526	1.0008	1.0000	.7500	.7480
RFI-1216-20	3/4	1	1 1/4	1.250	.156	.7577	.7526	1.0008	1.0000	.7500	.7480
RFI-1216-24	3/4	1	1 1/2	1.250	.156	.7577	.7526	1.0008	1.0000	.7500	.7480
RLCFI-1416-07	7/8	1	7/16	1.250	.062	.8789	.8756	1.0005	.9997	.8740	.8720
RLCFI-1416-12	7/8	1	7/16	1.250	.062	.8789	.8756	1.0005	.9997	.8740	.8720
RLCFI-1416-20	7/8	1	7/16	1.250	.062	.8789	.8756	1.0005	.9997	.8740	.8720
RFI-1418-10	7/8	1 1/8	5/8	1.375	.156	.8825	.8774	1.1258	1.1250	.8748	.8728
RFI-1418-12	7/8	1 1/8	3/4	1.375	.156	.8825	.8774	1.1258	1.1250	.8748	.8728
RFI-1418-16	7/8	1 1/8	1	1.375	.156	.8825	.8774	1.1258	1.1250	.8748	.8728
RFI-1418-24	7/8	1 1/8	1 1/2	1.375	.156	.8825	.8774	1.1258	1.1250	.8748	.8728
RFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0077	1.0026	1.1258	1.1250	1.0000	.9980
RFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0077	1.0026	1.1258	1.1250	1.0000	.9980
RFI-1618-20	1	1 1/8	1 1/4	1.375	.062	1.0077	1.0026	1.1258	1.1250	1.0000	.9980
RFI-1620-10	1	1 1/4	5/8	1.500	.188	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RFI-1620-12	1	1 1/4	3/4	1.500	.188	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RFI-1620-16	1	1 1/4	1	1.500	.188	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RFI-1620-20	1	1 1/4	1 1/4	1.500	.188	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RFI-1620-24	1	1 1/4	1 1/2	1.500	.188	1.0077	1.0026	1.2510	1.2500	1.0000	.9980
RLCFI-2022-09	1 1/4	1 13/32	9/16	1.687	.078	1.2547	1.2508	1.4108	1.4098	1.2488	1.2464
RFI-2024-16	1 1/4	1 1/2	1	1.750	.200	1.2594	1.2531	1.5049	1.5039	1.2500	1.2476
RFI-2428-12	1 1/2	1 3/4	3/4	2.000	.125	1.5094	1.5031	1.7585	1.7575	1.5000	1.4976
RFI-3236-12	2	2 1/4	3/4	2.500	.125	2.0114	2.0039	2.2591	2.2579	2.0000	1.9971
RFI-3236-24	2	2 1/4	1 1/2	2.500	.125	2.0114	2.0039	2.2591	2.2579	2.0000	1.9971
RFI-3236-32	2	2 1/4	2	2.500	.125	2.0114	2.0039	2.2591	2.2579	2.0000	1.9971

Part number RLCFI indicates a low clearance bearing

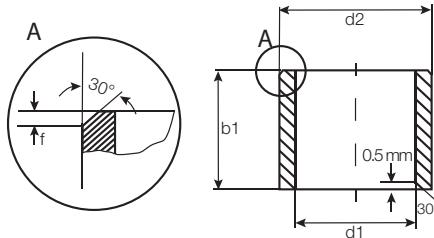


For tolerance values  
please refer to page 3.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
RSM-0506-05	5.0	+0.020 +0.068	6.0	5.0	5.068	5.020	6.012	6.000
RSM-0506-07	5.0	+0.020 +0.068	6.0	7.0	5.068	5.020	6.012	6.000
RSM-0608-06	6.0	+0.020 +0.068	8.0	6.0	6.068	6.020	8.015	8.000
RSM-0610-08	6.0	+0.020 +0.068	10.0	8.0	6.068	6.020	10.015	10.000
RSM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000
RSM-1012-05	10.0	+0.025 +0.083	12.0	5.0	10.083	10.025	12.018	12.000
RSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000
RSM-1012-15	10.0	+0.025 +0.083	12.0	15.0	10.083	10.025	12.018	12.000
RSM-1214-12	12.0	+0.032 +0.102	14.0	12.0	12.102	12.032	14.018	14.000
RSM-1416-10	14.0	+0.032 +0.102	16.0	10.0	14.102	14.032	16.018	16.000
RSM-1416-15	14.0	+0.032 +0.102	16.0	15.0	14.102	14.032	16.018	16.000
RSM-1618-15	16.0	+0.032 +0.102	18.0	15.0	16.102	16.032	18.018	18.000
RSM-1820-25	18.0	+0.032 +0.102	20.0	25.0	18.102	18.032	20.021	20.000
RSM-2023-15	20.0	+0.040 +0.124	23.0	15.0	20.124	20.040	23.021	23.000
RSM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000
RSM-3034-25	30.0	+0.040 +0.124	34.0	25.0	30.124	30.040	34.025	34.000

## iglide® Plain Bearings R - Flange Bearing, MM

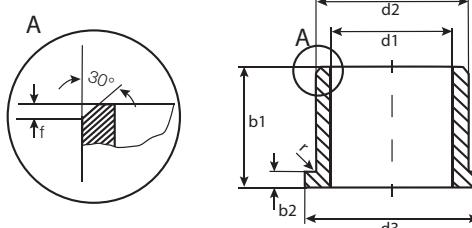

For tolerance values  
please refer to page 3.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	b1	d3	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7			h13	d13	-0.14	Max.	Min.	Max.	Min.
RFM-0608-06	6.0	+0.020 +0.068	8.0	6.0	12.0	1.0	6.068	6.020	8.015	8.000
RFM-0810-05	8.0	+0.025 +0.083	10.0	5.0	15.0	1.0	8.083	8.025	10.015	10.000
RFM-0810-10	8.0	+0.025 +0.083	10.0	10.0	15.0	1.0	8.083	8.025	10.015	10.000
RFM-1012-09	10.0	+0.025 +0.083	12.0	9.0	18.0	1.0	10.083	10.025	12.018	12.000
RFM-1012-10	10.0	+0.025 +0.083	12.0	10.0	18.0	1.0	10.083	10.025	12.018	12.000
RFM-1012-18	10.0	+0.025 +0.083	12.0	18.0	18.0	1.0	10.083	10.025	12.018	12.000
RFM-1214-12	12.0	+0.032 +0.102	14.0	12.0	20.0	1.0	12.102	12.032	14.018	14.000
RFM-1416-17	14.0	+0.032 +0.102	16.0	17.0	22.0	1.0	14.102	14.032	16.018	16.000
RFM-1618-17	16.0	+0.032 +0.102	18.0	17.0	24.0	1.0	16.102	16.032	18.018	18.000
RFM-1622-12	16.0	+0.032 +0.102	22.0	12.0	24.0	3.0	16.102	16.032	22.021	22.000
RFM-2023-21	20.0	+0.040 +0.124	23.0	21.0	30.0	1.5	20.124	20.040	23.021	23.000

R



## iglide® Plain Bearings R - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

3.12

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® R

igus®



iglide® J


### Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 1-5/8 in.  
Metric sizes from 2.5 - 75 mm

### Part Number Structure

#### Part Number Structure

**J S I-02 03-03**

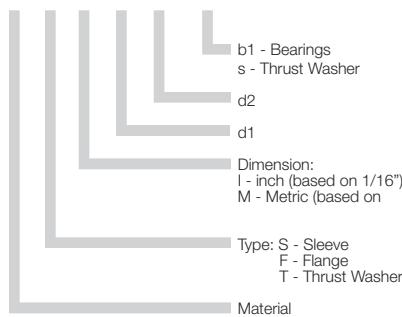

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	590
Oscillating	216	413
Linear	1574	1968

### Usage Guidelines



- When very low coefficients of friction are necessary
- When a cost effective bearing for low pressure loads is needed
- For high speeds
- For high wear resistance



- When high pressure loads occur
  - iglide® G300, iglide® L280
- When temperatures occur that are greater than 248°F for a short-term
  - iglide® G300



### Material Table

General Properties	Unit	iglide® J	Testing Method
Density	g/cm³	1.49	
Color		yellow	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.3	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.18	
p x v value, max. (dry)	psi x fpm	9,700	

### Mechanical Properties


Modulus of elasticity	psi	348,100	DIN 53457
Tensile strength at 68°F	psi	10,590	DIN 53452
Compressive strength	psi	8,702	
Permissible static surface pressure (68°F)	psi	5,076	
Shore D-hardness		74	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. application temperature, short-term	°F	248	
Min. application temperature	°F	-58	
Thermal conductivity	W/m x K	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K⁻¹ x 10⁻⁵	10	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹²	DIN 53482

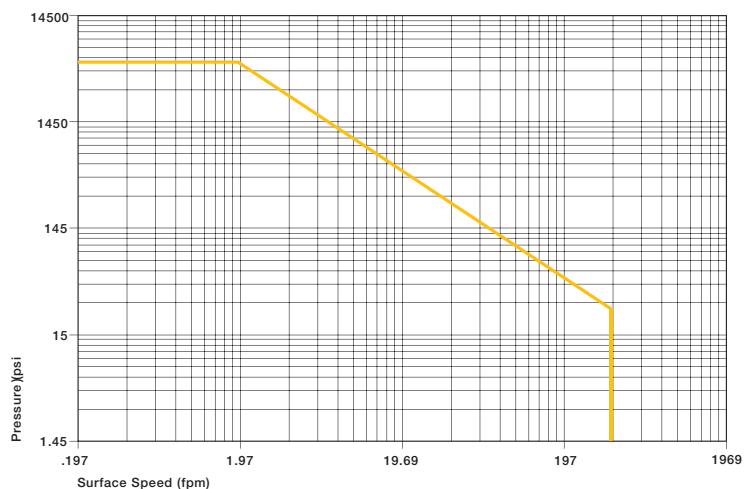

Permissible p x v value for iglide® J running dry against steel shaft, at 68°F


Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

The iglide® J plain bearings are designed for the lowest coefficients of friction while running dry and their low stick-slip tendency.

### Compressive Strength

With a maximum permissible surface pressure of 5075 psi, iglide® J plain bearings are not suited for extreme loads. The graph shows the elastic deformation of iglide® J for radial loads. At the maximum permissible load of 5075 psi, the deformation is less than 2.5%.

- Compressive Strength, Page 1.3

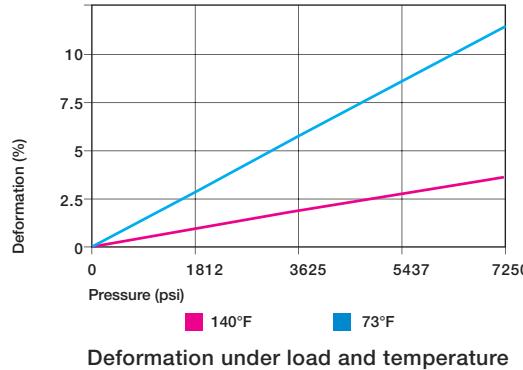

### Permissible Surface Speeds

The low coefficient of friction and the extremely low stick-slip tendency of iglide® J plain bearings are especially important at very low speeds. However, iglide® J material can also be used for high speeds of over 197 fpm. In both cases, the static friction is very low and stick-slip does not occur.

The maximum values given in the table can only be achieved at the lowest pressure loads. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this temperature level is rarely reached, due to varying application conditions.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

#### Continuous      Short Term

	Continuous fpm	Short Term fpm
Rotating	295	590
Oscillating	216	413
Linear	1574	1968


#### Maximum surface speeds

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

### Temperatures

iglide® J plain bearings can be used between -58°F and 194°F; the short-term maximum permissible temperature is 248°F. The graph shows that the compressive strength of iglide® J plain bearings decreases with increasing temperatures. Also, the wear increases significantly above 176°F.

- Application Temperatures, Page 1.7

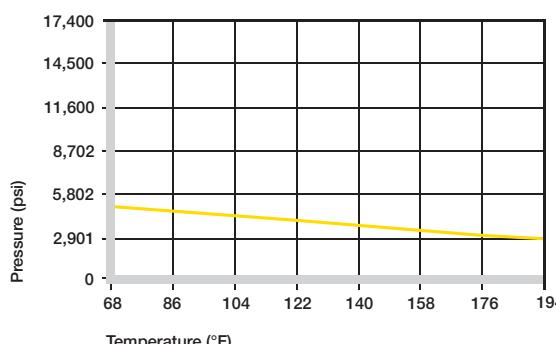

Recommended maximum permissible static surface pressure of iglide® J as a result of the temperature


iglide® J	Application Temperature
Minimum	-58 °F
Max., long-term	+194 °F
Max., short-term	+248 °F
Additional axial securing	140°F

#### Temperature limits for iglide® J

## Installation Tolerances

iglide® J plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

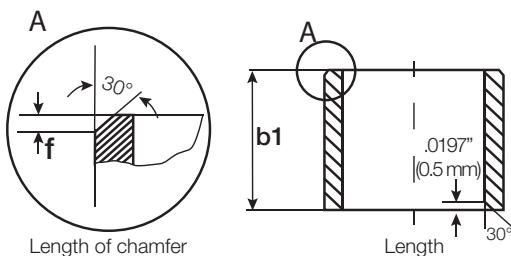

For Inch Size Bearings		
Length Tolerance (b1)		Length of Chamfer (f)
Length (inches)	Tolerance (h13) (inches)	Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

## For Metric Size Bearings

Length Tolerance (b1)		
Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	


## Friction and Wear

The graph to the right shows the coefficients of friction for different loads. The coefficient of friction level is very good for all loads with iglide® J.


Friction and wear are also dependent, to a large extent, on the shafting partner. With increasing shaft roughness, the coefficient of friction also increases.

For iglide® J a ground surface with an average roughness range of 4 - 12 rms is recommended for the shaft.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

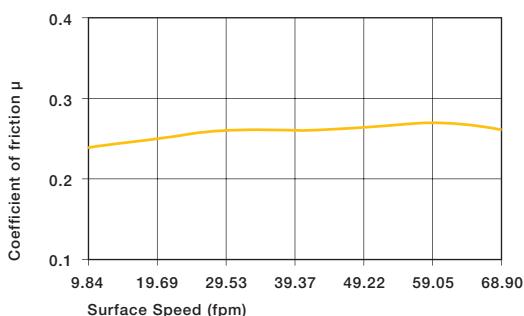

Coefficient of friction of iglide® J as a result of the surface speed; p = 108 psi

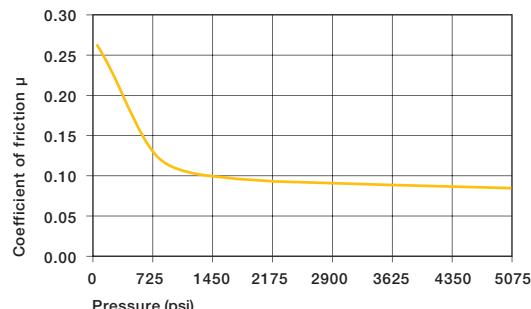


Coefficient of friction of iglide® J as a result of the load, v = 1.97 fpm

## iglide® J      Coefficient of Friction

Dry	0.06 - 0.18
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction for iglide® J against steel (Shaft finish = 40 rms, 50 HRC)

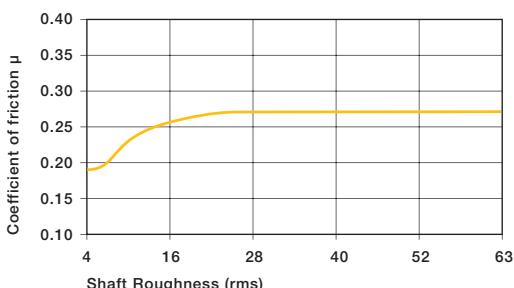

Coefficient of friction of iglide® J as a result of the shaft surface (1050 hard chromed)

### Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® J.

If iglide® J plain bearings are used in rotational applications with loads under 290 psi, several shaft materials are suitable. A Hard Chromed shaft provides the lowest wear in this range. When compared to most iglide® materials, iglide® J has very low wear results at low loads with all shaft materials tested.


Also, for increasing loads up to 725 psi, the wear resistance of iglide® J is excellent. Especially suitable is the combination of 303 stainless steel. In oscillating operation with Cold Rolled Steel and HR Carbon Steel, the wear of iglide® J is slightly higher than for rotation. For oscillating movements with loads of 290 psi, iglide® J performs best with Cold Rolled Steel shaft.

As shown in the graph, the difference in wear between rotation and oscillating movements is most significant for 303 stainless steel shafts. If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft Materials, Page 1.11

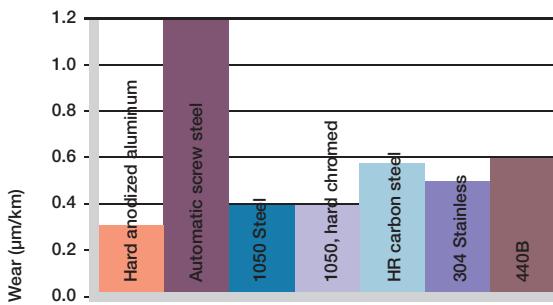

Wear of iglide® J, rotating application with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

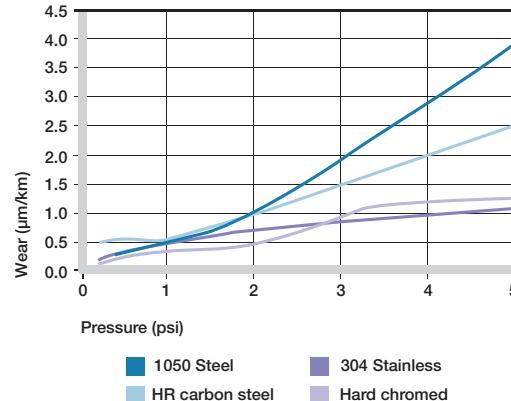

Wear of iglide® J, rotating application with different shaft materials, depending on load

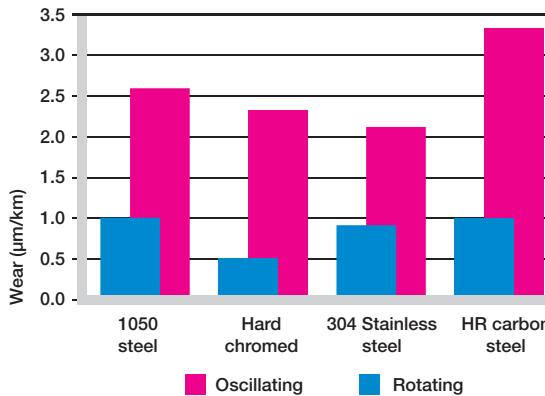

Wear for oscillating and rotating applications with different shaft materials under constant load  $p = 290$  psi

### Chemical Resistance

iglide® J plain bearings are resistant to diluted lyes and very weak acids, as well as fuels and all types of lubricants. The low moisture absorption also permits use in wet or damp environments. Plain bearings made of iglide® J are resistant to common cleaning agents used in the food industry.

The moisture absorption of iglide® J plain bearings is 0.3% in standard atmosphere. The saturation limit in water is 1.3%. These values are so low that possible design changes due to absorption are only necessary in extreme cases.


► Chemical Resistance, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, – not resistant

### Chemical resistance of iglide® J

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

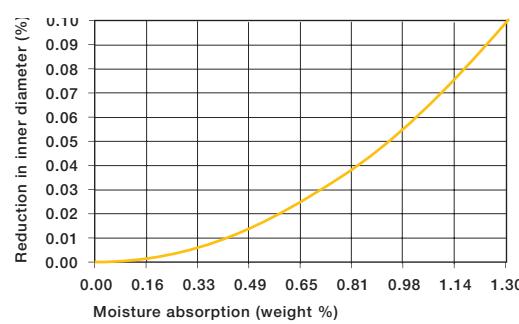

Effect of moisture absorption on iglide® J plain bearings

## Radiation Resistance

Plain bearings made from iglide® J are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

## UV-Resistance

iglide® J plain bearings become discolored under UV radiation. However, hardness, compressive strength and the wear resistance of the material do not change.

## Vacuum

When used in a vacuum environment, the iglide® J plain bearings release moisture as a vapor. Therefore, only dehumidified bearings made of iglide® J are suitable for the vacuum environment.

## Electrical Properties


iglide® J plain bearings are electrically insulating.

### iglide® J

Specific volume resistance >  $10^{13}$   $\Omega$ cm

Surface resistance >  $10^{12}$   $\Omega$

### Electrical properties of iglide® J

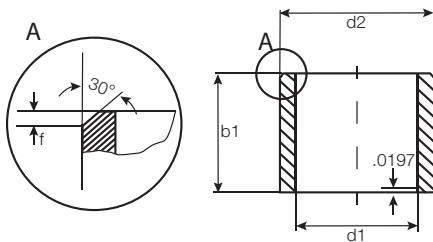

For tolerance values  
please refer to page 4.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
JSI-0204-04	1/8	1/4	1/4	.1280	.1262	.2515	.2510	.1250	.1241
JSI-0204-06	1/8	1/4	3/8	.1280	.1262	.2515	.2510	.1250	.1241
JSI-0304-06	3/16	1/4	3/8	.1905	.1886	.2506	.2500	.1865	.1858
JSI-0304-08	3/16	1/4	1/2	.1905	.1886	.2506	.2500	.1865	.1858
JSI-0305-05	3/16	5/16	5/16	.1905	.1887	.3140	.3135	.1875	.1866
JSI-0305-06	3/16	5/16	3/8	.1905	.1887	.3140	.3135	.1875	.1866
JSI-0305-08	3/16	5/16	1/2	.1905	.1887	.3140	.3135	.1875	.1866
JSI-0405-04	1/4	5/16	1/4	.2539	.2516	.3140	.3135	.2500	.2491
JSI-0405-06	1/4	5/16	3/8	.2539	.2516	.3140	.3135	.2500	.2491
JSI-0405-08	1/4	5/16	1/2	.2539	.2516	.3140	.3135	.2500	.2491
JSI-0406-04	1/4	3/8	1/4	.2539	.2516	.3765	.3760	.2500	.2491
JSI-0406-08	1/4	3/8	1/2	.2539	.2516	.3765	.3760	.2500	.2491
JSI-0406-12	1/4	3/8	3/4	.2539	.2516	.3765	.3760	.2500	.2491
JSI-0406-16	1/4	3/8	1	.2539	.2516	.3765	.3760	.2500	.2491
JSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
JSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747	.3115	.3106
JSI-0506-12	5/16	3/8	3/4	.3148	.3125	.3753	.3747	.3115	.3106
JSI-0507-06	5/16	7/16	3/8	.3164	.3141	.4390	.4385	.3125	.3116
JSI-0507-08	5/16	7/16	1/2	.3164	.3141	.4390	.4385	.3125	.3116
JSI-0507-10	5/16	7/16	5/8	.3164	.3141	.4390	.4385	.3125	.3116
JSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4381	.4375	.3750	.3736
JSI-0607-08	3/8	7/16	1/2	.3783	.3760	.4381	.4375	.3750	.3736
JSI-0608-03	3/8	1/2	3/16	.3787	.3764	.5006	.5000	.3750	.3736
JSI-0608-06	3/8	1/2	3/8	.3787	.3764	.5006	.5000	.3750	.3736
JSI-0608-08	3/8	1/2	1/2	.3787	.3764	.5006	.5000	.3750	.3736
JSI-0608-10	3/8	1/2	5/8	.3787	.3764	.5006	.5000	.3750	.3736
JSI-0708-08	7/16	17/32	1/2	.4406	.4379	.5316	.5309	.4375	.4366
JSI-0709-06	7/16	9/16	3/8	.4406	.4379	.5632	.5625	.4375	.4366
JSI-0809-06	1/2	19/32	3/8	.5047	.5020	.5941	.5934	.5000	.4983
JSI-0809-08	1/2	19/32	1/2	.5047	.5020	.5941	.5934	.5000	.4983
JSI-0809-12	1/2	19/32	3/4	.5047	.5020	.5941	.5934	.5000	.4983
JSI-0809-16	1/2	19/32	1	.5047	.5020	.5941	.5934	.5000	.4983
JSI-0810-04	1/2	5/8	1/4	.5047	.5020	.6260	.6250	.5000	.4990
JSI-0810-08	1/2	5/8	1/2	.5047	.5020	.6260	.6250	.5000	.4990
JSI-0810-12	1/2	5/8	3/4	.5047	.5020	.6260	.6250	.5000	.4990
JSI-0910-26	9/16	21/32	1 5/8	.5655	.5627	.6566	.6559	.5615	.5605
JSI-1011-08	5/8	23/32	1/2	.6280	.6253	.7192	.7184	.6240	.6230
JSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240	.6230

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



mm


# iglide® Plain Bearings

## J - Sleeve Bearing, Inch

iglide® J  
Sleeve - Inch



Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

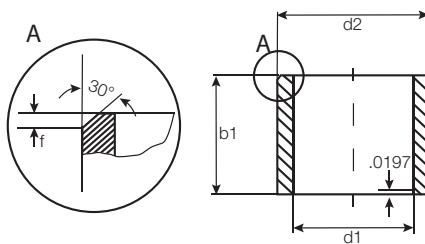

For tolerance values  
please refer to page 4.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
JSI-1011-14	5/8	23/32	7/8	.6280	.6253	.7192	.7184	.6240	.6230
JSI-1011-20	5/8	23/32	1 1/4	.6280	.6253	.7192	.7184	.6240	.6230
JSI-1012-04	5/8	3/4	1/4	.6297	.6270	.7510	.7500	.6250	.6240
JSI-1012-06	5/8	3/4	3/8	.6297	.6270	.7510	.7500	.6250	.6240
JSI-1012-08	5/8	3/4	1/2	.6297	.6270	.7510	.7500	.6250	.6240
JSI-1012-12	5/8	3/4	3/4	.6297	.6270	.7510	.7500	.6250	.6240
JSI-1012-16	5/8	3/4	1	.6297	.6270	.7510	.7500	.6250	.6240
JSI-1214-08	3/4	7/8	1/2	.7541	.7505	.8755	.8747	.7491	.7479
JSI-1214-12	3/4	7/8	3/4	.7541	.7505	.8755	.8747	.7491	.7479
JSI-1214-16	3/4	7/8	1	.7541	.7505	.8755	.8747	.7491	.7479
JSI-1216-12	3/4	1	3/4	.7559	.7525	1.0010	1.000	.7500	.7490
JSI-1216-16	3/4	1	1	.7559	.7525	1.0010	1.000	.7500	.7490
JSI-1315-15	13/16	15/16	15/16	.8174	.8141	.9383	.9375	.8125	.8105
JSI-1315-18	13/16	15/16	1 1/8	.8174	.8141	.9383	.9375	.8125	.8105
JSI-1416-12	7/8	1	3/4	.8791	.8757	1.0005	.9997	.8741	.8729
JSI-1418-12	7/8	1 1/8	3/4	.8809	.8775	1.1258	1.1250	.8750	.8740
JSI-1418-24	7/8	1 1/8	1 1/2	.8809	.8775	1.1258	1.1250	.8750	.8740
JSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1250	.9991	.9979
JSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1250	.9991	.9979
JSI-1620-12	1	1 1/4	3/4	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
JSI-1620-16	1	1 1/4	1	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
JSI-1620-24	1	1 1/4	1 1/2	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
JSI-1822-16	1 1/8	1 3/8	1	1.1327	1.1276	1.3760	1.3750	1.1250	1.1240
JSI-2022-14	1 1/4	1 13/32	7/8	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
JSI-2024-24	1 1/4	1 1/2	1 1/2	1.2600	1.2532	1.5005	1.4995	1.2500	1.2490
JSI-2426-32	1 1/2	1 5/8	2	1.5100	1.5032	1.6568	1.6558	1.4988	1.4972
JSI-2428-24	1 1/2	1 3/4	1 1/2	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
JSI-2832-20	1 3/4	2	1 1/4	1.7547	1.7507	2.0010	2.0000	1.7500	1.7476



For tolerance values  
please refer to page 4.4

$r = \text{max. } .0197$

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
						Max.	Min.	Max.	Min.
JFI-0204-06	1/8	1/4	3/8	.360	.047	.1280	.1262	.2515	.2510
JFI-0304-02	3/16	1/4	1/8	.375	.032	.1905	.1887	.2503	.2497
JFI-0304-04	3/16	1/4	1/4	.375	.032	.1905	.1887	.2503	.2497
JFI-0304-06	3/16	1/4	3/8	.375	.032	.1905	.1877	.2503	.2497
JFI-0304-08	3/16	1/4	1/2	.375	.032	.1905	.1887	.2503	.2497
JFI-0305-06	3/16	5/16	3/8	.370	.047	.1905	.1887	.3140	.3135
JFI-0305-08	3/16	5/16	1/2	.370	.047	.1905	.1887	.3140	.3135
JFI-0405-04	1/4	5/16	1/4	.430	.032	.2539	.2516	.3128	.3122
JFI-0405-06	1/4	5/16	3/8	.430	.032	.2539	.2516	.3128	.3122
JFI-0405-12	1/4	5/16	3/4	.430	.032	.2539	.2516	.3128	.3122
JFI-0406-03	1/4	3/8	3/16	.560	.047	.2539	.2516	.3765	.3760
JFI-0406-04	1/4	3/8	1/4	.560	.047	.2539	.2516	.3765	.3760
JFI-0406-08	1/4	3/8	1/2	.560	.047	.2539	.2516	.3765	.3760
JFI-0506-04	5/16	3/8	1/4	.500	.032	.3148	.3125	.3753	.3747
JFI-0506-06	5/16	3/8	3/8	.500	.032	.3148	.3125	.3753	.3747
JFI-0506-08	5/16	3/8	1/2	.500	.032	.3148	.3125	.3753	.3747
JFI-0507-08	5/16	7/16	1/2	.560	.062	.3164	.3141	.4390	.4385
JFI-0607-06	3/8	15/32	3/8	.687	.046	.3775	.3750	.4691	.4684
JFI-0607-08	3/8	15/32	1/2	.687	.046	.3775	.3750	.4691	.4684
JFI-0608-03	3/8	1/2	3/16	.625	.062	.3789	.3766	.5015	.5010
JFI-0608-04	3/8	1/2	1/4	.625	.062	.3789	.3766	.5015	.5010
JFI-0608-06	3/8	1/2	3/8	.625	.062	.3789	.3766	.5015	.5010
JFI-0608-08	3/8	1/2	1/2	.625	.062	.3789	.3766	.5015	.5010
JFI-0809-04	1/2	19/32	1/4	.875	.046	.5040	.5000	.5941	.5934
JFI-0809-06	1/2	19/32	3/8	.875	.046	.5040	.5000	.5941	.5934
JFI-0809-08	1/2	19/32	1/2	.875	.046	.5040	.5000	.5941	.5934
JFI-0810-04	1/2	5/8	1/4	.875	.062	.5047	.5020	.6260	.6250
JFI-0810-08	1/2	5/8	1/2	.875	.062	.5047	.5020	.6260	.6250
JFI-0810-10	1/2	5/8	5/8	.875	.062	.5047	.5020	.6260	.6250
JFI-0810-12	1/2	5/8	3/4	.875	.062	.5047	.5020	.6260	.6250
JFI-1011-06	5/8	23/32	3/8	.937	.046	.6280	.6253	.7192	.7184
JFI-1011-08	5/8	23/32	1/2	.937	.046	.6280	.6253	.7192	.7184
JFI-1011-12	5/8	23/32	3/4	1.000	.046	.6295	.6268	.7192	.7184
JFI-1012-08	5/8	3/4	1/2	1.000	.062	.6297	.6270	.7510	.7500
JFI-1012-12	5/8	3/4	3/4	1.000	.062	.6297	.6270	.7510	.7500
JFI-1012-16	5/8	3/4	1	1.000	.062	.6297	.6270	.7510	.7500
JFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7505	.8755	.8747
JFI-1214-09	3/4	7/8	9/16	1.125	.062	.7541	.7505	.8755	.8747
JFI-1214-10	3/4	7/8	5/8	1.125	.062	.7541	.7505	.8755	.8747
JFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7505	.8755	.8747
JFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7505	.8755	.8747

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1

inch

mm

J



igus®

# iglide® Plain Bearings

## J - Flange Bearing, Inch


 iglide® J  
 Flange - Inch

 Telephone 1-800-521-2747  
 1-401-438-7270  
 Fax

 Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>

 For tolerance values  
 please refer to page 4.4

r = max. .0197

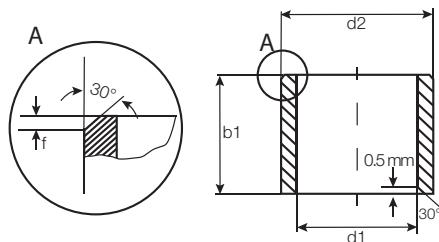Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
JFI-1216-12	3/4	1	3/4	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
JFI-1216-16	3/4	1	1	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
JFI-1416-12	7/8	1	3/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
JFI-141618-11	7/8	1	11/16	1.125	.062	.8807	.8774	1.0005	.9997	.8750	.8740
JFI-1418-24	7/8	1 1/8	1 1/2	1.375	.156	.8809	.8775	1.1260	1.1250	.8750	.8740
JFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
JFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
JFI-1620-12	1	1 1/4	3/4	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
JFI-1620-16	1	1 1/4	1	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
JFI-1620-24	1	1 1/4	1 1/2	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
JFI-2024-16	1 1/4	1 1/2	1	1.750	.200	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
JFI-2024-24	1 1/4	1 1/2	1 1/2	1.750	.200	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
JFI-2428-16	1 1/2	1 3/4	1	2.000	.125	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
JFI-2428-24	1 1/2	1 3/4	1 1/2	2.000	.125	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
JFI-2630-16	1 5/8	1 7/8	1	2.125	.125	1.6350	1.6282	1.8755	1.8745	1.6250	1.6240
JFI-3236-16	2.0	2 1/4	1	2.500	.125	2.0100	2.0032	2.2505	2.2495	2.0000	1.9990



For tolerance values  
please refer to page 4.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
JSM-0104-02	1.5	+0.014 +0.054	4.0	2.0	1.554	1.514	4.012	4.000
JSM-0205-02	2.0	+0.014 +0.054	5.0	2.5	2.054	2.014	5.012	5.000
JSM-0206-02	2.5	+0.014 +0.054	6.0	2.5	2.554	2.514	6.012	6.000
JSM-0304-05	3.0	+0.014 +0.054	4.5	5.0	3.054	3.014	4.512	4.500
JSM-0304-09	3.0	+0.014 +0.054	4.5	9.0	3.054	3.014	4.512	4.500
JSM-0305-04	3.0	+0.020 +0.080	5.0	4.0	3.080	3.020	5.012	5.000
JSM-0308-04	3.0	+0.020 +0.080	8.0	4.0	3.080	3.020	8.015	8.000
JSM-0308-05	3.0	+0.020 +0.080	8.0	5.0	3.080	3.020	8.015	8.000
JSM-0405-04	4.0	+0.020 +0.068	5.5	4.0	4.068	4.020	5.512	5.500
JSM-0405-08	4.0	+0.020 +0.068	5.5	8.0	4.068	4.020	5.512	5.500
JSM-0507-046	5.0	+0.020 +0.068	7.0	4.6	5.068	5.020	7.015	7.000
JSM-0507-05	5.0	+0.020 +0.068	7.0	5.0	5.068	5.020	7.015	7.000
JSM-0507-10	5.0	+0.020 +0.068	7.0	10.0	5.068	5.020	7.015	7.000
JSM-0507-15	5.0	+0.020 +0.068	7.0	15.0	5.068	5.020	7.015	7.000
JSM-0607-08	6.0	+0.010 +0.058	7.0	8.0	6.068	6.020	7.015	7.000
JSM-0607-12.5	6.0	+0.010 +0.058	7.0	12.5	6.068	6.020	7.015	7.000
JSM-0607-14	6.0	+0.010 +0.058	7.0	14.0	6.068	6.020	7.015	7.000
JSM-0608-043	6.0	+0.020 +0.068	8.0	4.3	6.058	6.020	8.015	8.000
JSM-0608-06	6.0	+0.020 +0.068	8.0	6.0	6.068	6.020	8.015	8.000
JSM-0608-10	6.0	+0.020 +0.068	8.0	10.0	6.068	6.020	8.015	8.000
JSM-0609-06	6.0	+0.020 +0.068	9.0	6.0	6.068	6.020	9.015	9.000
JSM-0610-10	6.0	+0.020 +0.068	10.0	10.0	6.068	6.020	10.015	10.000
JSM-0709-09	7.0	+0.025 +0.083	9.0	9.0	7.083	7.025	9.015	9.000
JSM-0810-04	8.0	+0.025 +0.083	10.0	4.0	8.083	8.025	10.015	10.000
JSM-0810-06	8.0	+0.025 +0.083	10.0	6.0	8.083	8.025	10.015	10.000
JSM-0810-08	8.0	+0.025 +0.083	10.0	8.0	8.083	8.025	10.015	10.000
JSM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000
JSM-0810-12	8.0	+0.025 +0.083	10.0	12.0	8.083	8.025	10.015	10.000
JSM-0810-16	8.0	+0.025 +0.083	10.0	16.0	8.083	8.025	10.015	10.000
JSM-0812-10	8.0	+0.040 +0.130	12.0	10.0	8.130	8.040	12.018	12.000
JSM-0812-12	8.0	+0.040 +0.130	12.0	12.0	8.130	8.040	12.018	12.000
JSM-1012-05	10.0	+0.025 +0.083	12.0	5.0	10.083	10.025	12.018	12.000
JSM-1012-06	10.0	+0.025 +0.083	12.0	6.0	10.083	10.025	12.018	12.000
JSM-1012-08	10.0	+0.025 +0.083	12.0	8.0	10.083	10.025	12.018	12.000
JSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000
JSM-1012-11	10.0	+0.025 +0.083	12.0	11.0	10.083	10.025	12.018	12.000
JSM-1012-12	10.0	+0.025 +0.083	12.0	12.0	10.083	10.025	12.018	12.000
JSM-1012-15	10.0	+0.025 +0.083	12.0	15.0	10.083	10.025	12.018	12.000
JSM-1012-20	10.0	+0.025 +0.083	12.0	20.0	10.083	10.025	12.018	12.000
JSM-1014-10	10.0	+0.040 +0.130	14.0	10.0	10.130	10.040	14.018	14.000

iglide® J  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1

inch

mm


# iglide® Plain Bearings

## J - Sleeve Bearing, MM

iglide® J  
Sleeve - MM

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

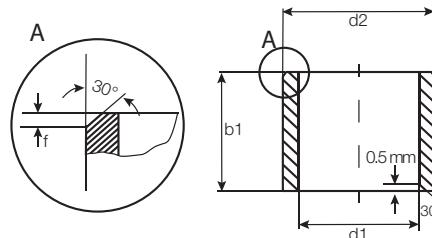

For tolerance values  
please refer to page 4.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
JSM-1014-16	10.0	+0.040 +0.130	14.0	16.0	10.130	10.040	14.018	14.000	10.000	9.964
JSM-1214-06	12.0	+0.032 +0.102	14.0	6.0	12.102	12.032	14.018	14.000	12.000	11.957
JSM-1214-08	12.0	+0.032 +0.102	14.0	8.0	12.102	12.032	14.018	14.000	12.000	11.957
JSM-1214-09	12.0	+0.032 +0.102	14.0	9.0	12.102	12.032	14.018	14.000	12.000	11.957
JSM-1214-10	12.0	+0.032 +0.102	14.0	10.0	12.102	12.032	14.018	14.000	12.000	11.957
JSM-1214-15	12.0	+0.032 +0.102	14.0	15.0	12.102	12.032	14.018	14.000	12.000	11.957
JSM-1216-12	12.0	+0.050 +0.160	16.0	12.0	12.160	12.050	16.018	16.000	12.000	11.957
JSM-1216-17	12.0	+0.050 +0.160	16.0	17.0	12.160	12.050	16.018	16.000	12.000	11.957
JSM-1416-05	14.0	+0.032 +0.102	16.0	5.0	14.102	14.032	16.018	16.000	14.000	13.957
JSM-1416-08	14.0	+0.032 +0.102	16.0	8.0	14.102	14.032	16.018	16.000	14.000	13.957
JSM-1416-10	14.0	+0.032 +0.102	16.0	10.0	14.102	14.032	16.018	16.000	14.000	13.957
JSM-1416-15	14.0	+0.032 +0.102	16.0	15.0	14.102	14.032	16.018	16.000	14.000	13.957
JSM-1416-20	14.0	+0.032 +0.102	16.0	20.0	14.102	14.032	16.018	16.000	14.000	13.957
JSM-1416-25	14.0	+0.032 +0.102	16.0	25.0	14.102	14.032	16.018	16.000	14.000	13.957
JSM-1418-18	14.0	+0.032 +0.102	18.0	18.0	14.102	14.032	18.018	18.000	14.000	13.957
JSM-1517-12	15.0	+0.032 +0.102	17.0	12.0	15.102	15.032	17.018	17.000	15.000	14.957
JSM-1517-20	15.0	+0.032 +0.102	17.0	20.0	15.102	15.032	17.018	17.000	15.000	14.957
JSM-1618-10	16.0	+0.032 +0.102	18.0	10.0	16.102	16.032	18.018	18.000	16.000	15.957
JSM-1618-12	16.0	+0.032 +0.102	18.0	12.0	16.102	16.032	18.018	18.000	16.000	15.957
JSM-1618-15	16.0	+0.032 +0.102	18.0	15.0	16.102	16.032	18.018	18.000	16.000	15.957
JSM-1618-20	16.0	+0.032 +0.102	18.0	20.0	16.102	16.032	18.018	18.000	16.000	15.957
JSM-1620-16	16.0	+0.050 +0.160	20.0	16.0	16.160	16.050	20.021	20.000	16.000	15.957
JSM-1622-16	16.0	+0.050 +0.160	22.0	16.0	16.160	16.050	22.021	22.000	16.000	15.957
JSM-1622-20	16.0	+0.050 +0.160	22.0	20.0	16.160	16.050	22.021	22.000	16.000	15.957
JSM-1820-15	18.0	+0.032 +0.102	20.0	15.0	18.102	18.032	20.021	20.000	18.000	17.957
JSM-1820-20	18.0	+0.032 +0.102	20.0	20.0	18.102	18.032	20.021	20.000	18.000	17.957
JSM-2022-20	20.0	+0.040 +0.124	22.0	20.0	20.124	20.040	22.021	22.000	20.000	19.948
JSM-2022-30	20.0	+0.040 +0.124	22.0	30.0	20.124	20.040	22.021	22.000	20.000	19.948
JSM-2023-15	20.0	+0.040 +0.124	23.0	15.0	20.124	20.040	23.021	23.000	20.000	19.948
JSM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000	20.000	19.948
JSM-2023-25	20.0	+0.040 +0.124	23.0	25.0	20.124	20.040	23.021	23.000	20.000	19.948
JSM-2026-06	20.0	+0.065 +0.195	26.0	6.0	20.195	20.065	26.021	26.000	20.000	19.948
JSM-2026-20	20.0	+0.065 +0.195	26.0	20.0	20.195	20.065	26.021	26.000	20.000	19.948
JSM-2026-25	20.0	+0.065 +0.195	26.0	25.0	20.195	20.065	26.021	26.000	20.000	19.948
JSM-2026-30	20.0	+0.065 +0.195	26.0	30.0	20.195	20.065	26.021	26.000	20.000	19.948
JSM-2427-25	24.0	+0.040 +0.124	27.0	25.0	24.124	24.040	27.021	27.000	24.000	23.948
JSM-2427-46	24.0	+0.040 +0.124	27.0	46.0	24.124	24.040	27.021	27.000	24.000	23.948
JSM-2528-12	25.0	+0.040 +0.124	28.0	12.0	25.124	25.040	28.021	28.000	25.000	24.948
JSM-2528-20	25.0	+0.040 +0.124	28.0	20.0	25.124	25.040	28.021	28.000	25.000	24.948
JSM-2528-30	25.0	+0.040 +0.124	28.0	30.0	25.124	25.040	28.021	28.000	25.000	24.948

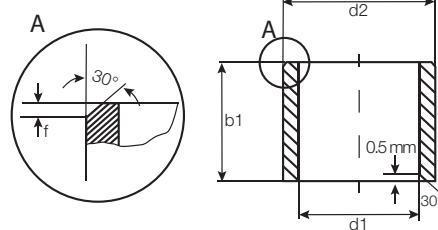

For tolerance values  
please refer to page 4.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
<b>JSM-2528-60</b>	25.0	+0.040 +0.124	28.0	60.0	25.124	25.040	28.021	28.000	25.000	24.948
<b>JSM-2532-25</b>	25.0	+0.065 +0.195	32.0	25.0	25.195	25.065	32.025	32.000	25.000	24.948
<b>JSM-2532-35</b>	25.0	+0.065 +0.195	32.0	35.0	25.195	25.065	32.025	32.000	25.000	24.948
<b>JSM-2630-20</b>	26.0	+0.065 +0.195	30.0	20.0	26.195	26.065	30.025	30.000	26.000	25.948
<b>JSM-2832-20</b>	28.0	+0.065 +0.195	32.0	20.0	28.195	28.065	32.025	32.000	28.000	27.948
<b>JSM-2836-29</b>	28.0	+0.065 +0.195	36.0	29.0	28.195	28.065	36.025	36.000	28.000	27.948
<b>JSM-3034-20</b>	30.0	+0.040 +0.124	34.0	20.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>JSM-3034-25</b>	30.0	+0.040 +0.124	34.0	25.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>JSM-3034-30</b>	30.0	+0.040 +0.124	34.0	30.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>JSM-3038-40</b>	30.0	+0.065 +0.195	38.0	40.0	30.195	30.065	38.025	38.000	30.000	29.948
<b>JSM-3236-20</b>	32.0	+0.050 +0.150	36.0	20.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>JSM-3236-30</b>	32.0	+0.050 +0.150	36.0	30.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>JSM-3236-40</b>	32.0	+0.050 +0.150	36.0	40.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>JSM-3539-20</b>	35.0	+0.050 +0.150	39.0	20.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>JSM-3539-30</b>	35.0	+0.050 +0.150	39.0	30.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>JSM-3539-40</b>	35.0	+0.050 +0.150	39.0	40.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>JSM-3640-45</b>	36.0	+0.050 +0.150	40.0	45.0	36.150	36.050	40.025	40.000	36.000	35.938
<b>JSM-4044-30</b>	40.0	+0.050 +0.150	44.0	30.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>JSM-4044-35</b>	40.0	+0.050 +0.150	44.0	35.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>JSM-4044-40</b>	40.0	+0.050 +0.150	44.0	40.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>JSM-5055-30</b>	50.0	+0.050 +0.150	55.0	30.0	50.150	50.050	55.030	55.000	50.000	49.938
<b>JSM-5055-50</b>	50.0	+0.050 +0.150	55.0	50.0	50.150	50.050	55.030	55.000	50.000	49.938
<b>JSM-5560-60</b>	55.0	+0.060 +0.180	60.0	60.0	55.180	55.060	60.030	60.000	55.000	54.926
<b>JSM-6065-60</b>	60.0	+0.060 +0.180	65.0	60.0	60.180	60.060	65.030	65.000	60.000	59.926
<b>JSM-7580-60</b>	75.0	+0.060 +0.180	80.0	60.0	75.180	75.060	80.030	80.000	75.000	74.926
<b>JSM-8085-100</b>	80.0	+0.060 +0.180	85.0	100.0	80.180	80.060	85.035	85.000	80.000	79.926
<b>JSM-8086-60</b>	80.0	+0.060 +0.180	86.0	60.0	80.180	80.060	85.035	86.000	80.000	79.926
<b>JSM-100105-100</b>	110.0	+0.072 +0.212	105.0	100.0	100.212	100.072	105.035	105.000	100.000	99.913
<b>JSM-110115-60</b>	11000	+0.072 +0.212	115.0	60.0	110.212	110.072	110.035	110.000	100.000	109.913

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





# iglide® Plain Bearings

## J - Flange Bearing, MM

iglide® J  
Flange - MM

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>





For tolerance values  
please refer to page 4.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7		d13	h13	-0.14		Max.	Min.	Max.	Min.
JFM-0304-05	3.0	+0.014 +0.054	4.5	7.5	5.0	0.75	3.054	3.014	4.512	4.500
JFM-0405-03	4.0	+0.020 +0.068	5.5	9.5	3.0	0.75	4.068	4.020	5.512	5.000
JFM-0405-06	4.0	+0.020 +0.068	5.5	9.5	6.0	0.75	4.068	4.020	5.512	5.000
JFM-0408-04	4.0	+0.030 +0.105	8.0	12.0	4.0	2.0	4.105	4.030	8.015	8.000
JFM-0507-03	5.0	+0.020 +0.068	7.0	11.0	3.0	1.0	5.068	5.020	7.015	7.000
JFM-0507-05	5.0	+0.020 +0.068	7.0	11.0	5.0	1.0	5.068	5.020	7.015	7.000
JFM-0608-04	6.0	+0.020 +0.068	8.0	12.0	4.0	1.0	6.068	6.020	8.015	8.000
JFM-0608-06	6.0	+0.020 +0.068	8.0	12.0	6.0	1.0	6.068	6.020	8.015	8.000
JFM-0608-08	6.0	+0.020 +0.068	8.0	12.0	8.0	1.0	6.068	6.020	8.015	8.000
JFM-0608-10	6.0	+0.020 +0.068	8.0	12.0	10.0	1.0	6.068	6.020	8.015	8.000
JFM-0610-10	6.0	+0.030 +0.105	10.0	14.0	10.0	2.0	6.105	6.030	10.015	10.000
JFM-0810-05	8.0	+0.025 +0.083	10.0	15.0	5.0	1.0	8.083	8.025	10.015	10.000
JFM-0810-06	8.0	+0.025 +0.083	10.0	15.0	6.0	1.0	8.083	8.025	10.015	10.000
JFM-0810-07	8.0	+0.025 +0.083	10.0	15.0	7.0	1.0	8.083	8.025	10.015	10.000
JFM-0810-08	8.0	+0.025 +0.083	10.0	15.0	8.0	1.0	8.083	8.025	10.015	10.000
JFM-0810-10	8.0	+0.025 +0.083	10.0	15.0	10.0	1.0	8.083	8.025	10.015	10.000
JFM-081014-10	8.0	+0.025 +0.083	10.0	14.0	10.0	1.0	8.083	8.025	10.015	10.000
JFM-081016-11	8.0	+0.025 +0.083	10.0	16.0	11.0	1.0	8.083	8.025	10.015	10.000
JFM-0812-05	8.0	+0.040 +0.130	12.0	16.0	5.0	2.0	8.130	8.040	12.018	12.000
JFM-0812-06	8.0	+0.040 +0.130	12.0	16.0	6.0	2.0	8.115	8.025	12.018	12.000
JFM-0812-30	8.0	+0.040 +0.130	12.0	16.0	30.0	2.0	8.130	8.040	12.018	12.000
JFM-101215-035	10.0	+0.025 +0.083	12.0	15.0	3.5	1.0	10.083	10.025	12.018	12.000
JFM-1012-05	10.0	+0.025 +0.083	12.0	18.0	5.0	1.0	10.083	10.025	12.018	12.000
JFM-1012-09	10.0	+0.025 +0.083	12.0	18.0	9.0	1.0	10.083	10.025	12.018	12.000
JFM-1012-10	10.0	+0.025 +0.083	12.0	18.0	10.0	1.0	10.083	10.025	12.018	12.000
JFM-1012-12	10.0	+0.025 +0.083	12.0	18.0	12.0	1.0	10.083	10.025	12.018	12.000
JFM-1012-15	10.0	+0.025 +0.083	12.0	18.0	15.0	1.0	10.083	10.025	12.018	12.000
JFM-1012-18	10.0	+0.025 +0.083	12.0	18.0	18.0	1.0	10.083	10.025	12.018	12.000
JFM-1014-14	10.0	+0.025 +0.083	14.0	17.5	14.0	1.0	10.083	10.025	14.018	14.000
JFM-101420-12	10.0	+0.025 +0.083	14.0	20.0	12.0	2.0	10.083	10.025	14.018	14.000
JFM-1016-10	10.0	+0.040 +0.130	16.0	22.0	10.0	3.0	10.130	10.040	16.018	16.000
JFM-1016-16	10.0	+0.040 +0.130	16.0	22.0	16.0	3.0	10.130	10.040	16.018	16.000
JFM-1113-05	11.0	+0.032 +0.102	13.0	18.0	5.0	1.0	11.102	11.032	13.018	13.000
JFM-1214-05	12.0	+0.032 +0.102	14.0	20.0	5.0	1.0	12.102	12.032	14.018	14.000
JFM-1214-07	12.0	+0.032 +0.102	14.0	20.0	7.0	1.0	12.102	12.032	14.018	14.000
JFM-1214-09	12.0	+0.032 +0.102	14.0	20.0	9.0	1.0	12.102	12.032	14.018	14.000
JFM-121418-10	12.0	+0.032 +0.102	14.0	18.0	10.0	1.0	12.102	12.032	14.018	14.000
JFM-1214-12	12.0	+0.032 +0.102	14.0	20.0	12.0	1.0	12.102	12.032	14.018	14.000
JFM-1214-15	12.0	+0.032 +0.102	14.0	20.0	15.0	1.0	12.102	12.032	14.018	14.000
JFM-1218-08	12.0	+0.050 +0.160	18.0	24.0	8.0	3.0	12.160	12.050	18.018	18.000
JFM-1218-12	12.0	+0.050 +0.160	18.0	24.0	12.0	3.0	12.160	12.050	18.018	18.000
JFM-1218-20	12.0	+0.050 +0.160	18.0	22.0	20.0	3.0	12.160	12.050	18.018	18.000
									12.000	11.957



For tolerance values  
please refer to page 4.4

$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7		d13	h13	-0.14		Max.	Min.	Max.	Min.
JFM-1416-03	14.0	+0.032 +0.102	16.0	22.0	3.0	1.0	14.102	14.032	16.018	16.000
JFM-1416-10	14.0	+0.032 +0.102	16.0	22.0	10.0	1.0	14.102	14.032	16.018	16.000
JFM-1416-12	14.0	+0.032 +0.102	16.0	22.0	12.0	1.0	14.102	14.032	16.018	16.000
JFM-1416-17	14.0	+0.032 +0.102	16.0	22.0	17.0	1.0	14.102	14.032	16.018	16.000
JFM-141822-20	14.0	+0.032 +0.102	18.0	22.0	20.0	2.0	14.102	14.032	18.018	18.000
JFM-1420-20	14.0	+0.050 +0.160	20.0	25.0	20.0	3.0	14.160	14.050	20.021	20.000
JFM-1517-09	15.0	+0.032 +0.102	17.0	23.0	9.0	1.0	15.102	15.032	17.018	17.000
JFM-1517-12	15.0	+0.032 +0.102	17.0	23.0	12.0	1.0	15.102	15.032	17.018	17.000
JFM-1517-17	15.0	+0.032 +0.102	17.0	23.0	17.0	1.0	15.102	15.032	17.018	17.000
JFM-1521-20	15.0	+0.050 +0.160	21.0	27.0	20.0	3.0	15.160	15.050	21.021	21.000
JFM-1618-17	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102	16.032	18.018	18.000
JFM-1622-12	16.0	+0.050 +0.160	22.0	28.0	12.0	3.0	16.160	16.050	22.021	22.000
JFM-1622-15	16.0	+0.050 +0.160	22.0	28.0	15.0	3.0	16.160	16.050	22.021	22.000
JFM-1622-20	16.0	+0.050 +0.160	22.0	28.0	20.0	3.0	16.160	16.050	22.021	22.000
JFM-1622-25	16.0	+0.050 +0.160	22.0	28.0	25.0	3.0	16.160	16.050	22.021	22.000
JFM-1719-09	17.0	+0.032 +0.102	19.0	25.0	9.0	1.0	17.102	17.032	19.018	19.000
JFM-1719-21	17.0	+0.032 +0.102	19.0	25.0	21.0	1.0	17.102	17.032	19.018	19.000
JFM-1820-04	18.0	+0.032 +0.102	20.0	26.0	4.0	1.0	18.102	18.032	20.021	20.000
JFM-1820-12	18.0	+0.032 +0.102	20.0	26.0	12.0	1.0	18.102	18.032	20.021	20.000
JFM-1820-22	18.0	+0.032 +0.102	20.0	26.0	22.0	1.0	18.102	18.032	20.021	20.000
JFM-1922-36	19.0	+0.040 +0.124	22.0	26.0	36.0	1.0	19.124	19.040	22.021	22.000
JFM-2023-11	20.0	+0.040 +0.124	23.0	30.0	11.0	1.5	20.124	20.040	23.021	23.000
JFM-2023-15.5	20.0	+0.040 +0.124	23.0	30.0	15.5	1.5	20.124	20.040	23.021	23.000
JFM-2023-21	20.0	+0.040 +0.124	23.0	30.0	21.5	1.5	20.124	20.040	23.021	23.000
JFM-202530-15	20.0	+0.065 +0.195	25.0	30.0	15.0	2.5	20.195	20.065	25.021	25.000
JFM-2026-15	20.0	+0.065 +0.195	26.0	32.0	15.0	3.0	20.195	20.065	26.021	26.000
JFM-2026-20	20.0	+0.065 +0.195	26.0	32.0	20.0	3.0	20.195	20.065	26.021	26.000
JFM-2026-25	20.0	+0.065 +0.195	26.0	32.0	25.0	3.0	20.195	20.065	26.021	26.000
JFM-2026-30	20.0	+0.065 +0.195	26.0	32.0	30.0	3.0	20.195	20.065	26.021	26.000
JFM-222532-08	22.0	+0.040 +0.124	25.0	32.0	8.0	1.5	22.124	22.040	25.021	25.000
JFM-2430-30	24.0	+0.040 +0.124	30.0	36.0	30.0	3.0	24.124	24.040	30.021	30.000
JFM-2528-06	25.0	+0.040 +0.124	28.0	35.0	6.0	1.5	25.124	25.040	28.021	28.000
JFM-2528-14.5	25.0	+0.040 +0.124	28.0	35.0	14.5	1.5	25.124	25.040	28.021	28.000
JFM-2528-21	25.0	+0.040 +0.124	28.0	35.0	21.0	1.5	25.124	25.040	28.021	28.000
JFM-2532-20	25.0	+0.065 +0.195	32.0	38.0	20.0	4.0	25.195	25.065	32.021	32.000
JFM-2532-25	25.0	+0.065 +0.195	32.0	38.0	25.0	4.0	25.195	25.065	32.021	32.000
JFM-2532-40	25.0	+0.065 +0.195	32.0	38.0	40.0	2.0	25.195	25.065	32.021	32.000
JFM-3034-20	30.0	+0.040 +0.124	34.0	42.0	20.0	2.0	30.124	30.040	34.025	34.000
JFM-3034-26	30.0	+0.040 +0.124	34.0	42.0	26.0	2.0	30.124	30.040	34.025	34.000
JFM-3038-20	30.0	+0.065 +0.195	38.0	44.0	20.0	4.0	30.195	30.065	38.025	38.000
JFM-3038-30	30.0	+0.065 +0.195	38.0	44.0	30.0	4.0	30.195	30.065	38.025	38.000
JFM-3038-36	30.0	+0.065 +0.195	38.0	44.0	36.0	4.0	30.195	30.065	38.025	38.000

iglide® J  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

inch

mm

J

igus®



# iglide® Plain Bearings

## J - Flange Bearing, MM

iglide® J  
Flange - MM

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>



For tolerance values  
please refer to page 4.4



r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup> After Pressfit in Ø H7	d1-Tolerance After Pressfit in Ø H7	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit Max. Min.	Housing Bore Max. Min.	Shaft Size Max. Min.
JFM-3539-12	35.0	+0.050 +0.150	39.0	47.0	12.0	2.0	35.150 35.050	39.025 39.000	35.000 34.938
JFM-3539-16	35.0	+0.050 +0.150	39.0	47.0	16.0	2.0	35.150 35.050	39.025 39.000	35.000 34.938
JFM-3539-26	35.0	+0.050 +0.150	39.0	47.0	26.0	2.0	35.150 35.050	39.025 39.000	35.000 34.938
JFM-4044-20	40.0	+0.050 +0.150	44.0	52.0	20.0	2.0	40.150 40.050	44.025 44.000	40.000 39.938
JFM-4044-30	40.0	+0.050 +0.150	44.0	52.0	30.0	2.0	40.150 40.050	44.025 44.000	40.000 39.938
JFM-4044-40	40.0	+0.050 +0.150	44.0	52.0	40.0	2.0	40.150 40.050	44.025 44.000	40.000 39.938
JFM-4550-20	45.0	+0.050 +0.150	50.0	58.0	20.0	2.0	45.150 45.050	50.025 50.000	45.000 44.938
JFM-4550-50	45.0	+0.050 +0.150	50.0	58.0	50.0	2.0	45.150 45.050	50.025 50.000	45.000 44.938
JFM-5055-50	50.0	+0.050 +0.150	55.0	63.0	50.0	2.0	50.150 50.050	55.030 55.000	50.000 54.926
JFM-556082-30	55.0	+0.060 +0.180	60.0	82.0	30.0	2.0	55.180 55.060	60.030 60.000	55.000 54.926
JFM-5560-50	55.0	+0.060 +0.180	60.0	68.0	50.0	2.0	55.180 55.060	60.030 60.000	55.000 54.926
JFM-6065-50	60.0	+0.060 +0.180	65.0	73.0	50.0	2.0	60.180 60.060	65.030 65.000	60.000 59.926
JFM-7075-50	70.0	+0.060 +0.180	75.0	83.0	50.0	2.0	70.180 70.060	75.030 75.000	70.000 69.926
JFM-9095-100	90.0	+0.072 +0.212	95.0	108.0	100.0	2.5	90.212 90.072	95.035 95.000	90.000 89.900
JFM-110115-100	100.0	+0.072 +0.212	115.0	123.0	100.0	2.5	110.212 110.072	115.035 115.000	110.000 109.900

# iglide® Plain Bearings

## J - Thrust Washer, MM

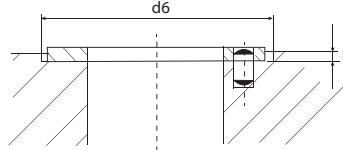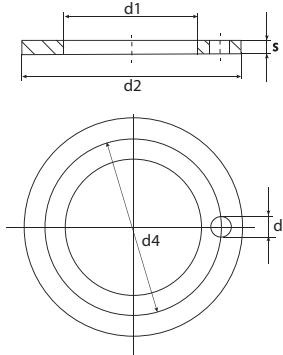

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 0.3	d2 -0.3	s -0.05	d4 -0.12 +0.12	d5 +0.375 +0.125	h +0.2 0.2	d6 +0.12
JTM-1224-015	12.0	24.0	1.5	18.0	1.5	1.0	24.0
JTM-2036-015	20.0	36.0	1.5	28.0	3.0	1.0	36.0


igus®



iglide® L280

**Product Range**

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 2-1/4 in.  
Metric sizes from 2 - 120 mm

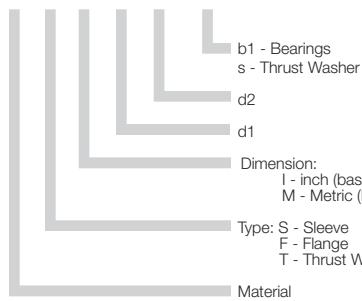**Part Number Structure****Part Number Structure**L S I-02 03-03**Permissible Surface Speeds**

	Continuous fpm	Short Term fpm
Rotating	196	492
Oscillating	137	354
Linear	787	1181

**Usage Guidelines**

- When especially high service life is necessary
- When low coefficients of dynamic friction and high wear resistance are needed
- For use on 303 stainless steel shafts
- For harsh environments and very rough shaft



- For high loads starting at 7250 psi  
► iglide® Q
- When temperatures are continuously above 266°F  
► iglide® T500, F, Z
- When an especially economical bearing is desired  
► iglide® G300

**Material Data**

General Properties	Unit	iglide® L280	Testing Method
Density	g/cm³	1.24	
Color		yellow	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.3	DIN 53495
Max. moisture absorption	% weight	6.5	
Coefficient of friction, dynamic against steel	$\mu$	0.08 - 0.23	
p x v-value, max. (dry)	psi x fpm	6,600	

**Mechanical Properties**


Modulus of elasticity	psi	507,600	DIN 53457
Tensile strength at 68°F	psi	18,130	DIN 53452
Compressive strength	psi	8,847	
Permissible static surface pressure (68°F)	psi	8,702	
Shore D-hardness		77	DIN 53505

**Physical and Thermal Properties**

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	356	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	9	DIN 53752

**Electrical Properties**

Specific volume resistance	Ωcm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	DIN 53482

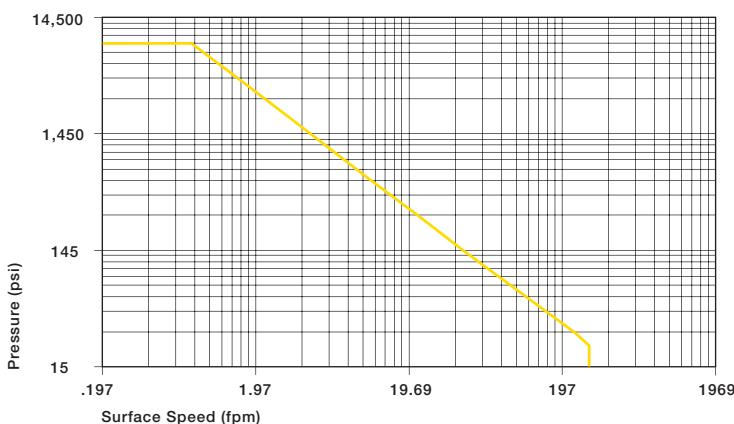

Permissible p x v - values for iglide® L280 running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system


High wear resistance, even in harsh environments or in connection with rough shafts, characterizes the iglide® L280 material. Of all iglide® materials, this material is the most resistant to these types of external effects.

## Compressive Strength

iglide® L280 exhibits a very high compression resistance in spite of its high elasticity. The graph shows the elastic deformation of iglide® L280 under radial loading. At the maximum permissible load of 8700 psi, the deformation at room temperature is less than 3%.

Below the maximum permissible pressure load of 8700 psi, the deformation at room temperature is virtually zero.

- Compressive Strength, Page 1.3

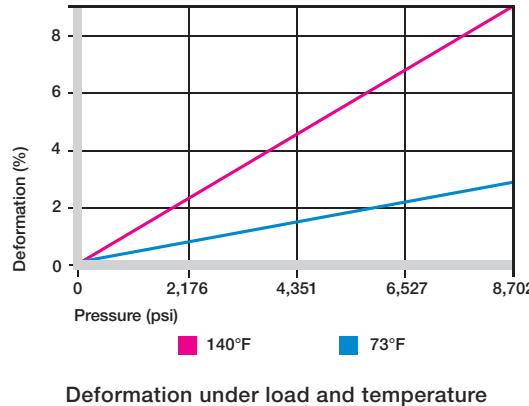

## Permissible Surface Speeds

Even at higher surface speeds, the coefficients of friction for iglide® L280 do not increase. Therefore, compared to other materials, higher surface speeds can be obtained, for example, up to 195 fpm rotating and up to 787 fpm linear.

The bearing wear remains low when used for long periods at high speeds, due to exceptional wear resistance.

Especially high speeds can be obtained with iglide® L280 bearings on hardened shafts with recommended surface finish.

- Surface Speed, Page 1.5
- p x v Value, Page 1.6

## Temperatures

iglide® L280 plain bearings show minimal reaction to changing external effects. This also applies to temperatures. iglide® L280 bearings maintain their exceptional wear resistance even up to the highest permissible application temperatures and at the same time resist becoming brittle at low temperatures.

On the other hand, the mechanical properties at high temperatures limit the application of iglide® L280. Even at temperatures of 140°F, relaxation of the bearing can occur. In this process, the pressfit forces of the bearing decrease to a large extent due to temperature. During re-cooling and the resulting contraction caused by it, migration of the bearing can occur.

In order to avoid this situation, iglide® L280 plain bearings always need to be axially secured in applications at 140°F and above.

- Application Temperatures, Page 1.7

iglide® L280	Application Temperature
Minimum	-40 °F
Max. long-term	+194 °F
Mechanical (ges.)	+266 °F
Max. short-term	+356 °F
Additional axial securing	+140°F

## Temperature limits for iglide® L280

	Continuous fpm	Short Term fpm
Rotating	196	492
Oscillating	137	354
Linear	787	1181

## Maximum surface speeds


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1°

inch

mm

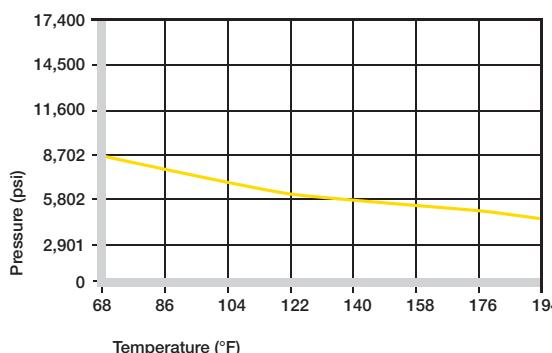


Recommended maximum permissible static surface pressure of iglide® L280 as a result of temperature

## Installation Tolerances

iglide® L280 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

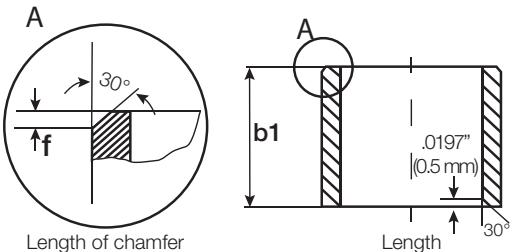

For Inch Size Bearings		
Length Tolerance (b1)		Length of Chamfer (f) Based on d1
Length (inches)	Tolerance (h13) (inches)	
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


For Metric Size Bearings		
Length Tolerance (b1)		Length of Chamfer (f) Based on d1
Length (mm)	Tolerance (h13) (μm)	
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The coefficients of friction for iglide® L280 decrease with increasing load. In the dry run against steel (Cold Rolled Steel), friction is reduced when load ranges from p = 72.5 to 507.5 psi by approximately 25%.

In contrast to other iglide® materials, the coefficient of friction of iglide® L280 remains consistently low at higher rotational speeds. Friction and wear are also, dependent, to a large degree on the shafting partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. Smooth shafts have the danger of stick-slip. Squeaking as an effect of stick-slip is mostly the result of shafts that are too smooth. For iglide L280 a ground surface with an average roughness range of 16-20 rms is recommended for the shaft. Tests with iglide® L280 have shown the wear resistance at this roughness is very high, while the friction assumes its lowest value.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

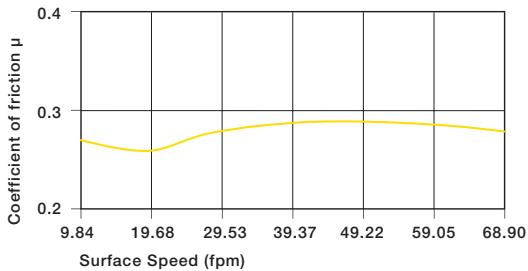


Coefficient of friction of iglide® L280 as a result of the surface speed, p = 108 psi, shaft made of Cold Rolled Steel

iglide® L280	Coefficient of Friction
Dry	0.08 - 0.23
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction for iglide® L280 against steel  
(Shaft Finish = 40 rms, 50 HRC)

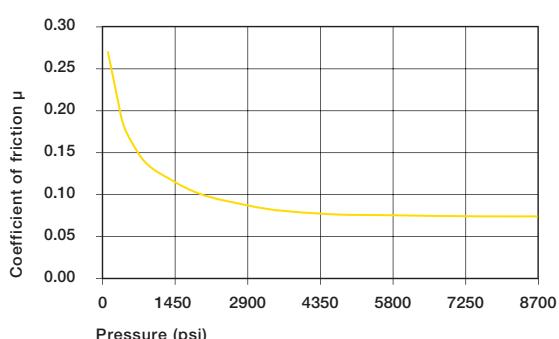

Coefficient of friction of iglide® L280 as a result of the load, v = 1.97 fpm

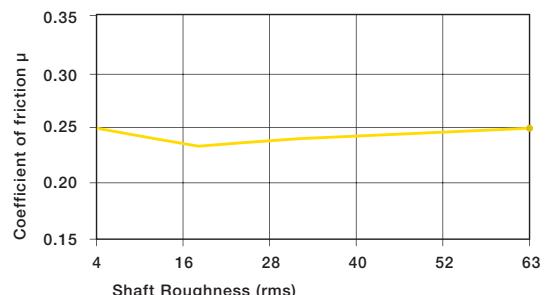

Coefficients of friction for iglide® L280 as a result of the shaft surface (shaft Cold Rolled Steel)

## Shaft Materials

The graphs show results of testing different shaft materials with plain bearings made of iglide® L280.


For rotational applications with low loads, the wear varies according to the shaft material. iglide® L280 provides very good to acceptable coefficients of friction for all shafts that were tested. iglide® L280 likes hard shafts. For small radial loads with hard-chromed shafts and/or shafts made of corrosion-resistant steel, iglide® L280 is the best suited iglide® material.

The soft shaft materials HR carbon steel and free-cutting steel are not as well suited for plain bearings made of iglide® L280.


Hardened shafts are preferred for applications for higher loads. The graph clearly shows the difference in materials for increasing loads. A similar picture emerges for oscillating applications. First, for low loads, the wear for the oscillating movement lies below that of a rotation at the same load. For higher loads, the situation changes.

If the shaft material you plan to use is not contained in this listing, please contact us.


► Shaft Materials, Page 1.11

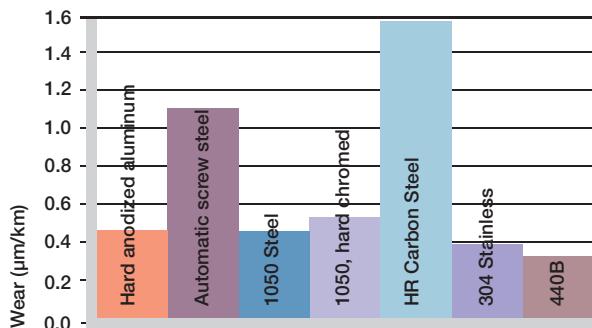

Wear of iglide® L280 with different shaft materials  
( $p = 108$  psi)

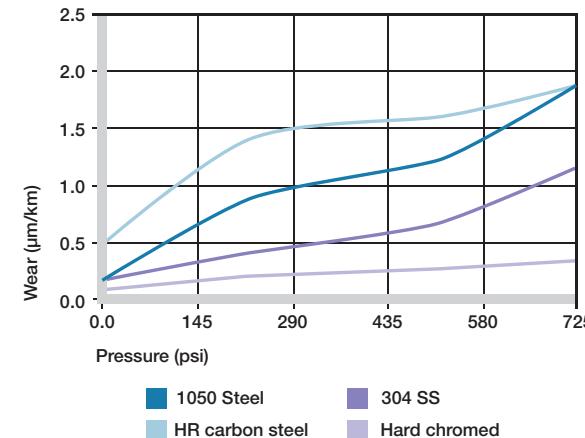

Wear with different shaft materials in rotational operation, as a result of the load

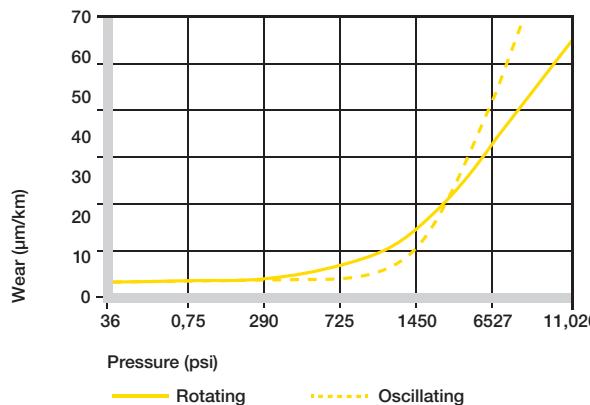

Wear for oscillating and rotating applications with shaft material Cold Rolled Steel, as a result of the load

## Chemical Resistance

iglide® L280 plain bearings have a good resistance to chemicals. They are resistant to most lubricants. iglide® L280 is not attacked by most weak organic and inorganic acids.

The moisture absorption of iglide® L280 plain bearings is approximately 1.3% weight in the standard atmosphere. The maximum water absorption is 6.5%. This must be taken into account along with other environmental influences.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	0

+ resistant, 0 conditionally resistant, – not resistant

### Chemical resistance of iglide® L280


All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

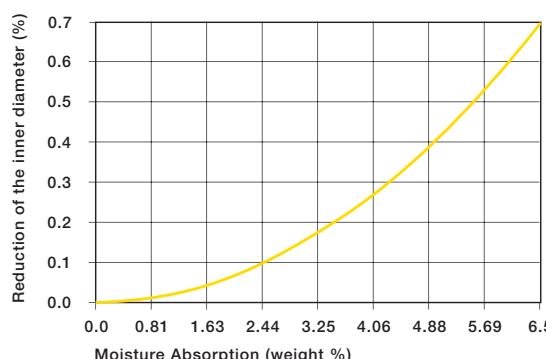


Effect of moisture absorption on iglide® L280 plain bearings

iglide® L280

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10  
inch  
mm

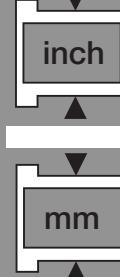

## Radiation Resistance

Plain bearings made from iglide® L280 are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

## UV-Resistance

iglide® L280 plain bearings are permanently resistant to UV radiation. A slight change in color (dark coloration) due to UV radiation and other weathering effects will not significantly influence the mechanical, electrical or thermal properties.

## Vacuum

In a vacuum, iglide® L280 plain bearings will outgas any moisture they may have absorbed. The use of iglide® L280 in a vacuum environment is only possible to a limited extent.

## Electrical Properties

iglide® L280 plain bearings are electrically insulating.

### iglide® L280

Specific volume resistance	> $10^{13}$ Ωcm
Surface Resistance	> $10^{12}$ Ω

Electrical properties of iglide® L280

## Application Examples




By converting to iglide® L280, the life of the bearing on this tea bag packaging machine was increased five times




Low coefficients of friction allow for small driving forces



iglide® L280, the highest wear resistance even in those places where abrasive media contact the bearing

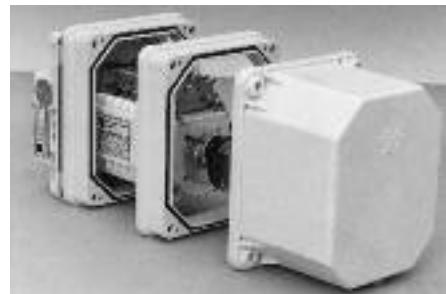

A quote from the test evaluation: "The plain bearing with the L280 material showed no wear at all".

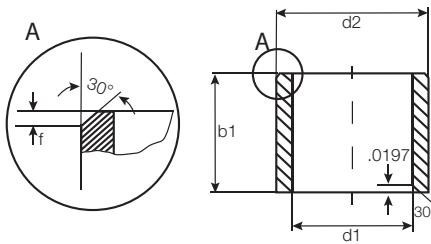

For tolerance values  
please refer to page 5.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore Max.	Shaft Size Max.
				Max.	Min.		
LSI-0203-03	1/8	3/16	3/16	.1269	.1251	.1878	.1873
LSI-0203-04	1/8	3/16	1/4	.1269	.1251	.1878	.1873
LSI-0203-06	1/8	3/16	3/8	.1269	.1251	.1878	.1873
LSI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497
LSI-0304-06	3/16	1/4	3/8	.1892	.1873	.2503	.2497
LSI-0304-08	3/16	1/4	1/2	.1892	.1873	.2503	.2497
LSI-0405-03	1/4	5/16	3/16	.2521	.2498	.3128	.3122
LSI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122
LSI-0405-05	1/4	5/16	5/16	.2521	.2498	.3128	.3122
LSI-0405-06	1/4	5/16	3/8	.2521	.2498	.3128	.3122
LSI-0405-08	1/4	5/16	1/2	.2521	.2498	.3128	.3122
LSI-0405-11	1/4	5/16	11/16	.2521	.2498	.3128	.3122
LSI-0506-04	5/16	3/8	1/4	.3148	.3125	.3753	.3747
LSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747
LSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747
LSI-0506-12	5/16	3/8	3/4	.3148	.3125	.3753	.3747
LSI-0607-04	3/8	15/32	1/4	.3773	.3750	.4691	.4684
LSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684
LSI-0607-07	3/8	15/32	7/16	.3773	.3750	.4691	.4684
LSI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684
LSI-0607-12	3/8	15/32	3/4	.3773	.3750	.4691	.4684
LSI-0608-12	3/8	1/2	3/4	.3783	.3760	.5007	.5000
LSI-0708-08	7/16	17/32	1/2	.4406	.4379	.5316	.5309
LSI-0809-03	1/2	19/32	3/16	.5030	.5003	.5941	.5934
LSI-0809-04	1/2	19/32	1/4	.5030	.5003	.5941	.5934
LSI-0809-06	1/2	19/32	3/8	.5030	.5003	.5941	.5934
LSI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934
LSI-0809-10	1/2	19/32	5/8	.5030	.5003	.5941	.5934
LSI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934
LSI-0809-16	1/2	19/32	1	.5030	.5003	.5941	.5934
LSI-0810-08	1/2	5/8	1/2	.5040	.5013	.6260	.6250
LSI-0810-10	1/2	5/8	5/8	.5040	.5013	.6260	.6250
LSI-0810-12	1/2	5/8	3/4	.5040	.5013	.6260	.6250
LSI-0810-16	1/2	5/8	1	.5040	.5013	.6260	.6250
LSI-0910-08	9/16	21/32	1/2	.5655	.5627	.6570	.6563
LSI-0910-12	9/16	21/32	3/4	.5655	.5627	.6570	.6563
LSI-1011-04	5/8	23/32	1/4	.6280	.6253	.7192	.7184
LSI-1011-06	5/8	23/32	3/8	.6280	.6253	.7192	.7184
LSI-1011-08	5/8	23/32	1/2	.6280	.6253	.7192	.7184
LSI-1011-10	5/8	23/32	5/8	.6280	.6253	.7192	.7184
LSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1




mm

# iglide® Plain Bearings

## L280 - Sleeve, Inch

iglide® L280  
Sleeve - Inch


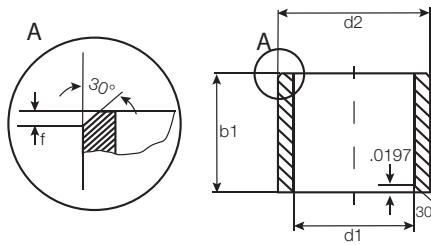


For tolerance values  
please refer to page 5.4

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Part Number	d1	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
				Max.	Min.	Max.	Min.
LSI-1011-16	5/8	23/32	1	.6280	.6253	.7192	.7184
LSI-1112-12	11/16	25/32	3/4	.6906	.6879	.7817	.7809
LSI-1214-08	3/4	7/8	1/2	.7541	.7507	.8755	.8747
LSI-1214-12	3/4	7/8	3/4	.7541	.7507	.8755	.8747
LSI-1214-16	3/4	7/8	1	.7541	.7507	.8755	.8747
LSI-1214-24	3/4	7/8	1 1/2	.7541	.7507	.8755	.8747
LSI-1416-04	7/8	1	1/4	.8791	.8757	1.0005	.9997
LSI-1416-06	7/8	1	3/8	.8791	.8757	1.0005	.9997
LSI-1416-08	7/8	1	1/2	.8791	.8757	1.0005	.9997
LSI-1416-10	7/8	1	5/8	.8791	.8757	1.0005	.9997
LSI-1416-12	7/8	1	3/4	.8791	.8757	1.0005	.9997
LSI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997
LSI-1416-24	7/8	1	1 1/2	.8791	.8757	1.0005	.9997
LSI-1618-06	1	1 1/8	3/8	1.0041	1.0007	1.1255	1.1247
LSI-1618-08	1	1 1/8	1/2	1.0041	1.0007	1.1255	1.1247
LSI-1618-12	1	1 1/8	3/4	1.0041	1.0007	1.1255	1.1247
LSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247
LSI-1618-20	1	1 1/8	1 1/4	1.0041	1.0007	1.1255	1.1247
LSI-1618-22	1	1 1/8	1 3/8	1.0041	1.0007	1.1255	1.1247
LSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1247
LSI-1820-12	1 1/8	1 9/32	3/4	1.1288	1.1254	1.2818	1.2808
LSI-2022-14	1 1/4	1 13/32	7/8	1.2548	1.2508	1.4068	1.4058
LSI-2022-16	1 1/4	1 13/32	1	1.2548	1.2508	1.4068	1.4058
LSI-2022-20	1 1/4	1 13/32	1 1/4	1.2548	1.2508	1.4068	1.4058
LSI-2022-24	1 1/4	1 13/32	1 1/2	1.2548	1.2508	1.4068	1.4058
LSI-2224-16	1 3/8	1 17/32	1	1.3798	1.3758	1.5318	1.5308
LSI-2224-24	1 3/8	1 17/32	1 1/2	1.3798	1.3758	1.5318	1.5308
LSI-2426-12	1 1/2	1 21/32	3/4	1.5048	1.5008	1.6568	1.6558
LSI-2426-16	1 1/2	1 21/32	1	1.5048	1.5008	1.6568	1.6558
LSI-2426-24	1 1/2	1 21/32	1 1/2	1.5048	1.5008	1.6568	1.6558
LSI-2426-44	1 1/2	1 21/32	2 3/4	1.5048	1.5008	1.6568	1.6558
LSI-2629-16	1 5/8	1 25/32	1	1.6297	1.6258	1.7818	1.7808
LSI-2629-20	1 5/8	1 25/32	1 1/4	1.6297	1.6258	1.7818	1.7808
LSI-2831-16	1 3/4	1 15/16	1	1.7547	1.7507	1.9381	1.9371
LSI-2831-24	1 3/4	1 15/16	1 1/2	1.7547	1.7507	1.9381	1.9371
LSI-2831-32	1 3/4	1 15/16	2	1.7547	1.7507	1.9381	1.9371
LSI-2831-48	1 3/4	1 15/16	3	1.7547	1.7507	1.9381	1.9371
LSI-3235-16	2	2 3/16	1	2.0057	2.0011	2.1883	2.1871
LSI-3235-24	2	2 3/16	1 1/2	2.0057	2.0011	2.1883	2.1871
LSI-3235-32	2	2 3/16	2	2.0057	2.0011	2.1883	2.1871
LSI-3639-32	2 1/4	2 7/16	2	2.2577	2.2531	2.4377	2.4365



For tolerance values  
please refer to page 5.4

$$r = \max . .0197$$

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
LFI-0203-03	1/8	3/16	3/16	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
LFI-0203-04	1/8	3/16	1/4	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
LFI-0203-06	1/8	3/16	3/8	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
LFI-0304-02	3/16	1/4	1/8	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
LFI-0304-04	3/16	1/4	1/4	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
LFI-0304-06	3/16	1/4	3/8	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
LFI-0304-08	3/16	1/4	1/2	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
LFI-0405-04	1/4	5/16	1/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
LFI-0405-05	1/4	5/16	5/16	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
LFI-0405-06	1/4	5/16	3/8	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
LFI-0405-08	1/4	5/16	1/2	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
LFI-0405-12	1/4	5/16	3/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
LFI-0506-04	5/16	3/8	1/4	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
LFI-0506-06	5/16	3/8	3/8	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
LFI-0506-08	5/16	3/8	1/2	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
LFI-0506-12	5/16	3/8	3/4	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
LFI-0607-04	3/8	15/32	1/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
LFI-0607-06	3/8	15/32	3/8	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
LFI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
LFI-0607-12	3/8	15/32	3/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
LFI-0607-14	3/8	15/32	7/8	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
LFI-0708-08	7/16	17/32	1/2	.750	.046	.4406	.4379	.5316	.5309	.4365	.4355
LFI-0809-04	1/2	19/32	1/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
LFI-0809-06	1/2	19/32	3/8	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
LFI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
LFI-0809-12	1/2	19/32	3/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
LFI-0809-16	1/2	19/32	1	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
LFI-1011-045	5/8	23/32	9/32	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
LFI-1011-08	5/8	23/32	1/2	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
LFI-1011-12	5/8	23/32	3/4	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
LFI-1011-16	5/8	23/32	1	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
LFI-1011-24	5/8	23/32	1 1/2	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
LFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
LFI-1214-10	3/4	7/8	5/8	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
LFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
LFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
LFI-1214-24	3/4	7/8	1 1/2	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
LFI-1416-04	7/8	1	1/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1416-075	7/8	1	15/32	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1416-08	7/8	1	1/2	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1416-115	7/8	1	23/32	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729

iglide® L280  
Flange - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+  
-  
1



inch

mm

# iglide® Plain Bearings

## L280 - Flange, Inch

iglide® L280  
Flange - Inch




For tolerance values  
please refer to page 5.4

r = max. .0197

Telephone 1-800-521-2747  
1-401-438-7270  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
LFI-1416-12	7/8	1	3/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1416-16	7/8	1	1	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1416-20	7/8	1	1 1/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1416-24	7/8	1	1 1/2	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-141618-08	7/8	1	1/2	1.125	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-141618-10	7/8	1	5/8	1.125	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-141620-11	7/8	1	11/16	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
LFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
LFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
LFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
LFI-1618-20	1	1 1/8	1 1/4	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
LFI-1618-24	1	1 1/8	1 1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
LFI-1620-08	1	1 1/4	1/2	1.500	.188	1.0041	1.0007	1.1255	1.1247	.9991	.9979
LFI-1820-08	1 1/8	1 9/32	1/2	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
LFI-1820-12	1 1/8	1 9/32	3/4	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
LFI-1820-24	1 1/8	1 9/32	1 1/2	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
LFI-2022-12	1 1/4	1 13/32	3/4	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
LFI-2022-14	1 1/4	1 13/32	7/8	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
LFI-2022-16	1 1/4	1 13/32	1	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
LFI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
LFI-2022-24	1 1/4	1 13/32	1 1/2	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
LFI-2224-16	1 3/8	1 17/32	1	1.875	.078	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
LFI-2426-12	1 1/2	1 21/32	3/4	2.000	.078	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
LFI-2426-16	1 1/2	1 21/32	1	2.000	.078	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
LFI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
LFI-2831-16	1 3/4	1 15/16	1	2.375	.093	1.7547	1.7507	1.9381	1.9371	1.7487	1.7471
LFI-2831-24	1 3/4	1 15/16	1 1/2	2.375	.093	1.7547	1.7507	1.9381	1.9371	1.7487	1.7471
LFI-2831-32	1 3/4	1 15/16	2	2.375	.093	1.7547	1.7507	1.9381	1.9371	1.7487	1.7471
LFI-3235-16	2	2 3/16	1	2.625	.093	2.0059	2.0012	2.1883	2.1871	1.9981	1.9969
LFI-3235-24	2	2 3/16	1 1/2	2.625	.093	2.0059	2.0012	2.1883	2.1871	1.9981	1.9969
LFI-3235-32	2	2 3/16	2	2.625	.093	2.0059	2.0012	2.1883	2.1871	1.9981	1.9969

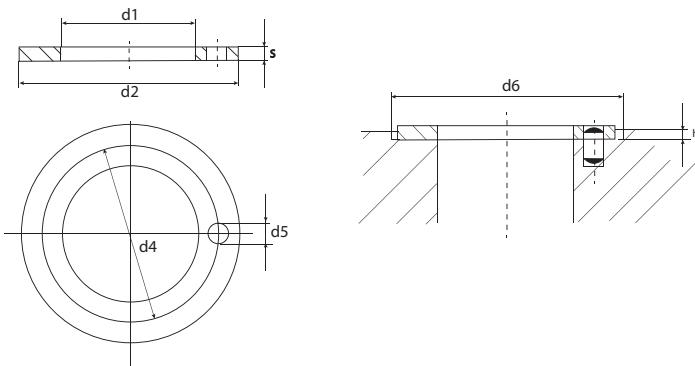

Part Number	d1 +.010	d2 -.010	s -.0020	d4 +- .005	d5 +.015 +.005	h +.008	d6 +.005
LTI-0610-01	.375	.625	.040	*	*	*	.625
LTI-0814-01	.500	.875	.0585	.692	.067	.040	.875
LTI-1018-01	.625	1.125	.0585	.880	.099	.040	1.125
LTI-1220-01	.750	1.250	.0585	1.005	.099	.040	1.250
LTI-1424-01	.875	1.500	.0585	1.192	.130	.040	1.500
LTI-1628-01	1.000	1.750	.0585	1.380	.130	.040	1.750
LTI-2034-01	1.250	2.125	.0585	1.692	.161	.040	2.125
LTI-2440-01	1.500	2.500	.0585	2.005	.192	.040	2.500
LTI-2844-01	1.750	2.750	.0585	2.255	.192	.040	2.750
LTI-3248-01	2.000	3.000	.0895	2.505	.192	.070	3.000

\*\* Designed without bore

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0  
+/-  
inch

inch

mm


# iglide® Plain Bearings

## L280 - Sleeve, MM

iglide® L280  
Sleeve - MM

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

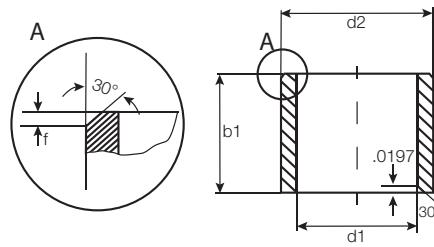

For tolerance values  
please refer to page 5.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1 h13	I.D. After Pressfit		Housing Bore		Shaft Size	
					Max.	Min.	Max.	Min.	Max.	Min.
LSM-0203-03	2.0	+0.014 +0.054	3.5	3.0	2.054	2.014	3.510	3.500	2.000	1.975
LSM-0204-03	2.5	+0.014 +0.054	4.0	3.0	2.554	2.514	4.012	4.000	2.500	2.475
LSM-0304-03	3.0	+0.014 +0.054	4.5	3.0	3.054	3.014	4.512	4.500	3.000	2.975
LSM-0304-05	3.0	+0.014 +0.054	4.5	5.0	3.054	3.014	4.512	4.500	3.000	2.975
LSM-0304-06	3.0	+0.014 +0.054	4.5	6.0	3.054	3.014	4.512	4.500	3.000	2.975
LSM-0405-04	4.0	+0.020 +0.068	5.5	4.0	4.068	4.020	5.512	5.500	4.000	3.970
LSM-0405-06	4.0	+0.020 +0.068	5.5	6.0	4.068	4.020	5.512	5.500	4.000	3.970
LSM-0405-08	4.0	+0.020 +0.068	5.5	8.0	4.068	4.020	5.512	5.500	4.000	3.970
LSM-0405-10	4.0	+0.020 +0.068	5.5	10.0	4.068	4.020	5.512	5.500	4.000	3.970
LSM-0507-05	5.0	+0.020 +0.068	7.0	5.0	5.068	5.020	7.015	7.000	5.000	4.970
LSM-0507-08	5.0	+0.020 +0.068	7.0	8.0	5.068	5.020	7.015	7.000	5.000	4.970
LSM-0507-10	5.0	+0.020 +0.068	7.0	10.0	5.068	5.020	7.015	7.000	5.000	4.970
LSM-0607-14	6.0	+0.010 +0.0408	7.0	14.0	6.040	6.010	7.015	7.000	6.000	5.970
LSM-0608-06	6.0	+0.020 +0.068	8.0	6.0	6.068	6.020	8.015	8.000	6.000	5.970
LSM-0608-08	6.0	+0.020 +0.068	8.0	8.0	6.068	6.020	8.015	8.000	6.000	5.970
LSM-0608-09	6.0	+0.020 +0.068	8.0	9.5	6.068	6.020	8.015	8.000	6.000	5.970
LSM-0608-10	6.0	+0.020 +0.068	8.0	10.0	6.068	6.020	8.015	8.000	6.000	5.970
LSM-0608-11	6.0	+0.020 +0.068	8.0	11.8	6.068	6.020	8.015	8.000	6.000	5.970
LSM-0608-13	6.0	+0.020 +0.068	8.0	13.8	6.068	6.020	8.015	8.000	6.000	5.970
LSM-0709-09	7.0	+0.025 +0.083	9.0	9.0	7.083	7.025	9.015	9.000	7.000	6.964
LSM-0709-12	7.0	+0.025 +0.083	9.0	12.0	7.083	7.025	9.015	9.000	7.000	6.964
LSM-0810-06	8.0	+0.025 +0.083	10.0	6.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-08	8.0	+0.025 +0.083	10.0	8.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-12	8.0	+0.025 +0.083	10.0	12.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-13	8.0	+0.025 +0.083	10.0	13.8	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-15	8.0	+0.025 +0.083	10.0	15.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-16	8.0	+0.025 +0.083	10.0	16.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-20	8.0	+0.025 +0.083	10.0	20.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0810-21	8.0	+0.025 +0.083	10.0	21.0	8.083	8.025	10.015	10.000	8.000	7.964
LSM-0911-06	9.0	+0.025 +0.083	11.0	6.0	9.083	9.025	11.018	11.000	9.000	8.964
LSM-1012-04	10.0	+0.025 +0.083	12.0	4.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-06	10.0	+0.025 +0.083	12.0	6.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-08	10.0	+0.025 +0.083	12.0	8.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-09	10.0	+0.025 +0.083	12.0	9.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-12	10.0	+0.025 +0.083	12.0	12.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-15	10.0	+0.025 +0.083	12.0	15.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-17	10.0	+0.025 +0.083	12.0	17.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-20	10.0	+0.025 +0.083	12.0	20.0	10.083	10.025	12.018	12.000	10.000	9.964
LSM-1012-25.5	10.0	+0.025 +0.083	12.0	25.5	10.083	10.025	12.018	12.000	10.000	9.964

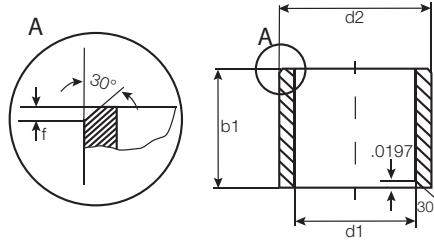

For tolerance values  
please refer to page 5.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore		Shaft Size		
		after pressfit in Ø H7		h13	Max.	Min.	Max.	Min.	Max.	
LSM-1113-08	11.0	+0.032 +0.102	13.0	8.0	11.102	11.032	13.018	13.000	11.000	10.957
LSM-1214-04	12.0	+0.032 +0.102	14.0	4.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-05	12.0	+0.032 +0.102	14.0	5.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-06	12.0	+0.032 +0.102	14.0	6.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-08	12.0	+0.032 +0.102	14.0	8.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-10	12.0	+0.032 +0.102	14.0	10.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-12	12.0	+0.032 +0.102	14.0	12.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-15	12.0	+0.032 +0.102	14.0	15.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-20	12.0	+0.032 +0.102	14.0	20.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1214-25	12.0	+0.032 +0.102	14.0	25.0	12.102	12.032	14.018	14.000	12.000	11.957
LSM-1315-07	13.0	+0.032 +0.102	15.0	7.0	13.102	13.032	15.018	15.000	13.000	12.957
LSM-1315-10	13.0	+0.032 +0.102	15.0	10.0	13.102	13.032	15.018	15.000	13.000	12.957
LSM-1315-15	13.0	+0.032 +0.102	15.0	15.0	13.102	13.032	15.018	15.000	13.000	12.957
LSM-1315-20	13.0	+0.032 +0.102	15.0	20.0	13.102	13.032	15.018	15.000	13.000	12.957
LSM-1416-07	14.0	+0.032 +0.102	16.0	7.5	14.102	14.032	16.018	16.000	14.000	13.957
LSM-1416-10	14.0	+0.032 +0.102	16.0	10.0	14.102	14.032	16.018	16.000	14.000	13.957
LSM-1416-15	14.0	+0.032 +0.102	16.0	15.0	14.102	14.032	16.018	16.000	14.000	13.957
LSM-1416-20	14.0	+0.032 +0.102	16.0	20.0	14.102	14.032	16.018	16.000	14.000	13.957
LSM-1416-25	14.0	+0.032 +0.102	16.0	25.0	14.102	14.032	16.018	16.000	14.000	13.957
LSM-1416-33	14.0	+0.032 +0.102	16.0	33.0	14.102	14.032	16.018	16.000	14.000	13.957
LSM-1517-10	15.0	+0.032 +0.102	17.0	10.0	15.102	15.032	17.018	17.000	15.000	14.957
LSM-1517-15	15.0	+0.032 +0.102	17.0	15.0	15.102	15.032	17.018	17.000	15.000	14.957
LSM-1517-20	15.0	+0.032 +0.102	17.0	20.0	15.102	15.032	17.018	17.000	15.000	14.957
LSM-1517-25	15.0	+0.032 +0.102	17.0	25.0	15.102	15.032	17.018	17.000	15.000	14.957
LSM-1618-07	16.0	+0.032 +0.102	18.0	7.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-08	16.0	+0.032 +0.102	18.0	8.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-11	16.0	+0.032 +0.102	18.0	11.5	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-12	16.0	+0.032 +0.102	18.0	12.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-15	16.0	+0.032 +0.102	18.0	15.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-20	16.0	+0.032 +0.102	18.0	20.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-25	16.0	+0.032 +0.102	18.0	25.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-30	16.0	+0.032 +0.102	18.0	30.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-35	16.0	+0.032 +0.102	18.0	35.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-42	16.0	+0.032 +0.102	18.0	42.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1618-45	16.0	+0.032 +0.102	18.0	45.0	16.102	16.032	18.018	18.000	16.000	15.957
LSM-1820-12	18.0	+0.032 +0.102	20.0	12.0	18.102	18.032	20.021	20.000	18.000	17.957
LSM-1820-15	18.0	+0.032 +0.102	20.0	15.0	18.102	18.032	20.021	20.000	18.000	17.957
LSM-1820-20	18.0	+0.032 +0.102	20.0	20.0	18.102	18.032	20.021	20.000	18.000	17.957
LSM-1820-25	18.0	+0.032 +0.102	20.0	25.0	18.102	18.032	20.021	20.000	18.000	17.957
LSM-1820-33	18.0	+0.032 +0.102	20.0	33.0	18.102	18.032	20.021	20.000	18.000	17.957
LSM-1820-35	18.0	+0.032 +0.102	20.0	35.0	18.102	18.032	20.021	20.000	18.000	17.957

iglide® L280  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-


1

inch

mm


**iglide® Plain Bearings  
L280 - Sleeve, MM**
**iglide® L280  
Sleeve - MM**
**Telephone 1-800-521-2747  
Fax 1-401-438-7270**

Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>

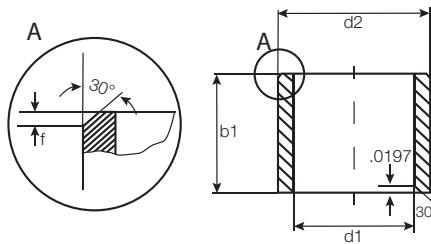
 For tolerance values  
please refer to page 5.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
LSM-1922-28	19.0	+0.040 +0.124	22.0	28.0	19.124	19.040	22.021	22.000	19.000	18.94
LSM-2022-11	20.0	+0.040 +0.124	22.0	11.5	20.124	20.040	22.021	22.000	20.000	19.948
LSM-2022-12	20.0	+0.040 +0.124	22.0	12.0	20.124	20.040	22.021	22.000	20.000	19.948
LSM-2022-15	20.0	+0.040 +0.124	22.0	15.0	20.124	20.040	22.021	22.000	20.000	19.948
LSM-2022-20	20.0	+0.040 +0.124	22.0	20.0	20.124	20.040	22.021	22.000	20.000	19.948
LSM-2022-30	20.0	+0.040 +0.124	22.0	30.0	20.124	20.040	22.021	22.000	20.000	19.948
LSM-2023-15	20.0	+0.040 +0.124	23.0	15.0	20.124	20.040	23.021	23.000	20.000	19.948
LSM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000	20.000	19.948
LSM-2023-23	20.0	+0.040 +0.124	23.0	23.0	20.124	20.040	23.021	23.000	20.000	19.948
LSM-2023-25	20.0	+0.040 +0.124	23.0	25.0	20.124	20.040	23.021	23.000	20.000	19.948
LSM-2023-30	20.0	+0.040 +0.124	23.0	30.0	20.124	20.040	23.021	23.000	20.000	19.948
LSM-2224-15	22.0	+0.040 +0.124	24.0	15.0	22.124	22.040	24.021	24.000	22.000	21.948
LSM-2224-20	22.0	+0.040 +0.124	24.0	20.0	22.124	22.040	24.021	24.000	22.000	21.948
LSM-2224-30	22.0	+0.040 +0.124	24.0	30.0	22.124	22.040	24.021	24.000	22.000	21.948
LSM-2224-35	22.0	+0.040 +0.124	24.0	35.0	22.124	22.040	24.021	24.000	22.000	21.948
LSM-2225-15	22.0	+0.040 +0.124	25.0	15.0	22.124	22.040	25.021	25.000	22.000	21.948
LSM-2225-20	22.0	+0.040 +0.124	25.0	20.0	22.124	22.040	25.021	25.000	22.000	21.948
LSM-2225-25	22.0	+0.040 +0.124	25.0	25.0	22.124	22.040	25.021	25.000	22.000	21.948
LSM-2225-30	22.0	+0.040 +0.124	25.0	30.0	22.124	22.040	25.021	25.000	22.000	21.948
LSM-2427-15	24.0	+0.040 +0.124	27.0	15.0	24.124	24.040	27.021	27.000	24.000	23.948
LSM-2427-20	24.0	+0.040 +0.124	27.0	20.0	24.124	24.040	27.021	27.000	24.000	23.948
LSM-2427-25	24.0	+0.040 +0.124	27.0	25.0	24.124	24.040	27.021	27.000	24.000	23.948
LSM-2427-30	24.0	+0.040 +0.124	27.0	30.0	24.124	24.040	27.021	27.000	24.000	23.948
LSM-2528-12	25.0	+0.040 +0.124	28.0	12.0	25.124	25.040	28.021	28.000	25.000	24.948
LSM-2528-14	25.0	+0.040 +0.124	28.0	14.0	25.124	25.040	28.021	28.000	25.000	24.948
LSM-2528-15	25.0	+0.040 +0.124	28.0	15.0	25.124	25.040	28.021	28.000	25.000	24.948
LSM-2528-20	25.0	+0.040 +0.124	28.0	20.0	25.124	25.040	28.021	28.000	25.000	24.948
LSM-2528-25	25.0	+0.040 +0.124	28.0	25.0	25.124	25.040	28.021	28.000	25.000	24.948
LSM-2528-30	25.0	+0.040 +0.124	28.0	30.0	25.124	25.040	28.021	28.000	25.000	24.948
LSM-2630-16	26.0	+0.040 +0.124	30.0	16.0	26.124	26.040	30.021	30.000	26.000	25.948
LSM-2630-25	26.0	+0.040 +0.124	30.0	25.0	26.124	26.040	30.021	30.000	26.000	25.948
LSM-2830-10	28.0	+0.040 +0.124	30.0	10.0	28.124	28.040	30.021	30.000	28.000	27.948
LSM-2831-10	28.0	+0.040 +0.124	31.0	10.0	28.124	28.040	31.025	31.000	28.000	27.948
LSM-2832-20	28.0	+0.040 +0.124	32.0	20.0	28.124	28.040	32.025	32.000	28.000	27.948
LSM-2832-25	28.0	+0.040 +0.124	32.0	25.0	28.124	28.040	32.025	32.000	28.000	27.948
LSM-2832-30	28.0	+0.040 +0.124	32.0	30.0	28.124	28.040	32.025	32.000	28.000	27.948
LSM-3034-16	30.0	+0.040 +0.124	34.0	16.0	30.124	30.040	34.025	34.000	30.000	29.948
LSM-3034-20	30.0	+0.040 +0.124	34.0	20.0	30.124	30.040	34.025	34.000	30.000	29.948
LSM-3034-24	30.0	+0.040 +0.124	34.0	24.0	30.124	30.040	34.025	34.000	30.000	29.948
LSM-3034-25	30.0	+0.040 +0.124	34.0	25.0	30.124	30.040	34.025	34.000	30.000	29.948

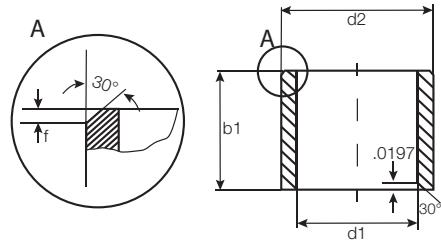

For tolerance values  
please refer to page 5.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
<b>LSM-3034-30</b>	30.0	+0.040 +0.124	34.0	30.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>LSM-3034-36</b>	30.0	+0.040 +0.124	34.0	36.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>LSM-3034-38</b>	30.0	+0.040 +0.124	34.0	38.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>LSM-3034-40</b>	30.0	+0.040 +0.124	34.0	40.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>LSM-3034-47</b>	30.0	+0.040 +0.124	34.0	47.0	30.124	30.040	34.025	34.000	30.000	29.948
<b>LSM-3236-20</b>	32.0	+0.050 +0.150	36.0	20.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>LSM-3236-25</b>	32.0	+0.050 +0.150	36.0	25.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>LSM-3236-30</b>	32.0	+0.050 +0.150	36.0	30.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>LSM-3236-40</b>	32.0	+0.050 +0.150	36.0	40.0	32.150	32.050	36.025	36.000	32.000	31.938
<b>LSM-3539-20</b>	35.0	+0.050 +0.150	39.0	20.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>LSM-3539-30</b>	35.0	+0.050 +0.150	39.0	30.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>LSM-3539-40</b>	35.0	+0.050 +0.150	39.0	40.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>LSM-3539-50</b>	35.0	+0.050 +0.150	39.0	50.0	35.150	35.050	39.025	39.000	35.000	34.938
<b>LSM-4044-20</b>	40.0	+0.050 +0.150	44.0	20.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>LSM-4044-30</b>	40.0	+0.050 +0.150	44.0	30.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>LSM-4044-40</b>	40.0	+0.050 +0.150	44.0	40.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>LSM-4044-50</b>	40.0	+0.050 +0.150	44.0	50.0	40.150	40.050	44.025	44.000	40.000	39.938
<b>LSM-4550-30</b>	45.0	+0.050 +0.150	50.0	30.0	45.150	45.050	50.025	50.000	45.000	44.938
<b>LSM-4550-50</b>	45.0	+0.050 +0.150	50.0	50.0	45.150	45.050	50.025	50.000	45.000	44.938
<b>LSM-5055-20</b>	50.0	+0.050 +0.150	55.0	20.0	50.150	50.050	55.030	55.000	50.000	49.938
<b>LSM-5055-30</b>	50.0	+0.050 +0.150	55.0	30.0	50.150	50.050	55.030	55.000	50.000	49.938
<b>LSM-5055-40</b>	50.0	+0.050 +0.150	55.0	40.0	50.150	50.050	55.030	55.000	50.000	49.938
<b>LSM-5055-50</b>	50.0	+0.050 +0.150	55.0	50.0	50.150	50.050	55.030	55.000	50.000	49.938
<b>LSM-5560-40</b>	55.0	+0.060 +0.180	60.0	40.0	55.180	55.060	60.030	60.000	55.000	54.926
<b>LSM-5560-60</b>	55.0	+0.060 +0.180	60.0	60.0	55.180	55.060	60.030	60.000	55.000	54.926
<b>LSM-6065-30</b>	60.0	+0.060 +0.180	65.0	30.0	60.180	60.060	65.030	65.000	60.000	59.926
<b>LSM-6065-60</b>	60.0	+0.060 +0.180	65.0	60.0	60.180	60.060	65.030	65.000	60.000	59.926
<b>LSM-6570-60</b>	65.0	+0.060 +0.180	70.0	60.0	65.180	65.060	70.030	70.000	65.000	64.926
<b>LSM-7075-60</b>	70.0	+0.060 +0.180	75.0	60.0	70.180	70.060	75.030	75.000	70.000	69.926
<b>LSM-7580-100</b>	75.0	+0.060 +0.180	80.0	100.0	75.180	75.060	80.030	80.000	75.000	74.926
<b>LSM-8085-100</b>	80.0	+0.060 +0.180	85.0	100.0	80.180	80.060	85.035	85.000	80.000	79.926
<b>LSM-9095-100</b>	90.0	+0.072 +0.212	95.0	100.0	90.212	90.072	95.035	95.000	90.000	89.913
<b>LSM-100105-100</b>	100.0	+0.072 +0.212	105.0	100.0	100.212	100.072	105.035	105.000	100.000	99.913

iglide® L280  
Sleeve - MM



PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

inch



mm


 For tolerance values  
 please refer to page 5.4

 $r = \text{max. } 0.5$ 

## Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max. Min.	Max. Min.
LFM-0304-03	3.0	+0.014 +0.054	4.5	7.5	3.0	0.75	3.054	3.014	4.512 4.500
LFM-0304-05	3.0	+0.014 +0.054	4.5	7.5	5.0	0.75	3.054	3.014	4.512 4.500
LFM-0405-03	4.0	+0.020 +0.068	5.5	9.5	3.0	0.75	4.068	4.020	5.512 5.500
LFM-0405-04	4.0	+0.020 +0.068	5.5	9.5	4.0	0.75	4.068	4.020	5.512 5.500
LFM-0405-06	4.0	+0.020 +0.068	5.5	9.5	6.0	0.75	4.068	4.020	5.512 5.500
LFM-0506-08	5.0	+0.010 +0.040	6.0	10.0	8.0	0.5	5.040	5.010	6.012 6.000
LFM-0507-04	5.0	+0.020 +0.068	7.0	11.0	4.0	1.0	5.068	5.020	7.015 7.000
LFM-0507-05	5.0	+0.020 +0.068	7.0	11.0	5.0	1.0	5.068	5.020	7.015 7.000
LFM-0608-04	6.0	+0.020 +0.068	8.0	12.0	4.0	1.0	6.068	6.020	8.015 8.000
LFM-0608-06	6.0	+0.020 +0.068	8.0	12.0	6.0	1.0	6.068	6.020	8.015 8.000
LFM-0608-08	6.0	+0.020 +0.068	8.0	12.0	8.0	1.0	6.068	6.020	8.015 8.000
LFM-0608-10	6.0	+0.020 +0.068	8.0	12.0	10.0	1.0	6.068	6.020	8.015 8.000
LFM-0608-15	6.0	+0.020 +0.068	8.0	12.0	15.0	1.0	6.068	6.020	8.015 8.000
LFM-0709-12	7.0	+0.025 +0.083	9.0	15.0	12.0	1.0	7.083	7.025	9.015 9.000
LFM-0810-02	8.0	+0.025 +0.083	10.0	15.0	2.7	1.0	8.083	8.025	10.015 10.000
LFM-0810-05	8.0	+0.025 +0.083	10.0	15.0	5.5	1.0	8.083	8.025	10.015 10.000
LFM-0810-07	8.0	+0.025 +0.083	10.0	15.0	7.5	1.0	8.083	8.025	10.015 10.000
LFM-0810-09	8.0	+0.025 +0.083	10.0	15.0	9.5	1.0	8.083	8.025	10.015 10.000
LFM-0810-10	8.0	+0.025 +0.083	10.0	15.0	10.0	1.0	8.083	8.025	10.015 10.000
LFM-0810-23	8.0	+0.025 +0.083	10.0	15.0	23.0	1.0	8.083	8.025	10.015 10.000
LFM-0810-30	8.0	+0.025 +0.083	10.0	15.0	30.0	1.0	8.083	8.025	10.015 10.000
LFM-081015-05	8.0	+0.025 +0.083	10.0	15.0	5.0	1.0	8.083	8.025	10.015 10.000
LFM-1012-04	10.0	+0.025 +0.083	12.0	18.0	4.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-05	10.0	+0.025 +0.083	12.0	18.0	5.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-06	10.0	+0.025 +0.083	12.0	18.0	6.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-07	10.0	+0.025 +0.083	12.0	18.0	7.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-09	10.0	+0.025 +0.083	12.0	18.0	9.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-10	10.0	+0.025 +0.083	12.0	18.0	10.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-12	10.0	+0.025 +0.083	12.0	18.0	12.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-15	10.0	+0.025 +0.083	12.0	18.0	15.0	1.0	10.083	10.025	12.018 12.000
LFM-1012-17	10.0	+0.025 +0.083	12.0	18.0	17.0	1.0	10.083	10.025	12.018 12.000
LFM-1214-04	12.0	+0.032 +0.102	14.0	20.0	4.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-06	12.0	+0.032 +0.102	14.0	20.0	6.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-07	12.0	+0.032 +0.102	14.0	20.0	7.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-09	12.0	+0.032 +0.102	14.0	20.0	9.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-10	12.0	+0.032 +0.102	14.0	20.0	10.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-11	12.0	+0.032 +0.102	14.0	20.0	11.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-12	12.0	+0.032 +0.102	14.0	20.0	12.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-15	12.0	+0.032 +0.102	14.0	20.0	15.0	1.0	12.102	12.032	14.018 14.000



For tolerance values  
please refer to page 5.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.
LFM-1214-17	12.0	+0.032 +0.102	14.0	20.0	17.0	1.0	12.102	12.032	14.018 14.000
LFM-1214-20	12.0	+0.032 +0.102	14.0	20.0	20.0	1.0	12.102	12.032	14.018 14.000
LFM-1315-06	13.0	+0.032 +0.102	15.0	22.0	6.0	1.0	13.102	13.032	15.018 15.000
LFM-1416-04	14.0	+0.032 +0.102	16.0	22.0	4.0	1.0	14.102	14.032	16.018 16.000
LFM-1416-05	14.0	+0.032 +0.102	16.0	22.0	5.0	1.0	14.102	14.032	16.018 16.000
LFM-1416-08	14.0	+0.032 +0.102	16.0	22.0	8.0	1.0	14.102	14.032	16.018 16.000
LFM-1416-12	14.0	+0.032 +0.102	16.0	22.0	12.0	1.0	14.102	14.032	16.018 16.000
LFM-1416-17	14.0	+0.032 +0.102	16.0	22.0	17.0	1.0	14.102	14.032	16.018 16.000
LFM-1416-29	14.0	+0.032 +0.102	16.0	22.0	29.0	1.0	14.102	14.032	16.018 16.000
LFM-1517-09	15.0	+0.032 +0.102	17.0	23.0	9.0	1.0	15.102	15.022	17.018 17.000
LFM-1517-12	15.0	+0.032 +0.102	17.0	23.0	12.0	1.0	15.102	15.022	17.018 17.000
LFM-1517-17	15.0	+0.032 +0.102	17.0	23.0	17.0	1.0	15.102	15.022	17.018 17.000
LFM-1517-20	15.0	+0.032 +0.102	17.0	23.0	20.0	1.0	15.102	15.022	17.018 17.000
LFM-1618-09	16.0	+0.032 +0.102	18.0	24.0	9.0	1.0	16.102	16.032	18.018 18.000
LFM-1618-12	16.0	+0.032 +0.102	18.0	24.0	12.0	1.0	16.102	16.032	18.018 18.000
LFM-1618-17	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102	16.032	18.018 18.000
LFM-1719-12	17.0	+0.032 +0.102	19.0	25.0	12.0	1.0	17.102	17.032	19.021 19.000
LFM-1719-18	17.0	+0.032 +0.102	19.0	25.0	18.0	1.0	17.102	17.032	19.021 19.000
LFM-1719-25	17.0	+0.032 +0.102	19.0	25.0	25.0	1.0	17.102	17.032	19.021 19.000
LFM-1820-06	18.0	+0.032 +0.102	20.0	26.0	6.0	1.0	18.102	18.032	20.021 20.000
LFM-1820-12	18.0	+0.032 +0.102	20.0	26.0	12.0	1.0	18.102	18.032	20.021 20.000
LFM-1820-17	18.0	+0.032 +0.102	20.0	26.0	17.0	1.0	18.102	18.032	20.021 20.000
LFM-1820-22	18.0	+0.032 +0.102	20.0	26.0	22.0	1.0	18.102	18.032	20.021 20.000
LFM-2023-11	20.0	+0.040 +0.124	23.0	23.0	11.0	1.5	20.124	20.040	23.021 23.000
LFM-2023-14	20.0	+0.040 +0.124	23.0	30.0	14.5	1.5	20.124	20.040	23.021 23.000
LFM-2023-16	20.0	+0.040 +0.124	23.0	30.0	16.0	1.5	20.124	20.040	23.021 23.000
LFM-2023-21	20.0	+0.040 +0.124	23.0	30.0	21.0	1.5	20.124	20.040	23.021 23.000
LFM-2427-10	24.0	+0.040 +0.124	27.0	32.0	10.5	1.5	24.124	24.040	27.021 27.000
LFM-2528-11	25.0	+0.040 +0.124	28.0	35.0	11.0	1.5	25.124	25.040	28.021 28.000
LFM-2528-16	25.0	+0.040 +0.124	28.0	35.0	16.5	1.5	25.124	25.040	28.021 28.000
LFM-2528-21	25.0	+0.040 +0.124	28.0	35.0	21.5	1.5	25.124	25.040	28.021 28.000
LFM-2528-30	25.0	+0.040 +0.124	28.0	35.0	30.0	1.5	25.124	25.040	28.021 28.000
LFM-252831-13	25.0	+0.040 +0.124	28.0	31.0	13.0	1.5	25.124	25.040	28.021 28.000
LFM-2830-36	28.0	+0.040 +0.124	30.0	35.0	36.0	1.0	28.124	28.040	30.025 30.000
LFM-3034-10	30.0	+0.040 +0.124	34.0	42.0	10.0	2.0	30.124	30.040	34.025 34.000
LFM-3034-16	30.0	+0.040 +0.124	34.0	42.0	16.0	2.0	30.124	30.040	34.025 34.000
LFM-3034-26	30.0	+0.040 +0.124	34.0	42.0	26.0	2.0	30.124	30.040	34.025 34.000
LFM-3034-37	30.0	+0.040 +0.124	34.0	42.0	37.0	2.0	30.124	30.040	34.025 34.000
LFM-3236-16	32.0	+0.050 +0.150	36.0	40.0	16.0	2.0	32.150	32.050	36.025 36.000
LFM-3236-26	32.0	+0.050 +0.150	36.0	40.0	26.0	2.0	32.150	32.050	36.025 36.000
LFM-3539-09	35.0	+0.050 +0.150	39.0	47.0	9.0	2.0	35.150	35.050	39.025 39.000
									35.000 34.938

iglide® L280  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



+

-

1

inch

mm




For tolerance values  
please refer to page 5.4

$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup> After Pressfit in Ø H7	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore		Shaft Size		
			d13	h13	-0.14	Max.	Min.	Max.	Min.	Max.	Min.	
LFM-3539-16	35.0	+0.050 +0.150	39.0	47.0	16.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
LFM-3539-26	35.0	+0.050 +0.150	39.0	47.0	26.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
LFM-353950-35	35.0	+0.050 +0.150	39.0	50.0	35.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
LFM-3842-22	38.0	+0.050 +0.150	42.0	50.0	22.0	2.0	38.150	38.050	42.025	42.000	38.000	37.938
LFM-4044-30	40.0	+0.050 +0.150	44.0	52.0	30.0	2.0	40.150	40.050	44.025	44.000	40.000	39.938
LFM-4044-40	40.0	+0.050 +0.150	44.0	52.0	40.0	2.0	40.150	40.050	44.025	44.000	40.000	39.938
LFM-4550-50	45.0	+0.050 +0.150	50.0	58.0	50.0	2.0	45.150	45.050	50.025	50.000	45.000	44.938
LFM-5055-40	50.0	+0.050 +0.150	55.0	63.0	40.0	2.0	50.150	50.050	55.030	55.000	50.000	49.938
LFM-5055-50	50.0	+0.050 +0.150	55.0	63.0	50.0	2.0	50.150	50.050	55.030	55.000	50.000	49.938
LFM-5560-60	55.0	+0.060 +0.180	60.0	68.0	60.0	2.0	55.180	55.060	60.030	60.000	55.000	54.926
LFM-5762-40	57.0	+0.060 +0.180	62.0	67.0	40.0	2.0	57.180	57.060	62.030	62.000	57.000	57.926
LFM-6065-60	60.0	+0.060 +0.180	65.0	73.0	60.0	2.0	60.180	60.060	65.030	65.000	60.000	59.926
LFM-6570-60	65.0	+0.060 +0.180	70.0	78.0	60.0	2.0	65.180	65.060	70.030	70.000	65.000	64.926
LFM-7075-100	70.0	+0.060 +0.180	75.0	83.0	100.0	2.0	70.180	70.060	75.030	75.000	70.000	69.926
LFM-7580-100	75.0	+0.060 +0.180	80.0	88.0	100.0	2.0	75.180	75.060	80.030	80.000	75.000	74.926
LFM-8085-100	80.0	+0.060 +0.180	85.0	93.0	100.0	2.5	80.180	80.060	85.035	85.000	80.000	79.926
LFM-9095-100	90.0	+0.072 +0.212	95.0	103.0	100.0	2.5	90.212	90.072	95.035	95.000	90.000	90.913
LFM-100105-100	100.0	+0.072 +0.212	105.0	113.0	100.0	2.5	100.212	100.072	105.035	105.000	100.000	99.913
LFM-120125-100	120.0	+0.072 +0.212	125.0	133.0	100.0	2.5	120.212	120.072	125.035	125.000	120.000	119.900

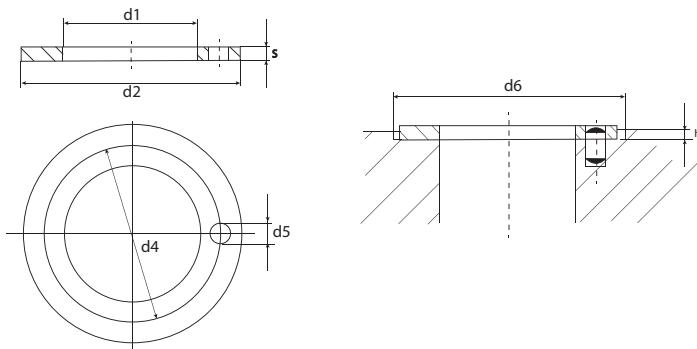


Part Number	d1 +0.25	d2 -0.25	s -0.05	d4 -0.12 +0.12	d5 +0.375 +0.125	h +0.2 -0.2	d6 +0.12
LTM-0509-006	5.0	9.5	0.6	*	*	.3	9.5
LTM-0620-015	6.0	20.0	1.5	13.0	1.5	1.0	20.0
LTM-0818-015	8.0	18.0	1.5	13.0	1.5	1.0	18.0
LTM-1018-010	10.0	18.0	1.0	*	*	.7	18.0
LTM-1018-015	10.0	18.0	1.5	*	*	.7	18.0
LTM-1224-015	12.0	24.0	1.5	18.0	1.5	1.0	24.0
LTM-1426-015	14.0	26.0	1.5	20.0	2.0	1.0	26.0
LTM-1524-015	15.0	24.0	1.5	19.5	1.5	1.0	24.0
LTM-1630-015	16.0	30.0	1.5	23.0	2.0	1.0	30.0
LTM-1832-015	18.0	32.0	1.5	25.0	2.0	1.0	32.0
LTM-2036-015	20.0	36.0	1.5	28.0	3.0	1.0	36.0
LTM-2238-015	22.0	38.0	1.5	30.0	3.0	1.0	38.0
LTM-2442-015	24.0	42.0	1.5	33.0	3.0	1.0	42.0
LTM-2644-015	26.0	44.0	1.5	35.0	3.0	1.0	44.0
LTM-2848-015	28.0	48.0	1.5	38.0	4.0	1.0	48.0
LTM-3254-015	32.0	54.0	1.5	43.0	4.0	1.0	54.0
LTM-3862-015	38.0	62.0	1.5	50.0	4.0	1.0	62.0
LTM-4266-015	42.0	66.0	1.5	54.0	4.0	1.0	66.0
LTM-4874-020	48.0	74.0	2.0	61.0	4.0	1.5	74.0
LTM-5278-020	52.0	78.0	2.0	65.0	4.0	1.5	78.0
LTM-6290-020	62.0	90.0	2.0	76.0	4.0	1.5	90.0
LTM-82110-020	82.0	110.0	2.0	*	*	1.5	110.0
LTM-102130-020	102.0	130.0	2.0	*	*	1.5	130.0
LTM-120150-020	120.0	150.0	2.0	*	*	1.5	150.0

\* Design without bore


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch



mm

L280



## iglide® Plain Bearings L280 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

5.20

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® L280

**igus®**



**iglide® G300**

# iglide® Plain Bearings G300 - Technical Data


## Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 3 in.  
Metric sizes from 1.5 - 150 mm

## Part Number Structure

### Part Number Structure

**G S I-02 03-03**

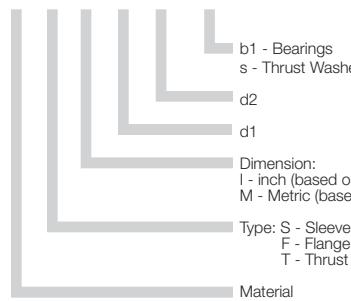

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	787	984

## Usage Guidelines



- When you need an economical all-around performance bearing
- For above average loads
- For low to average running speeds
- When the bearing needs to run on different shaft materials
- For oscillating and rotating movements



- When mechanical reaming of the wall surface is necessary
  - iglide® M250
- When the highest wear resistance is necessary
  - iglide® L280
- If temperatures are constantly greater than +266°F
  - iglide® T500, F, Z



## Material Data

General Properties	Unit	iglide® G300	Testing Method
Density	g/cm³	1.46	
Color		dark gray	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.7	DIN 53495
Max. moisture absorption	% weight	4.0	
Coefficient of friction, dynamic against steel	$\mu$	0.08 - 0.15	
p x v-value, max. (dry)	psi x fpm	12,000	

## Mechanical Properties


Modulus of elasticity	psi	1,131,000	DIN 53457
Tensile strength at 68°F	psi	30,460	DIN 53452
Compressive strength	psi	11,310	
Max. static surface pressure (68°F)	psi	11,600	
Shore D-hardness		81	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	266	
Max. short-term application temperature	°F	428	
Min. application temperature	°F	-40	
Thermal conductivity	(W/m x K)	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	(K⁻¹ x 10⁻⁵)	9	DIN 53752

## Electrical Properties

Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹¹	DIN 53482

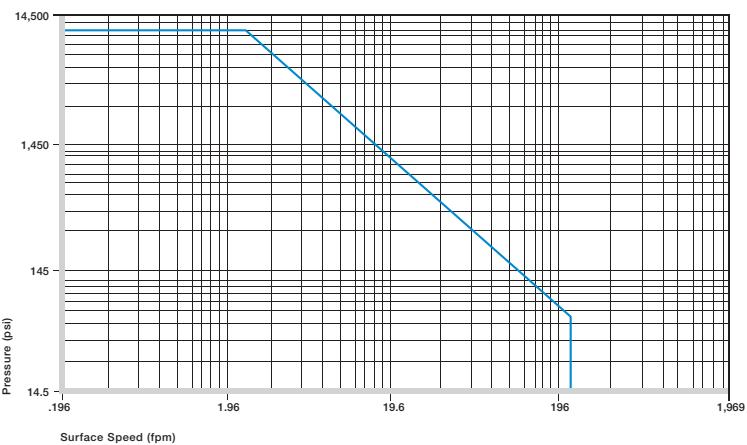


Permissible p x v - values for iglide® G300 running dry against a steel shaft, at 68°F

Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

## Compressive Strength

The graph shows the elastic deformation of iglide® G300 during radial loading. At the maximum permissible load of 11,600 psi, the deformation is less than 5%. The plastic deformation is minimal up to a pressure of approximately 14,500 psi. However, it is also a result of the cycle time.

- Compressive Strength, Page 1.3

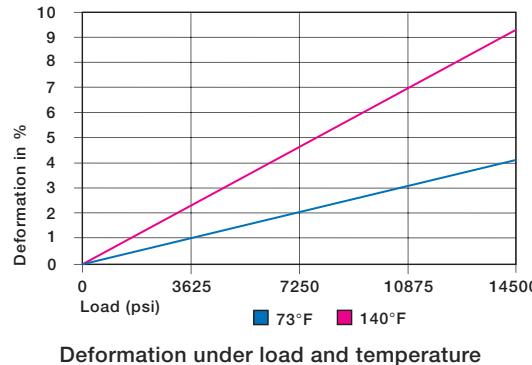

## Permissible Surface Speeds

iglide® G300 has been developed for low to medium surface speeds. The maximum values shown in the table can only be achieved at low pressure loads. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this temperature level is rarely reached, due to varying application conditions.

- Surface speed, Page 1.5
- p x v Value, Page 1.6

## Temperatures

Application temperatures affect the properties of plain bearings greatly. The short-term maximum temperature is 428°F, this allows the use of iglide® G300 plain bearings in heat treating applications in which the bearings are not subjected to additional loading.

With increasing temperatures, the compressive strength of iglide® G300 plain bearings decreases. The graph shows this inverse relationship. However, at the long-term maximum temperature of 266°F, the permissible surface pressure is still above 5,800 psi. The ambient temperatures that are prevalent in applications also has an effect on the bearing wear. With increasing temperatures, the wear increases and this effect is notable starting at the temperature of 248°F.

- Application Temperatures, Page 1.7


iglide® G300	Application Temperature
Minimum	-40 °F
Max. long-term	+266 °F
Max. short-term	+428 °F
Additional axial securing	+212°F

Temperature limits for iglide® G300

	Continuous fpm	Short Term fpm
--	----------------	----------------


Rotating	196	393
Oscillating	137	275
Linear	787	984

Maximum running speed

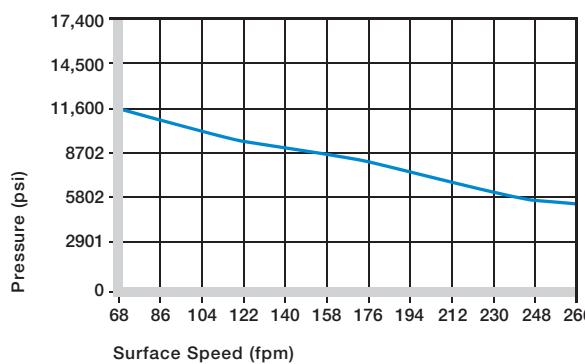

Recommended maximum permissible static surface pressure of iglide® G300 as a result of temperature


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

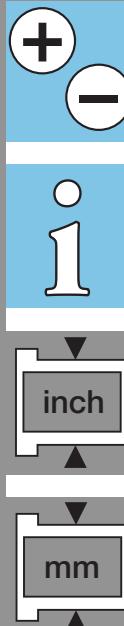

## Installation Tolerances

iglide® G300 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

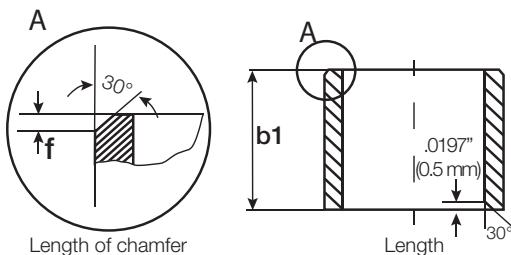

### For Inch Size Bearings

Length (inches)	Length Tolerance (b1)	Length of Chamfer (f) Based on d1
Tolerance (h13) (inches)		
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

### For Metric Size Bearings


Length (mm)	Length Tolerance (b1)	Length of Chamfer (f) Based on d1
Tolerance (h13) (μm)		
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. The coefficient of friction decreases with increasing loads, whereas an increase in surface speed causes an increase of the coefficient of friction. This relationship explains the excellent results of iglide® G300 plain bearings for high loads and low speeds.

The friction and wear are also dependent, to a large degree, on the shaft partner. Shafts that are too smooth, increase both the coefficient of friction and the wear of the bearing. For iglide® G300, a ground surface with an average roughness Ra= 32 rms is recommended.


- Coefficients of friction and surfaces, Page 1.8
- Wear Resistance, Page 1.9

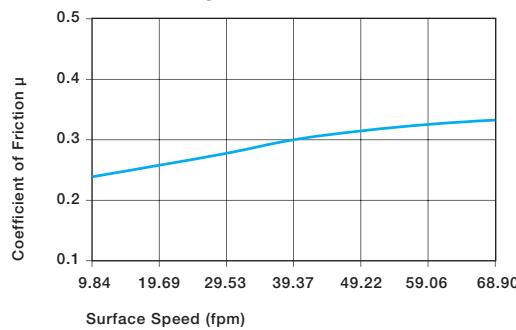


Coefficient of friction of iglide® G300 as a result of the running speed; p = 108 psi

iglide® G300	Coefficient of Friction
Dry	0.08 - 0.15
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction for iglide® G300 against steel  
(Shaft finish = 40 rms, 50 HRC)

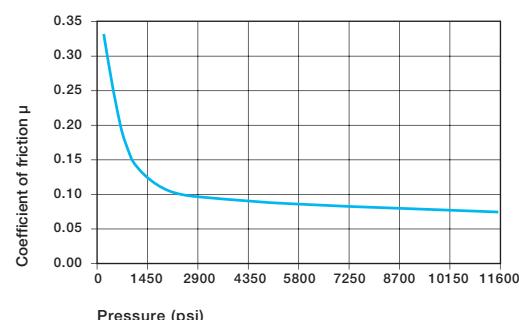

Coefficient of friction of iglide® G300 as a result of the load, v = 1.96 fpm

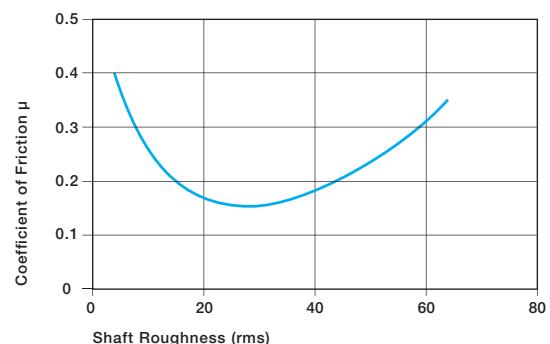

Coefficient of friction as result of the shaft surface  
(Shaft - 1050 hard chromed)

## Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® G300.

In the graph below it is observed that iglide® G300 can be combined with various shaft materials. The simple shaft materials of free-cutting steel and HR Carbon Steel have proven best at low loads. This helps to design cost-effective systems, since both iglide® G300 and the sliding partner are economically priced.


It is important to note that with increasing loads, the recommended hardness of the shaft increases. The "soft" shafts tend to wear more easily and thus increase the wear of the overall system. If the loads exceed 290 psi, it is important to recognize that the wear rate (the slope of the curves) clearly decreases with the hard shaft materials.

The comparison of rotational movements to oscillating movements shows that iglide® G300 can provide advantages in oscillating movements. The wear of the bearing is smaller for equivalent conditions. The higher the load, the larger the difference. This means that iglide® G300 can be used for oscillating movements that are well above the given maximum load of 11,600 psi. For these loads, the use of hardened shafts is recommended. In addition to the shaft materials presented here, many others have been tested. If the shaft material you plan on using is not contained in the test results presented here, please contact us.


► Shaft Materials, Page 1.11

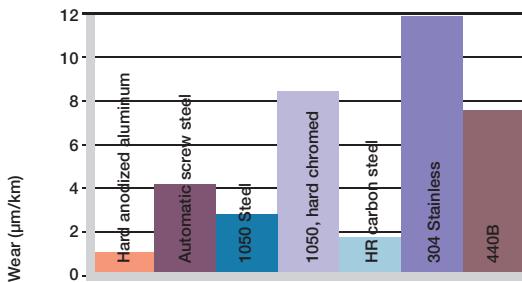

Wear of iglide® G300, rotating with different shaft materials, load p = 145 psi, v = 59 fpm

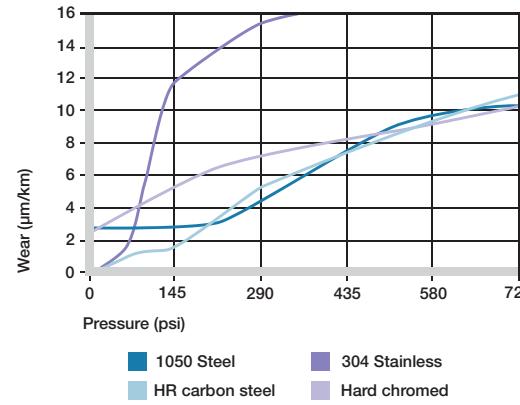

Wear with different shaft materials in rotational operation, as a result of the load

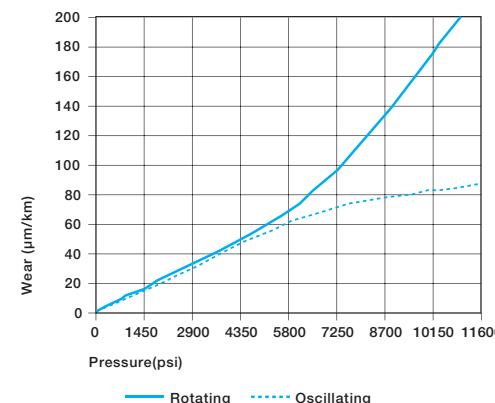

Wear for pivoting and rotating applications with shaft material 1050 hard chromed, as a result of the load

## Chemical & Moisture Resistance

iglide® G300 plain bearings have strong resistance to chemicals. They are also resistant to most lubricants.

iglide® G300 plain bearings are not affected by most weak organic and inorganic acids.


The moisture absorption of iglide® G300 plain bearings is approximately 1% in the standard atmosphere. The saturation limit submerged in water is 4%. This must be taken into account for these types of applications.

► Chemicals Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbon	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	0
+ resistant, 0 conditionally resistant, - not resistant	


### Chemical resistance of iglide® G300

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

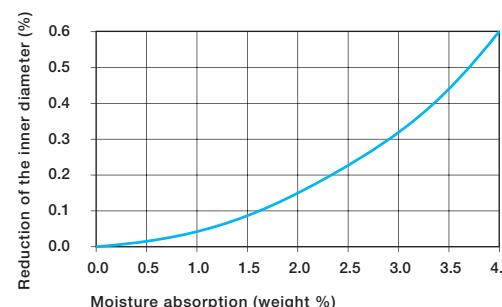

Effect of moisture absorption on iglide® G300 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0  
inch



mm  
inch

**Radiation Resistance**

Plain bearings made from iglide® G300 are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

**UV Resistance**

iglide® G300 plain bearings are permanently resistant to UV-radiation.

**Vacuum**

iglide® G300 plain bearings outgas in a vacuum. Use in a vacuum environment is only possible for dehumidified bearings.

**Electrical Properties**

iglide® G300 plain bearings are electrically insulating.

**iglide® G300**

Specific volume resistance	> $10^{13}$ Ωcm
----------------------------	-----------------

Surface resistance	> $10^{11}$ Ω
--------------------	---------------

Electrical properties of iglide® G300

**Application Examples**

Reliable under high load, wear-resistant during continuous rotational use



Tested at a load of 4046 lbs for 10,000 cycles, resulted in no measurable wear



The pneumatic rotational drive unit in steam lines at temperatures up to 275°F



Vibrations, dirt, and temperatures up to 266°F characterize the area surrounding the engine



Conveyor chains: Through edge loading, short-term surface pressures of over 7,250 psi can occur




iglide® G300 plain bearings have proven themselves in control levers and pedals of farm tractors and construction vehicles

# iglide® Plain Bearings

## G300 - Sleeve Bearing, Inch

**igus®**

**G300**

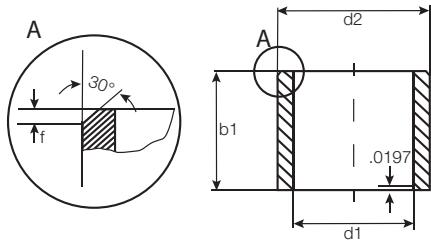


For tolerance values  
please refer to page 6.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
GSI-0203-03	1/8	3/16	3/16	.1269	.1251	.1878	.1873	.1243	.1236
GSI-0203-04	1/8	3/16	1/4	.1269	.1251	.1878	.1873	.1243	.1236
GSI-0203-06	1/8	3/16	3/8	.1269	.1251	.1878	.1873	.1243	.1236
GSI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497	.1865	.1858
GSI-0304-06	3/16	1/4	3/8	.1892	.1873	.2503	.2497	.1865	.1858
GSI-0304-08	3/16	1/4	1/2	.1892	.1873	.2503	.2497	.1865	.1858
GSI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490	.2481
GSI-0405-05	1/4	5/16	5/16	.2521	.2498	.3128	.3122	.2490	.2481
GSI-0405-06	1/4	5/16	3/8	.2521	.2498	.3128	.3122	.2490	.2481
GSI-0405-08	1/4	5/16	1/2	.2521	.2498	.3128	.3122	.2490	.2481
GSI-0405-10	1/4	5/16	5/8	.2521	.2498	.3128	.3122	.2490	.2481
GSI-0405-12	1/4	5/16	3/4	.2521	.2498	.3128	.3122	.2490	.2481
GSI-0506-04	5/16	3/8	1/4	.3148	.3125	.3753	.3747	.3115	.3106
GSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
GSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747	.3115	.3106
GSI-0506-12	5/16	3/8	3/4	.3148	.3125	.3753	.3747	.3115	.3106
GSI-0607-04	3/8	15/32	1/4	.3773	.3750	.4691	.4684	.3740	.3731
GSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684	.3740	.3731
GSI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684	.3740	.3731
GSI-0607-12	3/8	15/32	3/4	.3773	.3750	.4691	.4684	.3740	.3731
GSI-0608-08	3/8	1/2	1/2	.3783	.3760	.5015	.5010	.3750	.3741
GSI-0608-12	3/8	1/2	3/4	.3783	.3760	.5015	.5010	.3750	.3741
GSI-0708-04	7/16	17/32	1/4	.4406	.4379	.5316	.5309	.4365	.4355
GSI-0708-08	7/16	17/32	1/2	.4406	.4379	.5316	.5309	.4365	.4355
GSI-0809-03	1/2	19/32	3/16	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-04	1/2	19/32	1/4	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-06	1/2	19/32	3/8	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-10	1/2	19/32	5/8	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-14	1/2	19/32	7/8	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0809-16	1/2	19/32	1	.5030	.5003	.5941	.5934	.4990	.4980
GSI-0810-08	1/2	5/8	1/2	.5040	.5013	.6260	.6250	.5000	.4990
GSI-0810-12	1/2	5/8	3/4	.5040	.5013	.6260	.6250	.5000	.4990
GSI-0910-06	9/16	21/32	3/8	.5655	.5627	.6566	.6559	.5615	.5605
GSI-0910-08	9/16	21/32	1/2	.5655	.5627	.6566	.6559	.5615	.5605
GSI-0910-10	9/16	21/32	5/8	.5655	.5627	.6566	.6559	.5615	.5605
GSI-1011-06	5/8	23/32	3/8	.6280	.6253	.7192	.7184	.6240	.6230
GSI-1011-08	5/8	23/32	1/2	.6280	.6253	.7192	.7184	.6240	.6230
GSI-1011-10	5/8	23/32	5/8	.6280	.6253	.7192	.7184	.6240	.6230
GSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240	.6230
GSI-1011-16	5/8	23/32	1	.6280	.6253	.7192	.7184	.6240	.6230

iglide® G300  
Sleeve - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch




mm

# iglide® Plain Bearings

## G300 - Sleeve Bearing, Inch

iglide® G300  
Sleeve - Inch

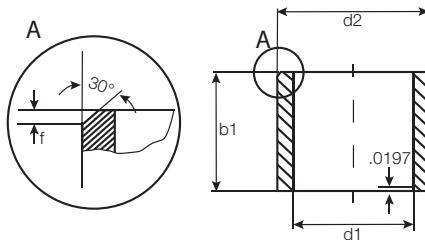


For tolerance values  
please refer to page 6.4

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>




Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore Max.	Housing Bore Min.	Shaft Size	
				Max.	Min.			Max.	Min.
GSI-1011-20	5/8	23/32	1 1/4	.6280	.6253	.7192	.7184	.6240	.6230
GSI-1011-30	5/8	23/32	1 7/8	.6280	.6253	.7192	.7184	.6240	.6230
GSI-1012-08	5/8	3/4	1/2	.6280	.6253	.7508	.7500	.6250	.6233
GSI-1012-16	5/8	3/4	1	.6280	.6253	.7508	.7500	.6250	.6233
GSI-1112-14	11/16	25/32	7/8	.6906	.6879	.7817	.7809	.6865	.6855
GSI-1214-02	3/4	7/8	1/8	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1214-06	3/4	7/8	3/8	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1214-08	3/4	7/8	1/2	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1214-12	3/4	7/8	3/4	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1214-16	3/4	7/8	1	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1214-20	3/4	7/8	1 1/4	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1214-24	3/4	7/8	1 1/2	.7541	.7508	.8755	.8747	.7491	.7479
GSI-1416-06	7/8	1	3/8	.8791	.8757	1.0005	.9997	.8741	.8729
GSI-1416-08	7/8	1	1/2	.8791	.8757	1.0005	.9997	.8741	.8729
GSI-1416-10	7/8	1	5/8	.8791	.8757	1.0005	.9997	.8741	.8729
GSI-1416-12	7/8	1	3/4	.8791	.8757	1.0005	.9997	.8741	.8729
GSI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997	.8741	.8729
GSI-1416-24	7/8	1	1 1/2	.8791	.8757	1.0005	.9997	.8741	.8729
GSI-1618-08	1	1 1/8	1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GSI-1618-12	1	1 1/8	3/4	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GSI-1618-20	1	1 1/8	1 1/4	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GSI-1618-33	1	1 1/8	2 1/16	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GSI-1820-12	1 1/8	1 9/32	3/4	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
GSI-1820-20	1 1/8	1 9/32	1 1/4	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
GSI-1820-24	1 1/8	1 9/32	1 1/2	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
GSI-2022-12	1 1/4	1 13/32	3/4	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GSI-2022-14	1 1/4	1 13/32	7/8	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GSI-2022-16	1 1/4	1 13/32	1	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GSI-2022-20	1 1/4	1 13/32	1 1/4	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GSI-2022-24	1 1/4	1 13/32	1 1/2	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GSI-2224-16	1 3/8	1 17/32	1	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
GSI-2224-24	1 3/8	1 17/32	1 1/2	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
GSI-2224-26	1 3/8	1 17/32	1 5/8	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
GSI-2426-06	1 1/2	1 21/32	3/8	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
GSI-2426-07	1 1/2	1 21/32	7/16	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
GSI-2426-08	1 1/2	1 21/32	1/2	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
GSI-2426-12	1 1/2	1 21/32	3/4	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
GSI-2426-16	1 1/2	1 21/32	1	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972

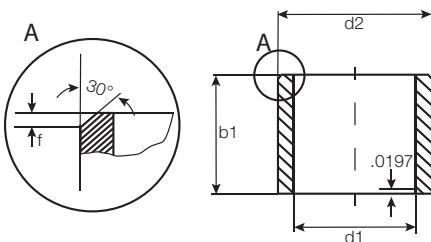

For tolerance values  
please refer to page 6.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
GSI-2426-24	1 1/2	1 21/32	1 1/2	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
GSI-2629-14	1 5/8	1 25/32	7/8	1.6297	1.6258	1.7818	1.7808	1.6238	1.6222
GSI-2629-20	1 5/8	1 25/32	1 1/4	1.6297	1.6258	1.7818	1.7808	1.6238	1.6222
GSI-2831-16	1 3/4	1 15/16	1	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
GSI-2831-24	1 3/4	1 15/16	1 1/2	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
GSI-2831-32	1 3/4	1 15/16	2	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
GSI-2831-40	1 3/4	1 15/16	2 1/2	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
GSI-2831-48	1 3/4	1 15/16	3	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
GSI-3235-16	2	2 3/16	1	2.0059	2.0012	2.1883	2.1871	1.9981	1.9969
GSI-3235-24	2	2 3/16	1 1/2	2.0059	2.0012	2.1883	2.1871	1.9981	1.9969
GSI-3235-32	2	2 3/16	2	2.0059	2.0012	2.1883	2.1871	1.9981	1.9969
GSI-3639-32	2 1/4	2 7/16	2	2.2577	2.2531	2.4377	2.4365	2.2507	2.2489
GSI-4043-32	2 2/4	2 11/16	2	2.5082	2.5035	2.6881	2.6869	2.5000	2.4971
GSI-4447-32	2 3/4	2 15/16	2	2.7570	2.7523	2.9370	2.9358	2.7500	2.7471
GSI-4851-32	3	3 3/16	2	3.0070	3.0023	3.1872	3.1858	3.0000	2.9971



PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



# iglide® Plain Bearings


## G300 - Flange Bearing, Inch

iglide® G300  
Flange - Inch



For tolerance values  
please refer to page 6.4

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
						Max.	Min.	Max.	Min.
GFI-0203-02	1/8	3/16	1/8	.312	.032	.1269	.1251	.1878	.1873
GFI-0203-03	1/8	3/16	3/16	.312	.032	.1269	.1251	.1878	.1873
GFI-0203-04	1/8	3/16	1/4	.312	.032	.1269	.1251	.1878	.1873
GFI-0203-06	1/8	3/16	3/8	.312	.032	.1269	.1251	.1878	.1873
GFI-0304-04	3/16	1/4	1/4	.375	.032	.1892	.1873	.2503	.2497
GFI-0304-06	3/16	1/4	3/8	.375	.032	.1892	.1873	.2503	.2497
GFI-0304-08	3/16	1/4	1/2	.375	.032	.1892	.1873	.2503	.2497
GFI-0405-2.4	1/4	5/16	5/32	.500	.032	.2521	.2498	.3128	.3122
GFI-0405-04	1/4	5/16	1/4	.500	.032	.2521	.2498	.3128	.3122
GFI-0405-05	1/4	5/16	5/16	.500	.032	.2521	.2498	.3128	.3122
GFI-0405-06	1/4	5/16	3/8	.500	.032	.2521	.2498	.3128	.3122
GFI-0405-08	1/4	5/16	1/2	.500	.032	.2521	.2498	.3128	.3122
GFI-0405-12	1/4	5/16	3/4	.500	.032	.2521	.2498	.3128	.3122
GFI-0506-03	5/16	3/8	3/16	.562	.032	.3148	.3125	.3753	.3747
GFI-0506-04	5/16	3/8	1/4	.562	.032	.3148	.3125	.3753	.3747
GFI-0506-06	5/16	3/8	3/8	.562	.032	.3148	.3125	.3753	.3747
GFI-0506-08	5/16	3/8	1/2	.562	.032	.3148	.3125	.3753	.3747
GFI-0506-12	5/16	3/8	3/4	.562	.032	.3148	.3125	.3753	.3747
GFI-0607-04	3/8	15/32	1/4	.687	.046	.3773	.3750	.4691	.4684
GFI-0607-05	3/8	15/32	5/16	.687	.046	.3773	.3750	.4691	.4684
GFI-0607-06	3/8	15/32	3/8	.687	.046	.3773	.3750	.4691	.4684
GFI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684
GFI-0607-12	3/8	15/32	3/4	.687	.046	.3773	.3750	.4691	.4684
GFI-0607-14	3/8	15/32	7/8	.687	.046	.3773	.3750	.4691	.4684
GFI-0708-04	7/16	17/32	1/4	.750	.046	.4406	.4379	.5316	.5309
GFI-0708-08	7/16	17/32	1/2	.750	.046	.4406	.4379	.5316	.5309
GFI-0809-02	1/2	19/32	1/8	.875	.046	.5030	.5003	.5941	.5934
GFI-0809-04	1/2	19/32	1/4	.875	.046	.5030	.5003	.5941	.5934
GFI-0809-05	1/2	19/32	5/16	.875	.046	.5030	.5003	.5941	.5934
GFI-0809-06	1/2	19/32	3/8	.875	.046	.5030	.5003	.5941	.5934
GFI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934
GFI-0809-12	1/2	19/32	3/4	.875	.046	.5030	.5003	.5941	.5934
GFI-0809-16	1/2	19/32	1	.875	.046	.5030	.5003	.5941	.5934
GFI-1011-06	5/8	23/32	3/8	.937	.046	.6280	.6253	.7192	.7184
GFI-1011-08	5/8	23/32	1/2	.937	.046	.6280	.6253	.7192	.7184
GFI-1011-12	5/8	23/32	3/4	.937	.046	.6280	.6253	.7192	.7184
GFI-1011-14	5/8	23/32	7/8	.937	.046	.6280	.6253	.7192	.7184
GFI-1011-16	5/8	23/32	1	.937	.046	.6280	.6253	.7192	.7184
GFI-1011-24	5/8	23/32	1 1/2	.937	.046	.6280	.6253	.7192	.7184
GFI-1214-02	3/4	7/8	1/8	1.125	.062	.7541	.7508	.8755	.8747
GFI-1214-06	3/4	7/8	3/8	1.125	.062	.7541	.7508	.8755	.8747

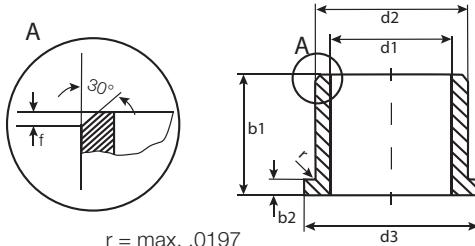

For tolerance values  
please refer to page 6.4

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
					-.0055	Max.	Min.	Max.	Min.
GFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7508	.8755	.8747
GFI-1214-10	3/4	7/8	5/8	1.125	.062	.7541	.7508	.8755	.8747
GFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7508	.8755	.8747
GFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7508	.8755	.8747
GFI-1214-24	3/4	7/8	1 1/2	1.125	.062	.7541	.7508	.8755	.8747
GFI-1416-08	7/8	1	1/2	1.250	.062	.8791	.8757	1.0005	.9997
GFI-1416-12	7/8	1	3/4	1.250	.062	.8791	.8757	1.0005	.9997
GFI-1416-16	7/8	1	1	1.250	.062	.8791	.8757	1.0005	.9997
GFI-1416-20	7/8	1	1 1/4	1.250	.062	.8791	.8757	1.0005	.9997
GFI-1416-24	7/8	1	1 1/2	1.250	.062	.8791	.8757	1.0005	.9997
GFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247
GFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041	1.0007	1.1255	1.1247
GFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247
GFI-1618-20	1	1 1/8	1 1/4	1.375	.062	1.0041	1.0007	1.1255	1.1247
GFI-1618-24	1	1 1/8	1 1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247
GFI-1820-12	1 1/8	1 9/32	3/4	1.562	.078	1.1288	1.1254	1.2818	1.2808
GFI-1820-24	1 1/8	1 9/32	1 1/2	1.562	.078	1.1288	1.1254	1.2818	1.2808
GFI-2022-06	1 1/4	1 13/32	3/8	1.687	.078	1.2548	1.2508	1.4068	1.4058
GFI-2022-12	1 1/4	1 13/32	3/4	1.687	.078	1.2548	1.2508	1.4068	1.4058
GFI-2022-14	1 1/4	1 13/32	7/8	1.687	.078	1.2548	1.2508	1.4068	1.4058
GFI-2022-16	1 1/4	1 13/32	1	1.687	.078	1.2548	1.2508	1.4068	1.4058
GFI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2548	1.2508	1.4068	1.4058
GFI-2022-24	1 1/4	1 13/32	1 1/2	1.687	.078	1.2548	1.2508	1.4068	1.4058
GFI-2224-16	1 3/8	1 17/32	1	1.875	.078	1.3798	1.3758	1.5318	1.5308
GFI-2426-12	1 1/2	1 21/32	3/4	2.000	.078	1.5048	1.5008	1.6568	1.6558
GFI-2426-16	1 1/2	1 21/32	1	2.000	.078	1.5048	1.5008	1.6568	1.6558
GFI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5048	1.5008	1.6568	1.6558
GFI-2831-16	1 3/4	1 15/16	1	2.375	.093	1.7547	1.7508	1.9381	1.9371
GFI-2831-24	1 3/4	1 15/16	1 1/2	2.375	.093	1.7547	1.7508	1.9381	1.9371
GFI-2831-32	1 3/4	1 15/16	2	2.375	.093	1.7547	1.7508	1.9381	1.9371
GFI-3235-16	2	2 3/16	1	2.625	.093	2.0059	2.0012	2.1883	2.1871
GFI-3235-24	2	2 3/16	1 1/2	2.625	.093	2.0059	2.0012	2.1883	2.1871
GFI-3235-32	2	2 3/16	2	2.625	.093	2.0059	2.0012	2.1883	2.1871
GFI-3639-32	2 1/4	2 7/16	2	2.750	.093	2.2577	2.2531	2.4377	2.4365
GFI-4043-32	2 1/2	2 11/16	2	3.125	.093	2.5082	2.5035	2.6881	2.6869
GFI-4447-32	2 3/4	2 15/16	2	3.375	.093	2.7570	2.7523	2.9370	2.9358
						2.7500	2.7471		

iglide® G300  
Flange - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1

inch


mm



**igus®**  
G300


## iglide® Plain Bearings G300 - Thrust Washer, Inch

iglide® G300  
Thrust Washer - Inch

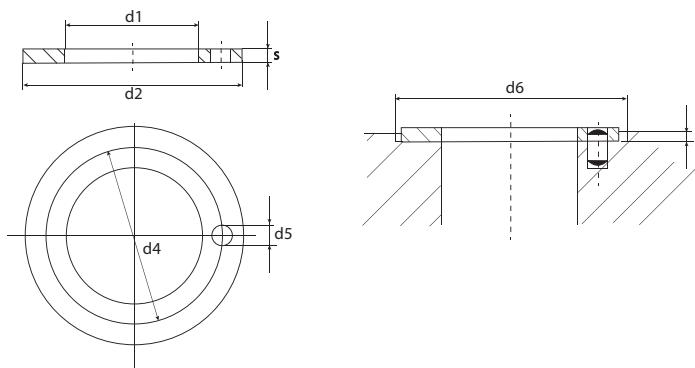

Part Number	d1 +.010	d2 -.010	s -.0020	d4 +.005	d5 +.015 +.005	h +.008	d6 +.005
GTI-0610-01	.375	.625	.040	*	*	*	.375
GTI-0814-01	.500	.875	.0585	.692	.067	.040	.875
GTI-1018-01	.625	1.125	.0585	.880	.099	.040	1.125
GTI-1220-01	.750	1.250	.0585	1.005	.099	.040	1.250
GTI-1424-01	.875	1.500	.0585	1.192	.130	.040	1.500
GTI-1628-01	1.000	1.750	.0585	1.380	.130	.040	1.750
GTI-2034-01	1.250	2.125	.0585	1.692	.161	.040	2.125
GTI-2440-01	1.500	2.500	.0585	2.005	.192	.040	2.500
GTI-2844-01	1.750	2.750	.0585	2.255	.192	.040	2.750
GTI-3248-01	2.000	3.000	.0895	2.505	.192	.070	3.000

\*Designed without fixation hole

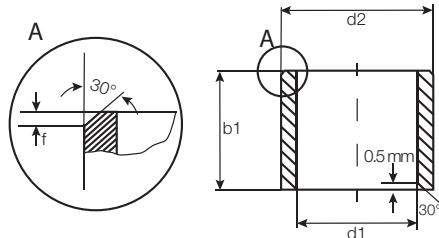

For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 after pressfit in Ø H7	d1-Tolerance	d2	b1 h13	I.D. After Pressfit Max.	I.D. After Pressfit Min.	Housing Bore Max.	Housing Bore Min.	Shaft Size Max.	Shaft Size Min.
GSM-0103-02	1.5	+0.014 +0.054	3.0	2.0	1.554	1.514	3.010	3.000	1.500	1.475
GSM-0203-03	2.0	+0.014 +0.054	3.5	3.0	2.054	2.014	3.510	3.500	2.000	1.975
GSM-02504-05	2.5	+0.014 +0.054	4.5	5.0	2.554	2.514	4.510	4.500	2.500	2.475
GSM-0304-03	3.0	+0.014 +0.054	4.5	3.0	3.054	3.014	4.512	4.500	3.000	2.975
GSM-0304-05	3.0	+0.014 +0.054	4.5	5.0	3.054	3.014	4.512	4.500	3.000	2.975
GSM-0304-06	3.0	+0.014 +0.054	4.5	6.0	3.054	3.014	4.512	4.500	3.000	2.975
GSM-0304-16	3.0	+0.014 +0.054	4.5	16.0	3.054	3.014	4.512	4.500	3.000	2.975
GSM-0405-04	4.0	+0.020 +0.068	5.5	4.0	4.068	4.020	5.512	5.500	4.000	3.970
GSM-0405-06	4.0	+0.020 +0.068	5.5	6.0	4.068	4.020	5.512	5.500	4.000	3.970
GSM-0406-08	4.5	+0.020 +0.068	6.0	8.0	4.568	4.520	6.012	6.000	4.500	4.470
GSM-0407-05	4.0	+0.020 +0.068	7.0	5.0	4.068	4.020	7.015	7.000	4.000	3.970
GSM-0407-055	4.0	+0.020 +0.068	7.0	5.5	4.068	4.020	7.015	7.000	4.000	3.970
GSM-0506-046	5.0	+0.010 +0.040	6.0	4.6	5.040	5.010	6.012	6.000	5.000	4.970
GSM-0506-05	5.0	+0.010 +0.040	6.0	5.0	5.040	5.010	6.012	6.000	5.000	4.970
GSM-0506-07	5.0	+0.010 +0.040	6.0	7.0	5.040	5.010	6.012	6.000	5.000	4.970
GSM-0507-05	5.0	+0.020 +0.068	7.0	5.0	5.068	5.020	7.015	7.000	5.000	4.970
GSM-0507-08	5.0	+0.020 +0.068	7.0	8.0	5.068	5.020	7.015	7.000	5.000	4.970
GSM-0507-10	5.0	+0.020 +0.068	7.0	10.0	5.068	5.020	7.015	7.000	5.000	4.970
GSM-0607-06	6.0	+0.010 +0.040	7.0	6.0	6.040	6.010	7.015	7.000	6.000	5.970
GSM-0607-12	6.0	+0.010 +0.040	7.0	12.0	6.040	6.010	7.015	7.000	6.000	5.970
GSM-0607-17.5	6.0	+0.010 +0.040	7.0	17.5	6.040	6.010	7.015	7.000	6.000	5.970
GSM-0608-025	6.0	+0.020 +0.068	8.0	2.5	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-04	6.0	+0.020 +0.068	8.0	4.0	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-05	6.0	+0.020 +0.068	8.0	5.0	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-055	6.0	+0.020 +0.068	8.0	5.5	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-06	6.0	+0.020 +0.068	8.0	6.0	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-08	6.0	+0.020 +0.068	8.0	8.0	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-09	6.0	+0.020 +0.068	8.0	9.5	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-10	6.0	+0.020 +0.068	8.0	10.0	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-11	6.0	+0.020 +0.068	8.0	11.8	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0608-13	6.0	+0.020 +0.068	8.0	13.8	6.068	6.020	8.015	8.000	6.000	5.970
GSM-0708-10	7.0	+0.013 +0.049	8.0	10.0	7.049	7.013	8.015	8.000	7.000	6.964
GSM-0708-19	7.0	+0.013 +0.049	8.0	19.0	7.049	7.013	8.015	8.000	7.000	6.964
GSM-0709-05	7.0	+0.025 +0.083	9.0	5.0	7.083	7.025	9.015	9.000	7.000	6.964
GSM-0709-08	7.0	+0.025 +0.083	9.0	8.0	7.083	7.025	9.015	9.000	7.000	6.964
GSM-0709-09	7.0	+0.025 +0.083	9.0	9.0	7.083	7.025	9.015	9.000	7.000	6.964
GSM-0709-10	7.0	+0.025 +0.083	9.0	10.0	7.083	7.025	9.015	9.000	7.000	6.694
GSM-0709-12	7.0	+0.025 +0.083	9.0	12.0	7.083	7.025	9.015	9.000	7.000	6.694
GSM-0809-05	8.0	+0.013 +0.049	9.0	5.0	8.049	8.013	9.015	9.000	8.000	7.964
GSM-0809-06	8.0	+0.013 +0.049	9.0	6.0	8.049	8.013	9.015	9.000	8.000	7.964
GSM-0809-08	8.0	+0.013 +0.049	9.0	8.0	8.049	8.013	9.015	9.000	8.000	7.964

iglide® G300  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1


inch

mm

# iglide® Plain Bearings

## G300 - Sleeve Bearing, MM


iglide® G300  
Sleeve - MM

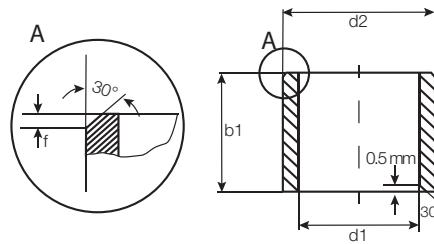

For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
GSM-0809-12	8.0	+0.013 +0.049	9.0	12.0	8.049	8.013	9.015	9.000	8.000	7.964
GSM-0810-05	8.0	+0.025 +0.083	10.0	5.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-06	8.0	+0.025 +0.083	10.0	6.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-07	8.0	+0.025 +0.083	10.0	7.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-08	8.0	+0.025 +0.083	10.0	8.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-12	8.0	+0.025 +0.083	10.0	12.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-13	8.0	+0.025 +0.083	10.0	13.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-15	8.0	+0.025 +0.083	10.0	15.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-16	8.0	+0.025 +0.083	10.0	16.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-20	8.0	+0.025 +0.083	10.0	20.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0810-22	8.0	+0.025 +0.083	10.0	22.0	8.083	8.025	10.015	10.000	8.000	7.964
GSM-0911-06	9.0	+0.025 +0.083	11.0	6.0	9.083	9.025	11.018	11.000	9.000	8.964
GSM-1011-06	10.0	+0.013 +0.049	11.0	6.0	10.049	10.013	11.018	11.000	10.000	9.964
GSM-1011-10	10.0	+0.013 +0.049	11.0	10.0	10.049	10.013	11.018	11.000	10.000	9.964
GSM-1011-20	10.0	+0.013 +0.049	11.0	20.0	10.049	10.013	11.018	11.000	10.000	9.964
GSM-1011-25	10.0	+0.013 +0.049	11.0	25.0	10.049	10.013	11.018	11.000	10.000	9.964
GSM-1011-30	10.0	+0.013 +0.049	11.0	30.0	10.049	10.013	11.018	11.000	10.000	9.964
GSM-1012-04	10.0	+0.025 +0.083	12.0	4.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-045	10.0	+0.025 +0.083	12.0	4.5	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-05	10.0	+0.025 +0.083	12.0	5.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-06	10.0	+0.025 +0.083	12.0	6.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-07	10.0	+0.025 +0.083	12.0	7.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-08	10.0	+0.025 +0.083	12.0	8.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-09	10.0	+0.025 +0.083	12.0	9.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-12	10.0	+0.025 +0.083	12.0	12.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-14	10.0	+0.025 +0.083	12.0	14.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-15	10.0	+0.025 +0.083	12.0	15.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-17	10.0	+0.025 +0.083	12.0	17.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1012-20	10.0	+0.025 +0.083	12.0	20.0	10.083	10.025	12.018	12.000	10.000	9.964
GSM-1013-13	10.0	+0.025 +0.083	13.0	13.5	10.083	10.025	13.018	13.000	10.000	9.964
GSM-1014-10	10.0	+0.025 +0.083	14.0	10.0	10.083	10.025	14.018	14.000	10.000	9.964
GSM-1014-20	10.0	+0.025 +0.083	14.0	20.0	10.083	10.025	14.018	14.000	10.000	9.964
GSM-1213-047	12.0	+0.016 +0.059	13.0	4.7	12.059	12.016	13.018	13.000	12.000	11.957
GSM-1213-10	12.0	+0.016 +0.059	13.0	10.0	12.059	12.016	13.018	13.000	12.000	11.957
GSM-1213-12	12.0	+0.016 +0.059	13.0	12.0	12.059	12.016	13.018	13.000	12.000	11.957
GSM-1213-15	12.0	+0.016 +0.059	13.0	15.0	12.059	12.016	13.018	13.000	12.000	11.957
GSM-1214-04	12.0	+0.032 +0.102	14.0	4.0	12.102	12.032	14.018	14.000	12.000	11.957
GSM-1214-05	12.0	+0.032 +0.102	14.0	5.0	12.102	12.032	14.018	14.000	12.000	11.957

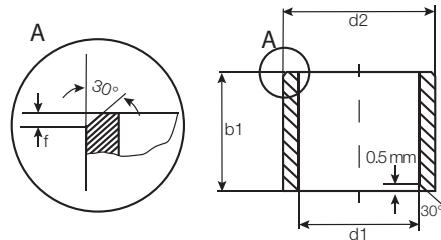

For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
GSM-1214-06	12.0	+0.032 +0.102	14.0	6.0	12.102	12.032	14.018	14.000
GSM-1214-08	12.0	+0.032 +0.102	14.0	8.0	12.102	12.032	14.018	14.000
GSM-1214-10	12.0	+0.032 +0.102	14.0	10.0	12.102	12.032	14.018	14.000
GSM-1214-12	12.0	+0.032 +0.102	14.0	12.0	12.102	12.032	14.018	14.000
GSM-1214-14	12.0	+0.032 +0.102	14.0	14.0	12.102	12.032	14.018	14.000
GSM-1214-15	12.0	+0.032 +0.102	14.0	15.0	12.102	12.032	14.018	14.000
GSM-1214-20	12.0	+0.032 +0.102	14.0	20.0	12.102	12.032	14.018	14.000
GSM-1214-25	12.0	+0.032 +0.102	14.0	25.0	12.102	12.032	14.018	14.000
GSM-1215-06	12.0	+0.032 +0.102	15.0	6.0	12.102	12.032	15.018	15.000
GSM-1215-22	12.0	+0.032 +0.102	15.0	22.0	12.102	12.032	15.018	15.000
GSM-1315-07	13.0	+0.032 +0.102	15.0	7.0	13.102	13.032	15.018	15.000
GSM-1315-075	13.0	+0.032 +0.102	15.0	7.5	13.102	13.032	15.018	15.000
GSM-1315-10	13.0	+0.032 +0.102	15.0	10.0	13.102	13.032	15.018	15.000
GSM-1315-15	13.0	+0.032 +0.102	15.0	15.0	13.102	13.032	15.018	15.000
GSM-1315-20	13.0	+0.032 +0.102	15.0	20.0	13.102	13.032	15.018	15.000
GSM-1315-25	13.0	+0.032 +0.102	15.0	25.0	13.102	13.032	15.018	15.000
GSM-1416-03	14.0	+0.032 +0.102	16.0	3.0	14.102	14.032	16.018	16.000
GSM-1416-06	14.0	+0.032 +0.102	16.0	6.0	14.102	14.032	16.018	16.000
GSM-1416-08	14.0	+0.032 +0.102	16.0	8.0	14.102	14.032	16.018	16.000
GSM-1416-10	14.0	+0.032 +0.102	16.0	10.0	14.102	14.032	16.018	16.000
GSM-1416-12	14.0	+0.032 +0.102	16.0	12.0	14.102	14.032	16.018	16.000
GSM-1416-15	14.0	+0.032 +0.102	16.0	15.0	14.102	14.032	16.018	16.000
GSM-1416-20	14.0	+0.032 +0.102	16.0	20.0	14.102	14.032	16.018	16.000
GSM-1416-25	14.0	+0.032 +0.102	16.0	25.0	14.102	14.032	16.018	16.000
GSM-1516-15	15.0	+0.016 +0.059	16.0	15.0	15.059	15.016	16.018	16.000
GSM-1517-04	15.0	+0.032 +0.102	17.0	4.0	15.102	15.032	17.018	17.000
GSM-1517-10	15.0	+0.032 +0.102	17.0	10.0	15.102	15.032	17.018	17.000
GSM-1517-12	15.0	+0.032 +0.102	17.0	12.0	15.102	15.032	17.018	17.000
GSM-1517-15	15.0	+0.032 +0.102	17.0	15.0	15.102	15.032	17.018	17.000
GSM-1517-20	15.0	+0.032 +0.102	17.0	20.0	15.102	15.032	17.018	17.000
GSM-1517-25	15.0	+0.032 +0.102	17.0	25.0	15.102	15.032	17.018	17.000
GSM-1618-055	16.0	+0.032 +0.102	18.0	5.5	16.102	16.032	18.018	18.000
GSM-1618-08	16.0	+0.032 +0.102	18.0	8.0	16.102	16.032	18.018	18.000
GSM-1618-10	16.0	+0.032 +0.102	18.0	10.0	16.102	16.032	18.018	18.000
GSM-1618-12	16.0	+0.032 +0.102	18.0	12.0	16.102	16.032	18.018	18.000
GSM-1618-13.5	16.0	+0.032 +0.102	18.0	13.5	16.102	16.032	18.018	18.000
GSM-1618-13.8	16.0	+0.032 +0.102	18.0	13.8	16.102	16.032	18.018	18.000
GSM-1618-15	16.0	+0.032 +0.102	18.0	15.0	16.102	16.032	18.018	18.000
GSM-1618-20	16.0	+0.032 +0.102	18.0	20.0	16.102	16.032	18.018	18.000
GSM-1618-25	16.0	+0.032 +0.102	18.0	25.0	16.102	16.032	18.018	18.000

iglide® G300  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1


inch

mm

# iglide® Plain Bearings

## G300 - Sleeve Bearing, MM


iglide® G300  
Sleeve - MM

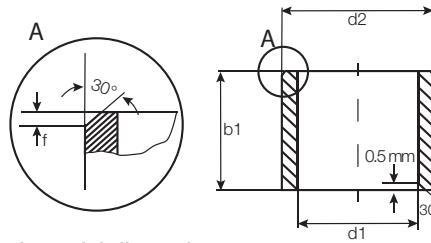

For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1 h13	I.D. After Pressfit		Housing Bore		Shaft Size	
					Max.	Min.	Max.	Min.	Max.	Min.
GSM-1618-30	16.0	+0.032 +0.102	18.0	30.0	16.102	16.032	18.018	18.000	16.000	15.957
GSM-1618-50	16.0	+0.032 +0.102	18.0	50.0	16.102	16.032	18.018	18.000	16.000	15.957
GSM-1819-15	18.0	+0.032 +0.102	19.0	15.0	18.102	18.032	19.021	19.000	18.000	17.957
GSM-1820-10	18.0	+0.032 +0.102	20.0	10.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1820-12	18.0	+0.032 +0.102	20.0	12.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1820-15	18.0	+0.032 +0.102	20.0	15.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1820-20	18.0	+0.032 +0.102	20.0	20.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1820-25	18.0	+0.032 +0.102	20.0	25.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1820-34	18.0	+0.032 +0.102	20.0	34.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1820-45	18.0	+0.032 +0.102	20.0	45.0	18.102	18.032	20.021	20.000	18.000	17.957
GSM-1922-06	19.0	+0.040 +0.124	22.0	6.0	19.124	19.040	22.021	22.000	19.000	18.948
GSM-1922-28	19.0	+0.040 +0.124	22.0	28.0	19.124	19.040	22.021	22.000	19.000	18.948
GSM-1922-35	19.0	+0.040 +0.124	22.0	35.0	19.124	19.040	22.021	22.000	19.000	18.948
GSM-2021-20	20.0	+0.020 +0.072	21.0	20.0	20.072	20.020	21.021	21.000	20.000	19.948
GSM-2022-03	20.0	+0.040 +0.124	22.0	3.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-08	20.0	+0.040 +0.124	22.0	8.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-105	20.0	+0.040 +0.124	22.0	10.5	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-15	20.0	+0.040 +0.124	22.0	15.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-20	20.0	+0.040 +0.124	22.0	20.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-22	20.0	+0.040 +0.124	22.0	22.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-30	20.0	+0.040 +0.124	22.0	30.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2022-47	20.0	+0.040 +0.124	22.0	47.0	20.124	20.040	22.021	22.000	20.000	19.948
GSM-2023-10	20.0	+0.040 +0.124	23.0	10.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2023-15	20.0	+0.040 +0.124	23.0	15.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2023-23	20.0	+0.040 +0.124	23.0	23.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2023-24	20.0	+0.040 +0.124	23.0	24.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2023-25	20.0	+0.040 +0.124	23.0	25.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2023-30	20.0	+0.040 +0.124	23.0	30.0	20.124	20.040	23.021	23.000	20.000	19.948
GSM-2224-10	22.0	+0.040 +0.124	24.0	10.0	22.124	22.040	24.021	24.000	22.000	21.948
GSM-2224-15	22.0	+0.040 +0.124	24.0	15.0	22.124	22.040	24.021	24.000	22.000	21.948
GSM-2224-17	22.0	+0.040 +0.124	24.0	17.0	22.124	22.040	24.021	24.000	22.000	21.948
GSM-2224-20	22.0	+0.040 +0.124	24.0	20.0	22.124	22.040	24.021	24.000	22.000	21.948
GSM-2224-30	22.0	+0.040 +0.124	24.0	30.0	22.124	22.040	24.021	24.000	22.000	21.948
GSM-2225-15	22.0	+0.040 +0.124	25.0	15.0	22.124	22.040	25.021	25.000	22.000	21.948
GSM-2225-20	22.0	+0.040 +0.124	25.0	20.0	22.124	22.040	25.021	25.000	22.000	21.948
GSM-2225-25	22.0	+0.040 +0.124	25.0	25.0	22.124	22.040	25.021	25.000	22.000	21.948
GSM-2225-30	22.0	+0.040 +0.124	25.0	30.0	22.124	22.040	25.021	25.000	22.000	21.948
GSM-2427-06	24.0	+0.040 +0.124	27.0	6.0	24.124	24.040	27.021	27.000	24.000	23.948
GSM-2427-15	24.0	+0.040 +0.124	27.0	15.0	24.124	24.040	27.021	27.000	24.000	23.948

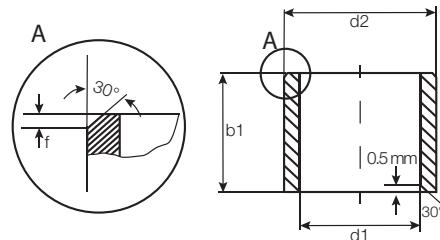

For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
GSM-2427-20	24.0	+0.040 +0.124	27.0	20.0	24.124	24.040	27.021	27.000	24.000	23.948
GSM-2427-25	24.0	+0.040 +0.124	27.0	25.0	24.124	24.040	27.021	27.000	24.000	23.948
GSM-2427-30	24.0	+0.040 +0.124	27.0	30.0	24.124	24.040	27.021	27.000	24.000	23.948
GSM-2526-25	25.0	+0.020 +0.072	26.0	25.0	25.072	25.020	26.021	26.000	25.000	24.948
GSM-2528-12	25.0	+0.040 +0.124	28.0	12.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-15	25.0	+0.040 +0.124	28.0	15.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-20	25.0	+0.040 +0.124	28.0	20.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-24	25.0	+0.040 +0.124	28.0	24.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-25	25.0	+0.040 +0.124	28.0	25.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-30	25.0	+0.040 +0.124	28.0	30.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-35	25.0	+0.040 +0.124	28.0	35.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2528-50	25.0	+0.040 +0.124	28.0	50.0	25.124	25.040	28.021	28.000	25.000	24.948
GSM-2630-16	26.0	+0.040 +0.124	30.0	16.0	26.124	26.040	30.021	30.000	26.000	25.948
GSM-2730-05	27.0	+0.040 +0.124	30.0	5.0	27.124	26.040	30.021	30.000	27.000	26.948
GSM-2832-10.5	28.0	+0.040 +0.124	32.0	10.5	28.124	28.040	32.025	32.000	28.000	27.948
GSM-2832-12	28.0	+0.040 +0.124	32.0	12.0	28.124	28.040	32.025	32.000	28.000	27.948
GSM-2832-15	28.0	+0.040 +0.124	32.0	15.0	28.124	28.040	32.025	32.000	28.000	27.948
GSM-2832-20	28.0	+0.040 +0.124	32.0	20.0	28.124	28.040	32.025	32.000	28.000	27.948
GSM-2832-23	28.0	+0.040 +0.124	32.0	23.0	28.124	28.040	32.025	32.000	28.000	27.948
GSM-2832-25	28.0	+0.040 +0.124	32.0	25.0	28.124	28.040	32.025	32.000	28.000	27.948
GSM-2832-30	28.0	+0.040 +0.124	32.0	30.0	28.124	28.040	32.025	32.000	28.000	27.948
GSM-3031-12	30.0	+0.020 +0.072	31.0	12.0	30.072	30.020	31.025	31.000	30.000	29.948
GSM-3031-30	30.0	+0.020 +0.072	31.0	30.0	30.072	30.020	31.025	31.000	30.000	29.948
GSM-3034-15	30.0	+0.040 +0.124	34.0	15.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3034-20	30.0	+0.040 +0.124	34.0	20.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3034-24	30.0	+0.040 +0.124	34.0	24.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3034-25	30.0	+0.040 +0.124	34.0	25.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3034-30	30.0	+0.040 +0.124	34.0	30.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3034-35	30.0	+0.040 +0.124	34.0	35.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3034-40	30.0	+0.040 +0.124	34.0	40.0	30.124	30.040	34.025	34.000	30.000	29.948
GSM-3236-20	32.0	+0.050 +0.150	36.0	20.0	32.150	32.050	36.025	36.000	32.000	31.938
GSM-3236-30	32.0	+0.050 +0.150	36.0	30.0	32.150	32.050	36.025	36.000	32.000	31.938
GSM-3236-40	32.0	+0.050 +0.150	36.0	40.0	32.150	32.050	36.025	36.000	32.000	31.938
GSM-3539-14	35.0	+0.050 +0.150	39.0	14.0	35.150	35.050	39.025	39.000	35.000	34.938
GSM-3539-20	35.0	+0.050 +0.150	39.0	20.0	35.150	35.050	39.025	39.000	35.000	34.938
GSM-3539-25	35.0	+0.050 +0.150	39.0	25.0	35.150	35.050	39.025	39.000	35.000	34.938
GSM-3539-30	35.0	+0.050 +0.150	39.0	30.0	35.150	35.050	39.025	39.000	35.000	34.938
GSM-3539-40	35.0	+0.050 +0.150	39.0	40.0	35.150	35.050	39.025	39.000	35.000	34.938
GSM-3539-50	35.0	+0.050 +0.150	39.0	50.0	35.150	35.050	39.025	39.000	35.000	34.938

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)


+

-

1

inch


mm

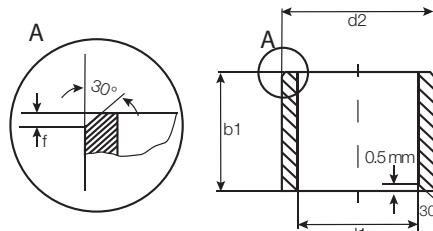

For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1	I.D. After Pressfit	Housing Bore		Shaft Size		
				h13	Max.	Min.	Max.	Min.	Max.	Min.
GSM-3640-20	36.0	+0.050 +0.150	40.0	20.0	36.150	36.050	40.025	40.000	36.000	35.938
GSM-3741-20	37.0	+0.050 +0.150	41.0	20.0	37.150	37.050	41.025	41.000	37.000	36.938
GSM-4044-10	40.0	+0.050 +0.150	44.0	10.0	40.150	40.050	44.025	44.000	40.000	39.938
GSM-4044-16	40.0	+0.050 +0.150	44.0	16.0	40.150	40.050	44.025	44.000	40.000	39.938
GSM-4044-20	40.0	+0.050 +0.150	44.0	20.0	40.150	40.050	44.025	44.000	40.000	39.938
GSM-4044-30	40.0	+0.050 +0.150	44.0	30.0	40.150	40.050	44.025	44.000	40.000	39.938
GSM-4044-40	40.0	+0.050 +0.150	44.0	40.0	40.150	40.050	44.025	44.000	40.000	39.938
GSM-4044-50	40.0	+0.050 +0.150	44.0	50.0	40.150	40.050	44.025	44.000	40.000	39.938
GSM-4246-40	42.0	+0.050 +0.150	46.0	40.0	42.150	42.050	46.025	46.000	42.000	41.938
GSM-4550-22	45.0	+0.050 +0.150	50.0	22.0	45.150	45.050	50.025	50.000	45.000	44.938
GSM-4550-30	45.0	+0.050 +0.150	50.0	30.0	45.150	45.050	50.025	50.000	45.000	44.938
GSM-4550-38	45.0	+0.050 +0.150	50.0	38.0	45.150	45.050	50.025	50.000	45.000	44.938
GSM-4550-40	45.0	+0.050 +0.150	50.0	40.0	45.150	45.050	50.025	50.000	45.000	44.938
GSM-4550-50	45.0	+0.050 +0.150	50.0	50.0	45.150	45.050	50.025	50.000	45.000	44.938
GSM-5053-50	50.0	+0.050 +0.150	53.0	50.0	50.150	50.050	53.030	53.000	50.000	49.938
GSM-5055-20	50.0	+0.050 +0.150	55.0	20.0	50.150	50.050	55.030	55.000	50.000	49.938
GSM-5055-25	50.0	+0.050 +0.150	55.0	25.0	50.150	50.050	55.030	55.000	50.000	49.938
GSM-5055-30	50.0	+0.050 +0.150	55.0	30.0	50.150	50.050	55.030	55.000	50.000	49.938
GSM-5055-40	50.0	+0.050 +0.150	55.0	40.0	50.150	50.050	55.030	55.000	50.000	49.938
GSM-5055-50	50.0	+0.050 +0.150	55.0	50.0	50.150	50.050	55.030	55.000	50.000	49.938
GSM-5257-20	52.0	+0.060 +0.180	57.0	20.0	52.180	52.060	57.030	57.000	52.000	51.926
GSM-5560-40	55.0	+0.060 +0.180	60.0	40.0	55.180	55.060	60.030	60.000	55.000	54.926
GSM-5560-50	55.0	+0.060 +0.180	60.0	50.0	55.180	55.060	60.030	60.000	55.000	54.926
GSM-5560-60	55.0	+0.060 +0.180	60.0	60.0	55.180	55.060	60.030	60.000	55.000	54.926
GSM-6065-30	60.0	+0.060 +0.180	65.0	30.0	60.180	60.060	65.030	65.000	60.000	59.926
GSM-6065-40	60.0	+0.060 +0.180	65.0	40.0	60.180	60.060	65.030	65.000	60.000	59.926
GSM-6065-50	60.0	+0.060 +0.180	65.0	50.0	60.180	60.060	65.030	65.000	60.000	59.926
GSM-6065-60	60.0	+0.060 +0.180	65.0	60.0	60.180	60.060	65.030	65.000	60.000	59.926
GSM-6267-35	62.0	+0.060 +0.180	67.0	35.0	62.180	62.060	67.030	67.000	62.000	61.926
GSM-6267-72	62.0	+0.060 +0.180	67.0	72.0	62.180	62.060	67.030	67.000	62.000	61.926
GSM-6570-30	65.0	+0.060 +0.180	70.0	30.0	65.180	65.060	70.030	70.000	65.000	64.926
GSM-6570-50	65.0	+0.060 +0.180	70.0	50.0	65.180	65.060	70.030	70.000	65.000	64.926
GSM-7075-60	70.0	+0.060 +0.180	75.0	60.0	70.180	70.060	75.030	75.000	70.000	69.926
GSM-7277-76	72.0	+0.060 +0.180	77.0	76.0	72.180	72.060	77.030	77.000	72.000	71.926
GSM-7277-78	72.0	+0.060 +0.180	77.0	78.0	72.180	72.060	77.030	77.000	72.000	71.926
GSM-7580-40	75.0	+0.060 +0.180	80.0	40.0	75.180	75.060	80.030	80.000	75.000	74.926
GSM-7580-60	75.0	+0.060 +0.180	80.0	60.0	75.180	75.060	80.030	80.000	75.000	74.926
GSM-8085-60	80.0	+0.060 +0.180	85.0	60.0	80.180	80.060	85.035	85.000	80.000	79.926
GSM-8085-100	80.0	+0.060 +0.180	85.0	100.0	80.180	80.060	85.035	85.000	80.000	79.926

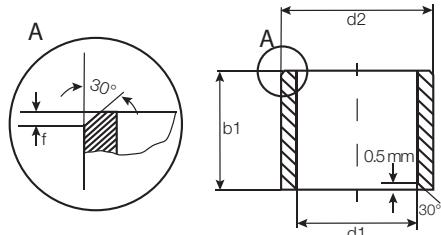


For tolerance values  
please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1 h13	I.D. After Pressfit		Housing Bore		Shaft Size	
					Max.	Min.	Max.	Min.	Max.	Min.
GSM-8590-100	85.0	+0.072 +0.212	90.0	100.0	85.212	85.072	90.035	90.000	85.000	84.913
GSM-9095-100	90.0	+0.072 +0.212	95.0	100.0	90.212	90.072	95.035	95.000	90.000	89.913
GSM-95100-100	95.0	+0.072 +0.212	100.0	100.0	95.212	95.072	100.035	100.000	95.000	94.913
GSM-100105-30	100.0	+0.072 +0.212	105.0	30.0	100.212	100.072	105.035	105.000	100.000	99.913
GSM-100105-100	100.0	+0.072 +0.212	105.0	100.0	100.212	100.072	105.035	105.000	100.000	99.913
GSM-110115-100	110.0	+0.072 +0.212	115.0	100.0	110.212	110.072	115.035	115.000	110.000	109.913
GSM-120125-100	120.0	+0.072 +0.212	125.0	100.0	120.212	120.072	125.040	125.000	120.000	119.913
GSM-125130-100	125.0	+0.085 +0.245	130.0	100.0	125.245	125.085	130.040	130.000	125.000	124.900
GSM-130135-100	130.0	+0.085 +0.245	135.0	100.0	130.245	130.085	135.040	135.000	130.000	129.900
GSM-135140-80	135.0	+0.085 +0.245	140.0	80.0	135.245	135.085	140.040	140.000	135.000	134.900
GSM-140145-100	140.0	+0.085 +0.245	145.0	100.0	140.245	140.085	145.040	145.000	140.000	139.900
GSM-150155-100	150.0	+0.085 +0.245	155.0	100.0	150.245	150.085	155.040	155.000	150.000	149.900

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm



# iglide® Plain Bearings

## G300 - Flange Bearing, MM

iglide® G300  
Flange - MM

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>





For tolerance values  
please refer to page 6.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup> after Pressfit in Ø H7	d1-Tolerance	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit	Housing Bore	Shaft Size
							Max.	Min.	Max. Min.
GFM-0304-02	3.0	+0.014 +0.054	4.5	7.5	2.0	0.75	3.054	3.014	4.512 4.500
GFM-0304-0275	3.0	+0.014 +0.054	4.5	7.5	2.75	0.75	3.054	3.014	4.512 4.500
GFM-0304-03	3.0	+0.014 +0.054	4.5	7.5	3.0	0.75	3.054	3.014	4.512 4.500
GFM-0304-05	3.0	+0.014 +0.054	4.5	7.5	5.0	0.75	3.054	3.014	4.512 4.500
GFM-030407-05	3.0	+0.014 +0.054	4.5	7.0	5.0	0.75	3.054	3.014	4.512 4.500
GFM-0405-03	4.0	+0.020 +0.068	5.5	9.5	3.0	0.75	4.068	4.020	5.512 5.500
GFM-0405-04	4.0	+0.020 +0.068	5.5	9.5	4.0	0.75	4.068	4.020	5.512 5.500
GFM-0405-06	4.0	+0.020 +0.068	5.5	9.5	6.0	0.75	4.068	4.020	5.512 5.500
GFM-040508-10	4.0	+0.020 +0.068	5.5	8.0	10.0	0.75	4.068	4.020	5.512 5.500
GFM-0506-035	5.0	+0.010 +0.040	6.0	10.0	3.5	0.5	5.040	5.010	6.012 6.000
GFM-0506-04	5.0	+0.010 +0.040	6.0	10.0	4.0	0.5	5.040	5.010	6.012 6.000
GFM-0506-05	5.0	+0.010 +0.040	6.0	10.0	5.0	0.5	5.040	5.010	6.012 6.000
GFM-0506-06	5.0	+0.010 +0.040	6.0	10.0	6.0	0.5	5.040	5.010	6.012 6.000
GFM-0506-15	5.0	+0.010 +0.040	6.0	10.0	15.25	0.5	5.040	5.010	6.012 6.000
GFM-0507-03	5.0	+0.020 +0.068	7.0	11.0	3.5	1.0	5.068	5.020	7.015 7.000
GFM-0507-04	5.0	+0.020 +0.068	7.0	11.0	4.0	1.0	5.068	5.020	7.015 7.000
GFM-0507-05	5.0	+0.020 +0.068	7.0	11.0	5.0	1.0	5.068	5.020	7.015 7.000
GFM-0507-07	5.0	+0.020 +0.068	7.0	11.0	7.0	1.0	5.068	5.020	7.015 7.000
GFM-0507-11	5.0	+0.020 +0.068	7.0	11.0	11.0	1.0	5.068	5.020	7.015 7.000
GFM-0507-30	5.0	+0.020 +0.068	7.0	11.0	30.0	1.0	5.068	5.020	7.015 7.000
GFM-050715-04	5.0	+0.020 +0.068	7.0	15.0	4.0	1.0	5.068	5.020	7.015 7.000
GFM-050709-05	5.0	+0.020 +0.068	7.0	9.0	5.0	1.0	5.068	5.020	7.015 7.000
GFM-0607-06	6.0	+0.010 +0.040	7.0	11.0	6.0	0.5	6.040	6.010	7.015 7.000
GFM-0607-10	6.0	+0.010 +0.040	7.0	11.0	10.0	0.5	6.040	6.010	7.015 7.000
GFM-0607-024	6.0	+0.010 +0.040	7.0	11.0	2.4	0.5	6.040	6.010	7.015 7.000
GFM-0608-04	6.0	+0.020 +0.068	8.0	12.0	4.0	1.0	6.068	6.020	8.015 8.000
GFM-0608-048	6.0	+0.020 +0.068	8.0	12.0	4.8	1.0	6.068	6.020	8.015 8.000
GFM-0608-05	6.0	+0.020 +0.068	8.0	12.0	5.0	1.0	6.068	6.020	8.015 8.000
GFM-0608-06	6.0	+0.020 +0.068	8.0	12.0	6.0	1.0	6.068	6.020	8.015 8.000
GFM-0608-07	6.0	+0.020 +0.068	8.0	12.0	7.0	1.0	6.068	6.020	8.015 8.000
GFM-0608-08	6.0	+0.020 +0.068	8.0	12.0	8.0	1.0	6.068	6.020	8.015 8.000
GFM-0608-10	6.0	+0.020 +0.068	8.0	12.0	10.0	1.0	6.068	6.020	8.015 8.000
GFM-060810-08	6.0	+0.020 +0.068	8.0	10.0	8.0	1.0	6.068	6.020	8.015 8.000
GFM-060812-20	6.0	+0.020 +0.068	8.0	12.0	20.0	1.0	6.068	6.020	8.015 8.000
GFM-060814-12	6.0	+0.020 +0.068	8.0	14.0	12.0	1.0	6.068	6.020	8.015 8.000
GFM-0708-03	7.0	+0.013 +0.049	8.0	12.0	3.0	0.5	7.049	7.013	8.015 8.000
GFM-0708-08	7.0	+0.013 +0.049	8.0	12.0	8.0	0.5	7.049	7.013	8.015 8.000
GFM-0709-06	7.0	+0.025 +0.083	9.0	15.0	6.0	1.0	7.083	7.025	9.015 9.000
GFM-0709-10	7.0	+0.025 +0.083	9.0	15.0	10.0	1.0	7.083	7.025	9.015 9.000
GFM-0709-12	7.0	+0.025 +0.083	9.0	15.0	12.0	1.0	7.083	7.025	9.015 9.000



For tolerance values  
please refer to page 6.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance after Pressfit in Ø H7	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit Max.	I.D. After Pressfit Min.	Housing Bore Max.	Housing Bore Min.	Shaft Size Max.	Shaft Size Min.
GFM-070919-10	7.0	+0.025 +0.083	9.0	19.0	10.0	1.0	7.083	7.025	9.015	9.000	7.000	6.964
GFM-0809-03	8.0	+0.013 +0.049	9.0	15.0	3.0	0.5	8.049	8.013	9.015	9.000	8.000	7.964
GFM-0809-035	8.0	+0.013 +0.049	9.0	13.0	3.5	0.5	8.049	8.013	9.015	9.000	8.000	7.964
GFM-0809-055	8.0	+0.013 +0.049	9.0	13.0	5.5	0.5	8.049	8.013	9.015	9.000	8.000	7.964
GFM-0809-08	8.0	+0.013 +0.049	9.0	13.0	8.0	0.5	8.049	8.013	9.015	9.000	8.000	7.964
GFM-0809-12	8.0	+0.013 +0.049	9.0	13.0	12.0	0.5	8.049	8.013	9.015	9.000	8.000	7.964
GFM-0810-02	8.0	+0.025 +0.083	10.0	15.0	2.7	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-03	8.0	+0.025 +0.083	10.0	15.0	3.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-035	8.0	+0.025 +0.083	10.0	15.0	3.5	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-04	8.0	+0.025 +0.083	10.0	15.0	4.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-05	8.0	+0.025 +0.083	10.0	15.0	5.5	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-06	8.0	+0.025 +0.083	10.0	15.0	6.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-065	8.0	+0.025 +0.083	10.0	15.0	6.5	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-07	8.0	+0.025 +0.083	10.0	15.0	7.5	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-09	8.0	+0.025 +0.083	10.0	15.0	9.5	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-10	8.0	+0.025 +0.083	10.0	15.0	10.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-11	8.0	+0.025 +0.083	10.0	15.0	11.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-15	8.0	+0.025 +0.083	10.0	15.0	15.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-25	8.0	+0.025 +0.083	10.0	15.0	25.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0810-30	8.0	+0.025 +0.083	10.0	15.0	30.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081013-08	8.0	+0.025 +0.083	10.0	13.0	8.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081014-05	8.0	+0.025 +0.083	10.0	14.0	5.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081014-06	8.0	+0.025 +0.083	10.0	14.0	6.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081014-08	8.0	+0.025 +0.083	10.0	14.0	8.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081014-10	8.0	+0.025 +0.083	10.0	14.0	10.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081016-11	8.0	+0.025 +0.083	10.0	16.0	11.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081016-15	8.0	+0.025 +0.083	10.0	16.0	15.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-081017-15	8.0	+0.025 +0.083	10.0	17.0	15.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
GFM-0811-07	8.0	+0.025 +0.083	11.0	18.0	7.0	1.0	8.083	8.025	11.018	11.000	8.000	7.964
GFM-0910-065	9.0	+0.013 +0.049	10.0	15.0	6.5	0.5	9.049	9.013	10.015	10.000	9.000	8.964
GFM-0910-17	9.0	+0.013 +0.049	10.0	15.0	17.5	0.5	9.049	9.013	10.015	10.000	9.000	8.964
GFM-1011-026	10.0	+0.013 +0.049	11.0	15.0	2.6	0.5	10.049	10.013	11.015	11.000	10.000	9.964
GFM-1011-03	10.0	+0.013 +0.049	11.0	15.0	3.5	0.5	10.049	10.013	11.015	11.000	10.000	9.964
GFM-1011-044	10.0	+0.013 +0.049	11.0	15.0	4.4	0.5	10.049	10.013	11.015	11.000	10.000	9.964
GFM-1011-10	10.0	+0.013 +0.049	11.0	15.0	10.0	0.5	10.049	10.013	11.015	11.000	10.000	9.964
GFM-1012-035	10.0	+0.025 +0.083	12.0	18.0	3.5	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-04	10.0	+0.025 +0.083	12.0	18.0	4.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-05	10.0	+0.025 +0.083	12.0	18.0	5.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-06	10.0	+0.025 +0.083	12.0	18.0	6.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101214-06	10.0	+0.025 +0.083	12.0	14.0	6.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964

iglide® G300  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch

mm

G300



igus®

# iglide® Plain Bearings

## G300 - Flange Bearing, MM



 iglide® G300  
 Flange - MM

 Telephone 1-800-521-2747  
 Fax 1-401-438-7270

 Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>

 For tolerance values  
 please refer to page 6.4

Dimensions according to ISO 3547-1 and special dimensions

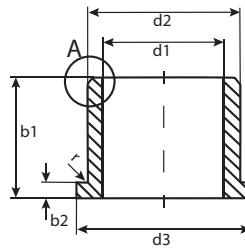Part Number	d1 <sup>1)</sup> after Pressfit in Ø H7	d1-Tolerance	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit	Housing Bore	Shaft Size			
							Max.	Min.	Max.	Min.	Max.	Min.
GFM-1012-07	10.0	+0.025 +0.083	12.0	18.0	7.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-09	10.0	+0.025 +0.083	12.0	18.0	9.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-10	10.0	+0.025 +0.083	12.0	18.0	10.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-12	10.0	+0.025 +0.083	12.0	18.0	12.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-15	10.0	+0.025 +0.083	12.0	18.0	15.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1012-17	10.0	+0.025 +0.083	12.0	18.0	17.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101216-06	10.0	+0.025 +0.083	12.0	16.0	6.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101214-07	10.0	+0.025 +0.083	12.0	14.0	7.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101216-09	10.0	+0.025 +0.083	12.0	16.0	9.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101216-10	10.0	+0.025 +0.083	12.0	16.0	10.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101215-12	10.0	+0.025 +0.083	12.0	15.0	12.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-101216-15	10.0	+0.025 +0.083	12.0	16.0	15.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
GFM-1013-12	10.0	+0.025 +0.083	13.0	18.0	12.0	1.5	10.083	10.025	13.018	13.000	10.000	9.964
GFM-111320-037	11.0	+0.032 +0.102	13.0	20.0	3.7	1.0	11.102	11.032	13.018	13.000	11.000	10.957
GFM-1213-03	12.0	+0.016 +0.059	13.0	17.0	3.0	0.5	12.059	12.016	13.018	13.000	12.000	11.957
GFM-1213-12	12.0	+0.016 +0.059	13.0	17.0	12.0	0.5	12.059	12.016	13.018	13.000	12.000	11.957
GFM-121315-12	12.0	+0.016 +0.059	13.0	15.0	12.0	1.0	12.059	12.016	13.018	13.000	12.000	11.957
GFM-1214-03	12.0	+0.032 +0.102	14.0	20.0	3.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-06	12.0	+0.032 +0.102	14.0	20.0	6.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-07	12.0	+0.032 +0.102	14.0	20.0	7.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-09	12.0	+0.032 +0.102	14.0	20.0	9.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-10	12.0	+0.032 +0.102	14.0	20.0	10.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-11	12.0	+0.032 +0.102	14.0	20.0	11.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-12	12.0	+0.032 +0.102	14.0	20.0	12.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-15	12.0	+0.032 +0.102	14.0	20.0	15.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-17	12.0	+0.032 +0.102	14.0	20.0	17.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-20	12.0	+0.032 +0.102	14.0	20.0	20.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1214-24	12.0	+0.032 +0.102	14.0	20.0	24.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121416-034	12.0	+0.032 +0.102	14.0	16.0	3.4	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121418-04	12.0	+0.032 +0.102	14.0	18.0	4.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121418-08	12.0	+0.032 +0.102	14.0	18.0	8.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121418-10	12.0	+0.032 +0.102	14.0	18.0	10.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121418-12	12.0	+0.032 +0.102	14.0	18.0	12.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121418-15	12.0	+0.032 +0.102	14.0	18.0	15.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-121418-20	12.0	+0.032 +0.102	14.0	18.0	20.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
GFM-1315-06	13.0	+0.032 +0.102	15.0	22.0	6.0	1.0	13.102	13.032	15.018	15.000	13.000	12.957
GFM-1416-03	14.0	+0.032 +0.102	16.0	22.0	3.0	1.0	14.102	14.032	16.018	16.000	14.000	13.957
GFM-1416-04	14.0	+0.032 +0.102	16.0	22.0	4.0	1.0	14.102	14.032	16.018	16.000	14.000	13.957
GFM-1416-05	14.0	+0.032 +0.102	16.0	22.0	5.0	1.0	14.102	14.032	16.018	16.000	14.000	13.957
GFM-1416-06	14.0	+0.032 +0.102	16.0	22.0	6.0	1.0	14.102	14.032	16.018	16.000	14.000	13.957



For tolerance values  
please refer to page 6.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup> after Pressfit in Ø H7	d1-Tolerance	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit Max.      Min.	Housing Bore Max.      Min.	Shaft Size Max.      Min.
GFM-1416-08	14.0	+0.032 +0.102	16.0	22.0	8.0	1.0	14.102 14.032	16.018 16.000	14.000 13.957
GFM-1416-10	14.0	+0.032 +0.102	16.0	22.0	10.0	1.0	14.102 14.032	16.018 16.000	14.000 13.957
GFM-1416-12	14.0	+0.032 +0.102	16.0	22.0	12.0	1.0	14.102 14.032	16.018 16.000	14.000 13.957
GFM-1416-17	14.0	+0.032 +0.102	16.0	22.0	17.0	1.0	14.102 14.032	16.018 16.000	14.000 13.957
GFM-1416-21	14.0	+0.032 +0.102	16.0	22.0	21.0	1.0	14.102 14.032	16.018 16.000	14.000 13.957
GFM-141624-16	14.0	+0.032 +0.102	16.0	24.0	16.0	1.0	14.102 14.032	16.018 16.000	14.000 13.957
GFM-1516-02	15.0	+0.016 +0.059	16.0	20.0	2.0	0.5	15.059 15.016	16.018 16.000	15.000 14.957
GFM-1516-025	15.0	+0.016 +0.059	16.0	20.0	2.5	0.5	15.059 15.016	16.018 16.000	15.000 14.957
GFM-1516-03	15.0	+0.016 +0.059	16.0	20.0	3.0	0.5	15.059 15.016	16.018 16.000	15.000 14.957
GFM-1516-15	15.0	+0.016 +0.059	16.0	20.0	15.0	0.5	15.059 15.016	16.018 16.000	15.000 14.957
GFM-1517-04	15.0	+0.032 +0.102	17.0	23.0	4.0	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-1517-045	15.0	+0.032 +0.102	17.0	23.0	4.5	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-1517-05	15.0	+0.032 +0.102	17.0	23.0	5.0	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-1517-09	15.0	+0.032 +0.102	17.0	23.0	9.0	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-1517-12	15.0	+0.032 +0.102	17.0	23.0	12.0	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-1517-17	15.0	+0.032 +0.102	17.0	23.0	17.0	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-1517-20	15.0	+0.032 +0.102	17.0	23.0	20.0	1.0	15.102 15.032	17.018 17.000	15.000 14.957
GFM-151824-32	15.0	+0.032 +0.102	18.0	24.0	32.0	1.5	15.102 15.032	18.018 18.000	15.000 14.957
GFM-1618-04	16.0	+0.032 +0.102	18.0	24.0	4.0	1.0	16.102 16.032	18.018 18.000	16.000 15.957
GFM-1618-06	16.0	+0.032 +0.102	18.0	24.0	6.0	1.0	16.102 16.032	18.018 18.000	16.000 15.957
GFM-1618-09	16.0	+0.032 +0.102	18.0	24.0	9.0	1.0	16.102 16.032	18.018 18.000	16.000 15.957
GFM-1618-12	16.0	+0.032 +0.102	18.0	24.0	12.0	1.0	16.102 16.032	18.018 18.000	16.000 15.957
GFM-1618-17	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102 16.032	18.018 18.000	16.000 15.957
GFM-1618-21	16.0	+0.032 +0.102	18.0	24.0	21.0	1.0	16.102 16.032	18.018 18.000	16.000 15.957
GFM-1622-12	16.0	+0.032 +0.102	22.0	25.0	12.0	1.0	16.102 16.032	22.021 22.000	16.000 15.957
GFM-1719-09	17.0	+0.032 +0.102	19.0	25.0	9.0	1.0	17.102 17.032	19.021 19.000	17.000 16.957
GFM-1719-25	17.0	+0.032 +0.102	19.0	25.0	25.0	1.0	17.102 17.032	19.021 19.000	17.000 16.957
GFM-1820-04	18.0	+0.032 +0.102	20.0	26.0	4.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-06	18.0	+0.032 +0.102	20.0	26.0	6.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-09	18.0	+0.032 +0.102	20.0	26.0	9.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-11	18.0	+0.032 +0.102	20.0	26.0	11.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-12	18.0	+0.032 +0.102	20.0	26.0	12.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-17	18.0	+0.032 +0.102	20.0	26.0	17.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-22	18.0	+0.032 +0.102	20.0	26.0	22.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-30	18.0	+0.032 +0.102	20.0	26.0	30.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-1820-32	18.0	+0.032 +0.102	20.0	26.0	32.0	1.0	18.102 18.032	20.021 20.000	18.000 17.957
GFM-182022-06	18.0	+0.032 +0.102	20.0	22.0	6.0	1.0	18.102 18.032	22.021 22.000	18.000 17.957
GFM-1822-28	18.0	+0.032 +0.102	22.0	26.0	28.0	2.0	18.102 18.032	22.021 22.000	18.000 17.957
GFM-2021-035	20.0	+0.020 +0.072	21.0	25.0	3.5	0.5	20.072 20.020	21.021 21.000	20.000 19.948
GFM-2021-20	20.0	+0.020 +0.072	21.0	25.0	20.0	0.5	20.072 20.020	21.021 21.000	20.000 19.948
GFM-2023-07	20.0	+0.040 +0.124	23.0	30.0	7.0	1.5	20.124 20.040	23.021 23.000	20.000 19.948

iglide® G300  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch

mm



# iglide® Plain Bearings

## G300 - Flange Bearing, MM

iglide® G300  
Flange - MM

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>





For tolerance values  
please refer to page 6.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size			
	after Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.	Max.	Min.	
GFM-2023-11	20.0	+0.040 +0.124	23.0	30.0	11.5	1.5	20.124	20.040	23.021	23.000	20.000	19.948
GFM-2023-16	20.0	+0.040 +0.124	23.0	30.0	16.5	1.5	20.124	20.040	23.021	23.000	20.000	19.948
GFM-2023-21	20.0	+0.040 +0.124	23.0	30.0	21.5	1.5	20.124	20.040	23.021	23.000	20.000	19.948
GFM-202329-20	20.0	+0.040 +0.124	23.0	30.0	20.0	1.5	20.124	20.040	23.021	23.000	20.000	19.948
GFM-202326-21	20.0	+0.040 +0.124	23.0	26.0	21.0	1.5	20.124	20.040	23.021	23.000	20.000	19.948
GFM-202328-15	20.0	+0.040 +0.124	23.0	28.0	15.0	1.5	20.124	20.040	23.021	23.000	20.000	19.948
GFM-2427-07	24.0	+0.040 +0.124	27.0	32.0	7.0	1.5	24.124	24.040	27.021	27.000	24.000	23.948
GFM-2427-10	24.0	+0.040 +0.124	27.0	32.0	10.5	1.5	24.124	24.040	27.021	27.000	24.000	23.948
GFM-2526-25	25.0	+0.020 +0.072	26.0	30.0	25.0	0.5	25.072	25.020	26.021	26.000	25.000	24.948
GFM-2527-48	25.0	+0.040 +0.124	27.0	32.0	48.0	1.0	25.124	25.040	27.021	27.000	25.000	24.948
GFM-2528-11	25.0	+0.040 +0.124	28.0	35.0	11.5	1.5	25.124	25.040	28.021	28.000	25.000	24.948
GFM-2528-16	25.0	+0.040 +0.124	28.0	35.0	16.5	1.5	25.124	25.040	28.021	28.000	25.000	24.948
GFM-2528-21	25.0	+0.040 +0.124	28.0	35.0	21.5	1.5	25.124	25.040	28.021	28.000	25.000	24.948
GFM-2630-12	26.0	+0.040 +0.124	30.0	37.0	12.0	2.0	26.124	26.040	30.021	30.000	26.000	25.948
GFM-2730-20	27.0	+0.040 +0.124	30.0	35.0	20.0	1.5	27.124	27.040	30.021	30.000	27.000	26.948
GFM-2830-10	28.0	+0.040 +0.124	30.0	35.0	10.0	1.0	28.124	28.040	30.021	30.000	28.000	27.948
GFM-2830-36	28.0	+0.040 +0.124	30.0	35.0	36.0	1.0	28.124	28.040	30.021	30.000	28.000	27.948
GFM-283239-20	28.0	+0.040 +0.124	32.0	39.0	20.0	2.0	28.124	28.040	32.025	32.000	28.000	27.948
GFM-3031-20	30.0	+0.040 +0.124	31.0	36.0	20.0	0.5	30.124	30.040	31.025	31.000	30.000	29.948
GFM-3031-30	30.0	+0.040 +0.124	31.0	35.0	30.0	0.5	30.124	30.040	31.025	31.000	30.000	29.948
GFM-3032-04	30.0	+0.040 +0.124	32.0	37.0	4.0	1.0	30.124	30.040	32.025	32.000	30.000	29.948
GFM-3032-12	30.0	+0.040 +0.124	32.0	37.0	12.0	1.0	30.124	30.040	32.025	32.000	30.000	29.948
GFM-3032-17	30.0	+0.040 +0.124	32.0	37.0	17.5	1.0	30.124	30.040	32.025	32.000	30.000	29.948
GFM-3032-22	30.0	+0.040 +0.124	32.0	37.0	22.0	1.0	30.124	30.040	32.025	32.000	30.000	29.948
GFM-3034-09	30.0	+0.040 +0.124	34.0	42.0	9.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948
GFM-3034-16	30.0	+0.040 +0.124	34.0	42.0	16.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948
GFM-3034-20	30.0	+0.040 +0.124	34.0	42.0	20.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948
GFM-3034-26	30.0	+0.040 +0.124	34.0	42.0	26.0	2.0	30.124	30.040	34.025	34.000	30.000	29.940
GFM-3034-37	30.0	+0.040 +0.124	34.0	42.0	37.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948
GFM-303440-10	30.0	+0.040 +0.124	34.0	40.0	10.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948
GFM-3236-16	32.0	+0.050 +0.150	36.0	40.0	16.0	2.0	32.150	32.050	36.025	36.000	32.000	31.938
GFM-3236-26	32.0	+0.050 +0.150	36.0	40.0	26.0	2.0	32.150	32.050	36.025	36.000	32.000	31.938
GFM-343850-35	34.0	+0.050 +0.150	38.0	50.0	35.0	2.0	34.150	34.050	38.025	38.000	34.000	34.938
GFM-3539-058	35.0	+0.050 +0.150	39.0	47.0	5.8	2.0	35.150	35.050	39.025	39.000	35.000	34.938
GFM-3539-07	35.0	+0.050 +0.150	39.0	47.0	7.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
GFM-3539-16	35.0	+0.050 +0.150	39.0	47.0	16.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
GFM-3539-26	35.0	+0.050 +0.150	39.0	47.0	26.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
GFM-3539-36	35.0	+0.050 +0.150	39.0	47.0	36.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
GFM-354051-30	35.0	+0.050 +0.150	40.0	51.0	30.0	2.5	35.150	35.050	40.025	40.000	35.000	34.938
GFM-3842-22	38.0	+0.050 +0.150	42.0	54.0	22.0	2.0	38.150	38.050	42.025	42.000	38.000	37.938
GFM-4044-07	40.0	+0.050 +0.150	44.0	52.0	7.0	2.0	40.150	40.050	44.025	44.000	40.000	39.938
GFM-4044-14	40.0	+0.050 +0.150	44.0	52.0	14.0	2.0	40.150	40.050	44.025	44.000	40.000	39.938



For tolerance values  
please refer to page 6.4

r = max. 0.5


Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size
	after Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.
<b>GFM-4044-20</b>	40.0	+0.050 +0.150	44.0	52.0	20.0	2.0	40.150	40.050	40.025 44.000
<b>GFM-4044-30</b>	40.0	+0.050 +0.150	44.0	52.0	30.0	2.0	40.150	40.050	40.025 44.000
<b>GFM-4044-40</b>	40.0	+0.050 +0.150	44.0	52.0	40.0	2.0	40.150	40.050	40.025 44.000
<b>GFM-4044-50</b>	40.0	+0.050 +0.150	44.0	52.0	50.0	2.0	40.150	40.050	40.025 44.000
<b>GFM-4246-19</b>	42.0	+0.050 +0.150	46.0	53.0	19.0	2.0	42.150	42.050	42.025 46.000
<b>GFM-4550-30</b>	45.0	+0.050 +0.150	50.0	58.0	30.0	2.0	45.150	45.050	45.025 50.000
<b>GFM-4550-50</b>	45.0	+0.050 +0.150	50.0	58.0	50.0	2.0	45.150	45.050	45.025 50.000
<b>GFM-5055-07</b>	50.0	+0.050 +0.150	55.0	63.0	7.0	2.0	50.150	50.050	50.030 55.000
<b>GFM-5055-10</b>	50.0	+0.050 +0.150	55.0	63.0	10.0	2.0	50.150	50.050	50.030 55.000
<b>GFM-5055-18</b>	50.0	+0.050 +0.150	55.0	63.0	18.0	2.0	50.150	50.050	50.030 55.000
<b>GFM-5055-25</b>	50.0	+0.050 +0.150	55.0	63.0	25.0	2.0	50.150	50.050	50.030 55.000
<b>GFM-5055-40</b>	50.0	+0.050 +0.150	55.0	63.0	40.0	2.0	50.150	50.050	50.030 55.000
<b>GFM-5055-50</b>	50.0	+0.050 +0.150	55.0	63.0	50.0	2.0	50.150	50.050	50.030 55.000
<b>GFM-6065-07</b>	60.0	+0.060 +0.180	65.0	73.0	7.0	2.0	60.180	60.060	60.030 65.000
<b>GFM-6065-22</b>	60.0	+0.060 +0.180	65.0	73.0	22.0	2.0	60.180	60.060	60.030 65.000
<b>GFM-6065-30</b>	60.0	+0.060 +0.180	65.0	73.0	30.0	2.0	60.180	60.060	60.030 65.000
<b>GFM-6065-50</b>	60.0	+0.060 +0.180	65.0	73.0	50.0	2.0	60.180	60.060	60.030 65.000
<b>GFM-606580-62</b>	60.0	+0.060 +0.180	65.0	80.0	62.0	2.0	60.180	60.060	60.030 65.000
<b>GFM-6570-50</b>	65.0	+0.060 +0.180	70.0	78.0	50.0	2.0	65.180	65.060	65.030 70.000
<b>GFM-7075-50</b>	70.0	+0.060 +0.180	75.0	83.0	50.0	2.0	70.180	70.060	70.030 75.000
<b>GFM-7580-50</b>	75.0	+0.060 +0.180	80.0	88.0	50.0	2.0	75.180	75.060	75.030 80.000
<b>GFM-8085-100</b>	80.0	+0.060 +0.180	85.0	93.0	100.0	2.5	80.180	80.060	80.035 85.000
<b>GFM-8590-100</b>	85.0	+0.072 +0.212	90.0	98.0	100.0	2.5	85.212	85.072	85.035 90.000
<b>GFM-9095-100</b>	90.0	+0.072 +0.212	95.0	103.0	100.0	2.5	90.212	90.072	90.035 95.000
<b>GFM-95100-100</b>	95.0	+0.072 +0.212	100.0	108.0	100.0	2.5	95.212	95.072	95.035 100.000
<b>GFM-100105-42.5</b>	100.0	+0.072 +0.212	105.0	113.0	42.5	2.5	100.212	100.072	100.035 105.000
<b>GFM-100105-100</b>	100.0	+0.072 +0.212	105.0	113.0	100.0	2.5	100.212	100.072	100.035 105.000
<b>GFM-110115-100</b>	110.0	+0.072 +0.212	115.0	123.0	100.0	2.5	110.212	110.072	110.035 115.000
<b>GFM-120125-100</b>	120.0	+0.072 +0.212	125.0	133.0	100.0	2.5	120.212	120.072	120.040 125.000
<b>GFM-125130-100</b>	125.0	+0.085 +0.245	130.0	138.0	100.0	2.5	125.245	125.085	125.040 130.000
<b>GFM-130135-100</b>	130.0	+0.085 +0.245	135.0	143.0	100.0	2.5	130.245	130.085	130.040 135.000
<b>GFM-140145-100</b>	140.0	+0.085 +0.245	145.0	153.0	100.0	2.5	140.245	140.085	140.040 145.000
<b>GFM-150155-40</b>	150.0	+0.085 +0.245	155.0	163.0	40.0	2.5	150.245	150.085	150.040 155.000
<b>GFM-150155-100</b>	150.0	+0.085 +0.245	155.0	163.0	100.0	2.5	150.245	150.085	150.040 155.000

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch



mm



G300


igus®

# iglide® Plain Bearings

## G300 - Thrust Washer, MM

iglide® G300

Thrust Washer - MM

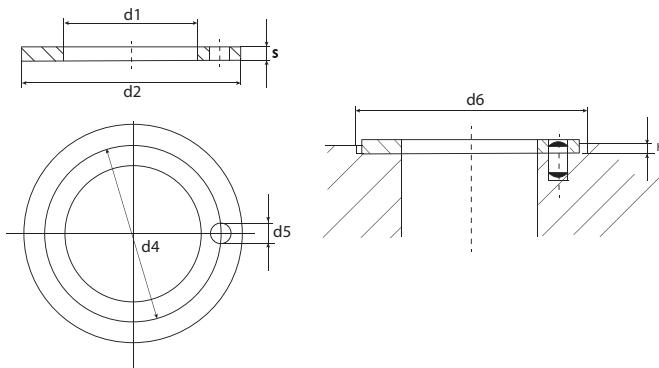

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Part Number	d1 +0.25	d2 -0.25	s -0.05	d4 -0.12 +0.12	d5 +0.375 +0.125	h +0.2 -0.2	d6 +0.12
GTM-0509-006	5.0	9.5	0.6	*	*	0.3	9.5
GTM-0615-015	6.0	15.0	1.5	*	*	1.0	15
GTM-0620-015	6.0	20.0	1.5	13.0	1.5	1.0	20
GTM-0713-005	7.0	13.0	0.5	*	*	0.2	13
GTM-0815-005	8.0	15.0	0.5	*	*	0.2	15
GTM-0815-015	8.0	15.0	1.5	11.5	*	1.0	15
GTM-0818-010	8.0	18.0	1.0	*	*	0.7	18
GTM-0818-015	8.0	18.0	1.5	13.0	1.5	1.0	18
GTM-0918-015	9.0	18.0	1.5	13.5	1.5	1.0	18
GTM-1018-010	10.0	18.0	1.0	*	*	0.7	18
GTM-1018-020	10.0	18.0	2.0	*	*	1.5	18
GTM-1224-015	12.0	24.0	1.5	18.0	1.5	1.0	24
GTM-1420-015	14.0	20.0	1.5	*	*	1.0	20
GTM-1426-015	14.0	26.0	1.5	20.0	2.0	1.0	26
GTM-1522-008	15.0	22.0	0.8	*	*	0.5	22
GTM-1524-015	15.0	24.0	1.5	19.5	1.5	1.0	24
GTM-1524-0275	15.0	24.0	2.75	*	*	2.0	24
GTM-1630-015	16.0	30.0	1.5	22.0	2.0	1.0	30
GTM-1832-015	18.0	32.0	1.5	25.0	2.0	1.0	32
GTM-2036-015	20.0	36.0	1.5	28.0	3.0	1.0	36
GTM-2238-015	22.0	38.0	1.5	30.0	3.0	1.0	38
GTM-2442-015	24.0	42.0	1.5	33.0	3.0	1.0	42
GTM-2644-015	26.0	44.0	1.5	35.0	3.0	1.0	44
GTM-2835-005	28.0	35.0	0.5	*	*	0.2	35
GTM-2848-015	28.0	48.0	1.5	38.0	4.0	1.0	48
GTM-3254-015	32.0	54.0	1.5	43.0	4.0	1.0	54
GTM-3862-015	38.0	62.0	1.5	50.0	4.0	1.0	62
GTM-4266-015	42.0	66.0	1.5	54.0	4.0	1.0	66
GTM-4874-020	48.0	74.0	2.0	61.0	4.0	1.5	74
GTM-5278-020	52.0	78.0	2.0	65.0	4.0	1.5	78
GTM-6290-020	62.0	90.0	2.0	76.0	4.0	1.5	90
GTM-6881-020	68.0	81.0	2.0	*	*	1.5	81

\* Designed without fixing bore

igus®



iglide® Q




### Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 3 in.  
Metric sizes from 6 - 80 mm)

### Part Number Structure

#### Part Number Structure

**Q S I-02 03-04**

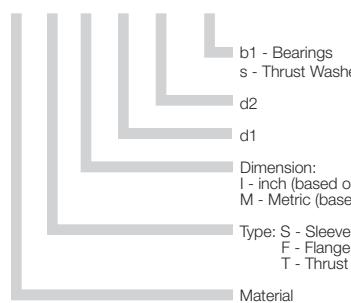

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	984	1181

### Usage Guidelines



- When there are very high loads
- For shock and impact loads
- For oscillating applications



- When temperatures are continuously greater than 275°F  
► iglide® T500, Z
- When electrically conductive bearings are needed  
► iglide® F



### Material Table

General Properties	Unit	iglide® Q	Testing Method
Density	g/cm <sup>3</sup>	1.40	
Color		black	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.9	DIN 53495
Max. moisture absorption	% weight	4.9	
Coefficient of friction, dynamic against steel	$\mu$	0.05 - 0.15	
p x v value, max. (dry)	psi x fpm	16,000	

### Mechanical Properties


Modulus of elasticity	psi	652,700	DIN 53457
Tensile strength at 68°F	psi	17,400	DIN 53452
Compressive strength	psi	12,910	
Permissible static surface pressure (68°F)	psi	14,500	
Shore D-hardness		83	DIN 53505

### Physical and Thermal Properties

Max., long-term application temperature	°F	275	
Max., short-term application temperature	°F	311	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.23	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	5	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10 <sup>15</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	DIN 53482

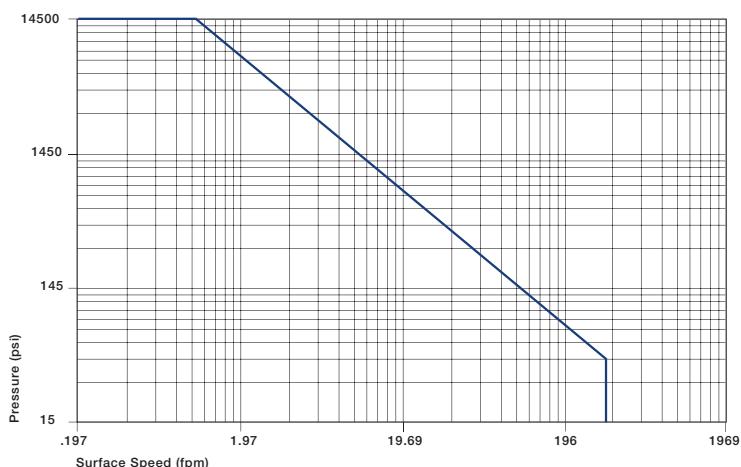

Permissible p x v value for iglide® Q running dry against a steel shaft, at 68°F


Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

Iglide® Q plain bearings were developed especially for high load applications. At high loads, iglide® Q ranks among the best iglide® materials for wear resistance. Starting at a radial load of 3625 psi, even plain bearings made of the highly wear-resistant iglide® L280 are outmatched. Special solid lubricants are distributed throughout the iglide® Q material, allowing maintenance-free dry running applications at any load.

## Compressive Strength

Iglide® Q is a material that is used when high loads over 7250 psi are required. The graph shows the elastic deformation of iglide® Q for radial loads. At the maximum permissible static load of 14,500 psi, deformation is less than 3% at room temperature.

- Compressive Strength, Page 1.3

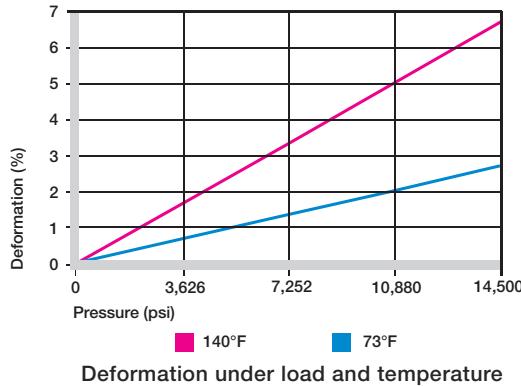

## Permissible Surface Speeds

Under extreme radial loads, iglide® Q plain bearings can achieve the highest  $p \times v$  values for plain bearings running dry. Although iglide® Q plain bearings provide the largest advantages, for high loads and low speeds, high surface speeds are also possible, due to excellent friction values. The values in the table show the speeds at which friction can cause temperature to increase to maximum permissible levels.

- Surface Speed, Page 1.5
- $p \times v$  value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	984	1181

Maximum surface speeds


## Temperatures

Plain bearings made of iglide® Q have excellent wear resistance even at high temperatures. The maximum long-term application temperature is 275°F. For the short-term, the material can withstand 311°F. Because of different environmental influences, the bearing can lose pressfit at lower temperatures. Therefore, it may be necessary to secure the bearings in the housing bore. Also, notice that the coefficient of friction increases rapidly as temperature increases beginning at approximately 212°F.

- Application Temperature, Page 1.7


iglide® Q	Application Temperature
Minimum	- 40 °F
Max., long-term	+ 275 °F
Max, short-term	+ 311 °F
Additional axial securing	+122°F

Temperature limits for iglide® Q

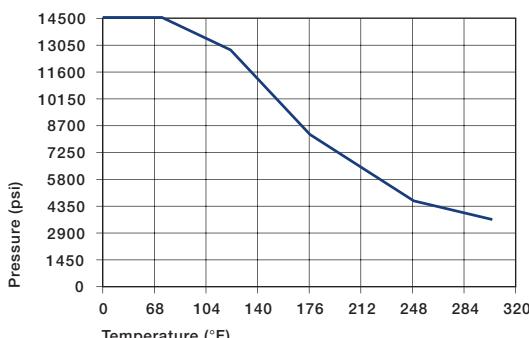

Recommended maximum static surface pressure of iglide® Q as a result of the temperature


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

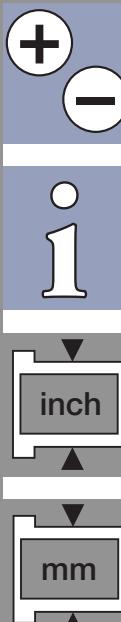

## Installation Tolerances

iglide® Q plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

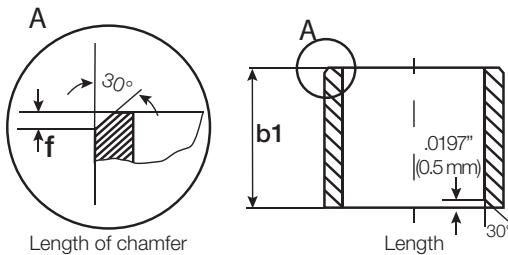

### For Inch Size Bearings

Length (inches)	Length Tolerance (b1)	Length of Chamfer (f) Based on d1
Tolerance (h13) (inches)		
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

### For Metric Size Bearings


Length (mm)	Length Tolerance (b1)	Length of Chamfer (f) Based on d1
Tolerance (h13) (μm)		
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Many self-lubricated plain bearings have coefficients of friction that decrease with increasing loads. iglide® Q has the best coefficient of friction of all the iglide® plain bearings. After a short start-up phase, the coefficient of friction drops to its final result.

With these low coefficients of friction, iglide® Q is the recommended material, when extreme loads exist and maximum wear resistance is needed. The shafting partner has a large influence on friction and wear. Very smooth shafts increase the friction of the bearing. For applications with high loads, we recommend hardened and ground surfaces with an average roughness range of 6-12 rms.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

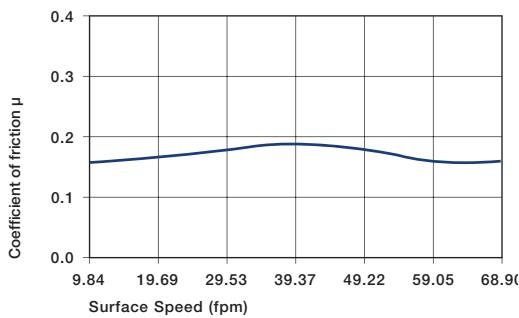


Coefficient of friction as a result of the surface speed;  
load = 108 psi constant


### iglide® Q      Coefficient of Friction

Dry	0.05 - 0.15
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction for iglide® Q against steel (Shaft finish = 40 rms, 50 HRC)

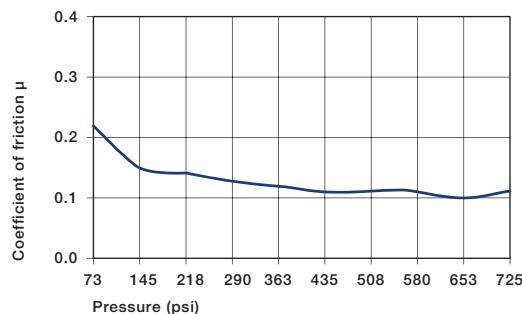

Coefficient of friction as a result of the load, v = 1.97 fpm

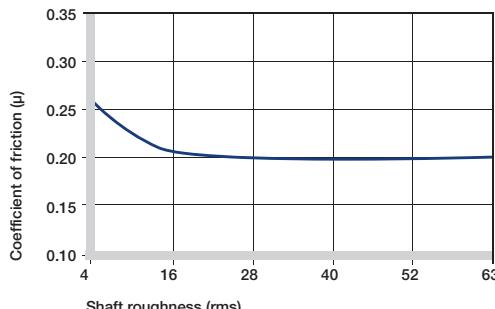

Coefficient of friction as a result of the shaft surface


### Shaft Materials

The graphs show results of testing different shaft materials with plain bearings made of iglide® Q.


iglide® Q plain bearings have a higher average wear rate at low loads, than bearings made of iglide® J or L280. However, the strength of iglide® Q is its wear resistance at heavy loads and in oscillating operation. In oscillating movements, iglide® Q plain bearings perform best against hard chromed or machined steel shafts.

If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft Materials, Page 1.11

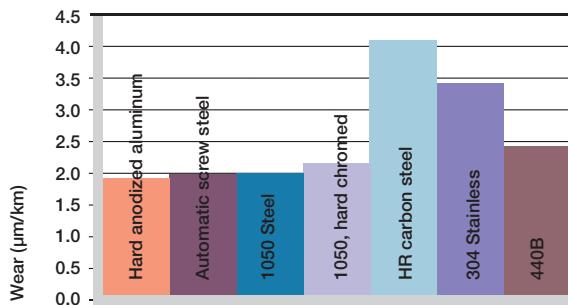


Wear of iglide® Q, rotating application with different shaft materials,  $p=108$  psi,  $v=98$  fpm

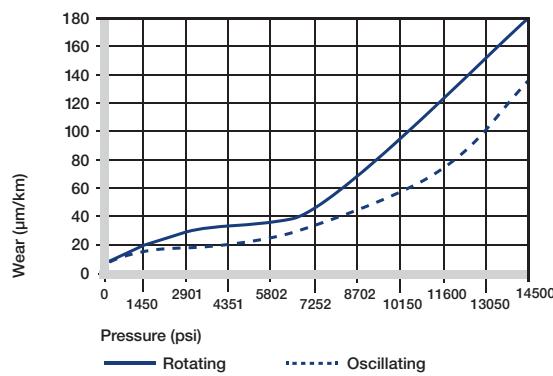

Wear for oscillating and rotating applications with a 1050 hard chromed shaft

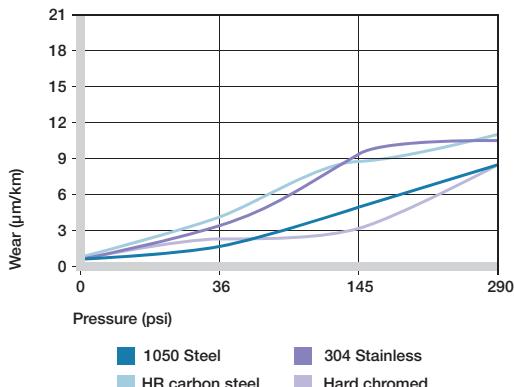



Wear with different shaft materials for rotating applications

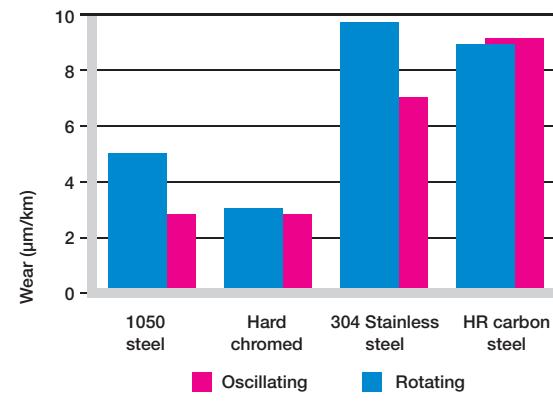

Wear for oscillating and rotating applications with different shaft materials at  $p = 290$  psi

iglide® Q

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

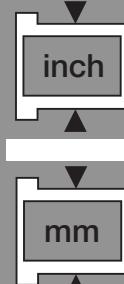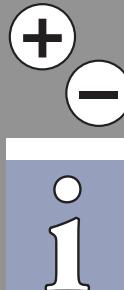

## Chemical Resistance

iglide® Q plain bearings have excellent chemical resistance. They are resistant to organic solvents, fuels, oils and fats. The material is only partially resistant to weak acids and weak lyes. The moisture absorption of iglide® Q plain bearings is approximately 0.9% in standard atmosphere. The saturation limit in water is 4.9%. This must be taken into account along with any other application conditions.


► Chemicals Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbon, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	0

+ resistant, 0 conditionally resistant, – not resistant

### Chemical resistance of iglide® Q

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

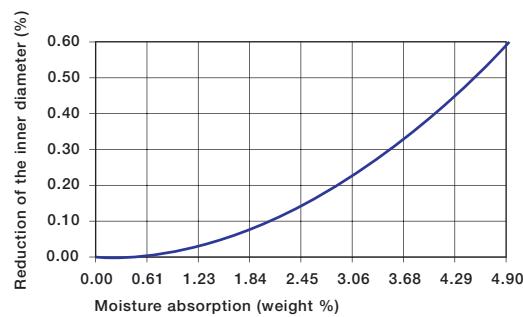

Effect of moisture absorption on iglide® Q plain bearings

## Radiation Resistance

Plain bearings made from iglide® Q are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

## UV-Resistance

The tribological properties of iglide® Q plain bearings stay constant for the most part under weathering effects. However, a slight embrittlement of the material occurs.

## Vacuum

When used in a vacuum, the iglide® Q plain bearings release existing moisture as a vapor. Therefore, only dehumidified bearings made of iglide® Q are suitable for the vacuum.


## Electrical Properties

iglide® Q plain bearings are electrically insulating.

### iglide® Q

Specific volume resistance	> $10^{15}$ Ωcm
Surface resistance	> $10^{12}$ Ω

### Electrical properties of iglide® Q

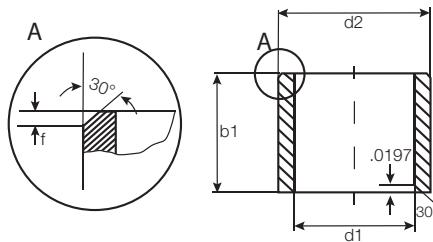

For tolerance values  
please refer to page 7.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
QSI-0203-04	1/8	3/16	1/4	.1269	.1251	.1878	.1873	.1243	.1236
QSI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497	.1865	.1858
QSI-0304-06	3/16	1/4	3/8	.1892	.1873	.2503	.2497	.1865	.1858
QSI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490	.2481
QSI-0405-06	1/4	5/16	3/8	.2521	.2498	.3128	.3122	.2490	.2481
QSI-0405-08	1/4	5/16	1/2	.2521	.2498	.3128	.3122	.2490	.2481
QSI-0506-04	5/16	3/8	1/4	.3148	.3125	.3753	.3747	.3115	.3106
QSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
QSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747	.3115	.3106
QSI-0607-04	3/8	15/32	1/4	.3773	.3750	.4691	.4684	.3740	.3731
QSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684	.3740	.3731
QSI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684	.3740	.3731
QSI-0708-08	7/16	17/32	1/2	.4406	.4379	.5316	.5309	.4365	.4355
QSI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934	.4990	.4980
QSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240	.6230
QSI-1214-08	3/4	7/8	1/2	.7541	.7507	.8755	.8747	.7491	.7479
QSI-1214-12	3/4	7/8	3/4	.7541	.7507	.8755	.8747	.7491	.7479
QSI-1214-16	3/4	7/8	1	.7541	.7507	.8755	.8747	.7491	.7479
QSI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997	.8741	.8729
QSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991	.9979
QSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
QSI-1820-24	1 1/8	1 9/32	1 1/2	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
QSI-2022-20	1 1/4	1 13/32	1 1/4	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
QSI-2022-24	1 1/4	1 13/32	1 1/2	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
QSI-2426-24	1 1/2	1 21/32	1 1/2	1.5408	1.5008	1.6568	1.6558	1.4988	1.4972
QSI-2629-20	1 5/8	1 25/32	1 1/4	1.6297	1.6258	1.7818	1.7808	1.6238	1.6222
QSI-2831-32	1 3/4	1 15/16	2	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
QSI-3235-12	2	2 3/16	3/4	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
QSI-3235-16	2	2 3/16	1	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
QSI-3235-24	2	2 3/16	1 1/2	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
QSI-3235-32	2	2 3/16	2	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
QSI-3235-40	2	2 3/16	2 1/2	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
QSI-3639-32	2 1/4	2 7/16	2	2.2577	2.2531	2.4377	2.4365	2.2507	2.2489
QSI-4043-16	2 1/2	2 11/16	1.0	2.5082	2.5035	2.6881	2.6869	2.5011	2.4993
QSI-4043-32	2 1/2	2 11/16	2.0	2.5082	2.5035	2.6881	2.6869	2.5011	2.4993
QSI-4851-16	3.0	3 3/16	1.0	3.0070	3.0023	3.1872	3.1858	3.0000	2.9982
QSI-4851-32	3.0	3 3/16	2.0	3.0070	3.0023	3.1872	3.1858	3.0000	2.9982
QSI-4851-48	3.0	3 3/16	3.0	3.0070	3.0023	3.1872	3.1858	3.0000	2.9982

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch



mm




**igus®**

## iglide® Plain Bearings Q - Flange, Inch


iglide® Q  
Flange - Inch

Telephone 1-800-521-2747  
1-401-438-7270  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>




r = max. .0197



For tolerance values  
please refer to page 7.4

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
QFI-0203-04	1/8	3/16	1/4	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
QFI-0304-06	3/16	1/4	3/8	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
QFI-0405-06	1/4	5/16	3/8	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
QFI-0405-08	1/4	5/16	1/2	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
QFI-0506-08	5/16	3/8	1/2	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
QFI-0607-04	3/8	15/32	1/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
QFI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
QFI-0809-04	1/2	19/32	1/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
QFI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
QFI-0809-12	1/2	19/32	3/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
QFI-1011-12	5/8	23/32	3/4	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
QFI-1012-08	5/8	3/4	1/2	1.000	.062	.6290	.6263	.7510	.7500	.6250	.6240
QFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
QFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
QFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
QFI-1416-12	7/8	1	3/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
QFI-1416-16	7/8	1	1	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
QFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
QFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
QFI-1618-24	1	1 1/8	1 1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
QFI-1820-12	1 1/8	1 9/32	3/4	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
QFI-1820-24	1 1/8	1 9/32	1 1/2	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
QFI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
QFI-2022-24	1 1/4	1 13/32	1 1/2	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
QFI-2426-04	1 1/2	1 21/32	1/4	2.000	.078	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
QFI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
QFI-2831-32	1 3/4	1 15/16	2	2.375	.093	1.7547	1.7508	1.9381	1.9371	1.7487	1.7471
QFI-3235-32	2	2 3/16	2	2.625	.093	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
QFI-3639-32	2 1/4	2 7/16	2	2.750	.093	2.2577	2.2531	2.4377	2.4365	2.2507	2.2489

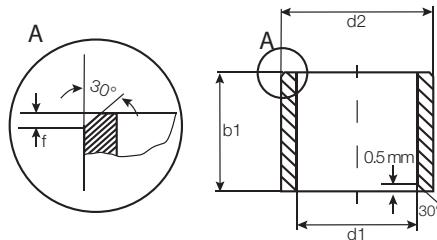

For tolerance values  
please refer to page 7.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
QSM-0608-10	6.0	+0.020 +0.068	8.0	10.0	6.068	6.020	8.015	8.000
QSM-0810-08	8.0	+0.025 +0.083	10.0	8.0	8.083	8.025	10.015	10.000
QSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000
QSM-1214-10	12.0	+0.032 +0.102	14.0	10.0	12.102	12.032	14.018	14.000
QSM-1214-20	12.0	+0.032 +0.102	14.0	20.0	12.102	12.032	14.018	14.000
QSM-1618-08	16.0	+0.032 +0.102	18.0	8.0	16.102	16.032	18.018	18.000
QSM-1618-12	16.0	+0.032 +0.102	18.0	12.0	16.102	16.032	18.018	18.000
QSM-1618-20	16.0	+0.032 +0.102	18.0	20.0	16.102	16.032	18.018	18.000
QSM-1820-20	18.0	+0.032 +0.102	20.0	20.0	18.102	18.032	20.021	20.000
QSM-2022-15	20.0	+0.040 +0.124	22.0	15.0	20.124	20.040	22.021	22.000
QSM-2023-15	20.0	+0.040 +0.124	23.0	15.0	20.124	20.040	23.021	23.000
QSM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000
QSM-2023-25	20.0	+0.040 +0.124	23.0	25.0	20.124	20.040	23.021	23.000
QSM-2023-30	20.0	+0.040 +0.124	23.0	30.0	20.124	20.040	23.021	23.000
QSM-2225-15	22.0	+0.040 +0.124	25.0	15.0	22.124	22.040	25.021	25.000
QSM-2528-25	25.0	+0.040 +0.124	28.0	25.0	25.124	25.040	28.021	28.000
QSM-2528-48	25.0	+0.040 +0.124	28.0	48.0	25.124	25.040	28.021	28.000
QSM-3034-20	30.0	+0.040 +0.124	34.0	20.0	30.124	30.040	34.025	34.000
QSM-3034-40	30.0	+0.040 +0.124	34.0	40.0	30.124	30.040	34.025	34.000
QSM-3539-15	35.0	+0.050 +0.150	39.0	15.0	35.150	35.050	39.025	39.000
QSM-3539-30	35.0	+0.050 +0.150	39.0	30.0	35.150	35.050	39.025	39.000
QSM-3539-50	35.0	+0.050 +0.150	39.0	50.0	35.150	35.050	39.025	39.000
QSM-4044-40	40.0	+0.050 +0.150	44.0	40.0	40.150	40.050	44.025	44.000
QSM-4044-47	40.0	+0.050 +0.150	44.0	47.0	40.150	40.050	44.025	44.000
QSM-4550-252	45.0	+0.050 +0.150	50.0	25.2	45.150	45.050	50.025	50.000
QSM-4550-50	45.0	+0.050 +0.150	50.0	50.0	45.150	45.050	50.025	50.000
QSM-5055-50	50.0	+0.050 +0.150	55.0	50.0	50.150	50.050	55.030	55.000
QSM-5055-60	50.0	+0.050 +0.150	55.0	60.0	50.150	50.050	55.030	55.000
QSM-5560-50	55.0	+0.050 +0.150	60.0	50.0	55.180	55.060	60.030	60.000
QSM-6065-50	60.0	+0.060 +0.180	65.0	50.0	60.180	60.060	65.030	65.000
QSM-6570-34	65.0	+0.060 +0.180	70.0	34.0	65.180	65.060	70.030	70.000
QSM-7075-50	70.0	+0.060 +0.180	75.0	50.0	70.180	70.060	75.030	75.000
QSM-8085-60	80.0	+0.060 +0.180	85.0	60.0	80.180	80.060	85.035	85.000
							80.000	79.926

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch





mm



**igus®**

# iglide® Plain Bearings Q - Flange, MM

iglide® Q  
Flange - MM




For tolerance values  
please refer to page 7.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max. Min.	Max. Min.	
<b>QFM-0608-04</b>	6.0	+0.020 +0.068	8.0	12.0	4.0	1.0	6.068	6.020	8.015 8.000	6.000 5.970
<b>QFM-0810-05</b>	8.0	+0.025 +0.083	10.0	15.0	5.5	1.0	8.083	8.025	10.015 10.000	8.000 7.964
<b>QFM-0810-06</b>	8.0	+0.025 +0.083	10.0	15.0	6.0	1.0	8.083	8.025	10.015 10.000	8.000 7.964
<b>QFM-1012-06</b>	10.0	+0.025 +0.083	12.0	18.0	6.0	1.0	10.083	10.025	12.018 12.000	10.000 9.964
<b>QFM-101215-08</b>	10.0	+0.025 +0.083	12.0	15.0	8.0	1.0	10.083	10.025	12.018 12.000	10.000 9.964
<b>QFM-1012-10</b>	10.0	+0.025 +0.083	12.0	18.0	10.0	1.0	10.083	10.025	12.018 12.000	10.000 9.964
<b>QFM-101215-035</b>	10.0	+0.025 +0.083	12.0	15.0	3.5	1.0	10.083	10.025	12.018 12.000	10.000 9.964
<b>QFM-1214-08</b>	12.0	+0.032 +0.102	14.0	20.0	8.0	1.0	12.102	12.032	14.018 14.000	12.000 11.957
<b>QFM-1214-12</b>	12.0	+0.032 +0.102	14.0	20.0	12.0	1.0	12.102	12.032	14.018 14.000	12.000 11.957
<b>QFM-1214-20</b>	12.0	+0.032 +0.102	14.0	20.0	20.0	1.0	12.102	12.032	14.018 14.000	12.000 11.957
<b>QFM-1416-12</b>	14.0	+0.032 +0.102	16.0	22.0	12.0	1.0	14.102	14.032	16.018 16.000	14.000 13.957
<b>QFM-1618-17</b>	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102	16.032	18.018 18.000	16.000 15.957
<b>QFM-1820-12</b>	18.0	+0.032 +0.102	20.0	26.0	12.0	1.0	18.102	18.032	20.021 20.000	18.000 17.957
<b>QFM-2023-21</b>	20.0	+0.040 +0.124	23.0	30.0	21.0	1.5	20.124	20.040	23.021 23.000	20.000 19.948
<b>QFM-2528-21</b>	25.0	+0.040 +0.124	28.0	35.0	21.5	1.5	25.124	25.040	28.021 28.000	25.000 24.948
<b>QFM-2528-25</b>	25.0	+0.040 +0.124	28.0	35.0	25.0	1.5	25.124	25.040	28.021 28.000	25.000 24.948
<b>QFM-2629-05</b>	26.0	+0.040 +0.124	29.0	35.0	5.0	1.5	26.124	26.040	29.021 29.000	26.000 25.948
<b>QFM-2629-10</b>	26.0	+0.040 +0.124	29.0	35.0	10.0	1.5	26.124	26.040	29.021 29.000	26.000 25.948
<b>QFM-2730-20</b>	27.0	+0.040 +0.124	30.0	38.0	20.0	1.5	27.124	27.040	30.021 30.000	27.000 26.948
<b>QFM-3034-37</b>	30.0	+0.040 +0.124	34.0	42.0	37.0	2.0	30.124	30.040	34.025 34.000	30.000 29.948
<b>QFM-3539-26</b>	35.0	+0.050 +0.150	39.0	47.0	26.0	2.0	35.150	35.050	39.025 39.000	35.000 34.938
<b>QFM-4044-40</b>	40.0	+0.050 +0.150	44.0	52.0	40.0	2.0	40.150	40.050	44.025 44.000	40.000 39.938
<b>QFM-5055-50</b>	50.0	+0.050 +0.150	55.0	63.0	50.0	2.0	50.150	50.050	55.030 55.000	50.000 49.938
<b>QFM-6065-50</b>	60.0	+0.060 +0.180	65.0	73.0	50.0	2.0	60.180	60.060	65.030 65.000	60.000 59.926
<b>QFM-7075-50</b>	70.0	+0.060 +0.180	75.0	83.0	75.0	2.0	70.180	70.060	75.030 75.000	70.000 69.926

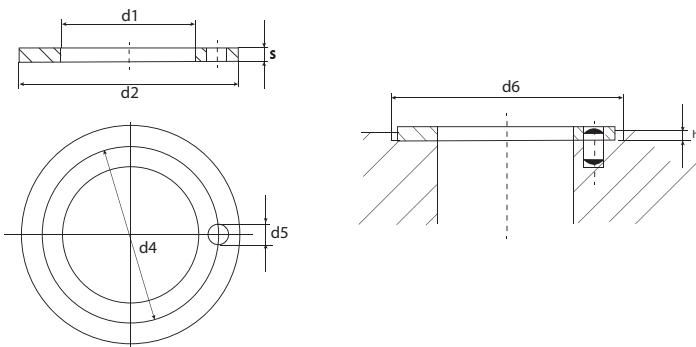

Dimensions according to ISO 3547-1 and special dimensions


Part Number	d1 +0.25	d2 -0.25	s -0.05	d4 -0.12 +0.12	d5 +0.375 +0.125	h +0.2 -0.2	d6 +0.12
QTM-2842-015	28.0	42.0	1.5	35.0	4.0	1.0	42.0
QTM-3254-015	32.0	54.0	1.5	43.0	4.0	1.0	54.0
QTM-3862-015	38.0	62.0	1.5	50.0	4.0	1.0	62.0
QTM-5278-020	52.0	78.0	2.0	65.0	4.0	1.5	78.0

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+ | 1.0 | I

inch

mm



**igus®**

## iglide® Plain Bearings Q - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® Q

igus®



iglide® P




### Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/4 - 2 in.  
Metric sizes from 3 - 95 mm)

### Part Number Structure

#### Part Number Structure

**P S I-04 05-04**

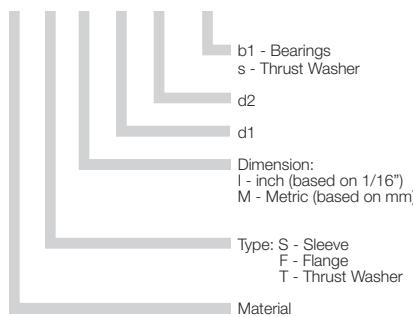

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	590	787

### Usage Guidelines



- When very low water absorption is needed
- When a cost-effective bearing for high pressure loads is desired
- For rotating movements under high loads
- When high precision in high humidity and moderately high temperatures are needed



- When the maximum application temperature is above 266°F
  - iglide® G300
- When mechanical reaming of the wall surface is necessary
  - iglide® M250
  - iglide® J
- When the highest wear resistance is needed
  - iglide® L280



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

### Material Data

General Properties	Unit	iglide® P	Testing Method
Density	g/cm³	1.58	
Color		black	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0,2	DIN 53495
Max. water absorption	% weight	0.4	
Coefficient of friction, dynamic against steel	$\mu$	0.06 - 0.21	
p x v value, max. (dry)	psi x fpm	11,000	

### Mechanical Properties


Modulus of elasticity	psi	768,700	DIN 53457
Tensile strength at 68°F	psi	17,400	DIN 53452
Compressive strength	psi	9,572	
Permissible static surface pressure (68°F)	psi	7,252	
Shore D-hardness		75	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	266	
Max. short-term application temperature	°F	392	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.25	ASTM C 177
Coefficient of thermal expansion	K <sup>-1</sup> x 10 <sup>-5</sup>	4	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	DIN 53482

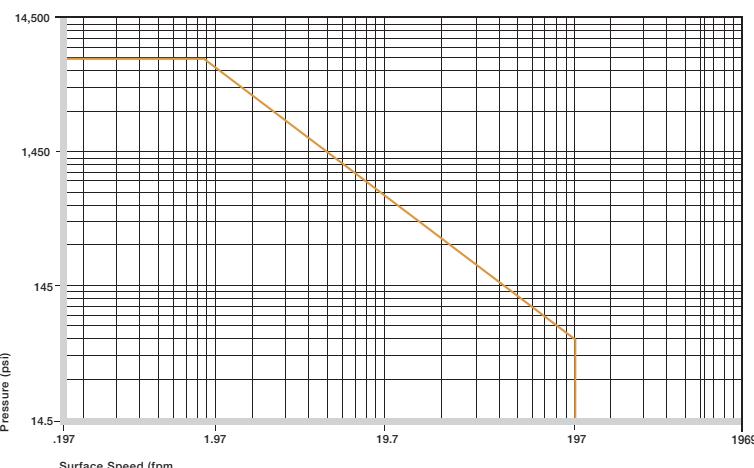


Permissible p x v value for iglide® P running dry against a steel shaft, at 68°F

With the iglide® P plain bearing, the user has a cost-effective, maintenance-free plain bearing. Compared to iglide® G300, plain bearings made of iglide® P are better suited for rotating movements and high loads.

### Compressive Strength

Graph 9.2 shows the elastic deformation of iglide® P for radial loads. At the maximum permissible load of 5075 psi, the deformation is less than 3% at room temperature.

- Compressive Strength, Page 1.3

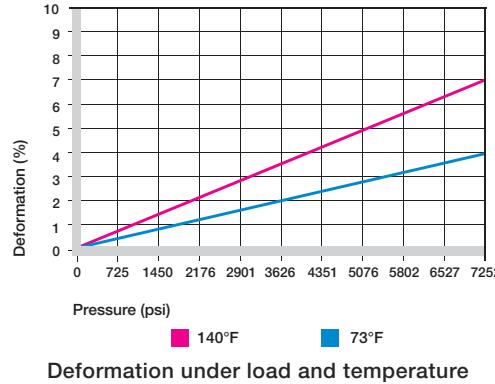

### Permissible Surface Speeds

Plain bearings made from iglide® P are maintenance-free plain bearings, which were developed for low to average surface speeds. The maximum values given in the table can only be achieved at a very low surface pressure. The maximum speed given is the speed at which an increase up to the continuous use temperature occurs due to friction.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	590	787

#### Maximum surface speed


### Temperatures

Even at its highest long-term application temperature of 266°F, iglide® P does not quite reach the values of iglide® G300. With a maximum permissible short-term temperature of 392°F, a heat treating process is possible, without additional loading.

With increasing temperatures, the compressive strength of iglide® P plain bearings decreases.

The ambient temperatures in the bearing system also have an effect on the bearing wear. With increasing temperatures, the wear increases.

- Application Temperatures, Page 1.7

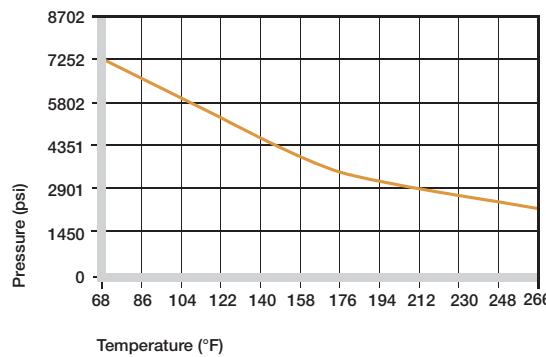

Recommended maximum permissible static surface pressure of iglide® P as a result of the temperature

iglide® P	Application Temperature
Minimum	- 40°F
Max., long-term	+ 266°F
Max., short-term	+ 392°F
Additional axial securing	+194°F


Temperature limits for iglide® P



## Installation Tolerances

iglide® P plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

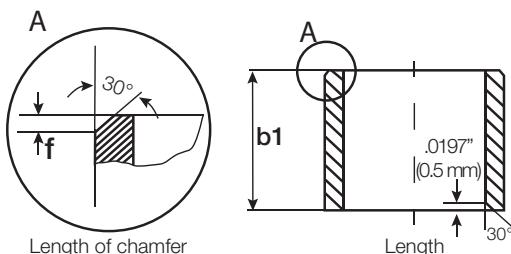

For Inch Size Bearings		
Length Tolerance (b1) (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


For Metric Size Bearings		
Length Tolerance (b1) (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	
> 3 to 6	-0 / -180	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 6 to 10	-0 / -220	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 10 to 18	-0 / -270	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 18 to 30	-0 / -330	f = 1.2 → d <sub>1</sub> > 30 mm
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction changes greatly with increasing load. For iglide® P the coefficient of friction increases slightly when the speed increases. The graph shown at the upper right shows how the coefficient of friction drops when the load increases. Starting at approximately 870 psi, the coefficient of friction is already below 0.1.

For iglide® P a ground surface with an average roughness range of 4-8 rms is recommended for the shaft. Both smoother and rougher shaft finishes cause the friction to clearly increase.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

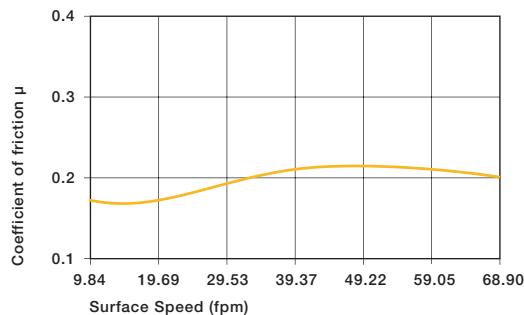


Coefficients of friction of iglide® P as a result of the surface speed; p = 108 psi

iglide® P	Coefficient of Friction
Dry	0.06 - 0.21
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction for iglide® P against steel (Shaft finish = 40 rms, 50 HRC)

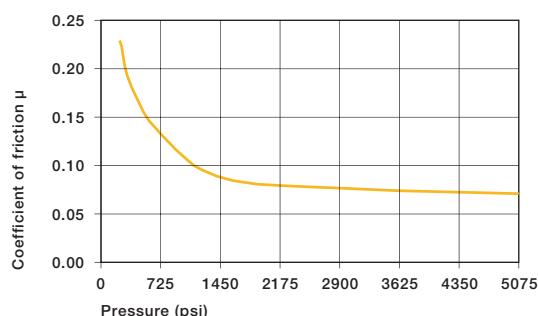

Coefficients of friction of iglide® P as a result of the load, v = 1.97 fpm

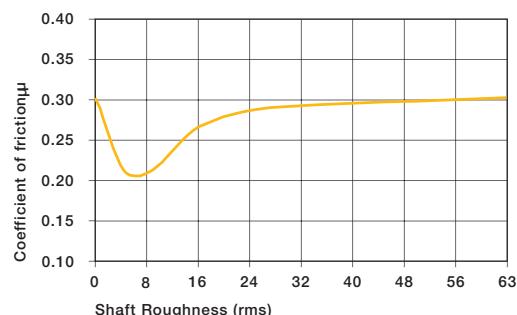

Coefficients of friction of iglide® P as a result of the shaft surface (shaft 1050 case hardened and ground steel)

### Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® P.

For rotating movements, the wear of iglide® P with Cold Rolled Steel and HR Carbon Steel shafts is very low. On the other hand, the bearings on 303 Stainless Steel shafts as well as hard-chromed shafts result in higher wear than other shaft materials even in the low load range. For example at a load of 290 psi, Cold Rolled Steel is six times better than 303 Stainless Steel.


For oscillating movements without loads, wear rates are lower than for most rotating movements. For this purpose, the Cold Rolled Steel and hard-chromed shafts prove to be the best sliding partners. Also, the 303 Stainless Steel shafts that have poor results for rotation, are very good in oscillating operation.

If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft Materials, Page 1.11

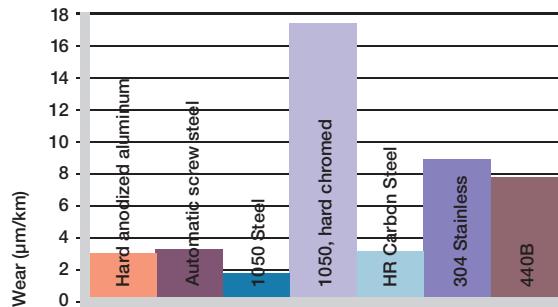


Wear of iglide® P with different shaft materials in rotating applications,  $p=108 \text{ psi}$ ,  $v=98 \text{ fpm}$

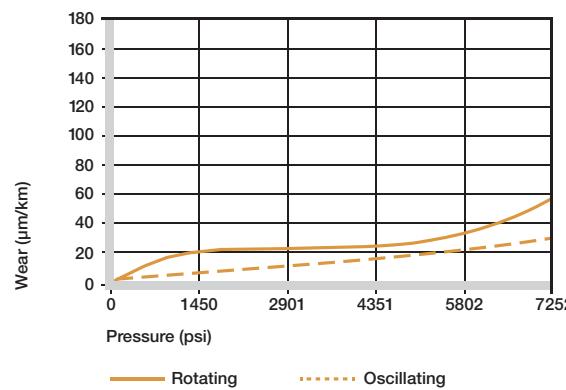

Wear with the Cold Rolled Steel shaft in oscillating and rotating applications

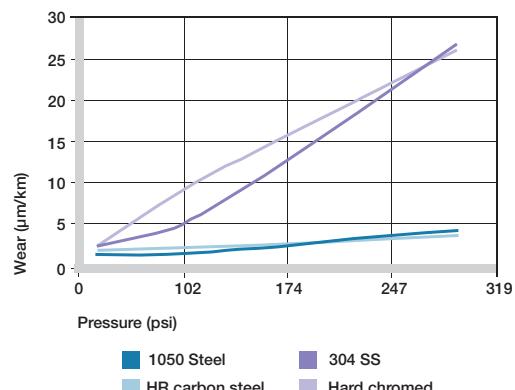

Wear of iglide® P with different shaft materials in rotating applications

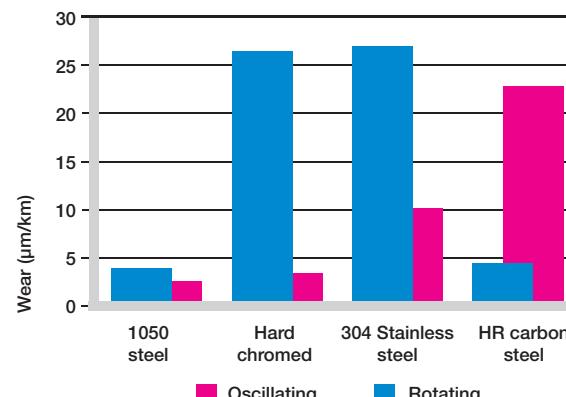

Wear with different shaft materials in oscillating and rotating applications  $p = 290 \text{ psi}$

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10

inch

mm

## Chemical Resistance

iglide® P plain bearings are resistant to most chemicals. They are resistant to most lubricants. iglide® P is not attacked by most weak organic and inorganic acids.

The moisture absorption of iglide® P plain bearings is approximately 0.2% in standard atmosphere. The saturation limit in water is 0.4%. This low moisture absorption is clearly below the values of iglide® G300.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbon, chlorinated	-
Greases, oils without additives	+
Fuels	+
Weak acids	0
Strong acids	-
Weak alkaline	-
Strong alkaline	-

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® P

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

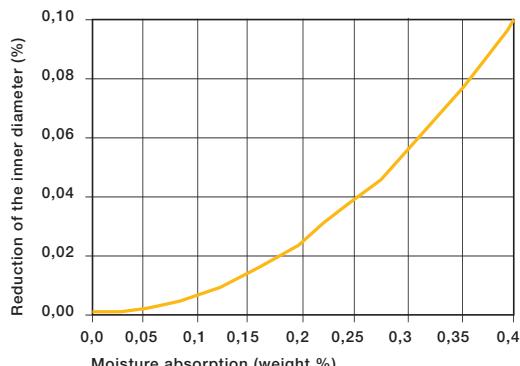

Effect of moisture absorption on iglide® P plain bearings

## Radiation Resistance

Plain bearings made of iglide® P have limited use under radioactive radiation. They are resistant to radiation up to an intensity of  $5 \times 10^2$  Gy.

## UV-Resistance

iglide® P plain bearings are partially UV resistance.

## Vacuum

In a vacuum environment, existing moisture of iglide® P plain bearings is released as a vapor. Use in a vacuum is only possible in a limited manner.


## Electrical Properties

iglide® P plain bearings are electrically insulating.

### iglide® P

Specific volume resistance	$> 10^{13} \Omega\text{cm}$
Surface resistance	$> 10^{12} \Omega$

### Electrical properties of iglide® P

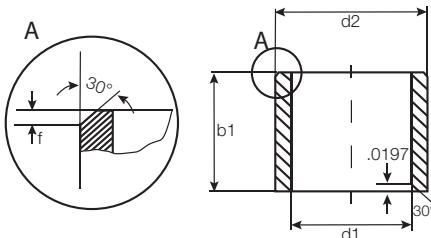


For tolerance values  
please refer to page 8.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
PSI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490	.2481
PSI-0405-06	1/4	5/16	3/8	.2521	.2498	.3128	.3122	.2490	.2481
PSI-0405-08	1/4	5/16	1/2	.2521	.2498	.3128	.3122	.2490	.2481
PSI-0405-12	1/4	5/16	3/4	.2521	.2498	.3128	.3122	.2490	.2481
PSI-0506-04	5/16	3/8	1/4	.3148	.3125	.3753	.3747	.3115	.3106
PSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
PSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747	.3115	.3106
PSI-0506-12	5/16	3/8	3/4	.3148	.3125	.3753	.3747	.3115	.3106
PSI-0607-04	3/8	15/32	1/4	.3773	.3750	.4691	.4684	.3740	.3731
PSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684	.3740	.3731
PSI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684	.3740	.3731
PSI-0607-12	3/8	15/32	3/4	.3773	.3750	.4691	.4684	.3740	.3731
PSI-0608-08	3/8	1/2	1/2	.3783	.3760	.5015	.5010	.3750	.3741
PSI-0809-06	1/2	19/32	3/8	.5030	.5003	.5941	.5934	.4990	.4980
PSI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934	.4990	.4980
PSI-0809-10	1/2	19/32	5/8	.5030	.5003	.5941	.5934	.4990	.4980
PSI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934	.4990	.4980
PSI-0809-16	1/2	19/32	1	.5030	.5003	.5941	.5934	.4990	.4980
PSI-1011-08	5/8	23/32	1/2	.6280	.6253	.7192	.7184	.6240	.6230
PSI-1011-10	5/8	23/32	5/8	.6280	.6253	.7192	.7184	.6240	.6230
PSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240	.6230
PSI-1011-16	5/8	23/32	1	.6280	.6253	.7192	.7184	.6240	.6230
PSI-1214-08	3/4	7/8	1/2	.7541	.7507	.8755	.8747	.7491	.7479
PSI-1214-12	3/4	7/8	3/4	.7541	.7507	.8755	.8747	.7491	.7479
PSI-1214-16	3/4	7/8	1	.7541	.7507	.8755	.8747	.7491	.7479
PSI-1416-08	7/8	1	1/2	.8791	.8757	1.0050	.9997	.8741	.8729
PSI-1416-12	7/8	1	3/4	.8791	.8757	1.0050	.9997	.8741	.8729
PSI-1416-16	7/8	1	1	.8791	.8757	1.0050	.9997	.8741	.8729
PSI-1618-08	1	1 1/8	1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PSI-1618-12	1	1 1/8	3/4	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PSI-2022-20	1 1/4	1 13/32	1	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
PSI-2022-24	1 1/4	1 13/32	1 1/2	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
PSI-2224-20	1 3/8	1 17/32	1 1/4	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
PSI-2224-24	1 3/8	1 17/32	1 1/2	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
PSI-2426-20	1 1/2	1 21/32	1 1/4	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
PSI-2426-24	1 1/2	1 21/32	1 1/2	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
PSI-3235-32	2	2 3/16	2	2.0052	2.0011	2.1883	2.1871	1.9981	1.9969

iglide® P  
Sleeve - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





# iglide® Plain Bearings

## P - Flange, Inch

iglide® P  
Flange - Inch


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

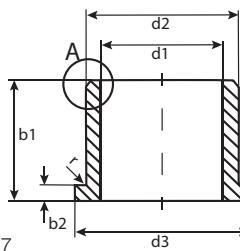

For tolerance values  
please refer to page 8.4

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
PFI-0405-04	1/4	5/16	1/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
PFI-0405-05	1/4	5/16	5/16	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
PFI-0405-06	1/4	5/16	3/8	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
PFI-0405-08	1/4	5/16	1/2	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
PFI-0405-12	1/4	5/16	3/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
PFI-0506-04	5/16	3/8	1/4	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
PFI-0506-06	5/16	3/8	3/8	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
PFI-0506-08	5/16	3/8	1/2	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
PFI-0506-12	5/16	3/8	3/4	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
PFI-0607-04	3/8	15/32	1/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
PFI-0607-06	3/8	15/32	3/8	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
PFI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
PFI-0607-12	3/8	15/32	3/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
PFI-0809-06	1/2	19/32	3/8	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
PFI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
PFI-0809-10	1/2	19/32	5/8	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
PFI-0809-12	1/2	19/32	3/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
PFI-0809-16	1/2	19/32	1	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
PFI-0810-10	1/2	5/8	5/8	.875	.062	.5040	.5013	.6257	.6250	.5000	.4983
PFI-1011-06	5/8	23/32	3/8	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
PFI-1011-08	5/8	23/32	1/2	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
PFI-1011-12	5/8	23/32	3/4	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
PFI-1011-16	5/8	23/32	1	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
PFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
PFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
PFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
PFI-1416-08	7/8	1	1/2	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
PFI-1416-12	7/8	1	3/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
PFI-1416-16	7/8	1	1	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
PFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PFI-1618-24	1	1 1/8	1 1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
PFI-2224-16	1 3/8	1 1/2	1	1.875	.078	1.3798	1.3758	1.5318	1.5308	1.3738	1.3722
PFI-2426-20	1 1/2	1 21/32	1 1/4	2.000	.078	1.5408	1.5008	1.6568	1.6558	1.4988	1.4972
PFI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5408	1.5008	1.6568	1.6558	1.4988	1.4972

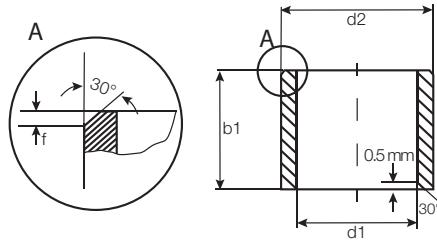

For tolerance values  
please refer to page 8.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
PSM-0304-03	3.0	+0.014 +0.054	4.5	3.0	3.054	3.014	4.512	4.500
PSM-0405-04	4.0	+0.020 +0.068	5.5	4.0	4.068	4.020	5.512	5.500
PSM-0507-05	5.0	+0.010 +0.040	7.0	5.0	5.040	5.010	7.015	7.000
PSM-0608-06	6.0	+0.020 +0.068	8.0	6.0	6.068	6.020	8.015	8.000
PSM-0810-08	8.0	+0.025 +0.083	10.0	8.0	8.083	8.025	10.015	10.000
PSM-0810-11	8.0	+0.025 +0.083	10.0	11.0	8.083	8.025	10.015	10.000
PSM-0810-12	8.0	+0.025 +0.083	10.0	12.0	8.083	8.025	10.015	10.000
PSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000
PSM-1214-15	12.0	+0.032 +0.102	14.0	15.0	12.102	12.032	14.018	14.000
PSM-1214-25	12.0	+0.032 +0.102	14.0	25.0	12.102	12.032	14.018	14.000
PSM-1517-15	15.0	+0.032 +0.102	17.0	15.0	15.102	15.032	17.018	17.000
PSM-1618-20	16.0	+0.032 +0.102	18.0	20.0	16.102	16.032	18.018	18.000
PSM-1618-42	16.0	+0.032 +0.102	18.0	42.0	16.102	16.032	18.018	18.000
PSM-1820-15	18.0	+0.032 +0.102	20.0	15.0	18.102	18.032	20.021	20.000
PSM-2022-22	20.0	+0.040 +0.124	22.0	22.0	20.124	20.040	22.021	22.000
PSM-2022-30	20.0	+0.040 +0.124	22.0	30.0	20.124	20.040	22.021	22.000
PSM-2022-51	20.0	+0.040 +0.124	22.0	51.0	20.124	20.040	22.021	22.000
PSM-2023-15	20.0	+0.040 +0.124	23.0	15.0	20.124	20.040	23.021	23.000
PSM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000
PSM-2023-30	20.0	+0.040 +0.124	23.0	30.0	20.124	20.040	23.021	23.000
PSM-2224-45	22.0	+0.040 +0.124	24.0	45.0	22.124	22.040	24.021	24.000
PSM-2225-15	22.0	+0.040 +0.124	25.0	15.0	22.124	22.040	25.021	25.000
PSM-2225-45	22.0	+0.040 +0.124	25.0	45.0	22.124	22.040	25.021	25.000
PSM-2325-37	23.0	+0.040 +0.124	25.0	37.0	23.124	23.040	25.021	25.000
PSM-2528-30	25.0	+0.040 +0.124	28.0	30.0	25.124	25.040	28.021	28.000
PSM-2528-35	25.0	+0.040 +0.124	28.0	35.0	25.124	25.040	28.021	28.000
PSM-2630-25	26.0	+0.040 +0.124	30.0	25.0	26.124	26.040	30.021	30.000
PSM-2832-20	28.0	+0.040 +0.124	32.0	20.0	28.124	28.040	32.025	32.000
PSM-2832-25	28.0	+0.040 +0.124	32.0	25.0	28.124	28.040	32.025	32.000
PSM-3034-20	30.0	+0.040 +0.124	34.0	20.0	30.124	30.040	34.025	34.000
PSM-3034-40	30.0	+0.040 +0.124	34.0	40.0	30.124	30.040	34.025	34.000
PSM-3034-45	30.0	+0.040 +0.124	34.0	45.0	30.124	30.040	34.025	34.000
PSM-3539-40	35.0	+0.050 +0.150	39.0	40.0	35.150	35.050	39.025	39.000
PSM-4044-50	40.0	+0.050 +0.150	44.0	50.0	40.150	40.050	44.025	44.000
PSM-4044-58	40.0	+0.050 +0.150	44.0	58.0	40.150	40.050	44.025	44.000
PSM-5055-40	50.0	+0.050 +0.150	55.0	40.0	50.150	50.050	55.030	55.000
PSM-6065-60	60.0	+0.060 +0.180	65.0	60.0	60.180	60.060	65.030	65.000
PSM-7580-80	75.0	+0.060 +0.180	80.0	80.0	75.180	75.060	80.030	80.000
PSM-9095-100	90.0	+0.072 +0.212	95.0	100.0	90.212	90.072	95.035	95.000
PSM-95100-100	95.0	+0.072 +0.212	100.0	100.0	95.212	95.072	100.035	100.000

iglide® P  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



+

-

1

inch

mm

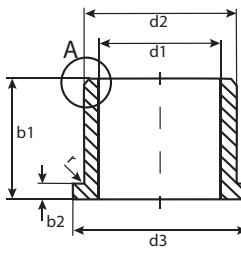


For tolerance values  
please refer to page 8.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size		
	After Pressfit in Ø H7		d13	h13	-0.14	Max...	Min.	Max.	Min.	Max.	Min.
PFM-0405-04	4.0	+0.020 +0.068	5.5	9.5	4.0	0.75	4.068	4.020	5.512	5.500	4.000 3.970
PFM-0507-05	5.0	+0.020 +0.068	7.0	11.0	5.0	1.0	5.068	5.020	7.015	7.000	5.000 4.970
PFM-0608-04	6.0	+0.020 +0.068	8.0	12.0	4.0	1.0	6.068	6.020	8.015	8.000	6.000 5.970
PFM-0810-10	8.0	+0.025 +0.083	10.0	15.0	10.0	1.0	8.083	8.025	10.015	10.000	8.000 7.964
PFM-081012-10	8.0	+0.025 +0.083	10.0	12.0	10.0	1.0	8.083	8.025	10.015	10.000	8.000 7.964
PFM-0810-15	8.0	+0.025 +0.083	10.0	15.0	15.0	1.0	8.083	8.025	10.018	10.000	10.000 9.964
PFM-1012-17	10.0	+0.025 +0.083	12.0	18.0	17.0	1.0	10.083	10.025	12.018	12.000	10.000 9.964
PFM-121418-08	12.0	+0.032 +0.102	14.0	18.0	8.0	1.0	12.102	12.032	14.018	14.000	12.000 11.957
PFM-1214-10	12.0	+0.032 +0.102	14.0	20.0	10.0	1.0	12.102	12.032	14.018	14.000	12.000 11.957
PFM-1214-15	12.0	+0.032 +0.102	14.0	20.0	15.0	1.0	12.102	12.032	14.018	14.000	12.000 11.957
PFM-1416-08	14.0	+0.032 +0.102	16.0	22.0	8.0	1.0	14.102	14.032	16.018	16.000	14.000 13.957
PFM-1416-12	14.0	+0.032 +0.102	16.0	22.0	12.0	1.0	14.102	14.032	16.018	16.000	14.000 13.957
PFM-141624-25	14.0	+0.032 +0.102	16.0	24.0	25.0	1.0	14.102	14.032	16.018	16.000	14.000 13.957
PFM-1517-22	15.0	+0.032 +0.102	17.0	23.0	22.0	1.0	15.102	15.032	17.018	17.000	15.000 14.957
PFM-151824-32	15.0	+0.032 +0.102	18.0	24.0	32.0	1.5	15.102	15.032	18.018	18.000	15.000 14.957
PFM-1618-12	16.0	+0.032 +0.102	18.0	24.0	12.0	1.0	16.102	16.072	18.018	18.000	16.000 15.957
PFM-1618-17	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102	16.072	18.018	18.000	16.000 15.957
PFM-161824-40	16.0	+0.032 +0.102	18.0	24.0	40.0	1.0	16.102	16.032	18.018	18.000	16.000 15.957
PFM-1719-25	17.0	+0.032 +0.102	19.0	25.0	25.0	1.0	17.102	17.032	19.018	19.000	17.000 16.957
PFM-1820-17	18.0	+0.032 +0.102	20.0	26.0	17.0	1.0	18.102	18.032	20.021	20.000	18.000 17.957
PFM-2023-16	20.0	+0.040 +0.124	23.0	30.0	16.5	1.5	20.124	20.040	23.021	23.000	20.000 19.948
PFM-2023-30	20.0	+0.040 +0.124	23.0	30.0	30.0	1.5	20.124	20.040	23.021	23.000	20.000 19.948
PFM-202328-15	20.0	+0.040 +0.124	23.0	28.0	15.0	1.5	20.124	20.040	23.021	23.000	20.000 19.948
PFM-2528-21	25.0	+0.040 +0.124	28.0	35.0	21.5	1.5	25.124	25.040	28.021	28.000	25.000 24.948
PFM-283239-20	28.0	+0.040 +0.124	32.0	39.0	20.0	2.0	28.124	28.040	32.025	32.000	28.000 28.948
PFM-3034-16	30.0	+0.040 +0.124	34.0	42.0	16.0	2.0	30.124	30.040	34.025	34.000	30.000 29.948
PFM-3034-26	30.0	+0.040 +0.124	34.0	42.0	26.0	2.0	30.124	30.040	34.025	34.000	30.000 29.948
PFM-3034-37	30.0	+0.040 +0.124	34.0	42.0	37.0	2.0	30.124	30.040	34.025	34.000	30.000 29.948
PFM-3236-16	32.0	+0.050 +0.150	36.0	40.0	16.0	2.0	32.150	32.050	36.025	36.000	32.000 31.938
PFM-3539-058	35.0	+0.050 +0.150	39.0	47.0	5.8	2.0	35.150	35.050	39.025	39.000	35.000 34.938
PFM-3539-26	35.0	+0.050 +0.150	39.0	47.0	26.0	2.0	35.150	35.050	39.025	39.000	35.000 34.938
PFM-4044-40	40.0	+0.050 +0.150	44.0	52.0	40.0	2.0	40.150	40.050	44.025	44.000	40.000 39.938
PFM-5055-60	50.0	+0.050 +0.150	55.0	63.0	60.0	2.0	50.150	50.050	55.030	55.000	50.000 49.938
PFM-6065-50	60.0	+0.060 +0.180	65.0	73.0	50.0	2.0	60.180	60.060	65.030	65.000	60.000 59.926
PFM-7075-50	70.0	+0.060 +0.180	75.0	83.0	50.0	2.0	70.180	70.060	75.030	75.000	70.000 69.926
PFM-8085-100	80.0	+0.060 +0.180	85.0	93.0	100.0	2.5	80.180	80.060	85.030	85.000	80.000 79.926

**igus®**

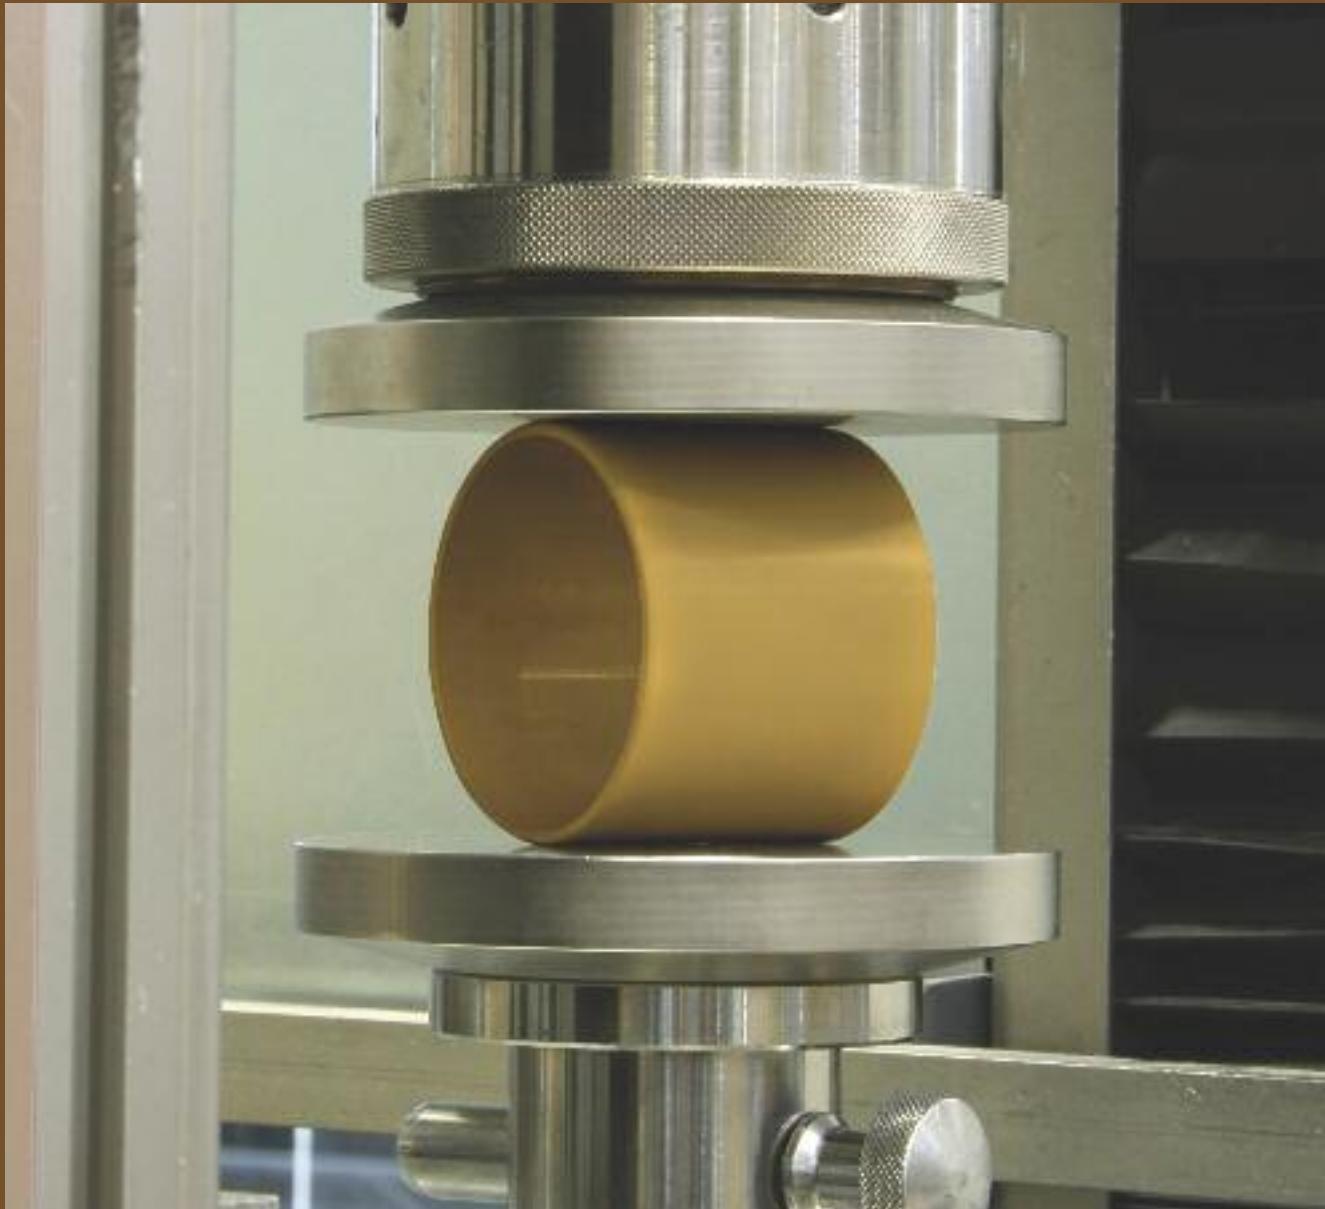

**iglide® Q2  
Extreme Loads**


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**Q2 S M - 03 04 - 03**

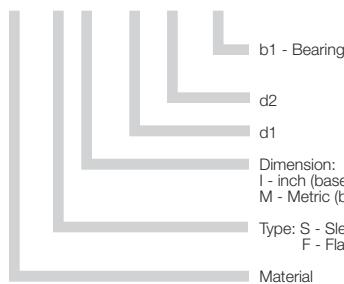

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	197	393
Oscillating	137	275
Linear	787	984

### Usage Guidelines



- When you need a cost effective general purpose bearing
- For use in wet environments
- When good wear resistance at medium loads is required



- When highest wear resistance is necessary
  - iglide® L280
- If high media-resistance is required
  - iglide® X6
- When a high-temperature bearing is needed
  - iglide® H

### Material Data

General Properties	Unit	iglide® Q2	Testing Method
Density	g/cm³	1.46	
Color		beige-brown	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.1	DIN 53495
Max. moisture absorption	% weight	4.6	
Coefficient of friction, dynamic against steel	$\mu$	0.22 - 0.42	
p x v value, max. (dry)	psi x fpm	19,500	

### Mechanical Properties


Modulus of elasticity	psi	1,214,000	DIN 53457
Tensile strength 68°F	psi	34,810	DIN 53452
Compressive strength	psi	18,850	
Permissible static surface pressure (68°F)	psi	17,400	
Shore D-hardness		80	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	266	
Max. short-term application temperature	°F	392	
Min. application temperature	°F	-40	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	8	DIN 53752

### Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{13}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{11}$	DIN 53482

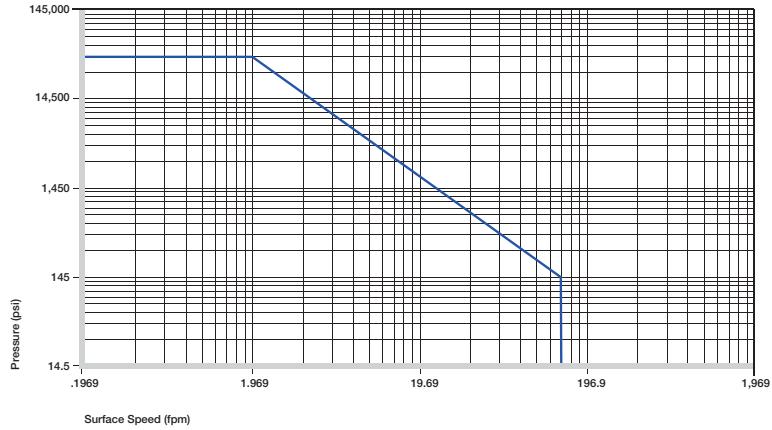

Permissible p x v values for iglide® Q2 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® Q2 plain bearings stand for high load capacities and good abrasion resistance at high loads. Solid lubricants reduce the coefficient of friction and improve the wear resistance, which was markedly improved as compared to other iglide® plain bearings.

## Compressive Strength

The graph shows the elastic deformation of iglide® Q2 during radial loading. Plastic deformation can occur, this depends on the applied pressure.

- Compressive Strength, Page 1.3

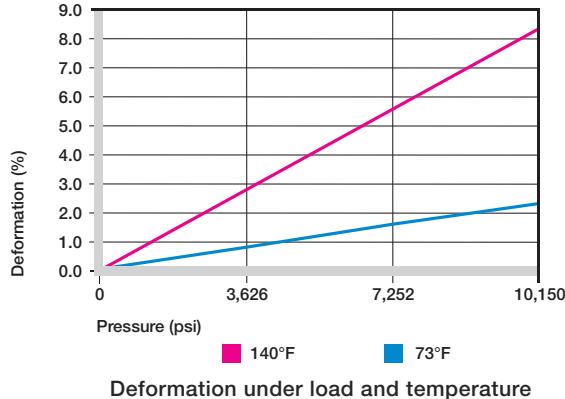

## Permissible Surface Speeds

The typical applications for iglide® Q2 plain bearings are high load pivoting motions at comparatively low speeds. Independent of that high speeds are still attainable. The speeds shown in the table are threshold values for minimal bearing loads. As loads increase, the admissible speed is reduced with higher loads due to the limitations of the  $p \times v$  value.

- Surface Speed, Page 1.5
- $p \times v$  value, Page 1.6


	Continuous fpm	Short Term fpm
Rotating	197	393
Oscillating	137	275
Linear	787	984

**Maximum surface speeds**

## Temperatures

iglide® Q2 is a very temperature resistant material. The short term temperature exposure limit is at 428°F. The long term upper temperature limit of 266°F permits the broad use in applications typical for the agricultural, utility vehicle or construction equipment fields. However, the pressure resistance of iglide® Q2 plain bearings declines as temperatures increase. When considering temperatures, the additional frictional heat in the bearing system must be taken into account.

- Application Temperatures, Page 1.7

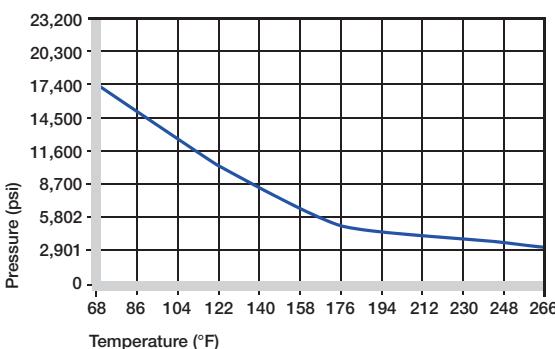


Recommended maximum permissible static surface pressure of iglide® Q2 as a result of the temperature

iglide® Q2	Application Temperature
Minimum	-40°F
Max. long-term	+266°F
Max. short-term	+392°F
Additional axial securing	+176°F

## Temperature iglide® Q2


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

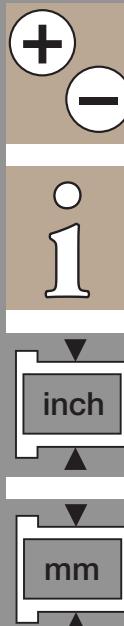

## Installation Tolerances

iglide® Q2 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

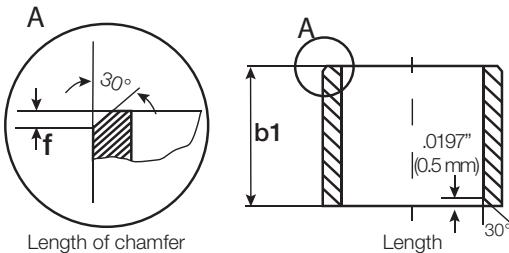

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

iglide® Q2 has a low coefficient of friction. Please note that a gliding partner with a rough surface finish will increase the friction. The highest coefficients of friction occur at 40 rms. For iglide® Q2 a ground surface with an average roughness range of 4 - 16 rms is recommended. Furthermore, the coefficient of friction of iglide® Q2 plain bearings largely depends on the speed and load. As the speed increases, the coefficient of friction will quickly increase as well. However, as the load is reduced, the coefficient of friction initially drops significantly, then moderately.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

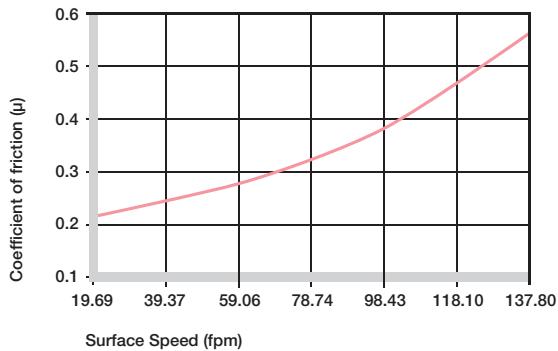


Coefficients of friction of iglide® Q2 as a function of the running speed; p = 108 psi

iglide® Q2	Coefficient of Friction
Dry	0.06 - 0.21
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® Q2 against steel (Shaft finish = 40 rms, 50 HRC)

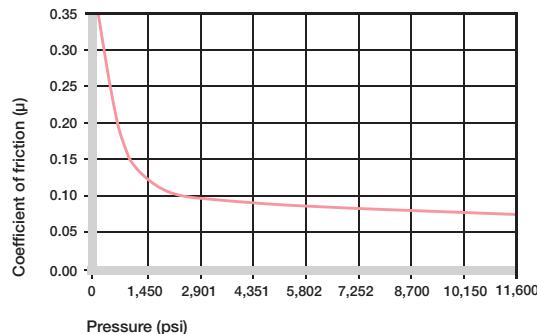

Coefficients of friction of iglide® Q2 as a function of the load, v = 0.01 m/s

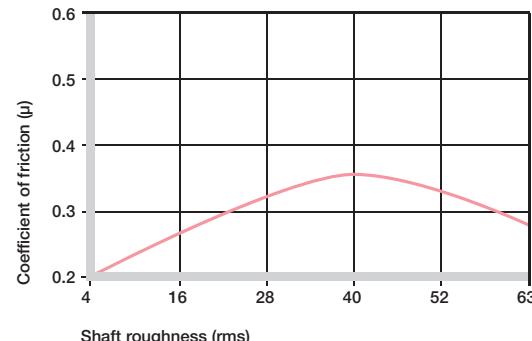


Coefficients of friction of iglide® Q2 as a function of the shaft surface (1050 hard chromed)


## Shaft Materials

Generally we recommend the use of hardened shafts for use in high load applications. Even at low to medium loads, iglide® Q2 will attain increased service life with hard shafts as compared to soft shafts. But for low load applications, the results are outstanding with free cutting steel as well. For high loads, the wear in pivoting applications is much lower than for rotations.


► Shaft Materials, Page 1.11

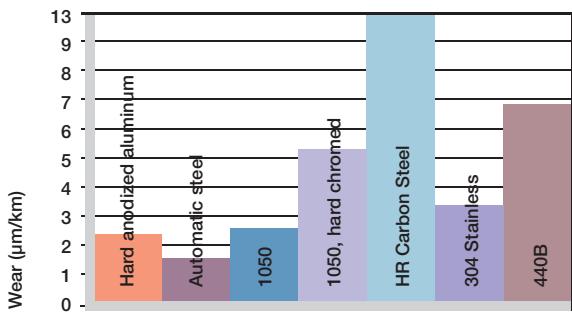

Wear of iglide® Q2, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

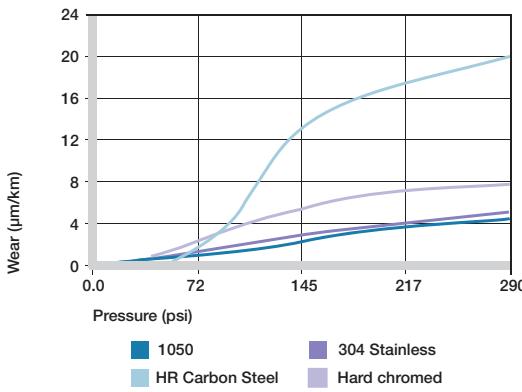

Wear of iglide® Q2 with different shaft materials in rotational applications

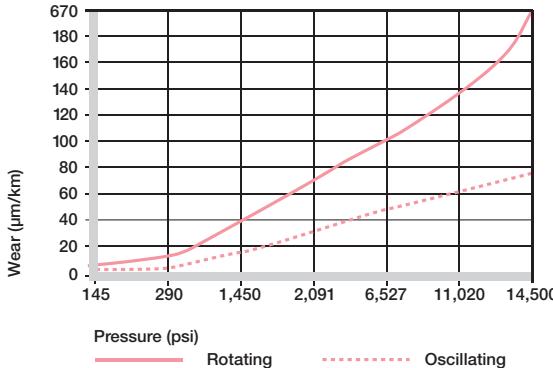

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

## Chemical Resistance


iglide® Q2 plain bearings have good resistance to chemicals. They are resistant to most lubricants. The resistance is only limited for acids.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	0 to –
Fuels	–
Weak acids	–
Strong acids	–
Weak alkaline	+ to 0
Strong alkaline	+ to 0
+ resistant, 0 conditionally resistant, – not resistant	


### Chemical resistance of iglide® Q2

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

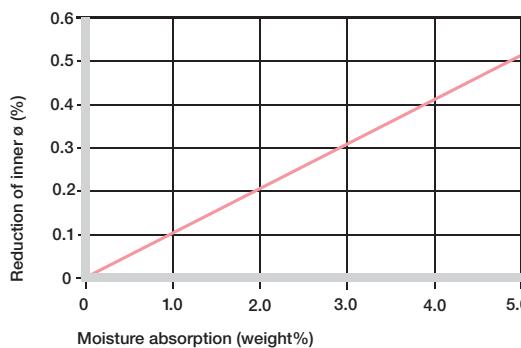

Effect of moisture absorption on iglide® Q2 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm

## Radiation Resistance

Plain bearings made from iglide® Q2 are radiation resistant up to an intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® Q2 plain bearings are permanently resistant to UV radiation.

---

## Vacuum

The low water elements degas in the vacuum. Applications under vacuum conditions are possible with restrictions.

---



## Electrical Properties

iglide® Q2 plain bearings are electrically insulating.

**iglide® Q2**

Specific volume resistance	> $10^{13}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$


**Electrical properties of iglide® Q2**



Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit	Housing Bore	Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.
Q2SM-0507-05	5.0	+0.020 +0.068	7.0	5.0	5.068	5.020	7.015	7.000
Q2SM-0608-06	5.0	+0.020 +0.068	8.0	6.0	6.068	6.020	8.015	8.000
Q2SM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000
Q2SM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000
Q2SM-1214-12	12.0	+0.032 +0.102	14.0	12.0	12.102	12.032	14.018	14.000
Q2SM-1517-15	15.0	+0.032 +0.102	17.0	15.0	15.102	15.032	17.018	17.000
Q2SM-1618-15	16.0	+0.032 +0.102	18.0	15.0	16.102	16.032	18.018	18.000
Q2SM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000
Q2SM-2023-30	20.0	+0.040 +0.124	23.0	30.0	20.124	20.040	23.021	23.000
Q2SM-2528-20	25.0	+0.040 +0.124	28.0	20.0	25.124	25.040	28.021	28.000
Q2SM-3034-30	30.0	+0.040 +0.124	34.0	30.0	30.124	30.040	34.025	34.000
Q2SM-3240-40	32.0	+0.050 +0.150	40.0	40.0	32.150	32.050	40.025	40.000
Q2SM-3539-40	35.0	+0.050 +0.150	39.0	40.0	35.150	35.050	39.025	39.000
Q2SM-4044-40	40.0	+0.050 +0.150	44.0	40.0	40.150	40.050	44.025	44.000
Q2SM-4550-50	45.0	+0.050 +0.150	50.0	50.0	45.150	45.050	50.025	50.000
Q2SM-5055-50	50.0	+0.050 +0.150	55.0	50.0	50.150	50.050	55.030	55.000
Q2SM-6065-60	60.0	+0.060 +0.180	65.0	60.0	60.180	60.060	65.030	65.000
Q2SM-6570-60	65.0	+0.060 +0.180	70.0	60.0	65.180	65.060	70.030	70.000
Q2SM-7075-60	70.0	+0.060 +0.180	75.0	60.0	70.180	70.060	75.030	75.000
Q2SM-7580-40	75.0	+0.060 +0.180	80.0	40.0	75.180	75.060	80.030	80.000

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



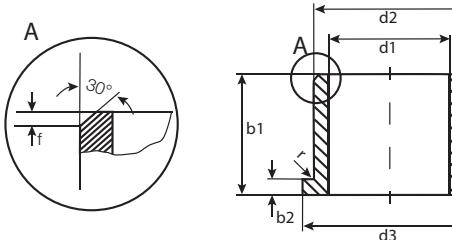

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance after Pressfit in Ø H7	d2	d3	b1	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						-0.14	Max.	Min.	Max.	Min.	Max.	Min.
Q2FM-0507-05	5.0	+0.020 +0.068	7.0	11.0	5.0	1.0	5.068	5.020	7.015	7.000	5.000	4.970
Q2FM-0608-06	6.0	+0.020 +0.068	8.0	12.0	6.0	1.0	6.068	6.020	8.015	8.000	6.000	5.970
Q2FM-0810-10	8.0	+0.025 +0.083	10.0	15.0	10.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
Q2FM-1012-10	10.0	+0.025 +0.083	12.0	18.0	10.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
Q2FM-1214-12	12.0	+0.032 +0.102	14.0	20.0	12.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
Q2FM-1517-17	15.0	+0.032 +0.102	17.0	23.0	17.0	1.0	15.102	15.032	17.018	17.000	15.000	14.957
Q2FM-1618-17	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102	16.032	18.018	18.000	16.000	15.957
Q2FM-2023-21	20.0	+0.040 +0.124	23.0	30.0	21.5	1.5	20.124	20.040	23.021	23.000	20.000	19.948
Q2FM-2528-21	25.0	+0.040 +0.124	28.0	35.0	21.5	1.5	25.124	25.040	28.021	28.000	25.000	24.948
Q2FM-3034-40	30.0	+0.040 +0.124	34.0	42.0	40.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948
Q2FM-3539-40	35.0	+0.050 +0.150	39.0	47.0	40.0	2.0	35.150	35.050	39.025	39.000	35.000	34.938
Q2FM-4044-10	40.0	+0.050 +0.150	44.0	52.0	14.0	2.0	40.150	40.050	44.025	44.000	40.000	39.938
Q2FM-4550-50	45.0	+0.050 +0.150	50.0	58.0	50.0	2.0	45.150	45.050	50.025	50.000	45.000	44.938
Q2FM-5055-50	50.0	+0.050 +0.150	55.0	63.0	50.0	2.0	50.150	50.050	55.030	55.000	50.000	49.938
Q2FM-6065-50	60.0	+0.060 +0.180	65.0	73.0	50.0	2.0	60.180	60.060	65.030	65.000	60.000	59.926

**igus®**




**iglide® H370**

## Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 1-1/4 in.  
Metric sizes from 3 - 75 mm

## Part Number Structure

## Part Number Structure

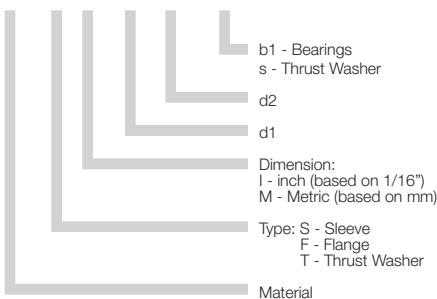H370 S I - 02 03 - 03

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	236	295
Oscillating	157	216
Linear	787	984

## Usage Guidelines



- For use underwater
- When high temperature resistance is necessary
- When high mechanical loading and wear resistance is required
- For use in contact with chemicals



- When mechanical reaming of the wall surface is necessary
  - iglide® M250
- When high wear resistance is needed
  - iglide® L280
- For use in dirty surroundings
  - iglide® M250



## Material Data

General Properties	Unit	iglide® H370	Testing Method
Density	g/cm³	1.66	
Color		gray	
Max. moisture absorption at 73°F / 50% r.h.	% weight	< 0.1	DIN 53495
Max. moisture absorption	% weight	< 0.1	
Coefficient of friction, dynamic against steel	μ	0.07 - 0.17	
p x v value, max. (dry)	psi x fpm	21,000	

## Mechanical Properties


Modulus of elasticity	psi	1,610,000	DIN 53457
Tensile strength at 68°F	psi	19,580	DIN 53452
Compressive strength	psi	11,460	
Permissible static surface pressure (68°C)	psi	10,880	
Shore D-hardness		82	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	392	
Max. short-term application temperature	°F	464	
Min. application Temperature	°F	-40	
Thermal conductivity	W/m x K	0.5	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	5	DIN 53752

## Electrical Properties

Specific volume resistance	Ωcm	< 10⁵	DIN IEC 93
Surface resistance	Ω	< 10⁵	DIN 53482

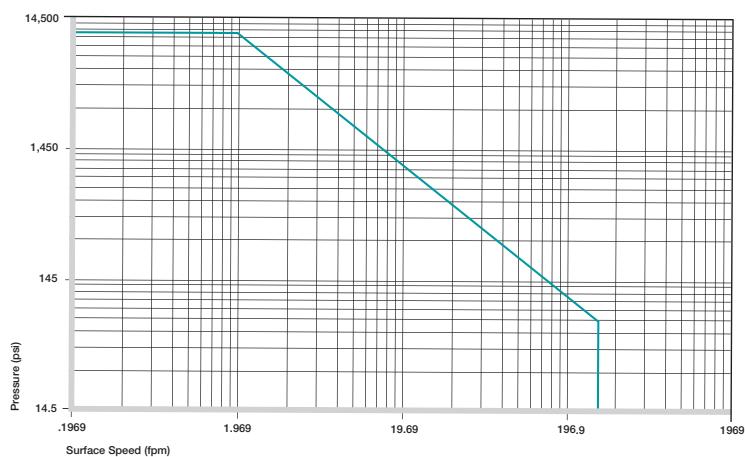

Permissible p x v value for iglide® H370 running dry against a steel shaft, at 68°F


Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

The iglide® H370 is a further development of the iglide® H series. The material is characterized by very low water absorption and clearly improved wear resistance. In terms of the mechanical and thermal characteristic values, iglide® H370 shows the same properties as iglide® H (see 10.1)

## Compressive Strength

The graph shows the elastic deformation of iglide® H370 for radial loads. At the maximum permissible load of 10875 psi, the deformation is approximately 2.5% at room temperature.

- Compressive Strength, Page 1.3

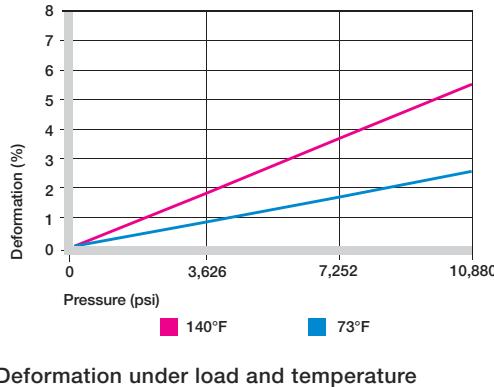

## Permissible Surface Speeds

The maximum permissible surface speed depends on the temperature during operation. iglide® H370 is able to run at speeds of up to 236 fpm (rotating) to 787 fpm (linear)

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

iglide® H370 is an extremely temperature-resistant material. With a maximum permissible short-term temperature of 464°F, iglide® H370 plain bearings may be subjected to a heat treating process without additional load. With increasing temperatures, the compressive strength of iglide® H370 plain bearings decreases. The graph to the right shows this relationship.

The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear. With increasing temperatures, the wear increases.

iglide® H370 loses approximately 75% of its compressive strength when the temperature increases from room temperature to 302°F. On the other hand, there is little change in wear resistance at the same temperature range.

- Application Temperatures, Page 1.7


### iglide® H370 Application Temperature

Minimum	- 40 °F
Max. long-term	+ 392 °F
Max. short-term	+ 464 °F
Additional axial securing	+212°F

### Temperature limits for iglide® H370


	Continuous fpm	Short Term fpm
Rotating	236	295
Oscillating	157	216
Linear	787	984

### Maximum surface speeds

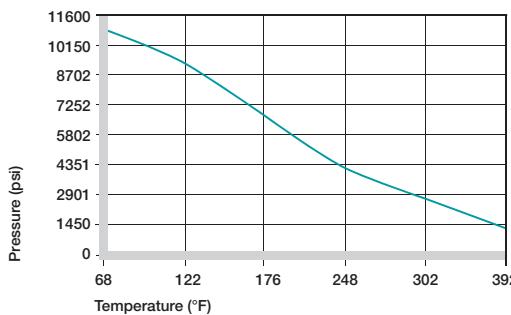

Recommended permissible maximum static surface pressure of iglide® H370 as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

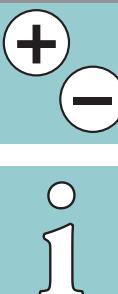


## Installation Tolerances

iglide® H370 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

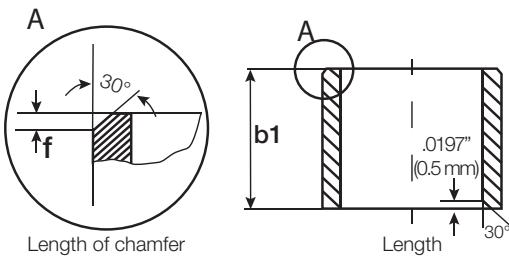

### For Metric Size Bearings


Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The friction and wear values are better for iglide® H370 than for iglide® H. Especially for underwater applications, there is no better material than iglide® H370. The coefficient of friction and wear resistance show little effect with increased speed and load. This relationship explains the excellent performance of iglide® H370 plain bearings at high loads.

Friction and wear are also dependent, to a large degree, on the shafting partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglide® H370 a ground surface with an average roughness range of 8-16 rms is recommended for the shaft.


- Coefficients of Friction and Surface, Page 1.8
- Wear Resistance, Page 1.9

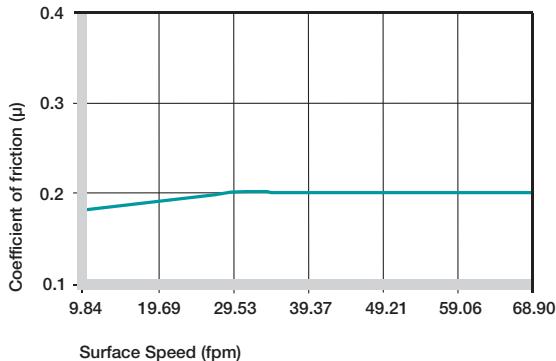


Coefficients of friction for iglide® H370 as a result of the surface speed; p = 108 psi

iglide® H370	Coefficient of Friction
Dry	0.07 - 0.17
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction for iglide® H370 against steel (Shaft finish = 40 rms, 50 HRC)

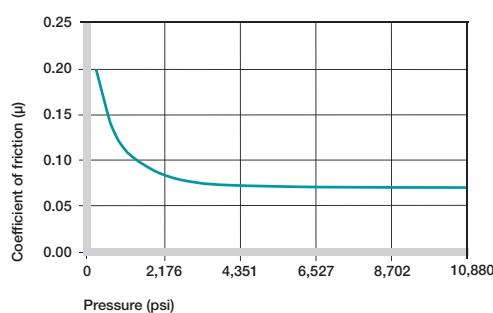

Coefficients of friction for iglide® H370 as a result of the load, v = 1.97 fpm

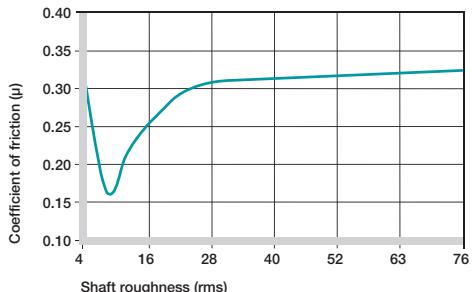

Coefficient of friction of iglide® H370 as a result of the shaft surface (shaft 1050 hard chromed)


## Shaft Materials

The graphs show results of testing different shaft materials with plain bearings made of iglide® H370.


For loads up to 290 psi, A hard-chromed shaft is the best material for iglide® H370 in rotating applications. Note the high wear values for 303 Stainless shafts, which have a tendency to stick-slip because of their very smooth surfaces. The HR Carbon Steel shaft has better rotational values than Cold Rolled Steel starting at 290 psi. On the other hand, for oscillating movements, the 303 Stainless Steel shaft has a clear superiority. As the graph shows, it produces, at 290 psi, a lower wear by a factor of 11 than the Cold Rolled Steel shaft.

If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft materials, Page 1.11

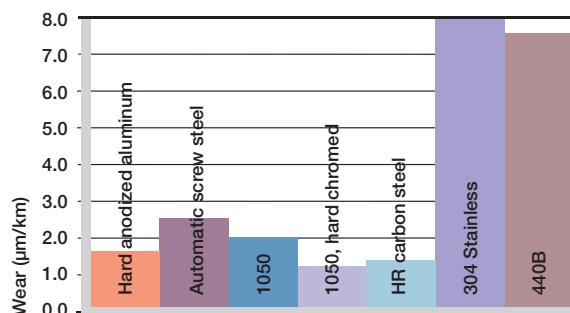

Wear of iglide® H370, rotating application with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

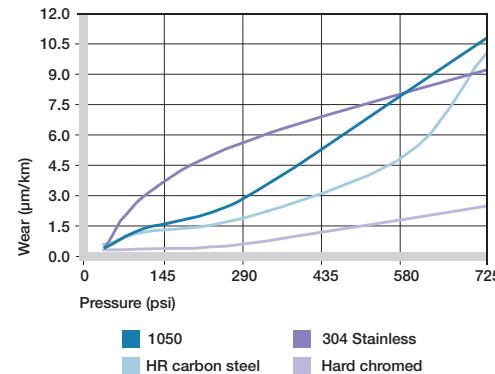

Wear of iglide® H370 with different shaft materials in rotating applications

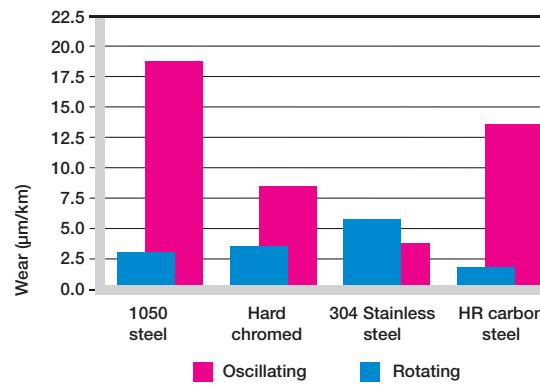

Wear for oscillating and rotating applications with different shaft materials  
 $p = 290$  psi

## Chemical Resistance

iglide® H370 plain bearings have a good chemical resistance. They are resistant to most lubricants, iglide® H370 is also resistant to most weak organic and inorganic acids.

The moisture absorption of iglide® H370 plain bearings is below 0.1% in standard atmosphere. The saturation limit in water is also below 0.1%. For this reason, iglide® H370 plain bearings are often used for underwater applications.

► Chemical Table, Page 1.16



Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+ to 0
Strong acids	+ to -
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	

### Chemical resistance of iglide® H370

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

iglide® H370

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

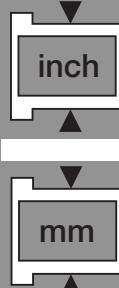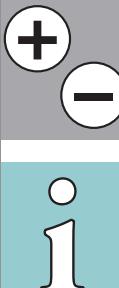

## Radiation Resistance

iglide® H370 withstands neutron and gamma particle radiation without detectable losses to its excellent mechanical properties. Plain bearings made from iglide® H370 are resistant to radiation up to an intensity of  $2 \times 10^2$  Gy

## UV-Resistance

iglide® H370 plain bearings are permanently resistant against UV radiation.

## Vacuum

In a vacuum environment, moisture is released as a vapor. However, due to its low moisture absorption, use in a vacuum is possible.

## Electrical Properties

iglide® H370 plain bearings are electrically conducting.

### iglide® H370


Specific volume resistance	< $10^5$ Ωcm
Surface resistance	< $10^5$ Ω

### Electrical properties of iglide® H370

## Application Example




Filling applications: linear, oscillating, and rotating movements can be achieved using iglide® H370 bearings

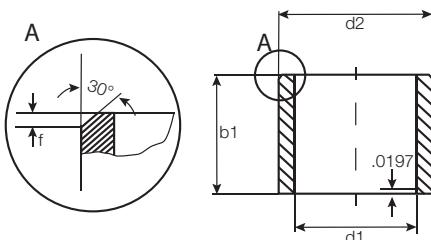

For tolerance values  
please refer to page 10.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7		h13	Max.	Min.	Max.	Min.	Max.	Min.
H370SI-0203-03	1/8	3/16	3/16	.1269	.1251	.1878	.1873	.1243	.1236
H370SI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497	.1865	.1858
H370SI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490	.2481
H370SI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
H370SI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684	.3740	.3731
H370SI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934	.4990	.4980
H370SI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240	.6230
H370SI-1214-12	3/4	7/8	3/4	.7541	.7505	.8755	.8747	.7491	.7479
H370SI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997	.8741	.8729
H370SI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991	.9979
H370SI-2022-20	1 1/4	1 13/32	1 1/4	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472

## iglide® Plain Bearings H370 - Flange, Inch

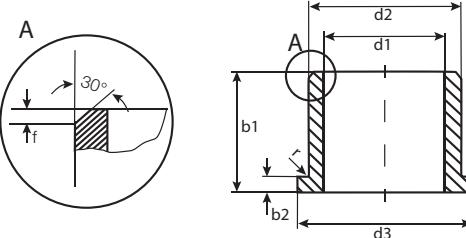


For tolerance values  
please refer to page 10.4

r = max. .0197

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
					-.0055	Max.	Min.	Max.	Min.	Max.	Min.
H370FI-0203-03	1/8	3/16	3/16	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
H370FI-0304-04	3/16	1/4	1/4	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
H370FI-0405-04	1/4	5/16	1/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
H370FI-0506-06	5/16	3/8	3/8	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
H370FI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
H370FI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
H370FI-1011-12	5/8	23/32	3/4	1.000	.046	.6280	.6253	.7192	.7184	.6240	.6230
H370FI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7505	.8755	.8747	.7491	.7479
H370FI-1416-16	7/8	1	1	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
H370FI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
H370FI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472

iglide® H370  
Sleeve - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

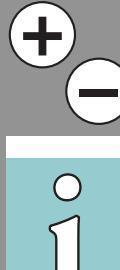

inch

mm



H370

igus®

# iglide® Plain Bearings

## H370 - Sleeve, MM



iglide® H370  
Sleeve - MM



For tolerance values  
please refer to page 10.4

Dimensions according to ISO 3547-1 and special dimensions

Part number	d1	d1-Tolerance after Pressfit in Ø H7	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				h13	Max.	Min.	Max.	Min.	Max.	Min.
H370SM-0304-03	3.0	+0.006 +0.046	4.5	3.0	3.046	3.006	4.512	4.500	3.000	2.975
H370SM-0405-04	4.0	+0.010 +0.058	5.5	4.0	4.058	4.010	5.512	5.500	4.000	3.970
H370SM-0405-12	4.0	+0.010 +0.058	5.5	4.0	4.058	4.010	5.512	5.500	4.000	3.970
H370SM-0507-05	5.0	+0.010 +0.058	7.0	5.0	5.058	5.010	7.015	7.000	5.000	4.970
H370SM-0608-06	6.0	+0.010 +0.058	8.0	6.0	6.058	6.010	8.015	8.000	6.000	5.970
H370SM-0608-10	6.0	+0.010 +0.058	8.0	10.0	6.058	6.010	8.015	8.000	6.000	5.970
H370SM-0810-08	8.0	+0.013 +0.071	10.0	8.0	8.071	8.013	10.015	10.000	8.000	7.964
H370SM-0810-10	8.0	+0.013 +0.071	10.0	10.0	8.071	8.013	10.015	10.000	8.000	7.964
H370SM-0810-15	8.0	+0.013 +0.071	10.0	15.0	8.071	8.013	10.015	10.000	8.000	7.964
H370SM-1012-06	10.0	+0.013 +0.071	12.0	6.0	10.071	10.013	12.018	12.000	10.000	9.964
H370SM-1012-10	10.0	+0.013 +0.071	12.0	10.0	10.071	10.013	12.018	12.000	10.000	9.964
H370SM-1012-15	10.0	+0.013 +0.071	12.0	15.0	10.071	10.013	12.018	12.000	10.000	9.964
H370SM-1214-10	12.0	+0.016 +0.086	14.0	10.0	12.086	12.016	14.018	14.000	12.000	11.957
H370SM-1214-15	12.0	+0.016 +0.086	14.0	15.0	12.086	12.016	14.018	14.000	12.000	11.957
H370SM-1416-20	14.0	+0.016 +0.086	16.0	20.0	14.086	14.016	16.018	16.000	14.000	13.957
H370SM-1517-15	15.0	+0.016 +0.086	17.0	15.0	15.086	15.016	17.018	17.000	15.000	14.957
H370SM-1618-15	16.0	+0.016 +0.086	18.0	15.0	16.086	16.016	18.018	18.000	16.000	15.957
H370SM-1618-20	16.0	+0.016 +0.086	18.0	20.0	16.086	16.016	18.018	18.000	16.000	15.957
H370SM-1820-15	18.0	+0.016 +0.086	20.0	15.0	18.086	18.016	20.021	20.000	18.000	17.957
H370SM-2023-20	20.0	+0.020 +0.104	23.0	20.0	20.104	20.020	23.021	23.000	20.000	19.948
H370SM-2528-20	25.0	+0.020 +0.104	28.0	20.0	25.104	25.020	28.021	28.000	25.000	24.948
H370SM-2832-20	28.0	+0.020 +0.104	32.0	20.0	28.104	28.020	32.021	32.000	28.000	27.948
H370SM-3034-30	30.0	+0.020 +0.104	34.0	30.0	30.104	30.020	34.025	34.000	30.000	29.948
H370SM-3236-30	32.0	+0.025 +0.125	36.0	30.0	32.125	32.025	36.025	36.000	32.000	31.938
H370SM-3539-40	35.0	+0.025 +0.125	39.0	40.0	35.125	35.025	39.025	39.000	35.000	34.938
H370SM-4044-50	40.0	+0.025 +0.125	44.0	50.0	40.125	40.025	44.025	44.000	40.000	39.938
H370SM-4550-30	45.0	+0.025 +0.125	50.0	30.0	45.125	45.025	50.025	50.000	45.000	44.938
H370SM-5055-40	50.0	+0.025 +0.125	55.0	40.0	50.125	50.025	55.030	55.000	50.000	49.938
H370SM-5055-60	55.0	+0.025 +0.125	55.0	60.0	50.125	50.025	55.030	55.000	50.000	49.938
H370SM-5560-26	55.0	+0.030 +0.150	60.0	26.0	55.150	55.030	60.030	60.000	55.000	54.926
H370SM-6065-60	60.0	+0.030 +0.150	65.0	60.0	60.150	60.030	65.030	65.000	60.000	59.926
H370SM-7580-60	75.0	+0.030 +0.150	80.0	60.0	75.150	75.030	80.030	80.000	75.000	74.926



For tolerance values  
please refer to page 10.4

$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore		Shaft Size	
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.	Max.	Min.
H370FM-0405-04	4.0	+0.010 +0.058	5.5	9.5	4.0	0.75	4.058	4.010	5.512	5.500	4.000 3.970
H370FM-0507-05	5.0	+0.010 +0.058	7.0	11.0	5.0	1.0	5.058	5.010	7.015	7.000	5.000 4.970
H370FM-0608-06	6.0	+0.010 +0.058	8.0	12.0	6.0	1.0	6.058	6.010	8.015	8.000	6.000 5.970
H370FM-0608-10	6.0	+0.010 +0.058	8.0	12.0	10.0	1.0	6.058	6.010	8.015	8.000	6.000 5.970
H370FM-0810-06	8.0	+0.013 +0.071	10.0	15.0	6.0	1.0	8.071	8.013	10.015	10.000	8.000 7.964
H370FM-0810-07	8.0	+0.013 +0.071	10.0	15.0	7.0	1.0	8.071	8.013	10.015	10.000	8.000 7.964
H370FM-0810-10	8.0	+0.013 +0.071	10.0	15.0	10.0	1.0	8.071	8.013	10.015	10.000	8.000 7.964
H370FM-0810-15	8.0	+0.013 +0.071	10.0	15.0	15.0	1.0	8.071	8.013	10.015	10.000	8.000 7.964
H370FM-1012-10	10.0	+0.013 +0.071	12.0	18.0	10.0	1.0	10.071	10.013	12.018	12.000	10.000 9.964
H370FM-1012-15	10.0	+0.013 +0.071	12.0	18.0	15.0	1.0	10.071	10.013	12.018	12.000	10.000 9.964
H370FM-1012-20	10.0	+0.013 +0.071	12.0	18.0	20.0	1.0	10.071	10.013	12.018	12.000	10.000 9.964
H370FM-1214-07	12.0	+0.016 +0.086	14.0	20.0	7.0	1.0	12.086	12.016	14.018	14.000	12.000 11.957
H370FM-1214-12	12.0	+0.016 +0.086	14.0	20.0	12.0	1.0	12.086	12.016	14.018	14.000	12.000 11.957
H370FM-1214-15	12.0	+0.016 +0.086	14.0	20.0	15.0	1.0	12.086	12.016	14.018	14.000	12.000 11.957
H370FM-1214-20	12.0	+0.016 +0.086	14.0	20.0	20.0	1.0	12.086	12.016	14.018	14.000	12.000 11.957
H370FM-1416-12	14.0	+0.016 +0.086	16.0	22.0	12.0	1.0	14.086	14.016	16.018	16.000	14.000 13.957
H370FM-1517-17	15.0	+0.016 +0.086	17.0	23.0	17.0	1.0	15.086	15.016	17.018	17.000	15.000 14.957
H370FM-1618-10	16.0	+0.016 +0.086	18.0	24.0	10.0	1.0	16.086	16.016	18.018	18.000	16.000 15.957
H370FM-1618-17	16.0	+0.016 +0.086	18.0	24.0	17.0	1.0	16.086	16.016	18.018	18.000	16.000 15.957
H370FM-1820-12	18.0	+0.016 +0.086	20.0	26.0	12.0	1.0	18.086	18.016	20.021	20.000	18.000 17.957
H370FM-1820-17	18.0	+0.016 +0.086	20.0	26.0	17.0	1.0	18.086	18.016	20.021	20.000	18.000 17.957
H370FM-2023-16	20.0	+0.020 +0.104	23.0	30.0	16.0	1.5	20.104	20.020	23.021	23.000	20.000 19.948
H370FM-2023-21	20.0	+0.020 +0.104	23.0	30.0	21.0	1.5	20.104	20.020	23.021	23.000	20.000 19.948
H370FM-2023-30	20.0	+0.020 +0.104	23.0	30.0	30.0	1.5	20.104	20.020	23.021	23.000	20.000 19.948
H370FM-2528-30	25.0	+0.020 +0.104	28.0	35.0	30.0	1.5	25.104	25.020	28.021	28.000	25.000 24.948
H370FM-3034-40	30.0	+0.020 +0.104	34.0	42.0	40.0	2.0	30.104	30.020	34.021	34.000	30.000 29.948
H370FM-3539-26	35.0	+0.025 +0.125	39.0	47.0	26.0	2.0	35.125	35.025	39.025	39.000	35.000 34.938
H370FM-4044-40	40.0	+0.025 +0.125	44.0	52.0	40.0	2.0	40.125	40.025	44.025	44.000	40.000 39.938
H370FM-5055-50	50.0	+0.025 +0.125	55.0	63.0	50.0	2.0	50.125	50.025	55.030	55.000	50.000 49.938
H370FM-6065-50	60.0	+0.030 +0.150	65.0	73.0	50.0	2.0	60.150	60.030	65.030	65.000	60.000 59.926
H370FM-7075-50	70.0	+0.030 +0.150	75.0	83.0	50.0	2.0	70.150	70.030	75.030	75.000	70.000 69.926

iglide® H370  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

inch

mm



## iglide® Plain Bearings H370 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

H370

igus®



iglide® A180

# iglide® Plain Bearings A180 - Technical Data


## Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 1-3/4 in.  
Metric sizes from 1 - 32 mm

## Part Number Structure

### Part Number Structure

#### A180 S I - 02 04 - 04

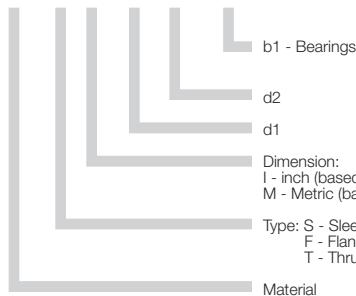

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	236
Oscillating	118	197
Linear	689	984

## Usage Guidelines



- When your bearing comes in direct contact with food or pharmaceuticals
- If FDA-compliance is required
- When quiet operation is important
- If low water absorption is needed



- When the maximum abrasion resistance is necessary
  - iglide® J
- When temperatures are continuously greater than 176°F
  - iglide® A290, A500
- When a cost-effective universal bearing is desired
  - iglide® G300
  - iglide® P



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

## Material Data

General Properties	Unit	iglide® A180	Testing Method
Density	g/cm³	1.46	
Color		white	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	1.3	
Coefficient of friction, dynamic against steel	$\mu$	0.05 - 0.23	
p x v value, max. (dry)	psi x fpm	8750	

## Mechanical Properties


Modulus of elasticity	psi	333,600	DIN 53457
Tensile strength 68°F	psi	12,760	DIN 53452
Compressive strength	psi	11,310	
Permissible static surface pressure (68°F)	psi	4,060	
Shore D-hardness		76	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	230	
Min. application temperature	°F	-58	
Thermal conductivity	[W/m x K]	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	11	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{12}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{11}$	DIN 53482

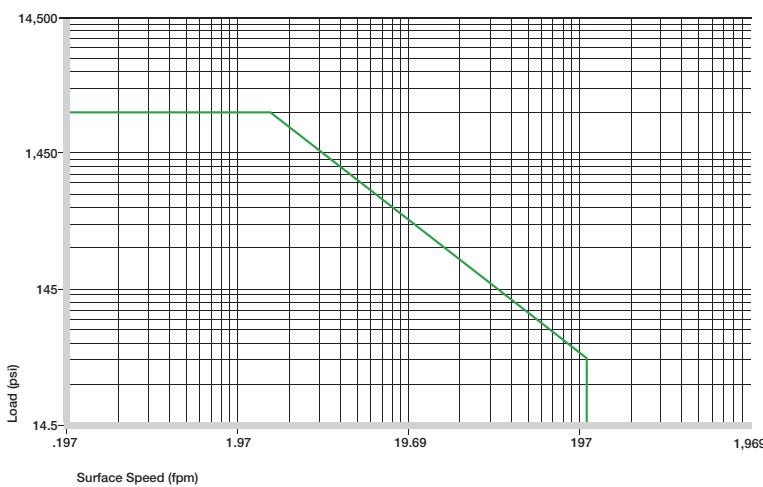

Permissible p x v values for iglide® A180 running dry against a steel shaft, at 68°F



iglide® A180 is FDA compliant

Bearings made of iglide® A180 are suitable for application in direct contact with foods. Therefore, they are the ideal solution for bearing positions on machines for the food and packaging industries, the medical equipment manufacturing, for small equipment for households, etc.


## Compressive Strength

The iglide® A180 distinguishes itself also in wet cleaning or where process-dependent contact with wet media is the business of the day by its extremely low humidity absorption

The graph at the right shows the elastic deformation of iglide® A180 during radial loading. At the recommended maximum surface pressure of 4060 psi the deformation is less than 2.5 %.

Plastic deformation is minimal up to this radial load. However, it is also a result of the service time.

- Compressive Strength, Page 1.3

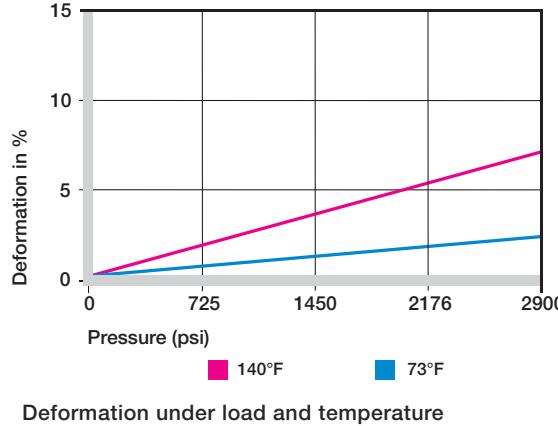

Deformation under load and temperature

## Permissible Surface Speeds

iglide® A180 is developed for low surface speeds. Maximum speeds up to 157 fpm (rotating) and 689 fpm (linear) respectively are permitted for continuous application in dry operation.

These given values indicate the limits at which an increase up to the continuous permissible temperature occurs. In practice these limit values are not always reached due to interactions

- Surface Speed, Page 1.5
- p x v value, Page 1.6


## Temperatures

The short-term permitted maximum temperature is +230 °F. With increasing temperatures, the compressive strength of iglide® A180 bearings decreases. The graph at the right shows this relationship. The temperatures prevalent in the bearing system also have an effect on the bearing wear.

- Application Temperatures, Page 1.7

	Continuous fpm	Short Term fpm
Rotating	157	236
Oscillating	118	197
Linear	689	984

Maximum surface speeds

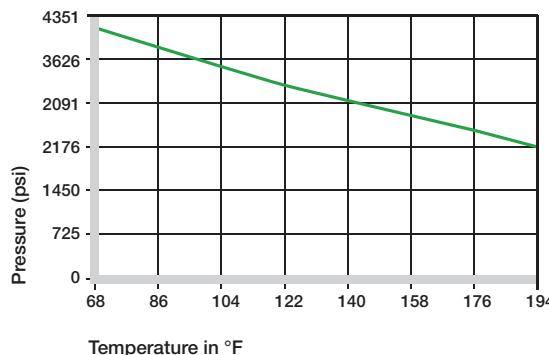


Recommended maximum permissible static surface pressure of iglide® A200 as a result of the temperature

iglide® A180	Application Temperature
Minimum	-58°F
Max. long-term	+194°F
Max. short-term	+230°F
Additional axial securing	+140°F

Table 12.3: Temperature iglide® A180


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

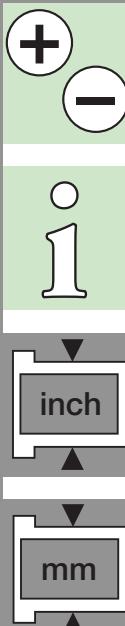

## Installation Tolerances

iglide® A180 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

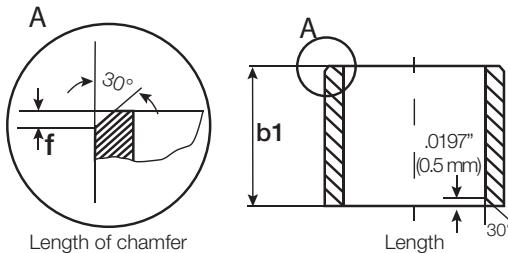

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction also changes with the load. For iglide® A180 plain bearings, the coefficient of friction  $\mu$  decreases slightly with increasing load. Friction and wear are also dependent to a large degree on the shafting partner. Shafts that are too smooth not only increase the coefficient of friction, they can also increase the wear of the bearing. For iglide® A180 a ground surface with an average roughness range of 16-24 rms is recommended for the shaft.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

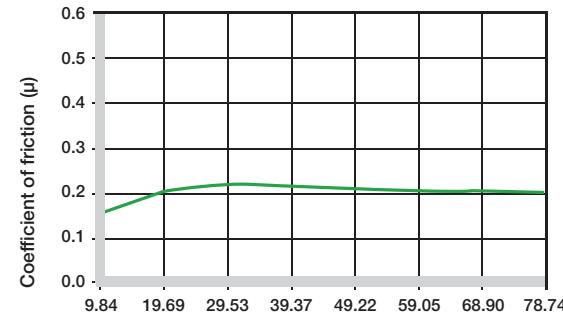


Coefficients of friction of iglide® A180 as a function of the running speed; p = 108 psi


### iglide® A200      Coefficient of Friction

Dry	0.05 - 0.23
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® A180 against steel (Shaft finish = 40 rms, 50 HRC)

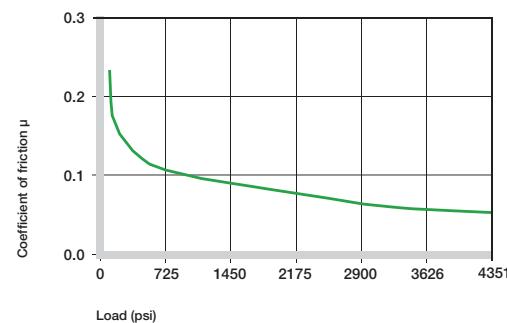

Coefficients of friction of iglide® A180 as a function of the load, v = 1.96 fpm

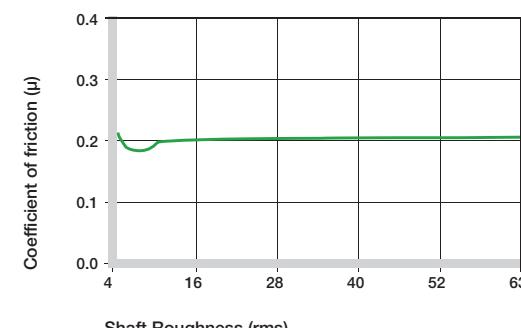

Coefficients of friction of iglide® A180 as a function of the shaft surface (1050 hard chromed)


### Shaft Materials

The graphs show the test results of iglide® A180 bearings running against various shaft materials.


The combination of iglide® A180 and hard-anodized aluminum clearly stands out. It attains good to excellent wear rates also with other shafts.

With Hard chromed shafts, the higher wear in pivoting applications is exemplary compared to rotating applications. The graph to the right clearly shows, in the example of the 304 stainless shafts, the direct increase in wear with rising load with "soft" shafts. The increase is hardly noticeable with hard shafts.


► Shaft Materials, Page 1.11

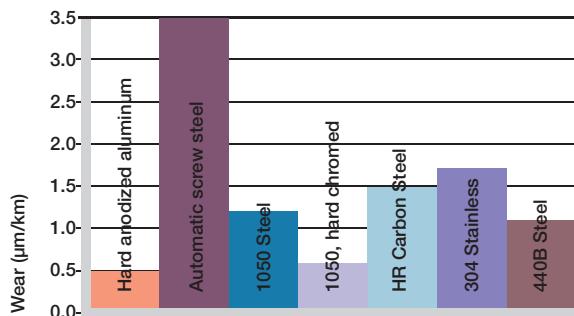

Wear of iglide® A180, rotating applications with different shaft materials,  $p = 145 \text{ psi}$ ,  $v = 59 \text{ fpm}$

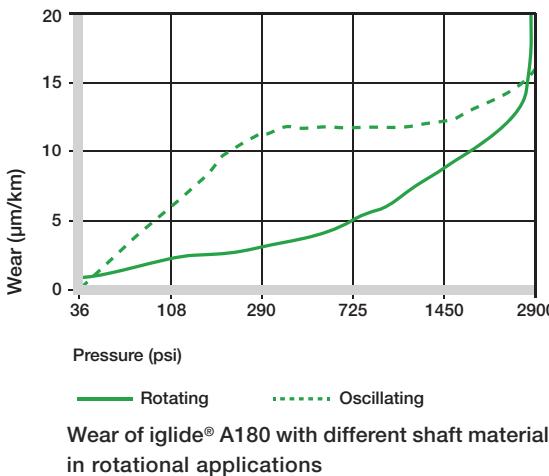

Wear of iglide® A180 with different shaft materials in rotational applications

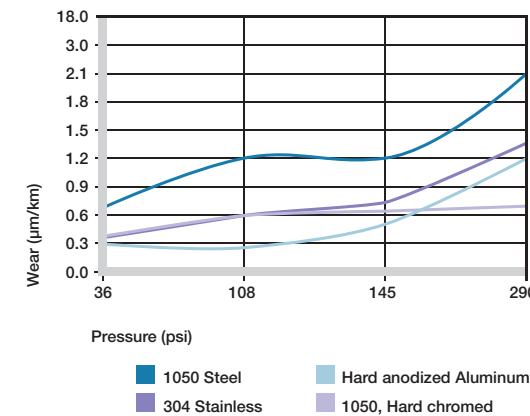

Wear with different shaft materials, oscillating and rotating movement  $p = 290 \text{ psi}$

### Chemical Resistance

iglide® A180 bearings can be used under various environmental conditions and in contact with numerous chemicals. The table gives an overview of the chemical resistance of iglide® A180 bearings at room temperature.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, – not resistant


### Chemical resistance of iglide® A180

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

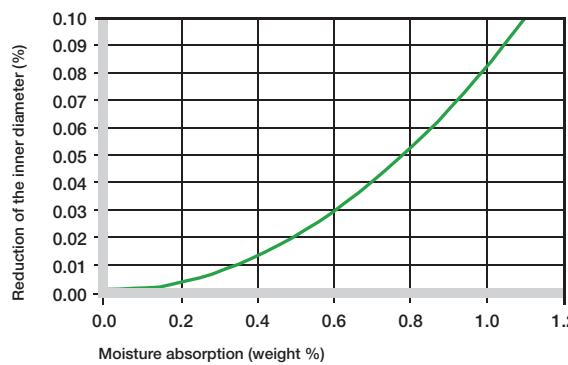

Effect of moisture absorption on iglide® A180 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10  
inch

mm

## Radiation Resistance

Plain bearings made of iglide® A180 are resistant to radiation up to an intensity of  $3 \cdot 10^2$  Gy. Higher radiation levels attack the material and can cause the loss of essential mechanical properties.

## UV-Resistance

iglide® A180 bearings are resistant to UV radiation, but the tribological properties deteriorate with continuous exposure.

## Vacuum

When used in a vacuum environment, the iglide® A180 plain bearings release moisture as a vapor. Therefore, only dehumidified bearings are suitable in a vacuum environment.


## Electrical Properties

iglide® A180 plain bearings are electrically insulating.

### iglide® A180

Specific volume resistance	> $10^{12}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® A180

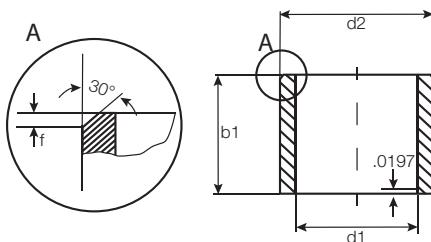

For tolerance values  
please refer to page 11.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
A180SI-0204-04	1/8	1/4	1/4	.1280	.1262	.2515	.2510	.1250	.1241
A180SI-0305-06	3/16	5/16	3/8	.1905	.1887	.3140	.3135	.1875	.1866
A180SI-0406-04	1/4	3/8	1/4	.2539	.2516	.3765	.3760	.2500	.2491
A180SI-0406-06	1/4	3/8	3/8	.2539	.2516	.3765	.3760	.2500	.2491
A180SI-0406-08	1/4	3/8	1/2	.2539	.2516	.3765	.3760	.2500	.2491
A180SI-0507-08	5/16	7/16	1/2	.3164	.3141	.4390	.4385	.3125	.3116
A180SI-0608-04	3/8	1/2	1/4	.3789	.3766	.5006	.5000	.3750	.3736
A180SI-0608-08	3/8	1/2	1/2	.3789	.3766	.5006	.5000	.3750	.3736
A180SI-0810-08	1/2	5/8	1/2	.5047	.5020	.6260	.6250	.5000	.4990
A180SI-0810-12	1/2	5/8	3/4	.5047	.5020	.6260	.6250	.5000	.4990
A180SI-1012-08	5/8	3/4	1/2	.6297	.6270	.7510	.7500	.6250	.6240
A180SI-1012-12	5/8	3/4	3/4	.6297	.6270	.7510	.7500	.6250	.6240
A180SI-1012-16	5/8	3/4	1	.6297	.6270	.7510	.7500	.6250	.6240
A180SI-1216-12	3/4	1	3/4	.7559	.7525	1.0010	1.0000	.7500	.7490
A180SI-1216-16	3/4	1	1	.7559	.7525	1.0010	1.0000	.7500	.7490
A180SI-1418-16	7/8	1 1/8	1	.8809	.8775	1.1260	1.1250	.8750	.8740
A180SI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1250	.9991	.9979
A180SI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1250	.9991	.9979
A180SI-1620-12	1	1 1/4	3/4	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
A180SI-1620-16	1	1 1/4	1	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
A180SI-2024-16	1 1/4	1 1/2	1	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
A180SI-2428-24	1 1/2	1 3/4	1 1/2	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10



inch



mm



# iglide® Plain Bearings

## A180 - Flange, Inch

iglide® A180  
Flange - Inch

Telephone 1-800-521-2747  
Fax 1-401-438-7270



Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>



For tolerance values  
please refer to page 11.4

r = max. .0197

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
A180FI-0204-04	1/8	1/4	1/4	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
A180FI-0305-06	3/16	5/16	3/8	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
A180FI-0406-04	1/4	3/8	1/4	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
A180FI-0406-06	1/4	3/8	3/8	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
A180FI-0507-08	5/16	7/16	1/2	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
A180FI-0608-04	3/8	1/2	1/4	.625	.062	.3787	.3764	.5007	.5000	.3750	.3736
A180FI-0608-08	3/8	1/2	1/2	.625	.062	.3789	.3764	.5007	.5000	.3750	.3736
A180FI-0810-08	1/2	5/8	1/2	.875	.062	.5047	.5020	.6257	.6250	.5000	.4983
A180FI-0810-12	1/2	5/8	3/4	.875	.062	.5047	.5020	.6257	.6250	.5000	.4983
A180FI-1012-08	5/8	3/4	1/2	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
A180FI-1012-12	5/8	3/4	3/4	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
A180FI-1012-16	5/8	3/4	1	1.000	.062	.6297	.6270	.7510	.7500	.6250	.6240
A180FI-1216-12	3/4	1	3/4	1.250	.156	.7559	.7525	1.0008	1.0000	.7500	.7480
A180FI-1216-16	3/4	1	1	1.250	.156	.7559	.7525	1.0008	1.0000	.7500	.7480
A180FI-1418-24	7/8	1 1/8	1 1/2	1.375	.156	.8809	.8775	1.1260	1.1250	.8750	.8730
A180FI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
A180FI-1620-16	1	1 1/4	1	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
A180FI-1620-24	1	1 1/4	1 1/2	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
A180FI-2024-16	1 1/4	1 1/2	1	1.750	.200	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
A180FI-2024-24	1 1/4	1 1/2	1 1/2	1.750	.200	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
A180FI-2428-16	1 1/2	1 3/4	1	2.000	.125	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
A180FI-2428-24	1 1/2	1 3/4	1 1/2	2.000	.125	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
A180FI-2832-16	1 3/4	2	1	2.250	.125	1.7560	1.7532	2.0012	2.0000	1.7500	1.7488



For tolerance values  
please refer to page 11.4



Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
A180SM-0608-10	6.0	+0.020 +0.068	8.0	10.0	6.068	6.020	8.015	8.000	6.000	5.970
A180SM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000	8.000	7.964
A180SM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000	10.000	9.964
A180SM-1214-15	12.0	+0.032 +0.102	14.0	15.0	12.102	12.032	14.018	14.000	12.000	11.957
A180SM-1618-15	16.0	+0.032 +0.102	18.0	15.0	16.102	16.032	18.018	18.000	16.000	15.957
A180SM-2023-20	20.0	+0.040 +0.124	23.0	20.0	20.124	20.040	23.021	23.000	20.000	19.948
A180SM-2528-30	25.0	+0.040 +0.124	28.0	20.0	25.124	25.040	28.021	28.000	25.000	24.948
A180SM-3034-20	30.0	+0.040 +0.124	34.0	20.0	30.124	30.040	34.025	34.000	30.000	29.948

iglide® A180  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

## iglide® Plain Bearings A180 - Flange, MM



For tolerance values  
please refer to page 11.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			d13	h13	-0,14	Max.	Min.	Max.	Min.	Max.	Min.
A180FM-0608-06	6.0	+0.020 +0.068	8.0	12.0	6.0	1.0	6.068	6.020	8.015	8.000	6.000	5.970
A180FM-0810-10	8.0	+0.025 +0.083	10.0	15.0	10.0	1.0	8.083	8.025	10.015	10.000	8.000	7.964
A180FM-1012-10	10.0	+0.025 +0.083	12.0	18.0	10.0	1.0	10.083	10.025	12.018	12.000	10.000	9.964
A180FM-1214-15	12.0	+0.032 +0.102	14.0	20.0	15.0	1.0	12.102	12.032	14.018	14.000	12.000	11.957
A180FM-1618-17	16.0	+0.032 +0.102	18.0	24.0	17.0	1.0	16.102	16.032	18.018	18.000	16.000	15.957
A180FM-2023-21	20.0	+0.040 +0.124	23.0	30.0	21.5	1.5	20.124	20.040	23.021	23.000	20.000	19.948
A180FM-2528-21	25.0	+0.040 +0.124	28.0	35.0	21.5	1.5	25.124	25.040	28.021	28.000	25.000	24.948
A180FM-3034-26	30.0	+0.040 +0.124	34.0	42.0	26.0	2.0	30.124	30.040	34.025	34.000	30.000	29.948

inch

mm



A180



## iglide® Plain Bearings A180 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® A180

igus®




iglide® A200

## Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 1-3/4 in.  
Metric sizes from 1 - 32 mm

## Part Number Structure

## Part Number Structure

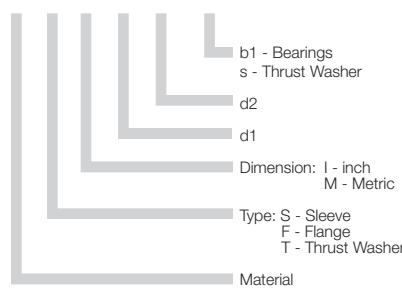**A S I-02 04-04**

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	295
Oscillating	118	216
Linear	393	590

## Usage Guidelines



- When your bearing comes in direct contact with food or pharmaceuticals
- For low speeds
- When quiet operation is important
- When dirt needs to become embedded



- When the maximum abrasion resistance is necessary
  - iglide® L280
- When temperatures are continuously greater than 176°F
  - iglide® A290, T500
- When a cost-effective universal bearing is desired
  - iglide® G300



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

## Material Data

General Properties	Unit	iglide® A200	Testing Method
Density	g/cm³	1.14	
Color		white	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.5	DIN 53495
Max. moisture absorption	% weight	7.6	
Coefficient of friction, dynamic against steel	$\mu$	0.10 - 0.40	
p x v value, max. (dry)	psi x fpm	2,900	

## Mechanical Properties


Modulus of elasticity	psi	362,600	DIN 53457
Tensile strength 68°F	psi	16,820	DIN 53452
Compressive strength	psi	7,832	
Permissible static surface pressure (68°F)	psi	2,611	
Shore D-hardness		81	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	176	
Max. short-term application temperature	°F	338	
Min. application temperature	°F	-40	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	10	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{13}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{12}$	DIN 53482

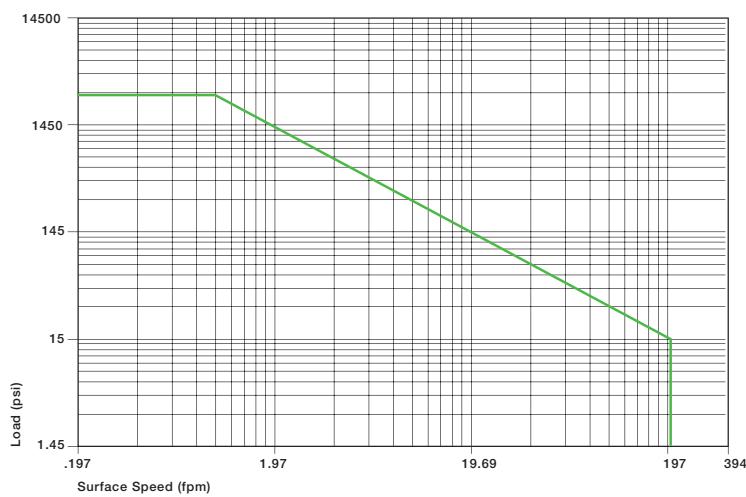

Permissible p x v values for iglide® A200 running dry against a steel shaft, at 68°F



iglide® A200 is FDA compliant

Plain bearings made of iglide® A200 are FDA compliant for use in direct contact with food and pharmaceuticals. They are an ideal solution for bearing applications on machines that manufacture consumables, pharmaceuticals, medical devices, small household appliances, etc. To achieve the benefit of food compatibility, mixing with solid lubricants must be avoided. The thermoplastic alloy of iglide® A200 is used for abrasion resistance. Furthermore, iglide® A200 is characterized by its capacity for embedding dirt and by its quiet running behavior.


## Compressive Strength

The high abrasion resistance, the resistance to dirt, and the ability to run dry make it possible to eliminate the customary, expensive protective coverings of lubricated bearings.

The graph shows the elastic deformation of iglide® A200 for radial loads. At the maximum permissible static surface pressure of 2610 psi, the deformation is less than 2%.

Plastic deformation is minimal up to this radial load. However, it is also a result of the cycle time.

- Compressive Strength, Page 1.3

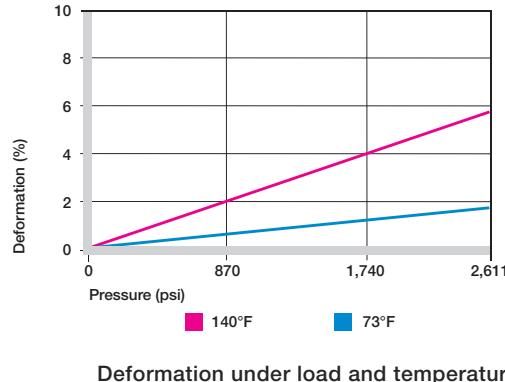

## Permissible Surface Speeds

iglide® A200 was developed for low surface speeds. Running dry for continuous usage, a maximum of 157 fpm (rotating) or 393 fpm (linear) is possible.

These given values indicate the limits at which an increase up to the continuous permissible temperature occurs. This increase is a result of friction. In practice these limit values are not often reached, due to varying application conditions.

- Surface Speed, Page 1.5
- p x v value, Page 1.6


## Temperatures

The maximum permissible short-term temperature is 338°F. With increasing temperatures, the compressive strength of iglide® A200 plain bearings decreases. The graph shows this relationship. The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear.

- Application Temperatures, Page 1.7

	Continuous fpm	Short Term fpm
Rotating	157	295
Oscillating	118	216
Linear	393	590

Maximum surface speeds

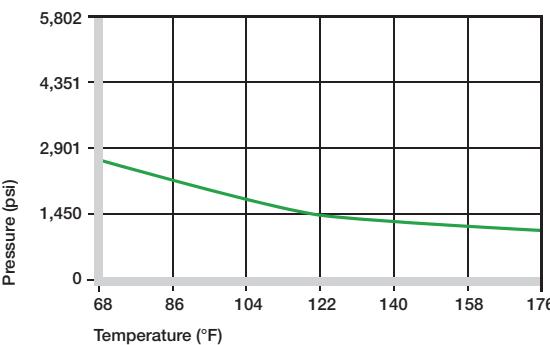


Recommended maximum permissible static surface pressure of iglide® A200 as a result of the temperature

iglide® A200	Application Temperature
Minimum	-40°F
Max. long-term	+176°F
Max. short-term	+338°F
Additional axial securing	+122°F

Temperature iglide® A200

iglide® A200


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

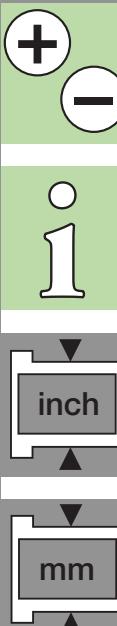

## Installation Tolerances

iglide® A200 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

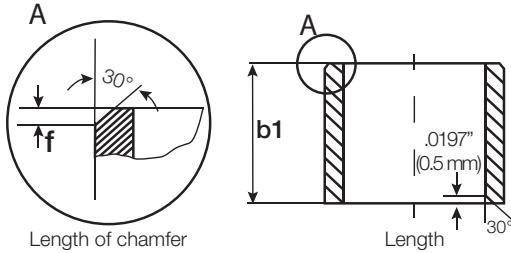

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction also changes with the load. For iglide® A200 plain bearings, the coefficient of friction  $\mu$  decreases slightly with increasing load. Friction and wear are also dependent to a large degree on the shafting partner. Shafts that are too smooth not only increase the coefficient of friction, they can also increase the wear of the bearing. For iglide® A200 a ground surface with an average roughness range of 16-24 rms is recommended for the shaft.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

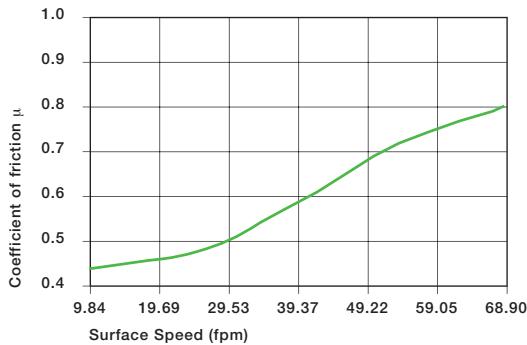


Coefficients of friction of iglide® A200 as a function of the running speed; p = 108 psi


### iglide® A200      Coefficient of Friction

Dry	0.10 - 0.40
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® A200 against steel (Shaft finish = 40 rms, 50 HRC)

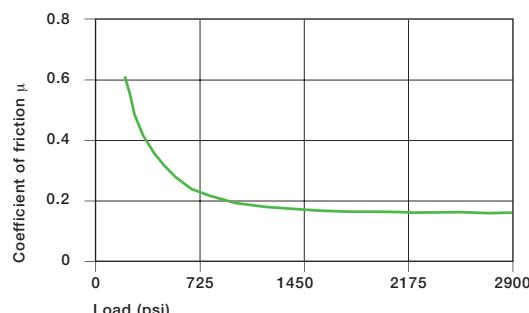

Coefficients of friction of iglide® A200 as a function of the load, v = 1.96 fpm

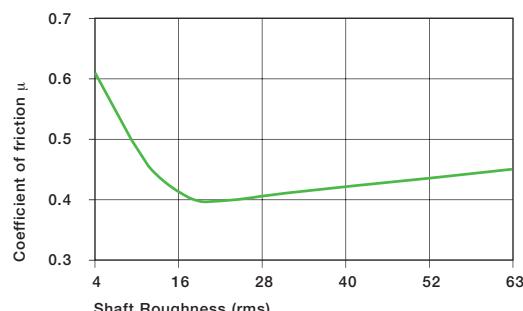


Coefficients of friction of iglide® A200 as a function of the shaft surface (1050 hard chromed)

## Shaft Materials


The graphs show the test results of iglide® A200 bearings running against various shaft materials.

The combination of iglide® A200 and hard chromed shaft clearly stands out. Up to a range of about 362 psi, the wear of this combination remains largely independent of the load. In pivoting applications below a load  $p = 290$  psi, the wear of iglide® A200 bearings is higher than in rotating applications with equal load. Here the HR carbon steel shaft is a positive exception with its much less coefficient of wear.


► Shaft Materials, Page 1.11

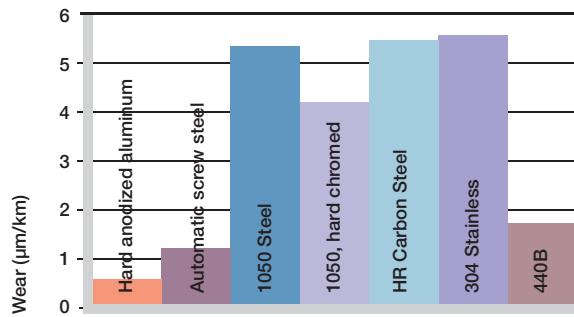

Wear of iglide® A200, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

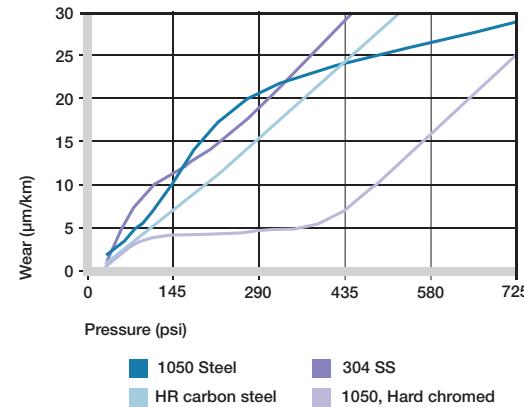

Wear of iglide® A200 with different shaft materials in rotational applications

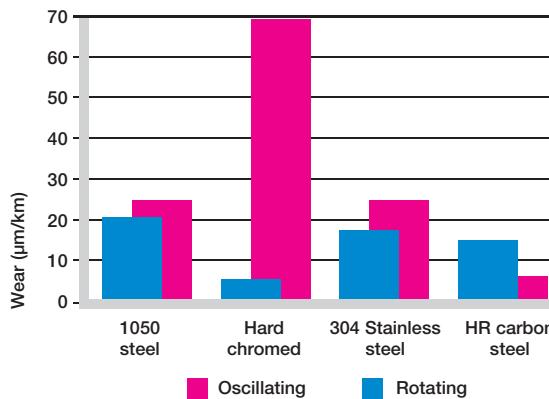

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

## Chemical Resistance

iglide® A200 plain bearings have strong resistance to chemicals. They are also resistant to most lubricants.

iglide® A200 plain bearings are not attacked by most weak organic and inorganic acids.

The moisture absorption of iglide® A200 plain bearings is approximately 1.5% in the standard atmosphere. The saturation limit submerged in water is 7.6%. This must be taken into account for these types of use applications.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	0

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® A200

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

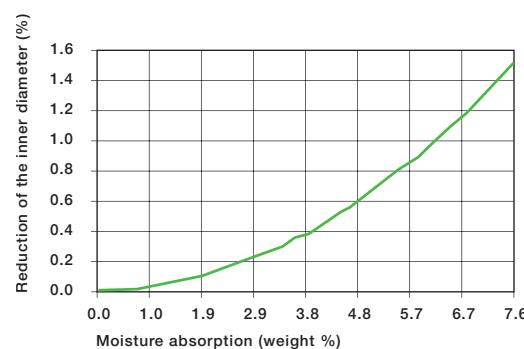

Effect of moisture absorption on iglide® A200 plain bearings

## Radiation Resistance

Plain bearings made from iglide® A200 are resistant to radiation up to an intensity of  $2 \times 10^4$  Gy. Higher radiation levels attack the material and can cause essential mechanical properties to be lost.

## UV-Resistance

iglide® A200 plain bearings are resistant to UV radiation.

## Vacuum

In a vacuum environment, iglide® A200 plain bearings have restricted use.


## Electrical Properties

iglide® A200 plain bearings are electrically insulating.

### iglide® A200

Specific volume resistance	> $10^{13}$ $\Omega$ cm
Surface resistance	> $10^{12}$ $\Omega$

### Electrical properties of iglide® A200

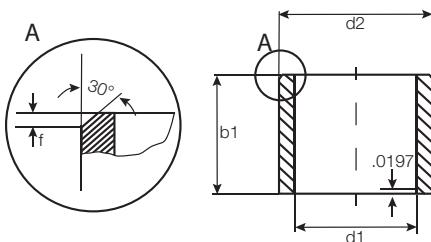


For tolerance values  
please refer to page 12.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
ASI-0204-04	1/8	1/4	1/4	.1280	.1262	.2515	.2510	.1250	.1241
ASI-0305-04	3/16	5/16	1/4	.1905	.1887	.3140	.3135	.1875	.1866
ASI-0406-04	1/4	3/8	1/4	.2539	.2516	.3765	.3760	.2500	.2491
ASI-0406-06	1/4	3/8	3/8	.2539	.2516	.3765	.3760	.2500	.2491
ASI-0406-08	1/4	3/8	1/2	.2539	.2516	.3765	.3760	.2500	.2491
ASI-0507-08	5/16	7/16	1/2	.3164	.3141	.4390	.4385	.3125	.3116
ASI-0608-04	3/8	1/2	1/4	.3789	.3766	.5015	.5010	.3750	.3741
ASI-0608-08	3/8	1/2	1/2	.3789	.3766	.5015	.5010	.3750	.3741
ASI-0810-08	1/2	5/8	1/2	.5047	.5020	.6260	.6250	.5000	.4990
ASI-0810-12	1/2	5/8	3/4	.5047	.5020	.6260	.6250	.5000	.4990
ASI-1013-05	5/8	13/16	5/16	.6297	.6270	.8135	.8125	.6250	.6240
ASI-1013-12	5/8	13/16	3/4	.6297	.6270	.8135	.8125	.6250	.6240
ASI-1216-12	3/4	1	3/4	.7559	.7525	1.0010	1.0000	.7500	.7490
ASI-1216-16	3/4	1	1	.7559	.7525	1.0010	1.0000	.7500	.7490
ASI-1418-16	7/8	1 1/8	1	.8809	.8775	1.1260	1.1250	.8750	.8740
ASI-1620-12	1	1 1/4	3/4	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
ASI-1620-16	1	1 1/4	1	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
ASI-2024-16	1 1/4	1 1/2	1	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
ASI-2428-24	1 1/2	1 3/4	1 1/2	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990

iglide® A200  
Sleeve - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0

inch

mm

A200

igus®



# iglide® Plain Bearings

## A200 - Flange, Inch

iglide® A200  
Flange - Inch  
Thrust Washer - Inch

Telephone 1-800-521-2747  
1-401-438-7270  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>




For tolerance values  
please refer to page 12.4


r = max. .0197

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
AFI-0204-04	1/8	1/4	1/4	.360	.047	.1280	.1262	.2515	.2510	.1250	.1241
AFI-0305-04	3/16	5/16	1/4	.370	.047	.1905	.1887	.3140	.3135	.1875	.1866
AFI-0406-04	1/4	3/8	1/4	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
AFI-0406-06	1/4	3/8	3/8	.560	.047	.2539	.2516	.3765	.3760	.2500	.2491
AFI-0507-08	5/16	7/16	1/2	.560	.062	.3164	.3141	.4390	.4385	.3125	.3116
AFI-0608-04	3/8	1/2	1/4	.625	.062	.3787	.3764	.5007	.5000	.3750	.3741
AFI-0608-08	3/8	1/2	1/2	.625	.062	.3789	.3766	.5015	.5010	.3750	.3741
AFI-0810-08	1/2	5/8	1/2	.875	.062	.5047	.5020	.6257	.6250	.5000	.4983
AFI-0810-12	1/2	5/8	3/4	.875	.062	.5047	.5020	.6257	.6250	.5000	.4983
AFI-1013-16	5/8	13/16	1	1.063	.156	.6297	.6270	.8135	.8125	.6250	.6240
AFI-1216-12	3/4	1	3/4	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
AFI-1216-16	3/4	1	1	1.250	.156	.7559	.7525	1.0010	1.0000	.7500	.7490
AFI-1418-24	7/8	1 1/8	1 1/2	1.375	.156	.8809	.8775	1.1260	1.1250	.8750	.8740
AFI-1620-16	1	1 1/4	1	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
AFI-1620-24	1	1 1/4	1 1/2	1.500	.188	1.0059	1.0025	1.2510	1.2500	1.0000	.9990
AFI-2024-16	1 1/4	1 1/2	1	1.750	.200	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
AFI-2024-24	1 1/4	1 1/2	1 1/2	1.750	.200	1.2600	1.2531	1.5005	1.4995	1.2500	1.2490
AFI-2428-16	1 1/2	1 3/4	1	2.000	.125	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
AFI-2428-24	1 1/2	1 3/4	1 1/2	2.000	.125	1.5100	1.5032	1.7505	1.7495	1.5000	1.4990
AFI-2832-16	1 3/4	2	1	2.250	.125	1.7560	1.7532	2.0005	1.9995	1.7500	1.7490

## iglide® A200 - Linear Plain Bearing Thrust Washer, Inch

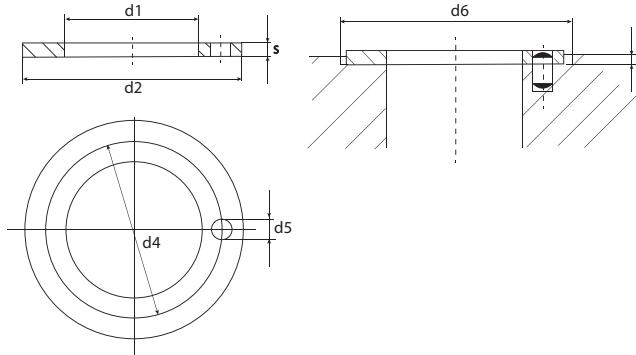

Part Number	d1 (nominal)	d1		d2	s
		Max.	Min.		
ATI-04	1/4	.2610	.2551	.6201	.6094
ATI-06	3/8	.3943	.3813	.7500	.7370
ATI-08	1/2	.5102	.5031	.8201	.8071
ATI-12	3/4	.7673	.7598	1.0654	1.0500
ATI-16	1	1.0268	1.0197	1.5000	1.4843

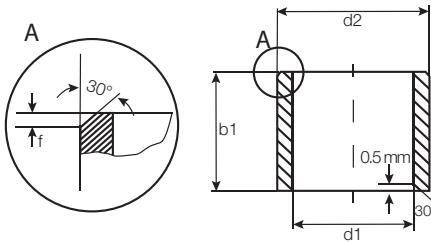

For tolerance values  
please refer to page 12.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
ASM-0103-02	1.0	+0.020 +0.080	3.0	2.0	1.080	1.020	3.010	3.000	1.000	.975
ASM-0104-02	1.5	+0.020 +0.080	4.0	2.0	1.580	1.520	4.012	4.000	1.500	1.475
ASM-0205-02	2.0	+0.020 +0.080	5.0	2.0	2.080	2.020	5.012	5.000	2.000	1.975
ASM-0205-03	2.0	+0.020 +0.080	5.0	3.0	2.080	2.020	5.012	5.000	2.000	1.975
ASM-0206-03	2.5	+0.020 +0.080	6.0	3.0	2.580	2.520	6.012	6.000	2.500	2.475
ASM-0305-03	3.0	+0.020 +0.080	5.0	3.0	3.080	3.020	5.012	5.000	3.000	2.975
ASM-0305-04	3.0	+0.020 +0.080	5.0	4.0	3.080	3.020	5.012	5.000	3.000	2.975
ASM-0306-03	3.0	+0.020 +0.080	6.0	3.0	3.080	3.020	6.012	6.000	3.000	2.975
ASM-0306-04	3.0	+0.020 +0.080	6.0	4.0	3.080	3.020	6.012	6.000	3.000	2.975
ASM-0407-03	4.0	+0.030 +0.105	7.0	3.0	4.105	4.030	7.015	7.000	4.000	3.970
ASM-0407-04	4.0	+0.030 +0.105	7.0	4.0	4.105	4.030	7.015	7.000	4.000	3.970
ASM-0407-06	4.0	+0.030 +0.105	7.0	6.0	4.105	4.030	7.015	7.000	4.000	3.970
ASM-0408-06	4.0	+0.030 +0.105	8.0	6.0	4.105	4.030	8.015	8.000	4.000	3.970
ASM-0508-04	5.0	+0.030 +0.105	8.0	4.0	5.105	5.030	8.015	8.000	5.000	4.970
ASM-0508-05	5.0	+0.030 +0.105	8.0	5.0	5.105	5.030	8.015	8.000	5.000	4.970
ASM-0508-08	5.0	+0.030 +0.105	8.0	8.0	5.105	5.030	8.015	8.000	5.000	4.970
ASM-0509-05	5.0	+0.030 +0.105	9.0	5.0	5.105	5.030	9.015	9.000	5.000	4.970
ASM-0509-08	5.0	+0.030 +0.105	9.0	8.0	5.105	5.030	9.015	9.000	5.000	4.970
ASM-0608-10	6.0	+0.030 +0.105	8.0	10.0	6.105	6.030	8.015	8.000	6.000	5.970
ASM-0609-06	6.0	+0.030 +0.105	9.0	6.0	6.105	6.030	9.015	9.000	6.000	5.970
ASM-0610-04	6.0	+0.030 +0.105	10.0	4.0	6.105	6.030	10.015	10.000	6.000	5.970
ASM-0610-06	6.0	+0.030 +0.105	10.0	6.0	6.105	6.030	10.015	10.000	6.000	5.970
ASM-0610-10	6.0	+0.030 +0.105	10.0	10.0	6.105	6.030	10.015	10.000	6.000	5.970
ASM-0612-06	6.0	+0.030 +0.105	12.0	6.0	6.105	6.030	12.018	12.000	6.000	5.970
ASM-0612-10	6.0	+0.030 +0.105	12.0	10.0	6.105	6.030	12.018	12.000	6.000	5.970
ASM-0710-05	7.0	+0.040 +0.130	10.0	5.0	7.130	7.040	10.015	10.000	7.000	6.964
ASM-0710-08	7.0	+0.040 +0.130	10.0	8.0	7.130	7.040	10.015	10.000	7.000	6.964
ASM-0810-06	8.0	+0.040 +0.130	10.0	6.0	8.130	8.040	10.015	10.000	8.000	7.964
ASM-0810-08	8.0	+0.040 +0.130	10.0	8.0	8.130	8.040	10.015	10.000	8.000	7.964
ASM-0810-10	8.0	+0.040 +0.130	10.0	10.0	8.130	8.040	10.015	10.000	8.000	7.964
ASM-0811-08	8.0	+0.040 +0.130	11.0	8.0	8.130	8.040	11.018	11.000	8.000	7.964
ASM-0811-12	8.0	+0.040 +0.130	11.0	12.0	8.130	8.040	11.018	11.000	8.000	7.964
ASM-0812-06	8.0	+0.040 +0.130	12.0	6.0	8.130	8.040	12.018	12.000	8.000	7.964
ASM-0812-08	8.0	+0.040 +0.130	12.0	8.0	8.130	8.040	12.018	12.000	8.000	7.964
ASM-0812-10	8.0	+0.040 +0.130	12.0	10.0	8.130	8.040	12.018	12.000	8.000	7.964
ASM-0812-12	8.0	+0.040 +0.130	12.0	12.0	8.130	8.040	12.018	12.000	8.000	7.964
ASM-0814-06	8.0	+0.040 +0.130	14.0	6.0	8.130	8.040	14.018	14.000	8.000	7.964
ASM-0814-10	8.0	+0.040 +0.130	14.0	10.0	8.130	8.040	14.018	14.000	8.000	7.964
ASM-0912-14	9.0	+0.040 +0.130	12.0	14.0	9.130	9.040	12.018	12.000	9.000	8.964
ASM-1012-10	10.0	+0.040 +0.130	12.0	10.0	10.130	10.040	12.018	12.000	10.000	9.964
ASM-1014-06	10.0	+0.040 +0.130	14.0	6.0	10.130	10.040	14.018	14.000	10.000	9.964

iglide® A200  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1

inch

mm



# iglide® Plain Bearings

## A200 - Sleeve, MM

iglide® A200  
Sleeve - MM

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>



For tolerance values  
please refer to page 12.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
ASM-1014-08	10.0	+0.040 +0.130	14.0	8.0	10.130	10.040	14.018	14.000	10.000	9.964
ASM-1014-10	10.0	+0.040 +0.130	14.0	10.0	10.130	10.040	14.018	14.000	10.000	9.964
ASM-1014-16	10.0	+0.040 +0.130	14.0	16.0	10.130	10.040	14.018	14.000	10.000	9.964
ASM-1016-06	10.0	+0.040 +0.130	16.0	6.0	10.130	10.040	16.018	16.000	10.000	9.964
ASM-1016-10	10.0	+0.040 +0.130	16.0	10.0	10.130	10.040	16.018	16.000	10.000	9.964
ASM-1016-16	10.0	+0.040 +0.130	16.0	16.0	10.130	10.040	16.018	16.000	10.000	9.964
ASM-1214-20	12.0	+0.050 +0.160	14.0	20.0	12.160	12.050	14.018	14.000	12.000	11.957
ASM-1216-15	12.0	+0.050 +0.160	16.0	15.0	12.160	12.050	16.018	16.000	12.000	11.957
ASM-1216-20	12.0	+0.050 +0.160	16.0	20.0	12.160	12.050	16.018	16.000	12.000	11.957
ASM-1218-08	12.0	+0.050 +0.160	18.0	8.0	12.160	12.050	18.018	18.000	12.000	11.957
ASM-1218-10	12.0	+0.050 +0.160	18.0	10.0	12.160	12.050	18.018	18.000	12.000	11.957
ASM-1218-15	12.0	+0.050 +0.160	18.0	15.0	12.160	12.050	18.018	18.000	12.000	11.957
ASM-1218-20	12.0	+0.050 +0.160	18.0	20.0	12.160	12.050	18.018	18.000	12.000	11.957
ASM-1416-10	14.0	+0.050 +0.160	16.0	10.0	14.160	14.050	16.018	16.000	14.000	13.957
ASM-1416-15	14.0	+0.050 +0.160	16.0	15.0	14.160	14.050	16.018	16.000	14.000	13.957
ASM-1416-20	14.0	+0.050 +0.160	16.0	20.0	14.160	14.050	16.018	16.000	14.000	13.957
ASM-1420-10	14.0	+0.050 +0.160	20.0	10.0	14.160	14.050	20.021	20.000	14.000	13.957
ASM-1420-15	14.0	+0.050 +0.160	20.0	15.0	14.160	14.050	20.021	20.000	14.000	13.957
ASM-1420-20	14.0	+0.050 +0.160	20.0	20.0	14.160	14.050	20.021	20.000	14.000	13.957
ASM-1517-10	15.0	+0.050 +0.160	17.0	10.0	15.160	15.050	17.018	17.000	15.000	14.957
ASM-1517-15	15.0	+0.050 +0.160	17.0	15.0	15.160	15.050	17.018	17.000	15.000	14.957
ASM-1521-10	15.0	+0.050 +0.160	21.0	10.0	15.160	15.050	21.021	21.000	15.000	14.957
ASM-1521-15	15.0	+0.050 +0.160	21.0	15.0	15.160	15.050	21.021	21.000	15.000	14.957
ASM-1521-20	15.0	+0.050 +0.160	21.0	20.0	15.160	15.050	21.021	21.000	15.000	14.957
ASM-1618-12	16.0	+0.050 +0.160	18.0	12.0	16.160	16.050	18.018	18.000	16.000	15.957
ASM-1618-20	16.0	+0.050 +0.160	18.0	20.0	16.160	16.050	18.018	18.000	16.000	15.957
ASM-1620-20	16.0	+0.050 +0.160	20.0	20.0	16.160	16.050	20.021	20.000	16.000	15.957
ASM-1620-25	16.0	+0.050 +0.160	20.0	25.0	16.160	16.050	20.021	20.000	16.000	15.957
ASM-1622-12	16.0	+0.050 +0.160	22.0	12.0	16.160	16.050	22.021	22.000	16.000	15.957
ASM-1622-15	16.0	+0.050 +0.160	22.0	15.0	16.160	16.050	22.021	22.000	16.000	15.957
ASM-1622-16	16.0	+0.050 +0.160	22.0	16.0	16.160	16.050	22.021	22.000	16.000	15.957
ASM-1622-20	16.0	+0.050 +0.160	22.0	20.0	16.160	16.050	22.021	22.000	16.000	15.957
ASM-1622-25	16.0	+0.050 +0.160	22.0	25.0	16.160	16.050	22.021	22.000	16.000	15.957
ASM-1824-12	18.0	+0.050 +0.160	24.0	12.0	18.160	18.050	24.021	24.000	18.000	17.957
ASM-1824-20	18.0	+0.050 +0.160	24.0	20.0	18.160	18.050	24.021	24.000	18.000	17.957
ASM-1824-30	18.0	+0.050 +0.160	24.0	30.0	18.160	18.050	24.021	24.000	18.000	17.957
ASM-2023-15	20.0	+0.065 +0.195	23.0	15.0	20.195	20.065	23.021	23.000	20.000	19.948
ASM-2023-20	20.0	+0.065 +0.195	23.0	20.0	20.195	20.065	23.021	23.000	20.000	19.948
ASM-2025-15	20.0	+0.065 +0.195	25.0	15.0	20.195	20.065	25.021	25.000	20.000	19.948
ASM-2025-20	20.0	+0.065 +0.195	25.0	20.0	20.195	20.065	25.021	25.000	20.000	19.948
ASM-2025-30	20.0	+0.065 +0.195	25.0	30.0	20.195	20.065	25.021	25.000	20.000	19.948

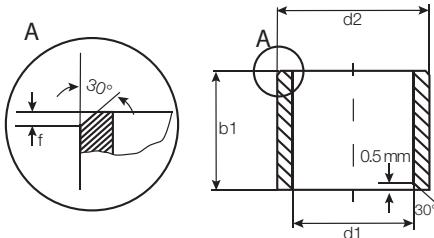

For tolerance values  
please refer to page 12.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
ASM-2026-15	20.0	+0.065 +0.195	26.0	15.0	20.195	20.065	26.021	26.000	20.000	19.948
ASM-2026-20	20.0	+0.065 +0.195	26.0	20.0	20.195	20.065	26.021	26.000	20.000	19.948
ASM-2026-30	20.0	+0.065 +0.195	26.0	30.0	20.195	20.065	26.021	26.000	20.000	19.948
ASM-2226-15	22.0	+0.065 +0.195	26.0	15.0	22.195	22.065	26.021	26.000	22.000	21.948
ASM-2228-10	22.0	+0.065 +0.195	28.0	10.0	22.195	22.065	28.021	28.000	22.000	21.948
ASM-2228-15	22.0	+0.065 +0.195	28.0	15.0	22.195	22.065	28.021	28.000	22.000	21.948
ASM-2228-20	22.0	+0.065 +0.195	28.0	20.0	22.195	22.065	28.021	28.000	22.000	21.948
ASM-2228-30	22.0	+0.065 +0.195	28.0	30.0	22.195	22.065	28.021	28.000	22.000	21.948
ASM-2430-15	24.0	+0.065 +0.195	30.0	15.0	24.195	24.065	30.021	30.000	24.000	23.948
ASM-2430-20	24.0	+0.065 +0.195	30.0	20.0	24.195	24.065	30.021	30.000	24.000	23.948
ASM-2430-30	24.0	+0.065 +0.195	30.0	30.0	24.195	24.065	30.021	30.000	24.000	23.948
ASM-2528-12	25.0	+0.065 +0.195	28.0	12.0	25.195	25.065	28.021	28.000	25.000	24.948
ASM-2528-20	25.0	+0.065 +0.195	28.0	20.0	25.195	25.065	28.021	28.000	25.000	24.948
ASM-2530-20	25.0	+0.065 +0.195	30.0	20.0	25.195	25.065	30.021	30.000	25.000	24.948
ASM-2530-30	25.0	+0.065 +0.195	30.0	30.0	25.195	25.065	30.021	30.000	25.000	24.948
ASM-2530-40	25.0	+0.065 +0.195	30.0	40.0	25.195	25.065	30.021	30.000	25.000	24.948
ASM-2532-20	25.0	+0.065 +0.195	32.0	20.0	25.195	25.065	32.021	32.000	25.000	24.948
ASM-2532-30	25.0	+0.065 +0.195	32.0	30.0	25.195	25.065	32.021	32.000	25.000	24.948
ASM-2532-40	25.0	+0.065 +0.195	32.0	40.0	25.195	25.065	32.021	32.000	25.000	24.948
ASM-2630-20	26.0	+0.065 +0.195	30.0	20.0	26.195	26.065	30.025	30.000	26.000	25.948
ASM-2632-30	26.0	+0.065 +0.195	32.0	30.0	26.195	26.065	32.025	32.000	26.000	25.948
ASM-2734-20	27.0	+0.065 +0.195	34.0	20.0	27.195	27.065	34.025	34.000	27.000	26.948
ASM-2734-30	27.0	+0.065 +0.195	34.0	30.0	27.195	27.065	34.025	34.000	27.000	26.948
ASM-2734-40	27.0	+0.065 +0.195	34.0	40.0	27.195	27.065	34.025	34.000	27.000	26.948
ASM-2833-20	28.0	+0.065 +0.195	33.0	20.0	28.195	28.065	33.025	33.000	28.000	27.948
ASM-2836-20	28.0	+0.065 +0.195	36.0	20.0	28.195	28.065	36.025	36.000	28.000	27.948
ASM-2836-30	28.0	+0.065 +0.195	36.0	30.0	28.195	28.065	36.025	36.000	28.000	27.948
ASM-2836-40	28.0	+0.065 +0.195	36.0	40.0	28.195	28.065	36.025	36.000	28.000	27.948
ASM-3038-20	30.0	+0.065 +0.195	38.0	20.0	30.195	30.065	38.025	38.000	30.000	29.948
ASM-3038-30	30.0	+0.065 +0.195	38.0	30.0	30.195	30.065	38.025	38.000	30.000	29.948
ASM-3038-40	30.0	+0.065 +0.195	38.0	40.0	30.195	30.065	38.025	38.000	30.000	29.948
ASM-3240-20	32.0	+0.080 +0.240	40.0	20.0	32.240	32.080	40.025	40.000	32.000	31.938
ASM-3240-30	32.0	+0.080 +0.240	40.0	30.0	32.240	32.080	40.025	40.000	32.000	31.938
ASM-3240-40	32.0	+0.080 +0.240	40.0	40.0	32.240	32.080	40.025	40.000	32.000	31.938

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+



1

inch

mm

**iglide® Plain Bearings  
A200 - Flange, MM**
**iglide® A200  
Flange - MM**
**Telephone 1-800-521-2747  
Fax 1-401-438-7270**



Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>


 For tolerance values  
please refer to page 12.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size		
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.	Max.	Min.
AFM-0103-02	1.0	+0.020 +0.080	3.0	5.0	2.0	1.0	1.080	1.020	3.010	3.000	1.000 .9750
AFM-0104-02	1.5	+0.020 +0.080	4.0	6.0	2.0	1.0	1.580	1.520	4.012	4.000	1.500 1.475
AFM-0205-03	2.0	+0.020 +0.080	5.0	8.0	3.0	1.5	2.080	2.020	5.012	5.000	2.000 1.975
AFM-0206-03	2.5	+0.020 +0.080	6.0	9.0	3.0	1.5	2.080	2.020	5.012	5.000	2.000 1.975
AFM-0306-04	3.0	+0.020 +0.080	6.0	9.0	4.0	1.5	3.080	3.020	6.012	6.000	3.000 2.975
AFM-0408-04	4.0	+0.030 +0.105	8.0	12.0	4.0	2.0	4.105	4.030	8.015	8.000	4.000 3.970
AFM-0408-06	4.0	+0.030 +0.105	8.0	12.0	6.0	2.0	4.105	4.030	8.015	8.000	4.000 3.970
AFM-0507-05	5.0	+0.030 +0.105	7.0	11.0	5.0	1.0	5.105	5.030	7.015	7.000	5.000 4.970
AFM-0509-05	5.0	+0.030 +0.105	9.0	13.0	5.0	2.0	5.105	5.030	9.015	9.000	5.000 4.970
AFM-0509-06	5.0	+0.030 +0.105	9.0	13.0	6.0	2.0	5.105	5.030	9.015	9.000	5.000 4.970
AFM-0509-08	5.0	+0.030 +0.105	9.0	13.0	8.0	2.0	5.105	5.030	9.015	9.000	5.000 4.970
AFM-0610-04	6.0	+0.030 +0.105	10.0	14.0	4.0	2.0	6.105	6.030	10.015	10.000	6.000 5.970
AFM-0610-06	6.0	+0.030 +0.105	10.0	14.0	6.0	2.0	6.105	6.030	10.015	10.000	6.000 5.970
AFM-0610-10	6.0	+0.030 +0.105	10.0	14.0	10.0	2.0	6.105	6.030	10.015	10.000	6.000 5.970
AFM-0612-06	6.0	+0.030 +0.105	12.0	14.0	6.0	3.0	6.105	6.030	12.018	12.000	6.000 5.970
AFM-0612-08	6.0	+0.030 +0.105	12.0	14.0	8.0	3.0	6.105	6.030	12.018	12.000	6.000 5.970
AFM-0612-10	6.0	+0.030 +0.105	12.0	14.0	10.0	3.0	6.105	6.030	12.018	12.000	6.000 5.970
AFM-0711-08	7.0	+0.040 +0.130	11.0	15.0	8.0	2.0	7.130	7.040	11.018	11.000	7.000 6.964
AFM-0811-08	8.0	+0.040 +0.130	11.0	13.0	8.0	2.0	8.130	8.040	11.018	11.000	8.000 7.964
AFM-0812-06	8.0	+0.040 +0.130	12.0	13.0	6.0	2.0	8.130	8.040	12.018	12.000	8.000 7.964
AFM-0812-08	8.0	+0.040 +0.130	12.0	16.0	8.0	2.0	8.130	8.040	12.018	12.000	8.000 7.964
AFM-0812-12	8.0	+0.040 +0.130	12.0	16.0	12.0	2.0	8.130	8.040	12.018	12.000	8.000 7.964
AFM-0812-22	8.0	+0.040 +0.130	12.0	16.0	22.0	2.0	8.130	8.040	12.018	12.000	8.000 7.964
AFM-0814-06	8.0	+0.040 +0.130	14.0	18.0	6.0	3.0	8.130	8.040	14.018	14.000	8.000 7.964
AFM-0814-10	8.0	+0.040 +0.130	14.0	18.0	10.0	3.0	8.130	8.040	14.018	14.000	8.000 7.964
AFM-0914-06	9.0	+0.040 +0.130	14.0	19.0	6.0	2.0	9.130	9.040	14.018	14.000	9.000 8.964
AFM-0914-10	9.0	+0.040 +0.130	14.0	19.0	10.0	2.0	9.130	9.040	14.018	14.000	9.000 8.964
AFM-0914-14	9.0	+0.040 +0.130	14.0	19.0	14.0	2.0	9.130	9.040	14.018	14.000	9.000 8.964
AFM-1012-10	10.0	+0.040 +0.130	12.0	18.0	10.0	1.0	10.130	10.040	12.018	12.000	10.000 9.964
AFM-1016-06	10.0	+0.040 +0.130	16.0	22.0	6.0	3.0	10.130	10.040	16.018	16.000	10.000 9.964
AFM-1016-08	10.0	+0.040 +0.130	16.0	22.0	8.0	3.0	10.130	10.040	16.018	16.000	10.000 9.964
AFM-1016-10	10.0	+0.040 +0.130	16.0	22.0	10.0	3.0	10.130	10.040	16.018	16.000	10.000 9.964
AFM-1016-16	10.0	+0.040 +0.130	16.0	22.0	16.0	3.0	10.130	10.040	16.018	16.000	10.000 9.964
AFM-101620-10	10.0	+0.040 +0.130	16.0	20.0	10.0	3.0	10.130	10.040	16.018	16.000	10.000 9.964
AFM-1214-12	12.0	+0.050 +0.160	14.0	20.0	12.0	1.0	12.160	12.050	14.018	14.000	12.000 11.957
AFM-1218-08	12.0	+0.050 +0.160	18.0	24.0	8.0	3.0	12.160	12.050	18.018	18.000	12.000 11.957
AFM-1218-10	12.0	+0.050 +0.160	18.0	22.0	10.0	3.0	12.160	12.050	18.018	18.000	12.000 11.957
AFM-1218-12	12.0	+0.050 +0.160	18.0	24.0	12.0	3.0	12.160	12.050	18.018	18.000	12.000 11.957
AFM-1218-15	12.0	+0.050 +0.160	18.0	22.0	15.0	3.0	12.160	12.050	18.018	18.000	12.000 11.957
AFM-1218-20	12.0	+0.050 +0.160	18.0	22.0	20.0	3.0	12.160	12.050	18.018	18.000	12.000 11.957
AFM-1420-10	14.0	+0.050 +0.160	20.0	25.0	10.0	3.0	14.160	14.050	20.021	20.000	14.000 13.957



For tolerance values  
please refer to page 12.4

$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup> After Pressfit in Ø H7	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
			d13	h13	-0,14	Max.	Min.	Max.	Min.	
AFM-1420-15	14.0	+0.050 +0.160	20.0	25.0	15.0	3.0	14.160	14.050	20.021	20.000
AFM-1420-20	14.0	+0.050 +0.160	20.0	25.0	20.0	3.0	14.160	14.050	20.021	20.000
AFM-1521-10	15.0	+0.050 +0.160	21.0	27.0	10.0	3.0	15.160	15.050	21.021	21.000
AFM-1521-15	15.0	+0.050 +0.160	21.0	27.0	15.0	3.0	15.160	15.050	21.021	21.000
AFM-1521-20	15.0	+0.050 +0.160	21.0	27.0	20.0	3.0	15.160	15.050	21.021	21.000
AFM-1521-25	15.0	+0.050 +0.160	21.0	27.0	25.0	3.0	15.160	15.050	21.021	21.000
AFM-1622-12	16.0	+0.050 +0.160	22.0	28.0	12.0	3.0	16.160	16.050	22.021	22.000
AFM-1622-15	16.0	+0.050 +0.160	22.0	28.0	15.0	3.0	16.160	16.050	22.021	22.000
AFM-1622-20	16.0	+0.050 +0.160	22.0	28.0	20.0	3.0	16.160	16.050	22.021	22.000
AFM-1622-25	16.0	+0.050 +0.160	22.0	28.0	25.0	3.0	16.160	16.050	22.021	22.000
AFM-1824-12	18.0	+0.050 +0.160	24.0	30.0	12.0	3.0	18.160	18.050	24.021	24.000
AFM-1824-18	18.0	+0.050 +0.160	24.0	30.0	18.0	3.0	18.160	18.050	24.021	24.000
AFM-1824-20	18.0	+0.050 +0.160	24.0	30.0	20.0	3.0	18.160	18.050	24.021	24.000
AFM-1824-30	18.0	+0.050 +0.160	24.0	30.0	30.0	3.0	18.160	18.050	24.021	24.000
AFM-2026-15	20.0	+0.065 +0.195	26.0	32.0	15.0	3.0	20.195	20.065	26.021	26.000
AFM-2026-20	20.0	+0.065 +0.195	26.0	32.0	20.0	3.0	20.195	20.065	26.021	26.000
AFM-2026-30	20.0	+0.065 +0.195	26.0	32.0	30.0	3.0	20.195	20.065	26.021	26.000
AFM-2228-15	22.0	+0.065 +0.195	28.0	34.0	15.0	3.0	22.195	22.065	28.021	28.000
AFM-2228-20	22.0	+0.065 +0.195	28.0	34.0	20.0	3.0	22.195	22.065	28.021	28.000
AFM-2228-30	22.0	+0.065 +0.195	28.0	34.0	30.0	3.0	22.195	22.065	28.021	28.000
AFM-2430-15	24.0	+0.065 +0.195	30.0	36.0	15.0	3.0	24.195	24.065	30.021	30.000
AFM-2430-20	24.0	+0.065 +0.195	30.0	36.0	20.0	3.0	24.195	24.065	30.021	30.000
AFM-2430-30	24.0	+0.065 +0.195	30.0	36.0	30.0	3.0	24.195	24.065	30.021	30.000
AFM-2532-20	25.0	+0.065 +0.195	32.0	38.0	20.0	4.0	25.195	25.065	32.025	32.000
AFM-2532-30	25.0	+0.065 +0.195	32.0	38.0	30.0	4.0	25.195	25.065	32.025	32.000
AFM-2532-40	25.0	+0.065 +0.195	32.0	38.0	40.0	4.0	25.195	25.065	32.025	32.000
AFM-2734-20	27.0	+0.065 +0.195	34.0	40.0	20.0	4.0	27.195	27.065	34.025	34.000
AFM-2734-30	27.0	+0.065 +0.195	34.0	40.0	30.0	4.0	27.195	27.065	34.025	34.000
AFM-2734-40	27.0	+0.065 +0.195	34.0	40.0	40.0	4.0	27.195	27.065	34.025	34.000
AFM-2836-20	28.0	+0.065 +0.195	36.0	42.0	20.0	4.0	28.195	28.065	36.025	36.000
AFM-2836-30	28.0	+0.065 +0.195	36.0	42.0	30.0	4.0	28.195	28.065	36.025	36.000
AFM-2836-40	28.0	+0.065 +0.195	36.0	42.0	40.0	4.0	28.195	28.065	36.025	36.000
AFM-3038-20	30.0	+0.065 +0.195	38.0	44.0	20.0	4.0	30.195	30.065	38.025	38.000
AFM-3038-30	30.0	+0.065 +0.195	38.0	44.0	30.0	4.0	30.195	30.065	38.025	38.000
AFM-3038-40	30.0	+0.065 +0.195	38.0	44.0	40.0	4.0	30.195	30.065	38.025	38.000
AFM-3240-20	32.0	+0.080 +0.240	40.0	46.0	20.0	4.0	32.240	32.080	40.025	40.000
AFM-3240-30	32.0	+0.080 +0.240	40.0	46.0	30.0	4.0	32.240	32.080	40.025	40.000
AFM-3240-40	32.0	+0.080 +0.240	40.0	46.0	40.0	4.0	32.240	32.080	40.025	40.000

iglide® A200  
Flange - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

inch

mm



**igus®**

## iglide® Plain Bearings A200 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® A200

igus®



iglide® A350


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available
- Inner diameters:  
Metric sizes from 6 - 20 mm

### Part Number Structure

#### Part Number Structure

#### A350 S M- 06 08 - 06

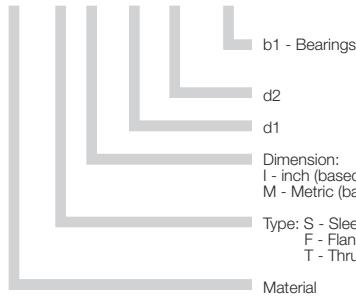

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	196	236
Oscillating	157	177
Linear	492	590

### Usage Guidelines



- If wear-resistance and FDA-conformance is necessary at high loads
- If FDA-compliance is required
- When quiet operation is important
- If the bearing is used in an acid environment



- When the maximum abrasion resistance is necessary
  - iglide® J
- When temperatures are continuously greater than 176°F
  - iglide® A290, A500
- When a cost-effective FDA bearing is desired
  - iglide® A200
  - iglide® A180
- For high speeds
  - iglide® J



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

### Material Data

General Properties	Unit	iglide® A350	Testing Method
Density	g/cm³	1.42	
Color		light blue	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.6	DIN 53495
Max. moisture absorption	% weight	1.9	
Coefficient of friction, dynamic against steel	$\mu$	0.10 - 0.20	
p x v value, max. (dry)	psi x fpm	11,500	

### Mechanical Properties


Modulus of elasticity	psi	290,100	DIN 53457
Tensile strength 68°F	psi	15,950	DIN 53452
Compressive strength	psi	11,310	
Permissible static surface pressure (68°F)	psi	8,702	
Shore D-hardness		76	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	356	
Max. short-term application temperature	°F	410	
Min. application temperature	°F	-148	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	8	DIN 53752

### Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{11}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{11}$	DIN 53482

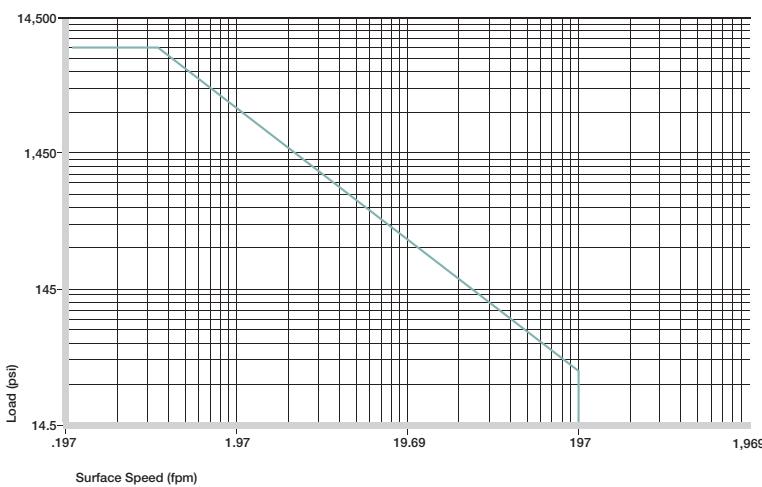

Permissible p x v values for iglide® A350 running dry against a steel shaft, at 68°F




iglide® A350 is FDA compliant

FDA-compliant and wear-resistant at high temperatures. A universal bearing for use in the area of food and pharmaceutical industries. Composition of FDA compliant materials allows for use in areas where, due to the contact with food, other bearings cannot be used. With good tribological and mechanical properties, iglide® A350 bearings are an excellent option for use in food machinery.

## Compressive Strength

The graph at the right shows the elastic deformation of iglide® A350 during radial loading. At the recommended maximum surface pressure of 2900 psi the deformation is less than 5 %.

- Compressive Strength, Page 1.3

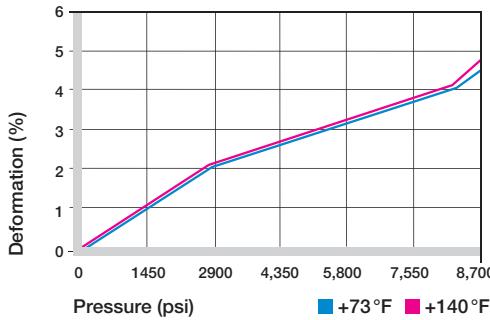

Deformation under load and temperature

## Permissible Surface Speeds

iglide® A350 bearings are suitable for low to medium speeds in both rotating and oscillating applications. Even linear movements can often be realized with iglide® A350.

With high sliding speeds, iglide® J or iglide® L250 can be interesting alternatives because the wear rate of these materials is better.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

Its temperature resistance makes iglide® A350 an ideal material for a bearing in the area of foodstuffs. Typically, temperatures range up to +266 °F, which corresponds perfectly with the applicable temperature range for iglide® A350. Short-term temperatures up to +410 °F are possible. Please note that at temperatures over +284 °F, the pressfit forces of the bearings may decrease and an additional axial securing device is recommended.

The wear-rate of iglide® A350 bearings rises only a little with higher temperatures. Tests have shown good wear results at +212 °F on all tested shaft materials.


- Application Temperatures, Page 1.7

iglide® A350	Application Temperature
Minimum	-148°F
Max. long-term	+356°F
Max. short-term	+410°F
Additional axial securing	+284°F

## Temperature iglide® A350


	Continuous fpm	Short Term fpm
Rotating	196	236
Oscillating	157	177
Linear	492	590

Maximum surface speeds

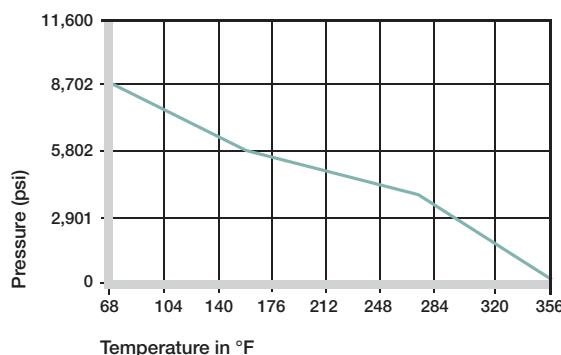

Recommended maximum permissible static surface pressure of iglide® A350 as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

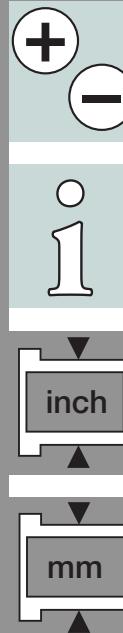


## Installation Tolerances

iglide® A350 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

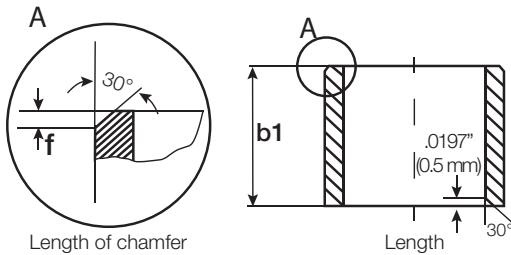


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The coefficient of friction of iglide® A350 on a steel shaft is in the mid range. The friction decreases at higher temperatures, which in dry operation is somewhat unusual.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

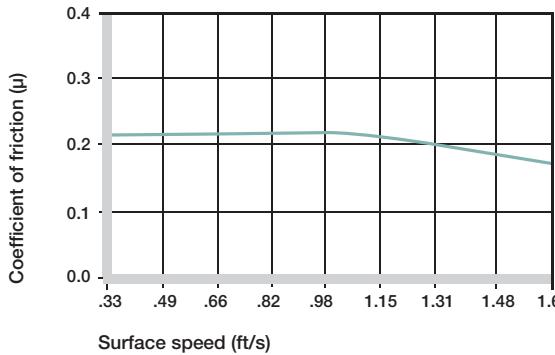


Coefficients of friction of iglide® A350 as a function of the running speed; p = 145 psi


### iglide® A200      Coefficient of Friction

Dry	0.10 - 0.20
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® A350 against steel (Shaft finish = 40 rms, 50 HRC)

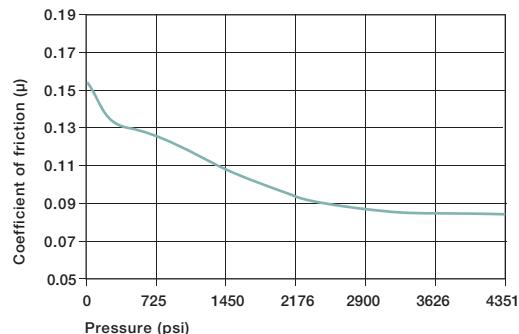

Coefficients of friction of iglide® A350 as a function of the load, v = 1.96 fpm

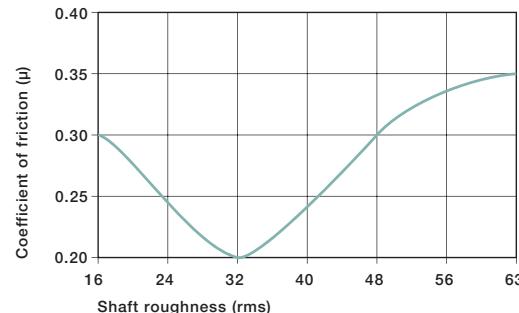


Coefficients of friction of iglide® A350 as a function of the shaft surface (1050 hard chromed and ground steel)

## Shaft Materials


Corrosion-resistant steels are rather considered a natural choice for use in the food industry.

Trials were therefore carried out especially on such materials. It has been shown that there is no clear favorite 440B and hard chrome plated steel are both suitable. Hard-anodized aluminum is also well suited for both linear and rotating movements.


► Shaft Materials, Page 1.11

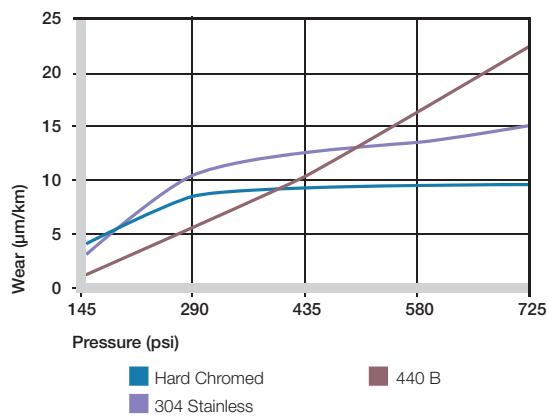

Wear with different shaft materials in rotational operation, as a function of the pressure

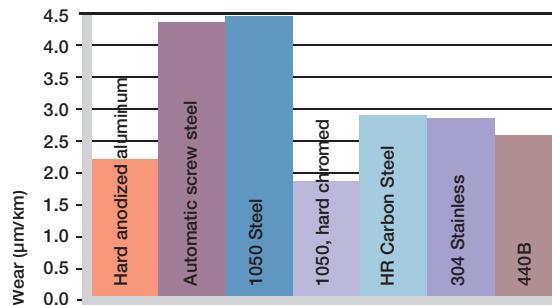

Wear, rotating application with different shaft materials,  $p = 145$  psi,  $v = 59$  fpm

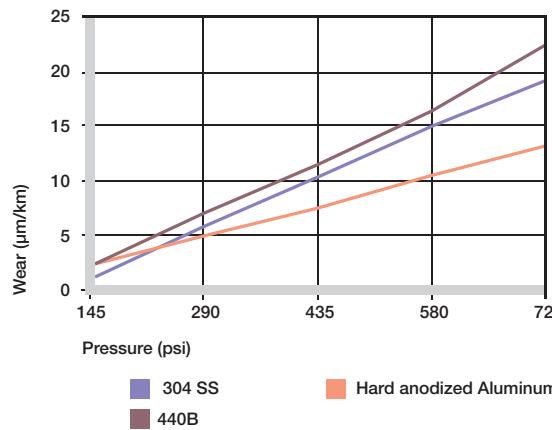

Wear on oscillating application with different shaft materials depending on the load

## Chemical Resistance


iglide® A350 plain bearings are resistant to diluted acids and alkalis, alcohols and detergents. They are also resistant to most lubricants. The iglide® A350 plain bearings are resistant to common cleaning agents in the food industry. iglide® A350 is affected by esters, ketones, chlorinated hydrocarbons, aromatics and highly polar solvents.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+ to 0
Greases, oils without additives	+
Fuels	+
Weak acids	+
Strong acids	+
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	


### Chemical resistance of iglide® A350

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

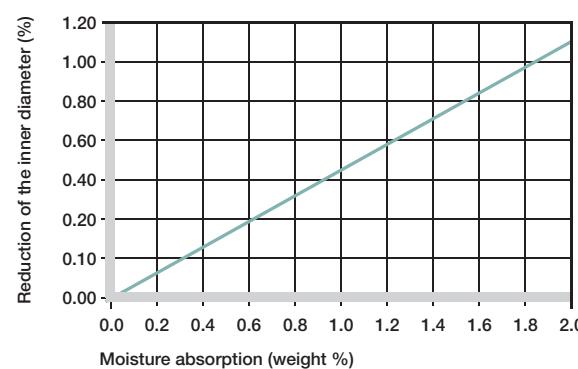

Effect of moisture absorption on iglide® A350 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



## Radiation Resistance

Plain bearings made of iglide® A350 are resistant to radiation up to an intensity of  $2 \cdot 10^2$  Gy.

## UV-Resistance

iglide® A350 bearings are resistant to UV radiation.

## Vacuum

When used in a vacuum environment, the iglide® A350 plain bearings release moisture as a vapor. Therefore, only dehumidified bearings are suitable in a vacuum environment.



## Electrical Properties

iglide® A350 plain bearings are electrically insulating.

### iglide® A200

Specific volume resistance	> $10^{11}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® A350



For tolerance values  
please refer to page 13.4



Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
A350SM-0608-10	6.0	+0.010 +0.058	8.0	6.0	6.058	6.010	8.012	8.000	6.000	5.970
A350SM-0810-10	8.0	+0.013 +0.071	10.0	10.0	8.071	8.013	10.015	10.000	8.000	7.964
A350SM-1012-10	10.0	+0.013 +0.071	12.0	10.0	10.071	10.013	12.018	12.000	10.000	9.964
A350SM-1214-12	12.0	+0.016 +0.086	14.0	12.0	12.086	12.086	14.018	14.000	12.000	11.957
A350SM-1618-15	16.0	+0.016 +0.086	18.0	15.0	16.086	16.016	18.018	18.000	16.000	15.957
A350SM-2023-20	20.0	+0.020 +0.104	23.0	20.0	20.104	20.020	23.021	23.000	20.000	19.948

iglide® A350  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

## iglide® Plain Bearings A350 - Flange, MM



For tolerance values  
please refer to page 13.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			d13	h13	-0,14	Max.	Min.	Max.	Min.	Max.	Min.
A350FM-0608-06	6.0	+0.010 +0.058	8.0	12.0	6.0	1.0	6.058	6.010	8.012	8.000	6.000	5.970
A350FM-0810-10	8.0	+0.013 +0.071	10.0	15.0	10.0	1.0	8.071	8.013	10.015	10.000	10.000	9.964
A350FM-1012-10	10.0	+0.013 +0.071	12.0	18.0	10.0	1.0	10.071	10.013	12.018	12.000	10.000	9.964
A350FM-1214-12	12.0	+0.016 +0.086	14.0	20.0	12.0	1.0	12.086	12.016	14.018	14.000	12.000	11.957
A350FM-1618-15	16.0	+0.016 +0.086	18.0	24.0	17.0	1.0	16.086	16.016	18.018	18.000	16.000	15.957
A350FM-2023-21	20.0	+0.020 +0.104	23.0	30.0	21.5	1.5	20.104	20.020	23.021	23.000	21.000	20.948

inch  
mm



## iglide® Plain Bearings A350 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® A350

igus®



iglide® T500


### Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 2-3/4 in.  
Metric sizes from 2 - 75 mm

### Part Number Structure

#### Part Number Structure

**T S I-02 03-03**

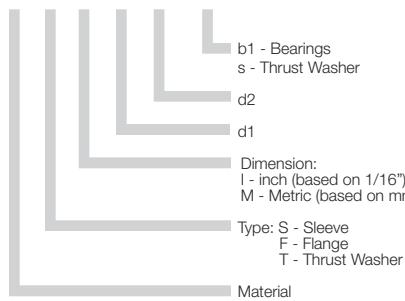

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	689
Oscillating	216	492
Linear	984	1968

### Usage Guidelines



- When especially high temperature resistance is necessary
- For loads up to 21,750 psi
- For linear movements with a hard stainless steel
- For linear movements especially at high temperatures
- When universal resistance to chemicals is required
- Very low moisture absorption



- For very low wear at high loads
  - iglide® Q, Z
- For edge compression
  - iglide® Z

### Material Table

#### General Properties

	Unit	iglide® T500	Testing Method
Density	g/cm³	1.44	
Color		black	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.5	
Coefficient of friction, dynamic against steel	μ	0.09 - 0.27	
p x v-value, max. (dry)	psi x fpm	37,700	

#### Mechanical Properties


Modulus of elasticity	psi	1,174,800	DIN 53457
Tensile strength at 68°F	psi	24,660	DIN 53452
Compressive strength	psi	14,500	
Permissible static surface pressure (68°F)	psi	21,760	
Shore D-hardness		85	DIN 53505

#### Physical and Thermal Properties

Max. long-term application temperature	°F	482	
Max. short-term application temperature	°F	599	
Min. application temperature	°F	-148	
Thermal conductivity	W/m x K	0.6	ASTM C 177
Coefficient of thermal expansion (to 73°F)	K⁻¹ x 10⁻⁵	5	DIN 53752

#### Electrical Properties

Specific volume resistance	Ωcm	< 10⁵	DIN IEC 93
Surface resistance	Ω	< 10³	DIN 53482

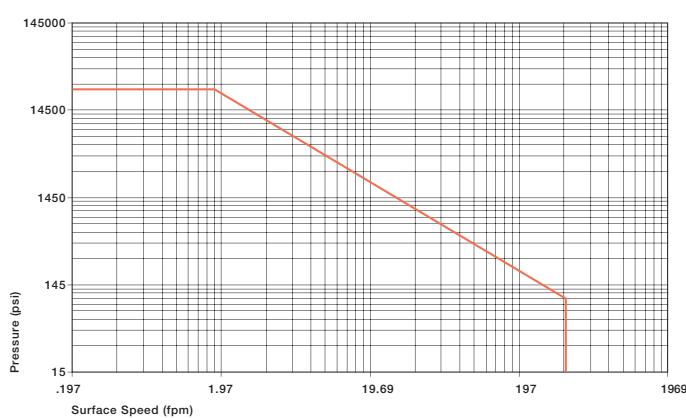

Permissible p x v values for iglide® T500 running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system


iglide® T500 is defined by its combination of high temperature-resistance with compressive strength, along with high resistance to chemicals.

## Compressive Strength

The graph shows how iglide® T500 plain bearings deform elastically under load. The graph on the preceding page shows the maximum p x v values at room temperature. In this case, the compressive strength of iglide® T500 even measures up to that of steel.

The graph below shows the special compression resistance of iglide® T500 also at very high temperatures. Even at the highest long-term application temperature of 482°F, iglide® T500 plain bearings still withstand a static surface pressure of approximately 4350 psi.

- Compressive Strength, Page 1.3

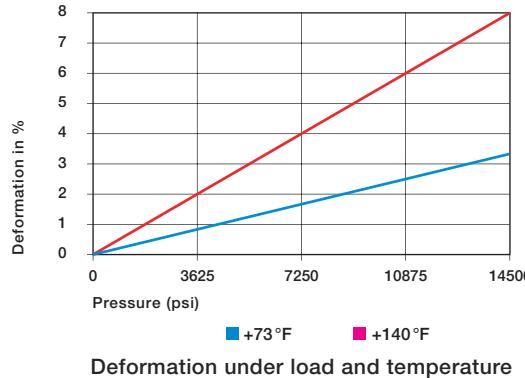

## Permissible Surface Speeds

iglide® T500 is designed for higher speeds than other iglide® bearings. This is due to its high temperature resistance and excellent heat conductivity. These benefits are readily apparent in the p x v values of max. 1.32 psi x fpm.

However, only the smallest radial loads may act on the bearings. At the given speeds, friction can cause a temperature increase to maximum permissible levels.

- Surface Speed, Page 1.5
- p x v Value, Page 1.6

## Temperatures

In terms of temperature resistance, iglide® T500 has also taken on a leading position. Having a permissible long-term application temperature of 482°F, iglide® T500 will even withstand 599°F for the short-term.

As in all thermoplastics, the compression resistance of T500 decreases with increasing temperature. However, the wear drops considerably when used within the observed temperature range of 73°F to 302°F. In certain cases, relaxation of the bearing can even occur at temperatures greater than 338°F. This could lead to, after re-cooling, the bearing moving out of the housing. At temperatures over 338°F, the axial security of the bearing in the housing needs to be tested. If necessary, secondary measures must be taken to mechanically secure the bearing. Please contact us if you have questions on bearing use.


- Application Temperatures, Page 1.7

iglide® T500	Application Temperature
Minimum	- 148°F
Max., long-term	+482°F
Max., short-term	+599°F
Additional axial securing	+275°F

## Temperature limits for iglide® T500



	Continuous fpm	Short Term fpm
Rotating	295	689
Oscillating	216	492
Linear	984	1968

## Maximum surface speeds

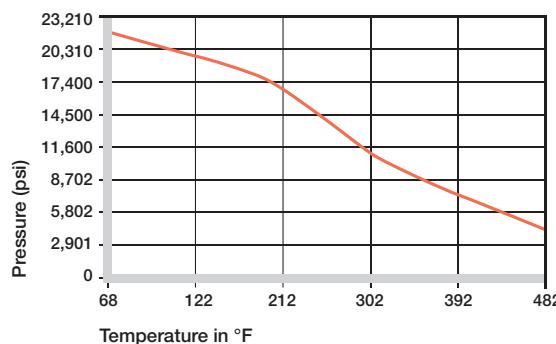

Recommended maximum permissible static surface pressure of iglide® T500 as a result of temperature


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

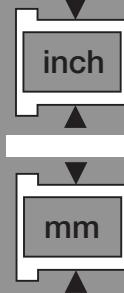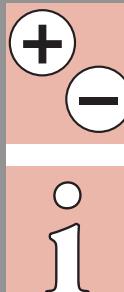

## Installation Tolerances

iglide® T500 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

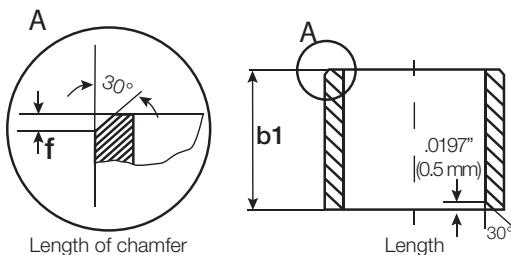

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 /-0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 /-0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 /-0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 /-0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 /-0.0154	
1.9685 to 3.1496	-0.0000 /-0.0181	

### For Metric Size Bearings


Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 /-140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 /-180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 /-220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 /-270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 /-330	
> 30 to 50	-0 /-390	
> 50 to 80	-0 /-460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. The coefficient of friction increases with an increase in surface speed. On the other hand, an increased load has an inverse effect: the coefficient of friction decreases. This explains the excellent performance of iglide® T500 plain bearings for high loads.

Friction and wear are also, dependent to a large degree on the shafting partner. Shafts that are too smooth increase the coefficient of friction of the bearing. For iglide T500 a ground surface with an average roughness range of 24 - 32 rms is recommended for the shaft.

- Coefficients of friction and surfaces, Page 1.8
- Wear resistance, Page 1.9

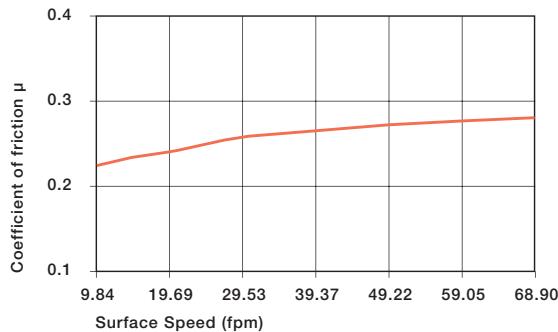


Coefficient of friction for iglide® T500 as a result of the surface speed; p = 108 psi, 1050 hard chromed

iglide® T500


Coefficient of Friction

Dry	0.09 - 0.27
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction for iglide® T500 against steel (Shaft finish = 40 rms, 50 HRC)

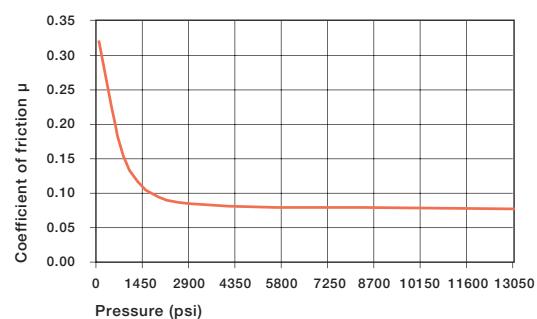

Coefficient of friction for iglide® T500 as a result of the load, v = 1.97 fpm

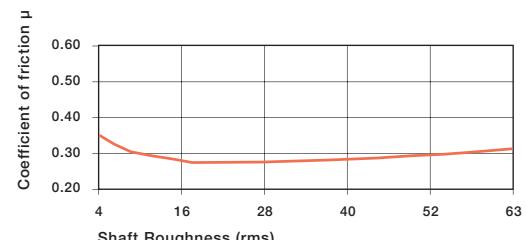


Coefficients of friction as a function of the shaft surface (1050 hard chromed)

## Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® T500. For low loads in rotating operation, the best wear values are found with 303 Stainless and HR Carbon Steel shafts. However, above a load of 290 psi, the bearing wear greatly increases with these two shaft materials. For the higher load range, hard-chromed shafts or Cold Rolled Steel shafts are advantageous. In oscillating operation at low loads, similar wear values for cold rolled steel and 303 stainless steel shafts occur. The wear is somewhat higher than during rotational movements.

If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft Materials, Page 1.11

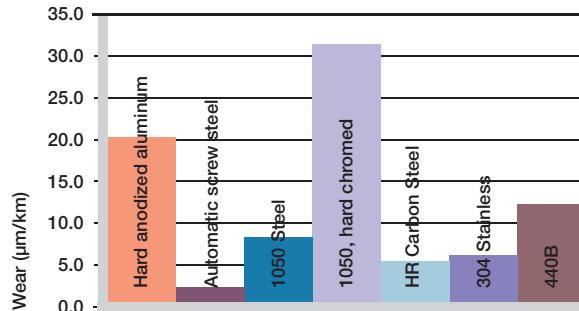

Wear of iglide® T500 with different shaft materials,  
 $p = 108 \text{ psi}$ ,  $v = 98 \text{ fpm}$

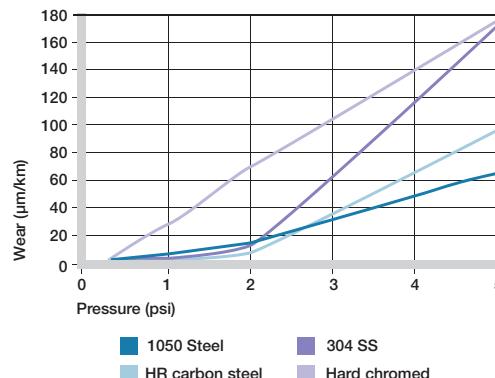

Wear of iglide® T500 with different shaft materials in  
rotational operation

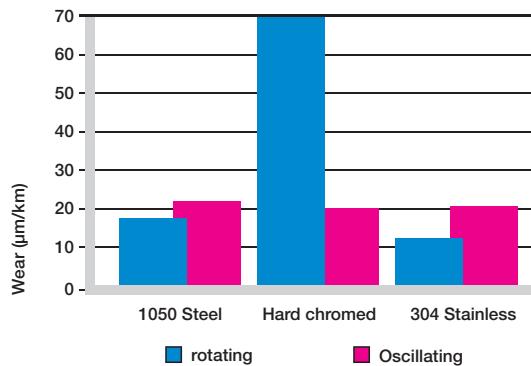

Wear for oscillating and rotating applications with  
different shaft materials  $p = 290 \text{ psi}$

## Chemical Resistance


iglide® T500 plain bearings are close to universally resistant to chemicals.

They are only attacked by concentrated nitric acid and by sulfuric acid with acidity levels over 65%. The list at the end of this catalog provides more comprehensive detailed information.

► Chemicals Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+
Strong acids	-
Weak alkaline	+
Strong alkaline	+

+ resistant, 0 conditionally resistant, - not resistant

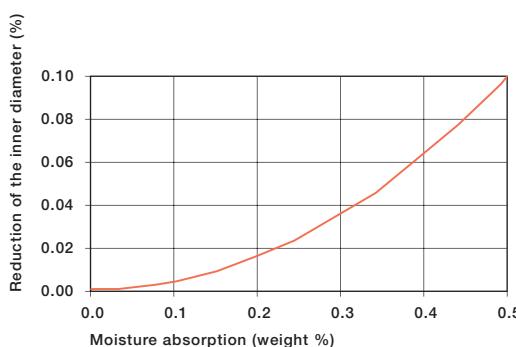

Effect of moisture absorption on iglide® T500 plain  
bearings

## Radiation Resistance

Plain bearings made from iglide® T500 are resistant to radiation up to an intensity of  $1 \times 10^5$  Gy. iglide® T500 is the most radioactive-resistant material of the iglide® product line. iglide® T500 is extremely resistant to hard gamma radiation and withstands a radiation dose of 1000 Mrad without detectable change in its properties. The material also withstands an alpha or beta radiation of 10,000 Mrad with practically no damage.

## UV Resistance

The excellent material properties of iglide® T500 do not change under UV radiation and other weathering effects.

## Vacuum

In a vacuum environment, iglide® T500 plain bearings can be used virtually without restrictions. Outgassing takes place to a very limited extent.

## Electrical Properties

iglide® T500 plain bearings are electrically conductive.

### iglide® T500

Specific volume resistance  $< 10^5 \Omega\text{cm}$


Surface Resistance  $< 10^3 \Omega$

### Electrical properties of iglide® T500

## Application Examples



Intake control device

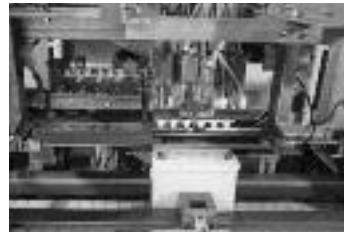

Battery decanting



Flaps, valves




Catering equipment



Application on an outboard engine





iglide® T500 plain bearing in valve applications

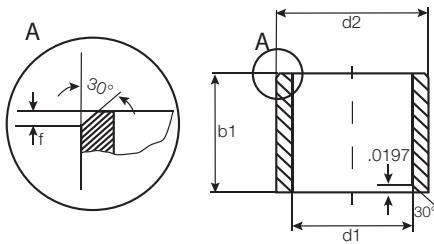


For tolerance values  
please refer to page 14.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
TSI-0203-03	1/8	3/16	3/16	.1269	.1251	.1878	.1873	.1243	.1236
TSI-0203-05	1/8	3/16	5/16	.1269	.1251	.1878	.1873	.1243	.1236
TSI-0203-06	1/8	3/16	3/8	.1269	.1251	.1878	.1873	.1243	.1236
TSI-0304-03	3/16	1/4	3/16	.1892	.1873	.2503	.2497	.1865	.1858
TSI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497	.1865	.1858
TSI-0304-06	3/16	1/4	3/8	.1892	.1873	.2503	.2497	.1865	.1858
TSI-0304-08	3/16	1/4	1/2	.1892	.1873	.2503	.2497	.1865	.1858
TSI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490	.2481
TSI-0405-06	1/4	5/16	3/8	.2521	.2498	.3128	.3122	.2490	.2481
TSI-0405-08	1/4	5/16	1/2	.2521	.2498	.3128	.3122	.2490	.2481
TSI-0506-04	5/16	3/8	1/4	.3148	.3125	.3753	.3747	.3115	.3106
TSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
TSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747	.3115	.3106
TSI-0607-04	3/8	15/32	1/4	.3773	.3750	.4691	.4684	.3740	.3731
TSI-0607-05	3/8	15/32	5/16	.3773	.3750	.4691	.4684	.3740	.3731
TSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684	.3740	.3731
TSI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684	.3740	.3731
TSI-0607-10	3/8	15/32	5/8	.3773	.3750	.4691	.4684	.3740	.3731
TSI-0607-12	3/8	15/32	3/4	.3773	.3750	.4691	.4684	.3740	.3731
TSI-0708-04	7/16	17/32	1/4	.4406	.4379	.5316	.5309	.4365	.4355
TSI-0708-08	7/16	17/32	1/2	.4406	.4379	.5316	.5309	.4365	.4355
TSI-0708-10	7/16	17/32	5/8	.4406	.4379	.5316	.5309	.4365	.4355
TSI-0708-12	7/16	17/32	3/4	.4406	.4379	.5316	.5309	.4365	.4355
TSI-0709-06	7/16	17/32	3/8	.4406	.4379	.5316	.5309	.4365	.4355
TSI-0809-04	1/2	19/32	1/4	.5030	.5003	.5941	.5934	.4990	.4980
TSI-0809-06	1/2	19/32	3/8	.5030	.5003	.5941	.5934	.4990	.4980
TSI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934	.4990	.4980
TSI-0809-10	1/2	19/32	5/8	.5030	.5003	.5941	.5934	.4990	.4980
TSI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934	.4990	.4980
TSI-0809-16	1/2	19/32	1	.5030	.5003	.5941	.5934	.4990	.4980
TSI-0910-08	9/16	21/32	1/2	.5655	.5627	.6566	.6559	.5615	.5605
TSI-0910-12	9/16	21/32	3/4	.5655	.5627	.6566	.6559	.5615	.5605
TSI-1011-04	5/8	23/32	1/4	.6280	.6253	.7192	.7184	.6240	.6230
TSI-1011-06	5/8	23/32	3/8	.6280	.6253	.7192	.7184	.6240	.6230
TSI-1011-08	5/8	23/32	1/2	.6280	.6253	.7192	.7184	.6240	.6230
TSI-1011-10	5/8	23/32	5/8	.6280	.6253	.7192	.7184	.6240	.6230
TSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240	.6230
TSI-1011-16	5/8	23/32	1	.6280	.6253	.7192	.7184	.6240	.6230
TSI-1112-04	11/16	25/32	1/4	.6906	.6879	.7817	.7809	.6865	.6855
TSI-1112-14	11/16	25/32	7/8	.6906	.6879	.7817	.7809	.6865	.6855

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1




inch





mm

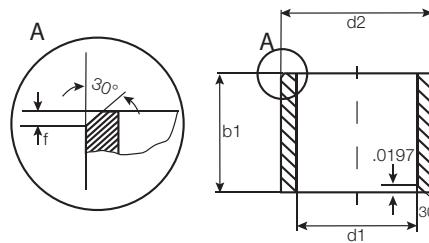


For tolerance values  
please refer to page 14.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
TSI-1214-06	3/4	7/8	3/8	.7541	.7507	.8755	.8747	.7491	.7479
TSI-1214-08	3/4	7/8	1/2	.7541	.7507	.8755	.8747	.7491	.7479
TSI-1214-12	3/4	7/8	3/4	.7541	.7507	.8755	.8747	.7491	.7479
TSI-1214-16	3/4	7/8	1	.7541	.7507	.8755	.8747	.7491	.7479
TSI-1416-12	7/8	1	3/4	.8791	.8757	1.0005	.9997	.8741	.8729
TSI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997	.8741	.8729
TSI-1416-24	7/8	1	1 1/2	.8791	.8757	1.0005	.9997	.8741	.8729
TSI-1618-08	1	1 1/8	1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TSI-1618-12	1	1 1/8	3/4	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TSI-1820-12	1 1/8	1 9/32	3/4	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
TSI-2022-10	1 1/4	1 13/32	5/8	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
TSI-2022-20	1 1/4	1 13/32	1 1/4	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
TSI-2426-12	1 1/2	1 21/32	3/4	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
TSI-2426-16	1 1/2	1 21/32	1	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
TSI-2426-24	1 1/2	1 21/32	1 1/2	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
TSI-2629-20	1 5/8	1 13/16	1 1/4	1.6297	1.6258	1.7818	1.7808	1.6238	1.6222
TSI-2831-16	1 3/4	1 15/16	1	1.7547	1.7507	1.9381	1.9371	1.7487	1.7471
TSI-3235-24	2	2 3/16	1 1/2	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
TSI-3235-32	2	2 3/16	2	2.0057	2.0011	2.1883	2.1871	1.9981	1.9969
TSI-3639-32	2 1/4	2 7/16	2	2.2577	2.2531	2.4377	2.4365	2.2507	2.2489
TSI-4447-32	2 3/4	2 15/16	2	2.7570	2.7523	2.9370	2.9358	2.7500	2.7490

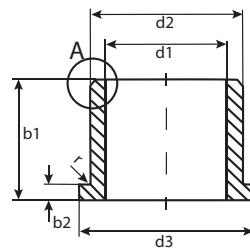

For tolerance values  
please refer to page 14.4

$r = \text{max. } .0197$

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
TFI-0203-03	1/8	3/16	3/16	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
TFI-0203-06	1/8	3/16	3/8	.312	.032	.1269	.1251	.1878	.1873	.1243	.1236
TFI-0304-04	3/16	1/4	1/4	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
TFI-0304-06	3/16	1/4	3/8	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
TFI-0304-08	3/16	1/4	1/2	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
TFI-0405-03	1/4	5/16	3/16	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
TFI-0405-04	1/4	5/16	1/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
TFI-0405-06	1/4	5/16	3/8	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
TFI-0405-08	1/4	5/16	1/2	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
TFI-0405-12	1/4	5/16	3/4	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
TFI-0506-04	5/16	3/8	1/4	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
TFI-0506-06	5/16	3/8	3/8	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
TFI-0506-08	5/16	3/8	1/2	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
TFI-0607-04	3/8	15/32	1/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
TFI-0607-06	3/8	15/32	3/8	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
TFI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
TFI-0607-12	3/8	15/32	3/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
TFI-0708-08	7/16	17/32	1/2	.750	.046	.4406	.4379	.5316	.5309	.4365	.4355
TFI-0809-04	1/2	19/32	1/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
TFI-0809-06	1/2	19/32	3/8	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
TFI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
TFI-0809-12	1/2	19/32	3/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
TFI-0809-16	1/2	19/32	1	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
TFI-1011-08	5/8	23/32	1/2	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
TFI-1011-12	5/8	23/32	3/4	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
TFI-1011-16	5/8	23/32	1	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
TFI-1011-24	5/8	23/32	1 1/2	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
TFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
TFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
TFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
TFI-1214-28	3/4	7/8	1 3/4	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
TFI-1416-12	7/8	1	3/4	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
TFI-1416-16	7/8	1	1	1.250	.062	.8791	.8757	1.0005	.9997	.8741	.8729
TFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TFI-1618-24	1	1 1/8	1 1/2	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
TFI-1719-06	1 1/16	1 3/16	3/8	1.500	.062	1.0666	1.0633	1.1883	1.1875	1.0616	1.0604
TFI-1820-12	1 1/8	1 9/32	3/4	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226

iglide® T500  
Flange - Inch

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1



inch

mm

**iglide® Plain Bearings  
T500 - Flange, Inch**



 iglide® T500  
Flange - Inch  
Thrust Washer - MM

 Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax


 Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>

 For tolerance values  
please refer to page 14.4

r = max. .0197

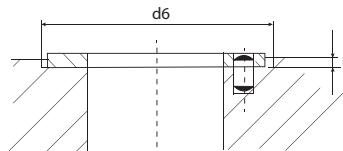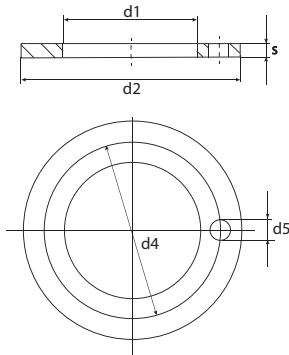Part Number	d1	d2	b1	d3	b2 .0055	I.D. After Pressfit		Housing Bore Max.	Shaft Size Max.
						Max.	Min.		
TFI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2548	1.2508	1.4068	1.4058
TFI-2022-32	1 1/4	1 13/32	2	1.687	.078	1.2548	1.2508	1.4068	1.4058
TFI-2426-12	1 1/2	1 21/32	3/4	2.000	.078	1.5048	1.5008	1.6568	1.6558
TFI-2426-16	1 1/2	1 21/32	1	2.000	.078	1.5048	1.5008	1.6568	1.6558
TFI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5048	1.5008	1.6568	1.6558
TFI-2831-16	1 3/4	1 15/16	1	2.375	.093	1.7547	1.7507	1.9381	1.9371
TFI-3235-32	2	2 3/16	2	2.625	.093	2.0057	2.0011	2.1883	2.1871
TFI-4447-32	2 3/4	2 15/16	2	3.375	.093	2.7570	2.7523	2.9370	2.9358

**iglide® T500 - Plain Bearings  
Thrust Washer - Inch**

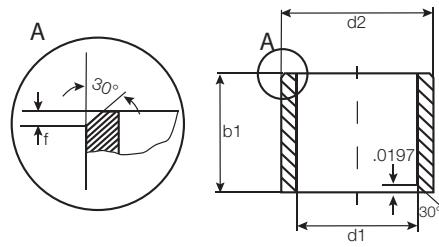
Part Number	d1 .010	d2 -.010	s -.0020	d4 +.005	d5 +.015 +.005	h +.008	d6 +.005
TTI-0814-01	.500	.875	.0585	.692	.067	.040	.875
TTI-1018-01	.625	1.125	.0585	.880	.099	.040	1.125
TTI-1220-01	.750	1.250	.0585	1.005	.099	.040	1.250
TTI-1422-01	.875	1.375	.0585	1.125	.130	.040	1.375
TTI-1424-01	.875	1.500	.0585	1.192	.130	.040	1.500
TTI-1628-01	1.000	1.750	.0585	1.380	.130	.040	1.750
TTI-1826-01	1.125	1.625	.0585	—	—	.040	1.625
TTI-2034-01	1.250	2.125	.0585	1.692	.161	.040	2.125
TTI-2844-01	1.750	2.750	.0585	2.255	.192	.040	2.750
TTI-3248-01	2.000	3.000	.0895	2.505	.192	.070	3.000



For tolerance values  
please refer to page 14.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	after pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
TSM-0203-03	2.0	+0.006 +0.046	3.5	3.0	2.046	2.006	3.580	3.500	2.000	1.975
TSM-0304-03	3.0	+0.006 +0.046	4.5	3.0	3.046	3.006	4.512	4.500	3.000	2.975
TSM-0304-06	3.0	+0.006 +0.046	4.5	6.0	3.046	3.006	4.512	4.500	3.000	2.975
TSM-0405-04	4.0	+0.010 +0.058	5.5	4.0	4.058	4.010	5.512	5.500	4.000	3.970
TSM-0507-035	5.0	+0.010 +0.058	7.0	3.5	5.058	5.010	7.015	7.000	5.000	4.970
TSM-0507-05	5.0	+0.010 +0.058	7.0	5.0	5.058	5.010	7.015	7.000	5.000	4.970
TSM-0507-08	5.0	+0.010 +0.058	7.0	8.0	5.058	5.010	7.015	7.000	5.000	4.970
TSM-0608-06	6.0	+0.010 +0.058	8.0	6.0	6.058	6.010	8.015	8.000	6.000	5.970
TSM-0608-08	6.0	+0.010 +0.058	8.0	8.0	6.058	6.010	8.015	8.000	6.000	5.970
TSM-0608-10	6.0	+0.010 +0.058	8.0	10.0	6.058	6.010	8.015	8.000	6.000	5.970
TSM-0608-13	6.0	+0.010 +0.058	8.0	13.0	6.058	6.010	8.015	8.000	6.000	5.970
TSM-0610-08	6.0	+0.010 +0.058	10.0	8.0	6.058	6.010	10.015	10.000	6.000	5.970
TSM-0610-20	6.0	+0.010 +0.058	10.0	20.0	6.058	6.010	10.015	10.000	6.000	5.970
TSM-0709-10	7.0	+0.013 +0.071	9.0	10.0	7.071	7.013	9.015	9.000	7.000	6.964
TSM-0709-12	7.0	+0.013 +0.071	9.0	12.0	7.071	7.013	9.015	9.000	7.000	6.964
TSM-0810-06	8.0	+0.013 +0.071	10.0	6.0	8.071	8.013	10.015	10.000	8.000	7.984
TSM-0810-08	8.0	+0.013 +0.071	10.0	8.0	8.071	8.013	10.015	10.000	8.000	7.964
TSM-0810-10	8.0	+0.013 +0.071	10.0	10.0	8.071	8.013	10.015	10.000	8.000	7.964
TSM-0810-15	8.0	+0.013 +0.071	10.0	15.0	8.071	8.013	10.015	10.000	8.000	7.964
TSM-1012-06	10.0	+0.013 +0.071	12.0	6.0	10.071	10.013	12.018	12.000	10.000	9.964
TSM-1012-08	10.0	+0.013 +0.071	12.0	8.0	10.071	10.013	12.018	12.000	10.000	9.964
TSM-1012-10	10.0	+0.013 +0.071	12.0	10.0	10.071	10.013	12.018	12.000	10.000	9.964
TSM-1012-12	10.0	+0.013 +0.071	12.0	12.0	10.071	10.013	12.018	12.000	10.000	9.964
TSM-1012-20	10.0	+0.013 +0.071	12.0	20.0	10.071	10.013	12.018	12.000	10.000	9.964
TSM-1214-035	12.0	+0.016 +0.086	14.0	3.5	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1214-06	12.0	+0.016 +0.086	14.0	6.0	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1214-08	12.0	+0.016 +0.086	14.0	8.0	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1214-10	12.0	+0.016 +0.086	14.0	10.0	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1214-12	12.0	+0.016 +0.086	14.0	12.0	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1214-15	12.0	+0.016 +0.086	14.0	15.0	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1214-20	12.0	+0.016 +0.086	14.0	20.0	12.086	12.016	14.018	14.000	12.000	11.957
TSM-1416-12	14.0	+0.016 +0.086	16.0	12.0	14.086	14.016	16.018	16.000	14.000	13.957
TSM-1416-15	14.0	+0.016 +0.086	16.0	15.0	14.086	14.016	16.018	16.000	14.000	13.957
TSM-1416-20	14.0	+0.016 +0.086	16.0	20.0	14.086	14.016	16.018	16.000	14.000	13.957
TSM-1517-15	15.0	+0.016 +0.086	17.0	15.0	15.086	15.016	17.018	17.000	15.000	14.957
TSM-1517-20	15.0	+0.016 +0.086	17.0	20.0	15.086	15.016	17.018	17.000	15.000	14.957

iglide® T500  
Sleeve - MM


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1


inch

mm

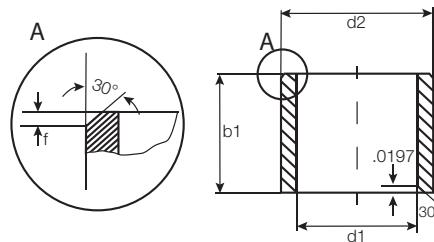
 For tolerance values  
 please refer to page 14.4

**Dimensions according to ISO 3547-1 and special dimensions**

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1 h13	I.D. After Pressfit		Housing Bore		Shaft Size	
					Max.	Min.	Max.	Min.	Max.	Min.
TSM-1618-10	16.0	+0.016 +0.086	18.0	10.0	16.086	16.016	18.018	18.000	16.000	15.957
TSM-1618-12	16.0	+0.016 +0.086	18.0	12.0	16.086	16.016	18.018	18.000	16.000	15.957
TSM-1618-15	16.0	+0.016 +0.086	18.0	15.0	16.086	16.016	18.018	18.000	16.000	15.957
TSM-1618-20	16.0	+0.016 +0.086	18.0	20.0	16.086	16.016	18.018	18.000	16.000	15.957
TSM-1618-35	16.0	+0.016 +0.086	18.0	35.0	16.086	16.016	18.018	18.000	16.000	15.957
TSM-1719-20	17.0	+0.016 +0.086	19.0	20.0	17.086	17.016	19.021	19.000	17.000	16.957
TSM-1820-15	18.0	+0.016 +0.086	20.0	15.0	18.086	18.016	20.021	20.000	18.000	17.957
TSM-1820-20	18.0	+0.016 +0.086	20.0	20.0	18.086	18.016	20.021	20.000	18.000	17.957
TSM-2022-14	20.0	+0.020 +0.104	22.0	14.0	20.104	20.020	22.021	22.000	20.000	19.948
TSM-2022-18	20.0	+0.020 +0.104	22.0	18.0	20.104	20.020	22.021	22.000	20.000	19.948
TSM-2022-20	20.0	+0.020 +0.104	22.0	20.0	20.104	20.020	22.021	22.000	20.000	19.948
TSM-2023-07	20.0	+0.020 +0.104	23.0	7.0	20.104	20.020	23.021	23.000	20.000	19.948
TSM-2023-10	20.0	+0.020 +0.104	23.0	10.0	20.101	20.020	23.021	23.000	20.000	19.948
TSM-2023-15	20.0	+0.020 +0.104	23.0	15.0	20.104	20.020	23.021	23.000	20.000	19.948
TSM-2023-20	20.0	+0.020 +0.104	23.0	20.0	20.104	20.020	23.021	23.000	20.000	19.948
TSM-2023-25	20.0	+0.020 +0.104	23.0	25.0	20.104	20.020	23.021	23.000	20.000	19.948
TSM-2023-30	20.0	+0.020 +0.104	23.0	30.0	20.104	20.020	23.021	23.000	20.000	19.948
TSM-2225-15	22.0	+0.020 +0.104	25.0	15.0	22.104	22.020	25.021	25.000	22.000	21.948
TSM-2225-20	22.0	+0.020 +0.104	25.0	20.0	22.104	22.020	25.021	25.000	22.000	21.948
TSM-2426-20	24.0	+0.020 +0.104	26.0	20.0	24.104	24.020	26.021	26.000	24.000	23.948
TSM-2427-20	24.0	+0.020 +0.104	27.0	20.0	24.104	24.020	27.021	27.000	24.000	23.948
TSM-2528-09	25.0	+0.020 +0.104	28.0	9.0	25.104	25.020	28.021	28.000	25.000	24.948
TSM-2528-12	25.0	+0.020 +0.104	28.0	12.0	25.104	25.020	28.021	28.000	25.000	24.948
TSM-2528-13	25.0	+0.020 +0.104	28.0	13.0	25.104	25.020	28.021	28.000	25.000	24.948
TSM-2528-15	25.0	+0.020 +0.104	28.0	15.0	25.104	25.020	28.021	28.000	25.000	24.948
TSM-2528-20	25.0	+0.020 +0.104	28.0	20.0	25.104	25.020	28.021	28.000	25.000	24.948
TSM-2528-30	25.0	+0.020 +0.104	28.0	30.0	25.104	25.020	28.021	28.000	25.000	24.948
TSM-2730-05	27.0	+0.020 +0.104	30.0	5.7	27.104	27.020	30.021	30.000	27.000	26.948
TSM-2832-20	28.0	+0.020 +0.104	32.0	20.0	28.104	28.020	32.025	32.000	28.000	27.948
TSM-2832-30	28.0	+0.020 +0.104	32.0	30.0	28.104	28.020	32.025	32.000	28.000	27.948
TSM-3034-20	30.0	+0.020 +0.104	34.0	20.0	30.104	30.020	34.025	34.000	30.000	29.948
TSM-3034-25	30.0	+0.020 +0.104	34.0	25.0	30.104	30.020	34.025	34.000	30.000	29.948
TSM-3034-30	30.0	+0.020 +0.104	34.0	30.0	30.104	30.020	34.025	34.000	30.000	29.948
TSM-3034-40	30.0	+0.020 +0.104	34.0	40.0	30.104	30.020	34.025	34.000	30.000	29.948
TSM-3236-25	32.0	+0.025 +0.125	36.0	25.0	32.125	32.025	36.025	36.000	32.000	31.938
TSM-3236-30	32.0	+0.025 +0.125	36.0	30.0	32.125	32.025	36.025	36.000	32.000	31.938
TSM-3539-20	35.0	+0.025 +0.125	39.0	20.0	35.125	35.025	39.025	39.000	35.000	34.938
TSM-3539-30	35.0	+0.025 +0.125	39.0	30.0	35.125	35.025	39.025	39.000	35.000	34.938

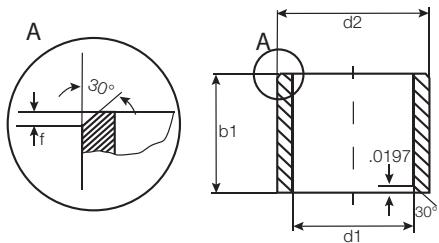


For tolerance values  
please refer to page 14.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 after pressfit in Ø H7	d1-Tolerance	d2	b1 h13	I.D. After Pressfit		Housing Bore		Shaft Size	
					Max.	Min.	Max.	Min.	Max.	Min.
TSM-3539-40	35.0	+0.025 +0.125	39.0	40.0	35.125	35.025	39.025	39.000	35.000	34.938
TSM-3539-50	35.0	+0.025 +0.125	39.0	50.0	35.125	35.025	39.025	39.000	35.000	34.938
TSM-4044-30	40.0	+0.025 +0.125	44.0	30.0	40.125	40.025	44.025	44.000	40.000	39.938
TSM-4044-40	40.0	+0.025 +0.125	44.0	40.0	40.125	40.025	44.025	44.000	40.000	39.938
TSM-4044-50	40.0	+0.025 +0.125	44.0	50.0	40.125	40.025	44.025	44.000	40.000	39.938
TSM-4550-50	45.0	+0.025 +0.125	50.0	50.0	45.125	45.025	50.025	50.000	45.000	44.938
TSM-5055-30	50.0	+0.025 +0.125	55.0	30.0	50.125	50.025	55.030	55.000	50.000	49.938
TSM-5055-40	50.0	+0.025 +0.125	55.0	40.0	50.125	50.025	55.030	55.000	50.000	49.938
TSM-5055-60	50.0	+0.025 +0.125	55.0	60.0	50.125	50.025	55.030	55.000	50.000	49.938
TSM-5560-50	55.0	+0.030 +0.150	60.0	50.0	55.150	55.030	60.030	60.000	55.000	54.926
TSM-6065-45	60.0	+0.030 +0.150	65.0	45.0	60.150	60.030	65.030	65.000	60.000	59.926
TSM-6065-60	60.0	+0.030 +0.150	65.0	60.0	60.150	60.030	65.030	65.000	60.000	59.926
TSM-6570-50	65.0	+0.030 +0.150	70.0	50.0	65.150	65.030	70.030	70.000	65.000	64.926
TSM-7075-70	70.0	+0.030 +0.150	75.0	70.0	70.150	70.030	75.030	75.000	70.000	69.926



iglide® T500  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm





For tolerance values  
please refer to page 14.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size
	After Pressfit in Ø H7		d13	h13	-0.14	Max.	Min.	Max.	Min.
TFM-0304-05	3.0	+0.006 +0.046	4.5	7.5	5.0	0.75	3.046	3.006	4.512 4.500
TFM-0405-04	4.0	+0.010 +0.058	5.5	9.5	4.0	0.75	4.058	4.010	5.512 5.500
TFM-0405-06	4.0	+0.010 +0.058	5.5	9.5	6.0	0.75	4.058	4.010	5.512 5.500
TFM-040508-06	4.0	+0.010 +0.058	5.5	8.0	6.0	0.75	4.058	4.010	5.512 5.500
TFM-0507-05	5.0	+0.010 +0.058	7.0	11.0	5.0	1.0	5.058	5.010	7.015 7.000
TFM-0608-08	6.0	+0.010 +0.058	8.0	12.0	8.0	1.0	6.058	6.010	8.015 8.000
TFM-0608-10	6.0	+0.010 +0.058	8.0	12.0	10.0	1.0	6.058	6.010	8.015 8.000
TFM-060812-20	6.0	+0.010 +0.058	8.0	12.0	20.0	1.0	6.058	6.010	8.015 8.000
TFM-081012-04	8.0	+0.013 +0.071	10.0	12.0	4.0	1.0	8.071	8.013	10.015 10.000
TFM-0810-05	8.0	+0.013 +0.071	10.0	15.0	5.0	1.0	8.071	8.013	10.015 10.000
TFM-0810-075	8.0	+0.013 +0.071	10.0	15.0	7.5	1.0	8.071	8.013	10.015 10.000
TFM-0810-08	8.0	+0.013 +0.071	10.0	15.0	8.0	1.0	8.071	8.013	10.015 10.000
TFM-0810-09	8.0	+0.013 +0.071	10.0	15.0	9.0	1.0	8.071	8.013	10.015 10.000
TFM-081117-05	8.0	+0.013 +0.071	11.0	17.0	5.0	1.5	8.071	8.013	11.015 11.000
TFM-1012-06	10.0	+0.013 +0.071	12.0	18.0	6.0	1.0	10.071	10.013	12.018 12.000
TFM-1012-08	10.0	+0.013 +0.071	12.0	15.0	8.0	1.0	10.071	10.013	12.018 12.000
TFM-1012-09	10.0	+0.013 +0.071	12.0	18.0	9.0	1.0	10.071	10.013	12.018 12.000
TFM-1012-15	10.0	+0.013 +0.071	12.0	18.0	15.0	1.0	10.071	10.013	12.018 12.000
TFM-1012-18	10.0	+0.013 +0.071	12.0	18.0	18.0	1.0	10.071	10.013	12.018 12.000
TFM-1012-22	10.0	+0.013 +0.071	12.0	18.0	22.0	1.0	10.071	10.013	12.018 12.000
TFM-1214-05	12.0	+0.016 +0.086	14.0	20.0	5.5	1.0	12.086	12.016	14.018 14.000
TFM-1214-09	12.0	+0.016 +0.086	14.0	20.0	9.0	1.0	12.086	12.016	14.018 14.000
TFM-1214-12	12.0	+0.016 +0.086	14.0	20.0	12.0	1.0	12.086	12.016	14.018 14.000
TFM-1214-15	12.0	+0.016 +0.086	14.0	20.0	15.0	1.0	12.086	12.016	14.018 14.000
TFM-1416-10	14.0	+0.016 +0.086	16.0	22.0	10.0	1.0	14.086	14.016	16.018 16.000
TFM-1416-12	14.0	+0.016 +0.086	16.0	22.0	12.0	1.0	14.086	14.016	16.018 16.000
TFM-1416-17	14.0	+0.016 +0.086	16.0	22.0	17.0	1.0	14.086	14.016	16.018 16.000
TFM-1517-12	15.0	+0.016 +0.086	17.0	23.0	12.0	1.0	15.086	15.016	17.018 17.000
TFM-1517-17	15.0	+0.016 +0.086	17.0	23.0	17.0	1.0	15.086	15.016	17.018 17.000
TFM-1618-12	16.0	+0.016 +0.086	18.0	24.0	12.0	1.0	16.086	16.016	18.018 18.000
TFM-1618-17	16.0	+0.016 +0.086	18.0	24.0	17.0	1.0	16.086	16.016	18.018 18.000
TFM-1820-12	18.0	+0.016 +0.086	20.0	26.0	12.0	1.0	18.086	18.016	20.021 20.000
TFM-1820-17	18.0	+0.016 +0.086	20.0	26.0	17.0	1.0	18.086	18.016	20.021 20.000
TFM-2023-075	20.0	+0.020 +0.104	23.0	30.0	7.5	1.5	20.104	20.020	23.021 23.000
TFM-2023-11	20.0	+0.020 +0.104	23.0	30.0	11.5	1.5	20.104	20.020	23.021 23.000
TFM-2023-16	20.0	+0.020 +0.104	23.0	30.0	16.0	1.5	20.104	20.020	23.021 23.000
TFM-2023-21	20.0	+0.020 +0.104	23.0	30.0	21.0	1.5	20.104	20.020	23.021 23.000
TFM-252833-08	25.0	+0.020 +0.104	28.0	33.0	8.0	1.5	25.104	25.020	28.021 28.000
TFM-2528-13	25.0	+0.020 +0.104	28.0	35.0	13.5	1.5	25.104	25.020	28.021 28.000
TFM-2528-21	25.0	+0.020 +0.104	28.0	35.0	21.0	1.5	25.104	25.020	28.021 28.000






For tolerance values  
please refer to page 14.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance After Pressfit in Ø H7	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit	Housing Bore	Shaft Size
							Max. Min.	Max. Min.	Max. Min.
TFM-2730-20	27.0	+0.020 +0.104	30.0	38.0	20.0	1.5	27.104 27.020	30.021 30.000	27.000 26.948
TFM-2834-44	28.0	+0.020 +0.104	34.0	42.0	44.0	2.0	28.104 28.020	34.021 34.000	28.000 27.948
TFM-3034-16	30.0	+0.020 +0.104	34.0	42.0	16.0	2.0	30.104 30.020	34.025 34.000	30.000 29.948
TFM-3034-26	30.0	+0.020 +0.104	34.0	42.0	26.0	2.0	30.104 30.020	34.025 34.000	30.000 29.948
TFM-3034-40	30.0	+0.020 +0.104	34.0	42.0	40.0	2.0	30.104 30.020	34.025 34.000	30.000 29.948
TFM-3236-15	32.0	+0.025 +0.125	36.0	45.0	15.0	2.0	32.125 32.025	36.025 36.000	32.000 31.938
TFM-3236-26	32.0	+0.025 +0.125	36.0	45.0	26.0	2.0	32.125 32.025	36.025 36.000	32.000 31.938
TFM-3539-26	35.0	+0.025 +0.125	39.0	47.0	26.0	2.0	35.125 35.025	39.025 39.000	35.000 34.938
TFM-4044-22	40.0	+0.025 +0.125	44.0	52.0	22.0	2.0	40.125 40.025	44.025 44.000	40.000 39.938
TFM-4044-30	40.0	+0.025 +0.125	44.0	52.0	30.0	2.0	40.125 40.025	44.025 44.000	40.000 39.938
TFM-4044-40	40.0	+0.025 +0.125	44.0	52.0	40.0	2.0	40.125 40.025	44.025 44.000	40.000 39.938
TFM-4550-50	45.0	+0.025 +0.125	50.0	58.0	50.0	2.0	45.125 45.025	50.025 50.000	45.000 44.938
TFM-5055-40	50.0	+0.025 +0.125	55.0	63.0	40.0	2.0	50.125 50.025	55.030 55.000	50.000 49.938
TFM-6065-40	60.0	+0.030 +0.150	65.0	73.0	40.0	2.0	60.150 60.030	65.030 65.000	60.000 59.926
TFM-7075-40	70.0	+0.030 +0.150	75.0	83.0	40.0	2.0	70.150 70.030	75.030 75.000	70.000 69.926
TFM-7580-50	75.0	+0.030 +0.150	80.0	88.0	50.0	2.0	75.150 75.030	80.030 80.000	75.000 74.926

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




T500

# iglide® Plain Bearings T500 - Thrust Washer, MM

iglide® T500

Thrust Washer - MM

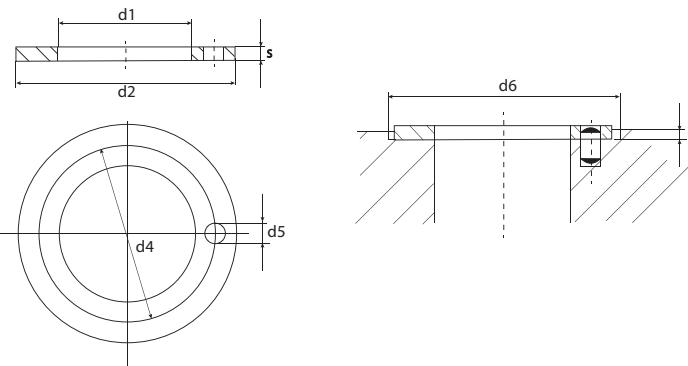

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 +0,25	d2 -0,25	s -0,05	d4 -0,12 +0,12	d5 +0,375 +0,125	h +0,2 -0,2	d6 +0,12
TTM-0620-015	6.0	20.0	1.5	13.0	1.5	1.0	20.0
TTM-0818-015	8.0	18.0	1.5	13.0	1.5	1.0	18.0
TTM-1018-010	10.0	18.0	1.0	**	**	.7	18.0
TTM-1224-015	12.0	24.0	1.5	18.0	1.5	1.0	24.0
TTM-1426-015	14.0	26.0	1.5	20.0	2.0	1.0	26.0
TTM-1524-015	15.0	24.0	1.5	19.5	1.5	1.0	24.0
TTM-1630-015	16.0	30.0	1.5	22.0	2.0	1.0	30.0
TTM-1832-015	18.0	32.0	1.5	25.0	2.0	1.0	32.0
TTM-2036-015	20.0	36.0	1.5	28.0	3.0	1.0	36.0
TTM-2238-015	22.0	38.0	1.5	30.0	3.0	1.0	38.0
TTM-2442-015	24.0	42.0	1.5	33.0	3.0	1.0	42.0
TTM-2644-015	26.0	44.0	1.5	35.0	3.0	1.0	44.0
TTM-2848-015	28.0	48.0	1.5	38.0	4.0	1.0	48.0
TTM-3254-015	32.0	54.0	1.5	43.0	4.0	1.0	54.0
TTM-3862-015	38.0	62.0	1.5	50.0	4.0	1.0	62.0
TTM-4266-015	42.0	66.0	1.5	84.0	4.0	1.0	66.0
TTM-4874-020	48.0	74.0	2.0	61.0	4.0	1.5	74.0
TTM-5278-020	52.0	78.0	2.0	65.0	4.0	1.5	78.0
TTM-6290-020	62.0	90.0	2.0	76.0	4.0	1.5	90.0

\*\* Designed without fixing bore

igus®



iglide® X6


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 1-1/2"  
Metric sizes from 3 - 40 mm

### Part Number Structure

#### Part Number Structure

X6 S I - 03 04 - 05

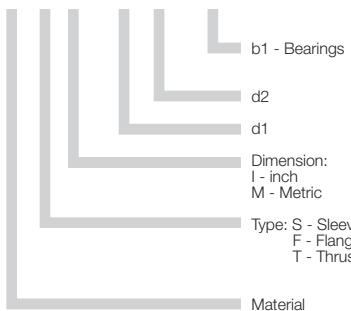

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	689
Oscillating	216	492
Linear	984	1969

### Usage Guidelines



- If temperatures are higher than 302°F
- When the wear performance of iglide® T500 in oscillation is not sufficient
- When the amount of pressfit required exceeds iglide® T500



- When you need a cost effective universal bearing
  - iglide® G300
- If you need a bearing for underwater use
  - iglide® H370
  - iglide® UW500
- When a wear-resistant high-temperature bearing for linear movements is needed
  - iglide® Z

### Material Table

General Properties	Unit	iglide® X6	Testing Method
Density	g/cm³	1.53	
Color		blue grey	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.5	
Coefficient of friction, dynamic against steel	μ	0.09 - 0.25	
p x v value, max. (dry)	psi x fpm	38,350	

### Mechanical Properties


Modulus of elasticity	psi	2,320,600	DIN 53457
Tensile strength at 68°F	psi	42,060	DIN 53452
Compressive strength	psi	27,557	
Permissible static surface pressure (68°F)	psi	21,755	
Shore D-hardness		89	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	482	
Max. application temperature, short-term	°F	599	
Min. application temperature	°F	-148	
Thermal conductivity	W/m x K	0.55	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	1.1	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	< 10⁵	DIN IEC 93
Surface resistance	Ω	< 10⁵	DIN 53482

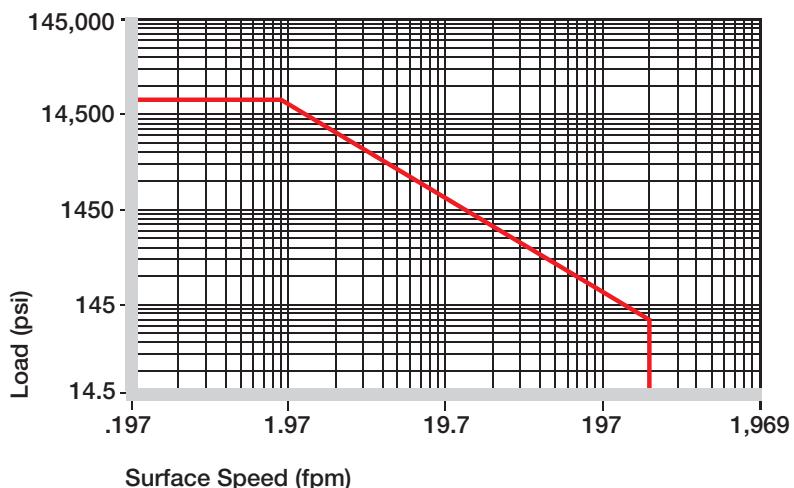

Permissible p x v value for iglide® X6 running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system


iglide® X6 bearing runs up to 6 times longer than the iglide® T500. Thanks to nano-technology, iglide® X6 shows an up to six times better performance than iglide® T500 in many oscillating and rotating applications - even at temperatures over 212°F.

### Compressive Strength

The recommended maximum surface pressure is a mechanical material parameter. No conclusions regarding the tribological properties can be drawn from this. With increasing temperatures, the compressive strength of iglide® X6 plain bearings decreases.

The graph at the right shows the elastic deformation of iglide® X6 during radial loading. At the recommended maximum surface pressure of 290 psi the deformation is less than 2%.

- Compressive Strength, Page 1.3

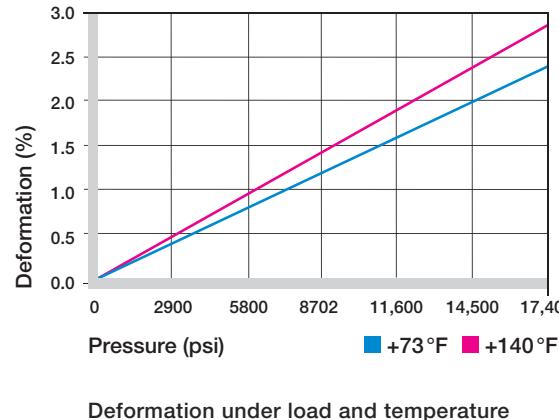

### Permissible Surface Speeds

Due to the high temperature resistance and good thermal conductivity, iglide® X6 is also suitable for high speed applications. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, this temperature is rarely reached due to varying application conditions.

- Surface Speed, Page 1.5
- p x v Value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	295	689
Oscillating	216	492
Linear	984	1969

Maximum surface speeds

### Temperatures


The surrounding temperatures noticeably influence the wear performance of plastic bearings. The temperature resistance of iglide® X6 is among the highest in the iglide® range.

In many tests it has shown a six times higher wear performance compared to the established high-temperature bearing iglide® T500. Another advantage to iglide® X6 is that axial securing is only necessary at temperatures above 320°F.

- Application Temperatures, Page 1.7

iglide® X6	Application Temperature
Minimum	- 148 °F
Max., long-term	+ 482 °F
Max., short-term	+ 599 °F
Add. securing is required from	+ 329°F

Temperature limits for iglide® X6

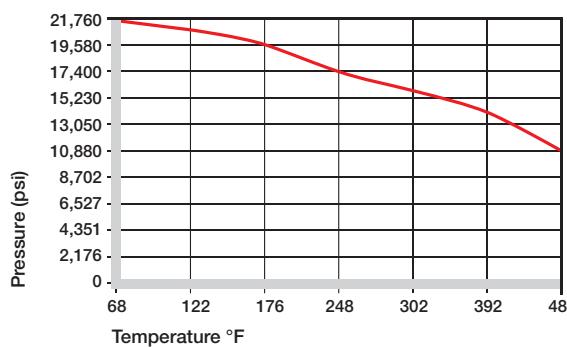

Recommended maximum permissible static surface pressure of iglide® X6 as a result of temperature (21,760 psi at +68°F)

iglide® X6

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1


inch

mm

## Installation Tolerances

iglide® X6 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

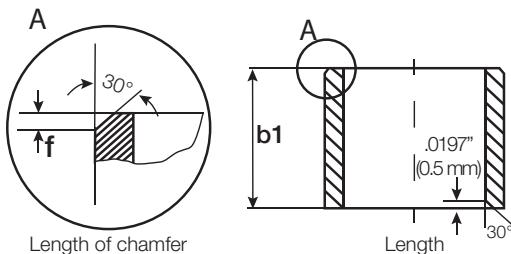

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 /-0.0071	f = .012 → d <sub>1</sub> .040" -.236"
0.2362 to 0.3937	-0.0000 /-0.0087	f = .019 → d <sub>1</sub> > .236" -.472"
0.3937 to 0.7086	-0.0000 /-0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 /-0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 /-0.0154	
1.9685 to 3.1496	-0.0000 /-0.0181	

### For Metric Size Bearings


Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 /-140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 /-180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 /-220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 /-270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 /-330	
> 30 to 50	-0 /-390	
> 50 to 80	-0 /-460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. The coefficient of friction of iglide® X6 declines with higher pressure and is practically constant for pressure above 4,350 psi. A higher speed of the shaft also results in a lower coefficient of friction. The best performance is achieved with the plain shaft materials free cutting steel and plain steel 1.0037. At higher loads, we recommend harder steel qualities. Non-hardened steel shafts can be worn by the bearing at pressure over 290 psi.

The wear database shows that iglide® X6 is more suitable for rotating than for oscillating applications. If the shaft material you plan on using is not shown in these test results, please contact us.


- Coefficients of friction and surfaces, Page 1.8
- Wear resistance, Page 1.9

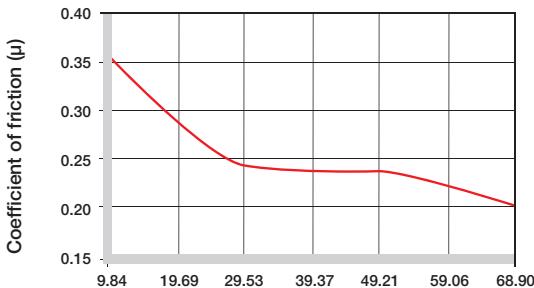


Coefficient of friction for iglide® X6 as a result of the running speed; p = 109 psi

iglide® X6	Coefficient of Friction
Dry	0.08 - 0.15
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction for iglide® X6 against steel (Shaft finish = 40 rms, 50 HRC)

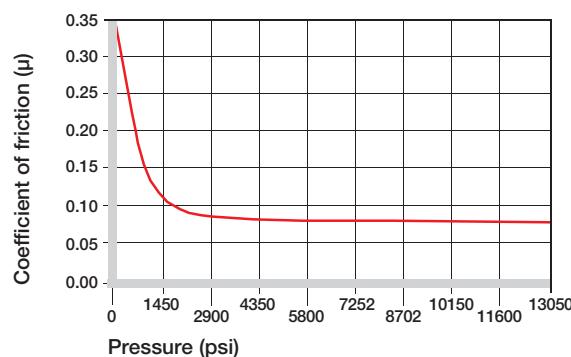

Coefficient of friction as a function of the pressure,  
v = 1.96 fpm

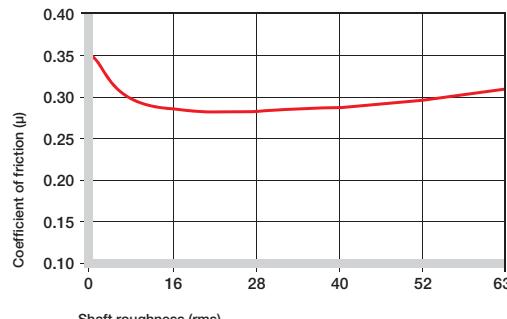


Coefficients of friction as a function of the shaft surface (1050 hard chromed and ground steel)


### Shaft Materials

The friction and wear are also dependent, to a large degree, on the shaft material. Shafts that are too smooth, increase both the coefficient of friction and the wear of the bearing. The best case for iglide® X6 is a ground surface with an average roughness rms 16-32. The graphs show the results of testing different shaft materials with plain bearings made of iglide® X6. In the graph at the right it shows that iglide® X6 can be combined with various shaft materials


► Shaft Materials, Page 1.11

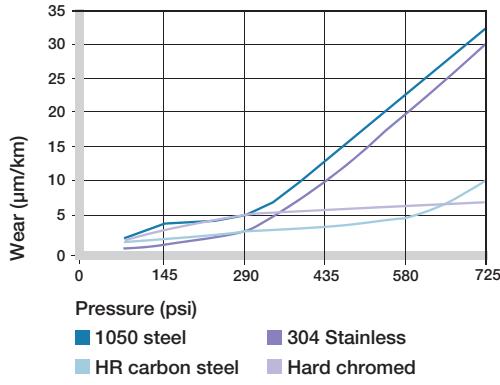

Wear with different shaft materials in rotational operation, as a function of the pressure

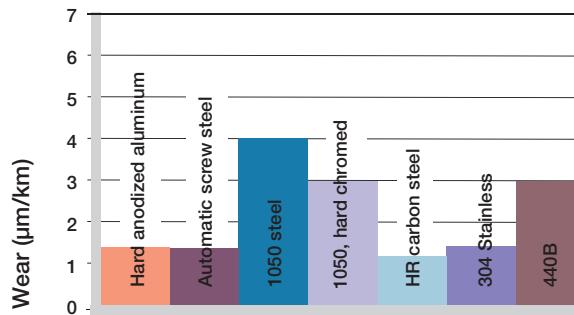

Wear rotating with different shaft materials,  $p = 145$  psi,  
 $v = 59$  fpm

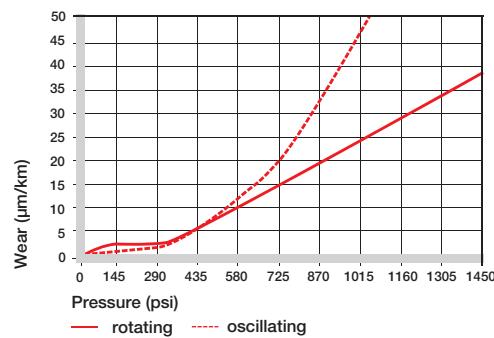

Wear for oscillating and rotating applications with shaft materials cf53 hardened and ground steel, as a function of the pressure

### Chemical Resistance

iglide® X6 plain bearings have almost universal chemical resistance. They are only affected by concentrated nitric acid and sulfuric acid. Due to the low water absorption, the material can be used in humid environments without problems. iglide® X6 is resistant to most typical detergents used in the food and packaging industries.


► Chemicals Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+
Strong acids	+
Weak alkaline	+
Strong alkaline	+

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® X6


All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

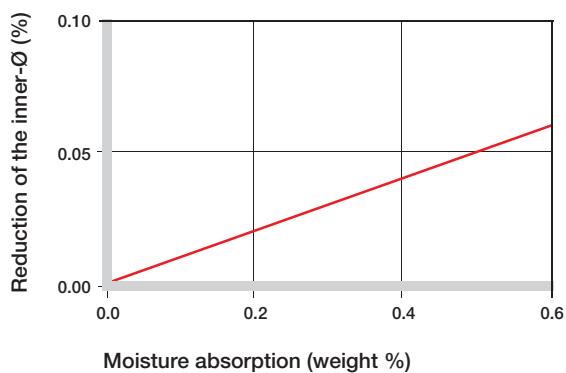

Effect of moisture absorption on iglide® X6 plain bearings

iglide® X6

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0

inch

mm

## Radiation Resistance

Plain bearings made from iglide® X6 are resistant to radiation up to an intensity of  $2 \times 10^5$  Gy.

## UV Resistance

Partially resistant against UV rays

## Vacuum

In a vacuum environment, iglide® X6 plain bearings can be used virtually without restrictions. Outgassing takes place to a very limited extent.


## Electrical Properties

iglide® X6 plain bearings are electrically insulating.

### iglide® X6

Specific volume resistance	< $10^5$ $\Omega$ cm
Surface Resistance	< $10^3$ $\Omega$


### Electrical properties of iglide® X6

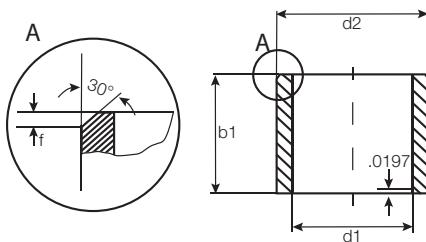


For tolerance values  
please refer to page 15.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
X6SI-0203-03	1/8	3/16	3/16	.1269	.1251	.1878	.1873	.1243	.1236
X6SI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497	.1865	.1858
X6SI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490	.2481
X6SI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115	.3106
X6SI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684	.3740	.3731
X6SI-0708-08	7/16	17/32	1/2	.4406	.4379	.5316	.5309	.4365	.4355
X6SI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934	.4990	.4980
X6SI-0809-10	1/2	19/32	5/8	.5030	.5003	.5941	.5934	.4990	.4980
X6SI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934	.4990	.4980
X6SI-1011-10	5/8	23/32	5/8	.6280	.6253	.7192	.7184	.6240	.6230
X6SI-1214-08	3/4	7/8	1/2	.7541	.7507	.8755	.8747	.7491	.7479
X6SI-1214-12	3/4	7/8	3/4	.7541	.7507	.8755	.8747	.7491	.7479
X6SI-1214-16	3/4	7/8	1	.7541	.7507	.8755	.8747	.7491	.7479
X6SI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997	.8741	.8729
X6SI-1618-08	1	1 1/8	1/2	1.0041	1.0007	1.1255	1.1247	.9991	.9979
X6SI-1618-12	1	1 1/8	3/4	1.0041	1.0007	1.1255	1.1247	.9991	.9979
X6SI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991	.9979
X6SI-2426-16	1 1/2	1 21/32	1	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
X6SI-2426-24	1 1/2	1 21/32	1 1/2	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch



mm





**igus®**

## iglide® Plain Bearings X6 - Flange, Inch

iglide® X6  
Flange - Inch

Telephone 1-800-521-2747  
Fax 1-401-438-7270



Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>



For tolerance values  
please refer to page 15.4

r = max. .0197

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit Max. Min.	Housing Bore Max. Min.	Shaft Size Max. Min.
					-.0055			
X6FI-0203-03	1/8	3/16	3/16	.312	.032	.1269 .1251	.1878 .1873	.1243 .1236
X6FI-0304-04	3/16	1/4	1/4	.375	.032	.1892 .1873	.2503 .2497	.1865 .1858
X6FI-0405-04	1/4	5/16	1/4	.500	.032	.2521 .2498	.3128 .3122	.2490 .2481
X6FI-0506-06	5/16	3/8	3/8	.562	.032	.3148 .3125	.3753 .3747	.3115 .3106
X6FI-0607-06	3/8	15/32	3/8	.687	.046	.3773 .3750	.4691 .4684	.3740 .3731
X6FI-0708-08	7/16	17/32	1/2	.750	.046	.4406 .4379	.5316 .5309	.4365 .4355
X6FI-0809-08	1/2	19/32	1/2	.875	.046	.5030 .5003	.5941 .5934	.4990 .4980
X6FI-0809-10	1/2	19/32	5/8	.875	.046	.5030 .5003	.5941 .5934	.4990 .4980
X6FI-0809-12	1/2	19/32	3/4	.875	.046	.5030 .5003	.5941 .5934	.4990 .4980
X6FI-1011-10	5/8	23/32	5/8	.937	.046	.6280 .6253	.7192 .7184	.6240 .6230
X6FI-1214-08	3/4	7/8	1/2	1.125	.062	.7541 .7507	.8755 .8747	.7491 .7479
X6FI-1214-12	3/4	7/8	3/4	1.125	.062	.7541 .7507	.8755 .8747	.7491 .7479
X6FI-1214-16	3/4	7/8	1	1.125	.062	.7541 .7507	.8755 .8747	.7491 .7479
X6FI-1416-16	7/8	1	1	1.250	.062	.8791 .8757	1.0005 .9997	.8741 .8729
X6FI-1618-08	1	1 1/8	1/2	1.375	.062	1.0041 1.0007	1.1255 1.1247	.9991 .9979
X6FI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041 1.0007	1.1255 1.1247	.9991 .9979
X6FI-1618-16	1	1 1/8	1	1.375	.062	1.0041 1.0007	1.1255 1.1247	.9991 .9979
X6FI-2426-16	1 1/2	1 21/32	1	2.000	.078	1.5048 1.5008	1.6568 1.6558	1.4988 1.4972
X6FI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5048 1.5008	1.6568 1.6558	1.4988 1.4972



For tolerance values  
please refer to page 15.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				h13	Max.	Min.	Max.	Min.	Max.	Min.
<b>X6SM-0304-03</b>	3.0	+0.006 +0.046	4.5	3.0	3.046	3.006	4.512	4.500	3.000	2.975
<b>X6SM-0507-05</b>	5.0	+0.010 +0.058	7.0	5.0	5.058	5.010	7.015	7.000	5.000	4.970
<b>X6SM-0608-06</b>	6.0	+0.010 +0.058	8.0	6.0	6.058	6.010	8.015	8.000	6.000	5.970
<b>X6SM-0810-10</b>	8.0	+0.013 +0.071	10.0	10.0	8.071	8.013	10.015	10.000	8.000	7.964
<b>X6SM-1012-10</b>	10.0	+0.013 +0.071	12.0	10.0	10.071	10.013	12.018	12.000	10.000	9.964
<b>X6SM-1214-12</b>	12.0	+0.016 +0.086	14.0	12.0	12.086	12.016	14.018	14.000	12.000	11.957
<b>X6SM-1618-15</b>	16.0	+0.016 +0.086	18.0	15.0	16.086	16.016	18.018	18.000	16.000	15.957
<b>X6SM-2023-20</b>	20.0	+0.020 +0.104	23.0	20.0	20.104	20.020	23.021	23.000	20.000	19.948
<b>X6SM-2528-30</b>	25.0	+0.020 +0.104	28.0	30.0	25.104	25.020	28.021	28.000	25.000	24.948
<b>X6SM-3034-30</b>	30.0	+0.020 +0.104	34.0	30.0	30.104	30.020	34.025	34.000	30.000	29.948
<b>X6SM-3539-40</b>	35.0	+0.025 +0.125	39.0	40.0	35.125	35.025	39.025	39.000	35.000	34.938
<b>X6SM-4044-40</b>	40.0	+0.025 +0.125	44.0	40.0	40.125	40.025	44.025	44.000	40.000	39.938

iglide® X6  
Sleeve - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1  
+  
I



inch  
mm



**igus®**

## iglide® Plain Bearings X6 - Flange, MM

iglide® X6  
Flange - MM



For tolerance values  
please refer to page 15.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance After Pressfit in Ø H7	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size	
				d13	h13	-0.14	Max.	Min.	Max.	Min.
X6FM-0304-05	3.0	+0.006 +0.046	4.5	7.5	5.0	0.75	3.046	3.006	4.512	4.500
X6FM-0507-05	5.0	+0.010 +0.058	7.0	11.0	5.0	1.0	5.058	5.010	7.015	7.000
X6FM-0608-06	6.0	+0.010 +0.058	8.0	12.0	8.0	1.0	6.058	6.010	8.015	8.000
X6FM-0810-10	8.0	+0.013 +0.071	10.0	15.0	9.0	1.0	8.071	8.013	10.015	10.000
X6FM-1012-10	10.0	+0.013 +0.071	12.0	18.0	9.0	1.0	10.071	10.013	12.018	12.000
X6FM-1214-12	12.0	+0.016 +0.086	14.0	20.0	12.0	1.0	12.086	12.016	14.018	14.000
X6FM-1618-17	16.0	+0.016 +0.086	18.0	24.0	17.0	1.0	16.086	16.016	18.018	18.000
X6FM-2023-21	20.0	+0.020 +0.104	23.0	30.0	21.0	1.5	20.104	20.020	23.021	23.000
X6FM-2528-21	25.0	+0.020 +0.104	28.0	35.0	21.0	1.5	25.104	25.020	28.021	28.000
X6FM-3034-40	30.0	+0.020 +0.104	34.0	42.0	40.0	2.0	30.104	30.020	34.025	34.000
X6FM-3539-26	35.0	+0.025 +0.125	39.0	47.0	26.0	2.0	35.125	35.025	39.025	39.000
X6FM-4044-40	40.0	+0.025 +0.125	44.0	52.0	40.0	2.0	40.125	40.025	44.025	44.000
									40.000	39.938




iglide® X6

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0 + 1.0 inch

inch

mm



**igus®**

## iglide® Plain Bearings X6 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® X6

**igus®**



**iglide® Z**




### Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 2-1/4 in.  
Metric sizes from 4 - 75 mm

### Part Number Structure

#### Part Number Structure

**Z S I-02 03-03**

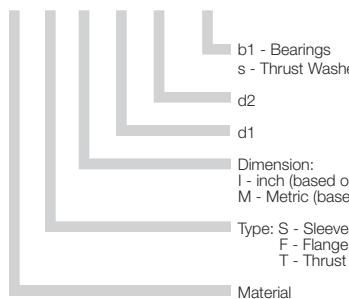

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	689
Oscillating	216	492
Linear	984	1181

### Usage Guidelines



- For continuous temperatures up to 482°F
- For high radial loads and high temperature
- For high surface speeds
- For edge loading in connection with high surface pressures



- For low loads and temperatures
  - iglide® P
- When a cost effective all-around bearing is sought
  - iglide® G300
- When electrically conductive bearings are needed
  - iglide® F

### Material Data

General Properties	Unit	iglide® Z	Testing Method
Density	g/cm³	1.40	
Color		brown	
Max. moisture absorption at 73°F/ 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.1	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.14	
p x v value, max. (dry)	psi x fpm	24,000	

### Mechanical Properties


Modulus of elasticity	psi	348,100	DIN 53457
Tensile strength at 68°F	psi	13,775	DIN 53452
Compressive strength	psi	9,425	
Permissible static surface pressure (68°F)	psi	21,750	
Shore D-hardness		81	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	482	
Max. short-term application temperature	°F	590	
Minimum application temperature	°F	-148	
Thermal conductivity	W/m x K	0.62	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	4	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10¹¹	DIN IEC 93
Surface resistance	Ω	> 10¹¹	DIN 53482

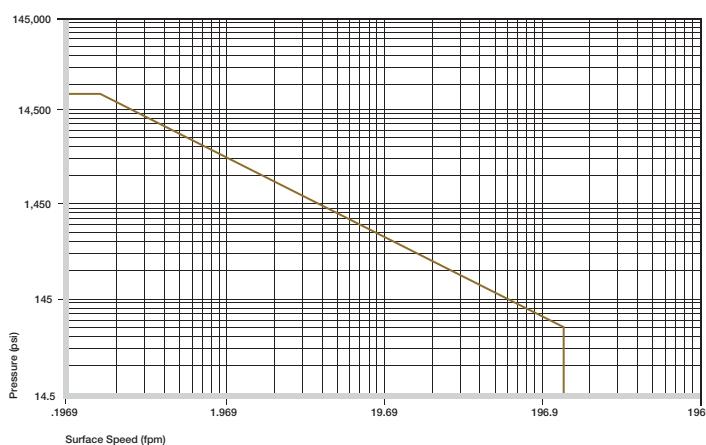

Permissible p x v values for iglide® Z running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

### Compressive Strength

Iglide® Z is a high-temperature bearing material, which is suited for applications with very high loads. For radial pressures between 7,250 and 14,500 psi, there is no better dry running wear-resistant iglide® material. The graph shows the elastic deformation of iglide® Z for radial loads. At the maximum permissible load of 14,500, the deformation is approximately 5.5% at room temperature.

- Compressive Strength, Page 1.3

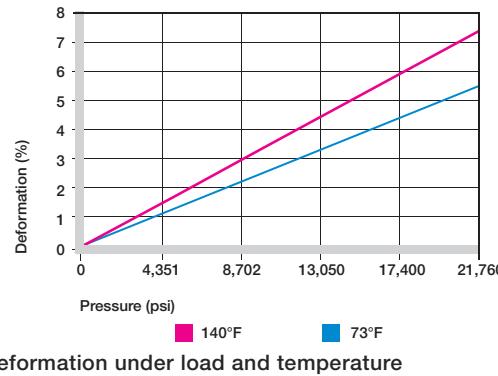

### Permissible Surface Speeds

Iglide® Z is suited for both average and high speeds due to its high thermal resistance. The maximum values given in the table can only be achieved at the lowest pressure loads. At the given speeds, friction can cause temperature to increase to maximum permissible levels.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

### Temperatures

The maximum permissible short-term temperature is 590°F. This represents the highest thermal resistance of any iglide® material. With increasing temperatures, the compressive strength of iglide® Z plain bearings decreases. The graph shows this relationship. The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear. With increasing temperatures, the wear increases.

The graph shows that when the temperature increases from room temperature to 302°F, the wear of iglide® Z only doubles. At high temperatures, iglide® Z is also the most wear-resistant material while running dry.


- Application Temperatures, Page 1.7

iglide® Z	Application Temperature
Minimum	- 148°F
Max. long-term	+ 482°F
Max. short-term	+ 590°F
Additional axial securing	+293°F


### Temperature limits for iglide® Z

	Continuous fpm	Short Term fpm
Rotating	295	689
Oscillating	216	492
Linear	984	1181

### Maximum surface speed

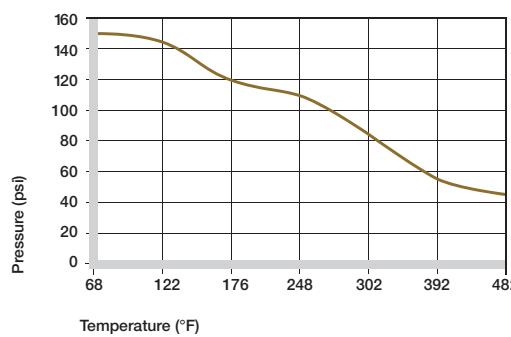

Recommended maximum permissible static surface pressure of iglide® Z as a result of the temperature

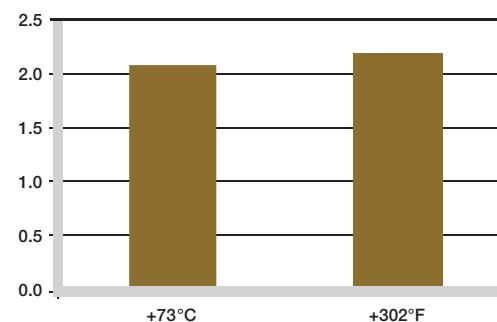

Wear of iglide® Z as a result of temperature, rotation with  $p = 108$  psi,  $v = 98$  fpm, (1050 hard chromed)

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10


inch

mm

## Installation Tolerances

iglide® Z plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

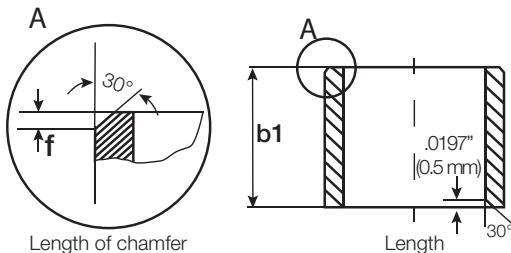

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	


## Friction and Wear

Similar to wear resistance, the coefficient of friction only changes slightly with increasing load. Friction and wear are also dependent, to a large degree, on the shaft partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. iglide® Z proves to be relatively resistant in regard to the shaft surface. For iglide® Z a ground surface with an average roughness range of 16-32 rms is recommended for the shaft.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

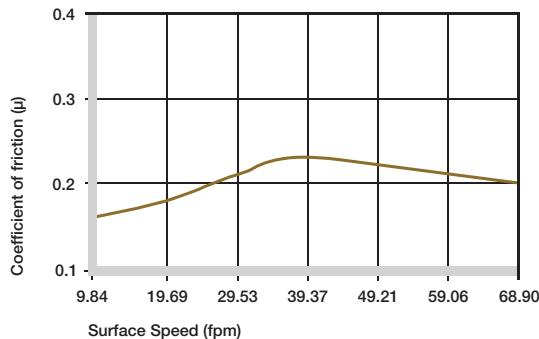


Coefficients of friction of iglide® Z as a result of the running speed; p = 108 psi

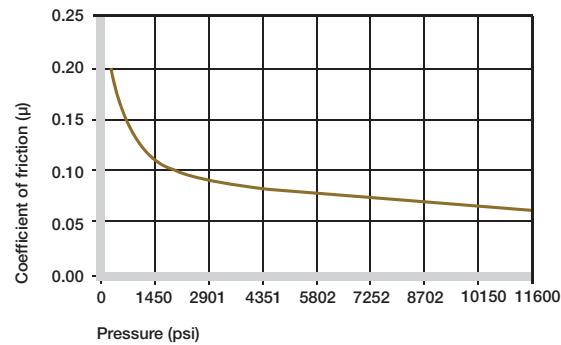

Coefficients of friction of iglide® Z as a result of the load, v = 1.97 fpm

iglide® Z	Coefficient of Friction
Dry	0.06 - 0.14
Grease	0.09
Oil	0.04
Water	0.04

Table 15.4: Coefficients of friction for iglide® Z against steel (Shaft finish = 40 rms, 50 HRC)

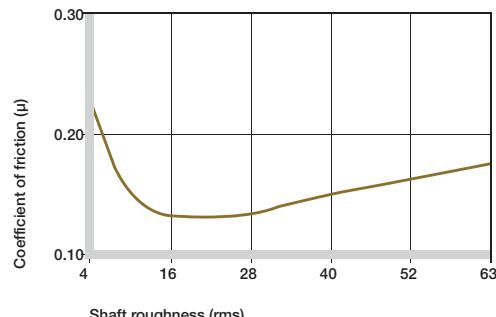


Coefficients of friction of iglide® Z as a result of the shaft surface (1050 hard chromed)

### Shaft Materials


The diagrams show wear rates in the lower load range, which are very similar to those of other iglide® materials. In the upper range on the other hand, iglide® Z outperforms all other materials in wear resistance. Provided a 1050 hard chromed shaft is used, the wear at 6525 psi is still only 15 µm/km.

For low loads, iglide® Z plain bearings wear in oscillating operation less than in rotation. 303 Stainless Steel and hard-chromed shaft are of interest here. The value 0.5 µm/km shows 303 Stainless provides the lowest wear in oscillating movements at 280 psi. For higher loads, hard-chromed shafts outperform 303 Stainless. However even at 14,500 psi, iglide® Z obtains excellent wear values. If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft Materials, Page 1.11

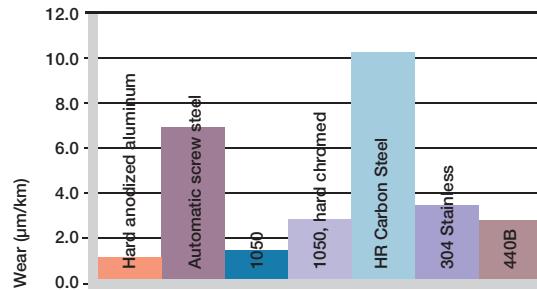


Wear of iglide® Z rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

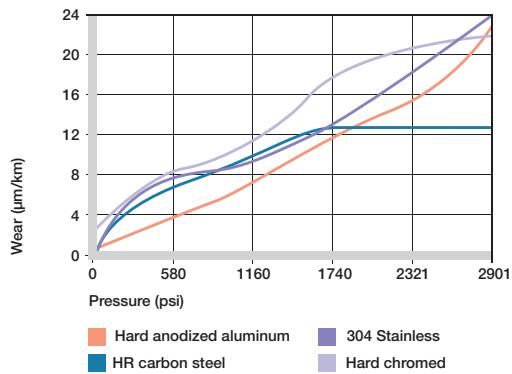

Wear of iglide® Z with different shaft materials in rotating applications


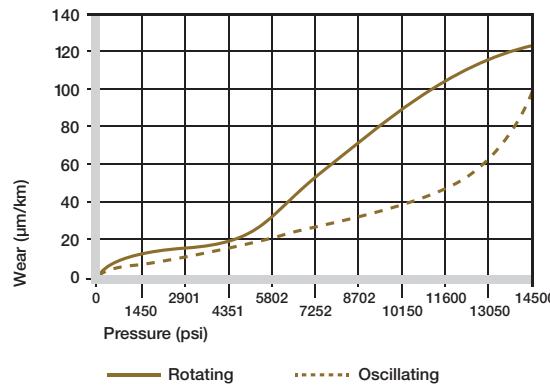


Wear for oscillating and rotating applications with 1050 hard chromed

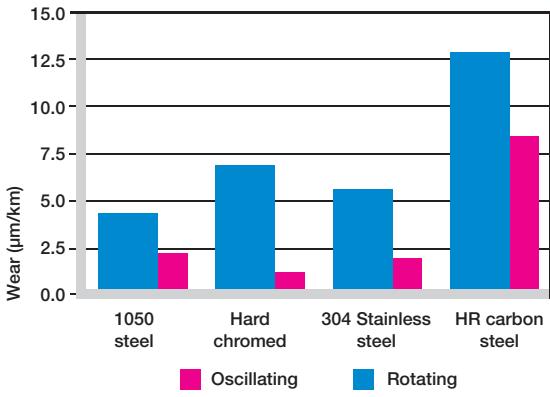

Wear for oscillating and rotating applications with different shaft materials, load  $p = 290$  psi

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

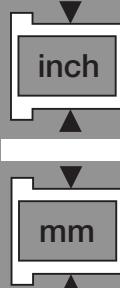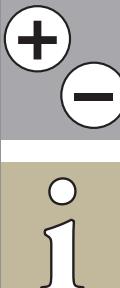

## Chemical Resistance

iglide® Z plain bearings have a good resistance to chemicals. They have an excellent resistance against organic solvents, fuels, oils and greases. The material is only partially resistant against weak acids. The moisture absorption of iglide® Z plain bearings is approximately 0.3% in standard atmosphere. The saturation limit in water is 1.1%.


► Chemical Resistance, Page 1.16

Medium	Resistance
Alcohol	0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+
Strong acids	-
Weak alkaline	+
Strong alkaline	-

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® Z

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

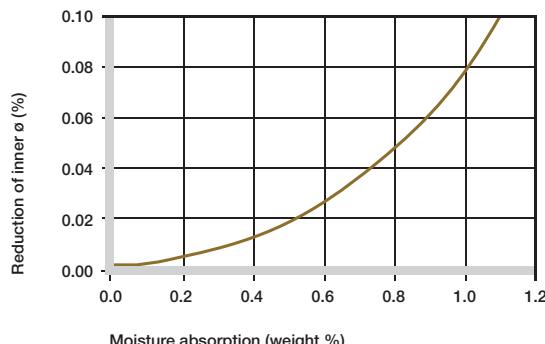

Effect of moisture absorption on iglide® Z plain bearings

## Radiation Resistance

Plain bearings made from iglide® Z are resistant to radiation up to an intensity of  $1 \times 10^5$  Gy.

## UV-Resistance

UV radiation causes approximately 50% decline of the tribological properties (wear) of plain bearings made from iglide® Z.

## Vacuum

For use in a vacuum environment, moisture content is released as vapor. Therefore, only dehumidified bearings made of iglide® Z are suitable for a vacuum environment.


## Electrical Properties

iglide® Z plain bearings are electrically insulating.

### iglide® Z

Specific volume resistivity	$> 10^{11} \Omega\text{cm}$
Surface resistance	$> 10^{11} \Omega$



### Electrical properties of iglide® Z

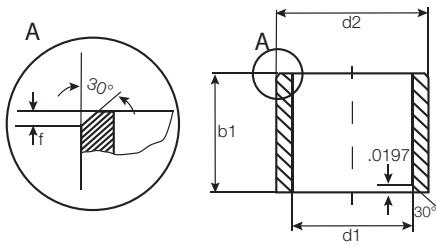

For tolerance values please refer to page 15.4

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
				Max.	Min.	Max.	Min.	Max.	Min.
ZSI-0203-03	1/8	3/16	3/16	.1266	.1247	.1878	.1873	.1243	.1236
ZSI-0506-06	5/16	3/8	3/8	.3143	.3120	.3753	.3747	.3115	.3106
ZSI-0607-04	3/8	15/32	1/4	.3768	.3745	.4691	.4685	.3740	.3731
ZSI-0607-06	3/8	15/32	3/8	.3768	.3745	.4691	.4685	.3740	.3731
ZSI-0607-08	3/8	15/32	1/2	.3768	.3745	.4691	.4685	.3740	.3731
ZSI-0708-08	7/16	17/32	1/2	.4399	.4371	.5316	.5307	.4365	.4355
ZSI-0809-12	1/2	19/32	3/4	.5024	.4996	.5941	.5933	.4990	.4980
ZSI-0810-12	1/2	5/8	3/4	.5034	.5006	.6260	.6248	.5000	.4990
ZSI-1011-12	5/8	23/32	3/4	.6274	.6246	.7192	.7185	.6240	.6230
ZSI-1214-12	3/4	7/8	3/4	.7532	.7499	.8755	.8748	.7491	.7479
ZSI-1214-16	3/4	7/8	1	.7532	.7499	.8755	.8748	.7491	.7479
ZSI-1416-16	7/8	1	1	.8782	.8749	1.0005	.9997	.8741	.8729
ZSI-1618-16	1	1 1/8	1	1.0032	.9999	1.1255	1.1247	.9991	.9979
ZSI-1618-24	1	1 1/8	1 1/2	1.0032	.9999	1.1255	1.1247	.9991	.9979
ZSI-1820-24	1 1/8	1 9/32	1 1/2	1.1279	1.1246	1.2818	1.2807	1.1238	1.1226
ZSI-2022-20	1 1/4	1 13/32	1 1/4	1.2537	1.2498	1.4068	1.4059	1.2488	1.2472
ZSI-2426-24	1 1/2	1 21/32	1 1/2	1.5037	1.4998	1.6568	1.6559	1.4988	1.4972
ZSI-2831-32	1 3/4	1 15/16	2	1.7536	1.7497	1.9381	1.9370	1.7487	1.7471
ZSI-3235-16	2	2 3/16	1	2.0040	1.9993	2.1883	2.1870	1.9981	1.9969
ZSI-3235-32	2	2 3/16	2	2.0040	1.9993	2.1883	2.1870	1.9981	1.9969
ZSI-3639-32	2 1/4	2 7/16	2	2.2566	2.2519	2.4377	2.4366	2.2507	2.2489

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

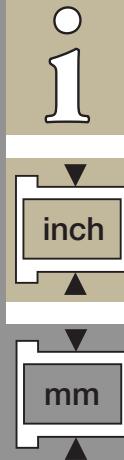



Z

igus®

# iglide® Plain Bearings


## Z - Flange, Inch

 iglide® Z  
 Flange - Inch

 For tolerance values please  
 refer to page 15.4

 Telephone 1-800-521-2747  
 Fax 1-401-438-7270

 Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>

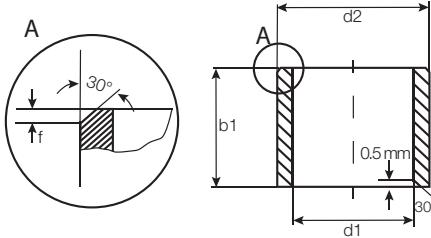Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
					-.0055	Max.	Min.	Max.	Min.	Max.	Min.
ZFI-0405-08	1/4	5/16	1/2	.500	.032	.2518	.2495	.3128	.3122	.2490	.2476
ZFI-0506-06	5/16	3/8	3/8	.562	.032	.3143	.3120	.3753	.3747	.3115	.3101
ZFI-0607-08	3/8	15/32	1/2	.687	.046	.3768	.3745	.4691	.4684	.3740	.3731
ZFI-0708-08	7/16	17/32	1/2	.750	.046	.4399	.4371	.5314	.5307	.4365	.4348
ZFI-1012-08	5/8	3/4	1/2	1.000	.062	.6284	.6256	.7508	.7500	.6250	.6240
ZFI-1214-12	3/4	7/8	3/4	1.125	.062	.7532	.7499	.8755	.8748	.7491	.7479
ZFI-1214-16	3/4	7/8	1	1.125	.062	.7532	.7499	.8755	.8748	.7491	.7479
ZFI-1416-12	7/8	1	3/4	1.250	.062	.8782	.8749	1.0005	.9997	.8741	.8729
ZFI-1416-16	7/8	1	1	1.250	.062	.8782	.8749	1.0005	.9997	.8741	.8729
ZFI-1618-08	1	1 1/8	1/2	1.375	.062	1.0032	.9999	1.1255	1.1247	.9991	.9979
ZFI-1618-16	1	1 1/8	1	1.375	.062	1.0032	.9999	1.1255	1.1247	.9991	.9979
ZFI-1820-12	1 1/8	1 9/32	3/4	1.562	.078	1.1279	1.1246	1.2818	1.2807	1.1238	1.1226
ZFI-1820-24	1 1/8	1 9/32	1 1/2	1.562	.078	1.1279	1.1246	1.2818	1.2807	1.1238	1.1226
ZFI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2537	1.2498	1.4068	1.4059	1.2488	1.2472
ZFI-2022-24	1 1/4	1 13/32	1 1/2	1.687	.078	1.2537	1.2498	1.4068	1.4059	1.2488	1.2472
ZFI-2426-24	1 1/2	1 21/32	1 1/2	2.000	.078	1.5037	1.4998	1.6568	1.6559	1.4988	1.4972
ZFI-2831-32	1 3/4	1 15/16	2	2.375	.093	1.7536	1.7497	1.9381	1.9370	1.7487	1.7471
ZFI-3235-32	2	2 3/16	2	2.625	.093	2.0040	1.9993	2.1883	2.1870	1.9981	1.9969



For tolerance values please refer to page 15.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
	After Pressfit in Ø H7			h13	Max.	Min.	Max.	Min.	Max.	Min.
ZSM-0405-04	4.0	+0.010 +0.058	5.5	4.0	4.058	4.010	5.512	5.500	4.000	3.970
ZSM-0507-05	5.0	+0.010 +0.058	7.0	5.0	5.058	5.010	7.015	7.000	5.000	4.970
ZSM-0608-08	6.0	+0.010 +0.058	8.0	8.0	6.058	6.010	8.015	8.000	6.000	5.970
ZSM-0608-12	6.0	+0.010 +0.058	8.0	12.0	6.058	6.010	8.015	8.000	6.000	5.970
ZSM-0810-08	8.0	+0.013 +0.071	10.0	8.0	8.071	8.013	10.015	10.000	8.000	7.964
ZSM-0810-10	8.0	+0.013 +0.071	10.0	10.0	8.071	8.013	10.015	10.000	8.000	7.964
ZSM-1012-08	10.0	+0.013 +0.071	12.0	8.0	10.071	10.013	12.018	12.000	10.000	9.964
ZSM-1012-10	10.0	+0.013 +0.071	12.0	10.0	10.071	10.013	12.018	12.000	10.000	9.964
ZSM-1012-12	10.0	+0.013 +0.071	12.0	12.0	10.071	10.013	12.018	12.000	10.000	9.964
ZSM-1214-15	12.0	+0.016 +0.086	14.0	15.0	12.086	12.016	14.018	14.000	12.000	11.957
ZSM-1517-15	15.0	+0.016 +0.086	17.0	15.0	15.086	15.016	17.018	17.000	15.000	13.957
ZSM-1618-12	16.0	+0.016 +0.086	18.0	12.0	16.086	16.016	18.018	18.000	16.000	15.957
ZSM-1618-15	16.0	+0.016 +0.086	18.0	15.0	16.086	16.016	18.018	18.000	16.000	15.957
ZSM-1820-20	18.0	+0.016 +0.086	20.0	20.0	18.086	18.016	20.021	20.000	18.000	17.957
ZSM-2022-15	20.0	+0.020 +0.104	22.0	15.0	20.104	20.020	22.021	22.000	20.000	19.948
ZSM-2023-20	20.0	+0.020 +0.104	23.0	20.0	20.104	20.020	23.021	23.000	20.000	19.948
ZSM-2023-30	20.0	+0.020 +0.104	23.0	30.0	20.104	20.020	23.021	23.000	20.000	19.948
ZSM-2023-35	20.0	+0.020 +0.104	23.0	35.0	20.104	20.020	23.021	23.000	20.000	19.948
ZSM-2225-20	22.0	+0.020 +0.104	25.0	20.0	22.104	22.020	25.021	25.000	22.000	21.948
ZSM-2528-20	25.0	+0.020 +0.104	28.0	20.0	25.104	25.020	28.021	28.000	25.000	24.948
ZSM-2528-30	25.0	+0.020 +0.104	28.0	30.0	25.104	25.020	28.021	28.000	25.000	24.948
ZSM-2528-48	25.0	+0.020 +0.104	28.0	48.0	25.104	25.020	28.021	28.000	25.000	24.948
ZSM-3034-20	30.0	+0.020 +0.104	34.0	20.0	30.104	30.020	34.025	34.000	30.000	29.948
ZSM-3034-30	30.0	+0.020 +0.104	34.0	30.0	30.104	30.020	34.025	34.000	30.000	29.948
ZSM-3034-40	30.0	+0.020 +0.104	34.0	40.0	30.104	30.020	34.025	34.000	30.000	29.948
ZSM-3539-20	35.0	+0.025 +0.125	39.0	20.0	35.125	35.025	39.025	39.000	35.000	34.938
ZSM-4044-40	40.0	+0.025 +0.125	44.0	40.0	40.125	40.025	44.025	44.000	40.000	39.938
ZSM-5055-60	50.0	+0.025 +0.125	55.0	60.0	50.125	50.025	55.030	55.000	50.000	49.938
ZSM-6065-60	60.0	+0.025 +0.125	65.0	60.0	60.125	60.025	65.030	65.000	60.000	59.926

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



mm

Z



igus®

# iglide® Plain Bearings

## Z - Flange, MM

 iglide® Z  
 Flange - MM


 Telephone 1-800-521-2747  
 1-401-438-7270  
 Fax

 Internet: <http://www.igus.com>  
 email: [sales@igus.com](mailto:sales@igus.com)  
 QuickSpec: <http://www.igus.com/iglide-quickspec>

 For tolerance values please  
 refer to page 15.4

r = max. 0.5

Dimensions according to ISO 3547-1 and special dimensions

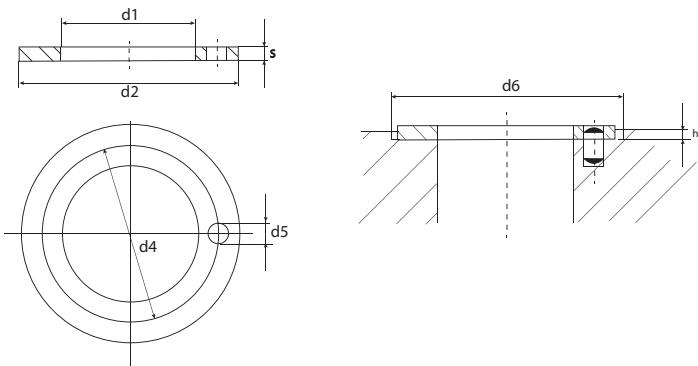Part Number	d1 <sup>1)</sup>	d1-Tolerance After Pressfit in Ø H7	d2	d3 d13	b1 h13	b2 -0.14	I.D. After Pressfit	Housing Bore	Shaft Size
						Max.	Min.	Max.	Min.
ZFM-0405-04	4.0	+0.010 +0.058	5.5	9.5	4.0	0.75	4.058 4.010	5.512 5.500	4.000 3.970
ZFM-0507-05	5.0	+0.010 +0.058	7.0	11.0	5.0	1.00	5.058 5.010	7.015 7.000	5.000 4.970
ZFM-0608-08	6.0	+0.010 +0.058	8.0	12.0	8.0	1.0	6.058 6.010	8.015 8.000	6.000 5.970
ZFM-0810-09	8.0	+0.013 +0.071	10.0	15.0	9.0	1.0	8.071 8.013	10.015 10.000	8.000 7.964
ZFM-1012-09	10.0	+0.013 +0.071	12.0	18.0	9.0	1.0	10.071 10.013	12.018 12.000	10.000 9.964
ZFM-1214-09	12.0	+0.016 +0.086	14.0	20.0	9.0	1.0	12.086 12.016	14.018 14.000	12.000 11.957
ZFM-1214-12	12.0	+0.016 +0.086	14.0	20.0	12.0	1.0	12.086 12.016	14.018 14.000	12.000 11.957
ZFM-1214-15	12.0	+0.016 +0.086	14.0	20.0	15.0	1.0	12.086 12.016	14.018 14.000	12.000 11.957
ZFM-1214-20	12.0	+0.016 +0.086	14.0	20.0	20.0	1.0	12.086 12.016	14.018 14.000	12.000 11.957
ZFM-1416-16	14.0	+0.016 +0.086	16.0	22.0	16.0	1.0	14.086 14.016	16.018 16.000	14.000 13.957
ZFM-1416-17	14.0	+0.016 +0.086	16.0	22.0	17.0	1.0	14.086 14.016	16.018 16.000	14.000 13.957
ZFM-1517-11	15.0	+0.016 +0.086	17.0	23.0	11.0	1.0	15.086 15.016	17.018 17.000	15.000 14.957
ZFM-1517-15	15.0	+0.016 +0.086	17.0	23.0	15.0	1.0	15.086 15.016	17.018 17.000	15.000 14.957
ZFM-1820-04	18.0	+0.016 +0.086	20.0	26.0	4.0	1.0	18.086 18.016	20.021 20.000	18.000 17.957
ZFM-1820-17	18.0	+0.016 +0.086	20.0	26.0	17.0	1.0	18.086 18.016	20.021 20.000	18.000 17.957
ZFM-2022-21	20.0	+0.020 +0.104	22.0	30.0	21.0	1.5	20.104 20.020	22.040 22.000	20.000 19.948
ZFM-2023-11	20.0	+0.020 +0.104	23.0	30.0	11.5	1.5	20.104 20.020	23.021 23.000	20.000 19.948
ZFM-2023-155	20.0	+0.020 +0.104	23.0	30.0	15.5	1.5	20.104 20.020	23.021 23.000	20.000 19.948
ZFM-2023-16	20.0	+0.020 +0.104	23.0	30.0	16.0	1.5	20.104 20.020	23.021 23.000	20.000 19.948
ZFM-2023-21	20.0	+0.020 +0.104	23.0	30.0	21.5	1.5	20.104 20.020	23.021 23.000	20.000 19.948
ZFM-2023-31	20.0	+0.020 +0.104	23.0	30.0	31.5	1.5	20.104 20.020	23.021 23.000	20.000 19.948
ZFM-2528-16	25.0	+0.020 +0.104	28.0	35.0	16.5	1.5	25.104 25.020	28.021 28.000	25.000 24.948
ZFM-2528-21	25.0	+0.020 +0.104	28.0	35.0	21.5	1.5	25.104 25.020	28.021 28.000	25.000 24.948
ZFM-2528-31	25.0	+0.020 +0.104	28.0	35.0	31.5	1.5	25.104 25.020	28.021 28.000	25.000 24.948
ZFM-3034-20	30.0	+0.020 +0.104	34.0	42.0	20.0	2	30.104 30.020	34.025 34.000	30.000 29.948
ZFM-3034-26	30.0	+0.020 +0.104	34.0	42.0	26.0	2.0	30.104 30.020	34.025 34.000	30.000 29.948
ZFM-3034-37	30.0	+0.020 +0.104	34.0	42.0	37.0	2.0	30.104 30.020	34.025 34.000	30.000 29.948
ZFM-3539-26	35.0	+0.025 +0.125	39.0	47.0	26.0	2.0	35.125 35.025	39.025 39.000	35.000 34.938
ZFM-4044-20	40.0	+0.025 +0.125	44.0	52.0	20.0	2.0	40.125 40.025	44.025 44.000	40.000 39.938
ZFM-4044-40	40.0	+0.025 +0.125	44.0	52.0	40.0	2.0	40.125 40.025	44.025 44.000	40.000 39.938
ZFM-7580-50	75.0	+0.030 +0.150	80.0	88.0	50.0	2.0	75.150 75.030	80.030 80.000	75.000 74.926



Dimensions according to ISO 3547-1 and special dimensions

Part number	d1 +0.25	d2 -0.25	s -0.05	d4 -0.12 +0.12	d5 +0.375 +0.125	h +0.2 -0.2	d6 +0.12
ZTM-2644-015	26.0	44.0	1.5	35.0	3.0	1.0	44.0
ZTM-3254-015	32.0	54.0	1.5	43.0	4.0	1.0	54.0
ZTM-4874-020	48.0	74.0	2.0	61.0	4.0	1.5	74.0
ZTM-6290-020	62.0	90.0	2.0	76.0	4.0	1.5	90.0

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+ | 1. | 0. | + | 1. | 0. | +

inch

mm

**Z**



## iglide® Plain Bearings Z - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® Z


**igus®**



**iglide® GLW**  
**For high volume**

**Product Range**

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Inch sizes from 1/8 - 2 in.  
Metric sizes from 3 - 50 mm

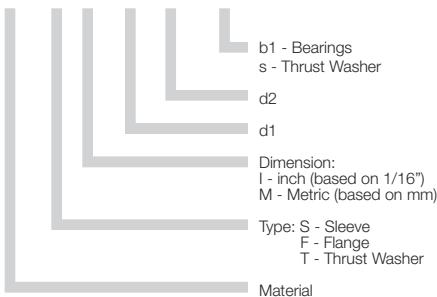**Part Number Structure****Part Number Structure****GLW S I - 02 03 - 04****Permissible Surface Speeds**

	Continuous fpm	Short Term fpm
Rotating	157	196
Oscillating	118	137
Linear	492	590

**Usage Guidelines**

- When you need an economical all-around bearing for mass production
- For high, primarily static loads
- For low to medium speeds
- When the bearing should be suitable for different shafts



- When mechanical reaming of the wall surface is necessary
  - iglide® M250
- For primarily dynamic loads,
  - iglide® G300
- When the highest wear resistance is necessary
  - iglide® L280
- When temperatures occur that are constantly greater than 266°F
  - iglide® T500, F

**Material Data**

General Properties	Unit	iglide® GLW	Testing Method
Density	g/cm <sup>3</sup>	1.36	
Color		black	
Max moisture absorption at 73°F/50% r.h.	% weight	1.3	DIN 53495
Max. moisture absorption	% weight	5.5	
Coefficient of friction, dynamic against steel	μ	0.10 - 0.24	
p x v value, max. (dry)	psi x fpm	8,600	

**Mechanical Properties**


Modulus of elasticity	psi	1,116,500	DIN 53457
Tensile strength at 68°F	psi	34,075	DIN 53452
Compressive strength	psi	10,730	
Permissible static surface pressure (68°F)	psi	11,600	
Shore D-hardness		78	DIN 53505

**Physical and Thermal Properties**

Max. long-term application temperature	°F	212	
Max. short-term application temperature	°F	320	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	17	DIN 53752

**Electrical Properties**

Specific volume resistance	Ωcm	> 10 <sup>11</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>11</sup>	DIN 53482

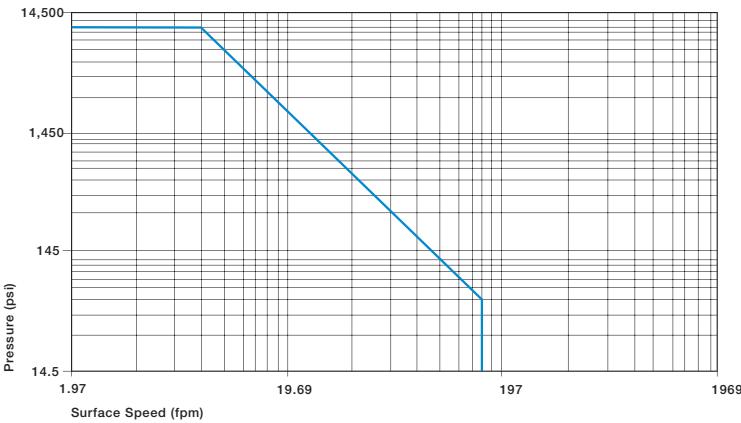

Permissible p x v values for iglide® GLW running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

With plain bearings made of iglide® GLW, we can offer our customers an alternative to iglide® G300 for mass-production applications. With similar characteristic values as iglide® G300 plain bearings, iglide® GLW plain bearings are recommended for primarily static loads. For these applications, where the dynamic properties of iglide® G300 are virtually unnecessary, they present a very cost-effective alternative.

## Compressive Strength

The graph shows the elastic deformation of iglide® GLW for radial loads. At the maximum permissible load of 10,150 psi at room temperature, the deformation is less than 3%. At this load, a plastic deformation is minimal. However, it is also a result of the cycle time.

- Compressive Strength, Page 1.12



## Permissible Surface Speeds

iglide® GLW was developed for low to average surface speeds. In constant operation, a maximum 157 fpm (rotating) or 492 fpm (linear) is permitted. Please note that the maximum values shown in the table are only possible at the lowest pressure loads. In practice, these values are rarely reached, due to the temperature increasing over the maximum permitted value.

- Surface Speed, Page 1.14
- p x v value, Page 1.15

## Temperatures

The surrounding temperatures affect the properties of plain bearings to a large extent. With a maximum permissible short-term temperature of 320°F, it is possible to subject iglide® GLW plain bearings to a heat treating process, provided they are not additionally loaded. With increasing temperatures, the compressive strength of iglide® GLW plain bearings decreases. The graph shows this relationship. With increasing temperatures in the bearing system, the wear also increases.


- Application temperatures, Page 1.16

iglide® GLW	Application Temperature
Minimum	-40°F
Max. long-term	+212°F
Max. short-term	+320°F
Additional axial securing	+176°F

Temperature limits for iglide® GLW


	Continuous fpm	Short Term fpm
Rotating	157	196
Oscillating	118	137
Linear	492	590

Maximum surface speeds

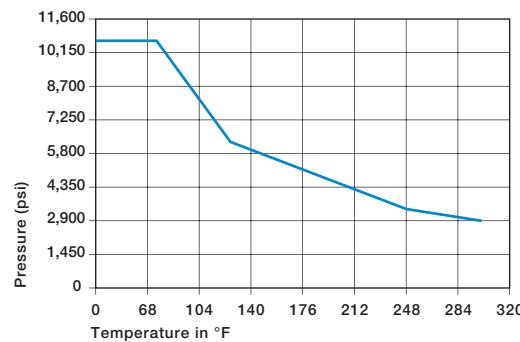

Recommended maximum permissible static surface pressure of iglide® GLW as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

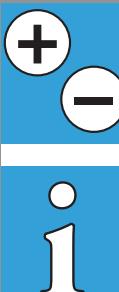


inch

mm

## Installation Tolerances

iglide® GLW plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

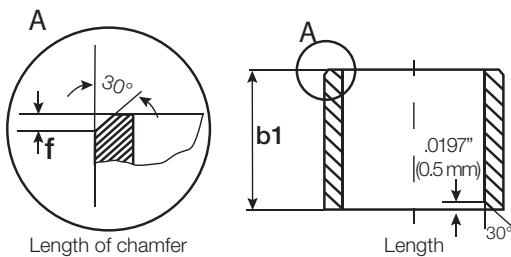

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. It is of interest that the coefficient of friction  $\mu$  decreases with increasing load. This relationship explains the excellent suitability of iglide® GLW plain bearings for high loads. Friction and wear are also dependent, to a large degree on the shafting partner. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglide® GLW a ground surface with an average roughness range of 8 - 64 rms is recommended for the shaft.


- Coefficients of friction and surfaces, Page 1.8
- Wear Resistance, Page 1.9

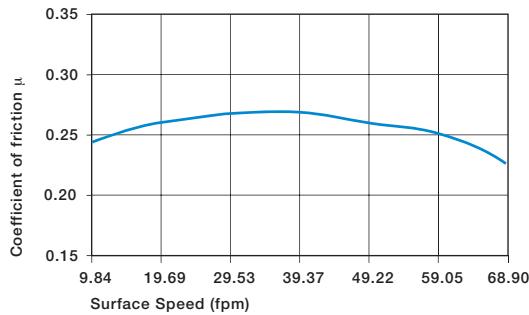


Coefficient of friction of iglide® GLW as a result of the surface speed  $p = 108$  psi (1050 hard chromed)

iglide® GLW	Coefficient of Friction
Dry	0.10 - 0.24
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction for iglide® GLW against steel (Shaft finish = 40 rms, 50 HRC)

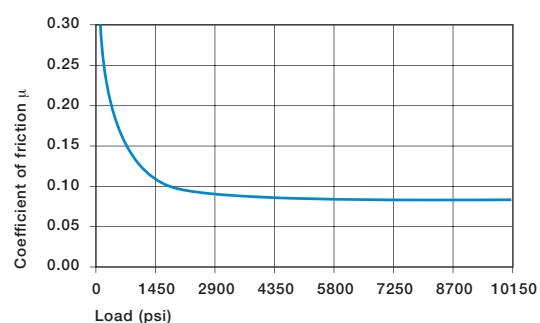

Coefficient of friction of iglide® GLW as a result of the shaft surface  $v = 1.97$  fpm (1050 hard chromed)

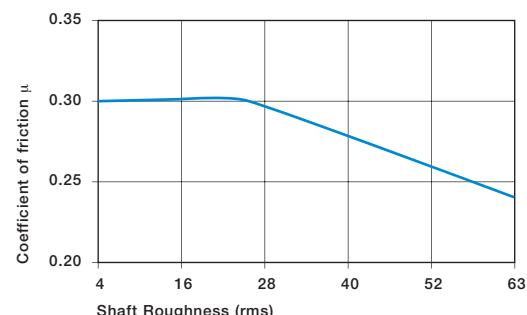


Coefficient of friction and wear as a result of the shaft surface

## Shaft Materials

To a large extent, friction and wear depend on the shaft material. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. A ground surface with an average roughness between 4 and 8 rms is the most suitable. The following graph shows an extract of the results of tests with different shaft materials using iglide® GLW plain bearings.

If the shaft material you plan on using is not shown in these test results, please contact us.

► Shaft Materials, Page 1.11

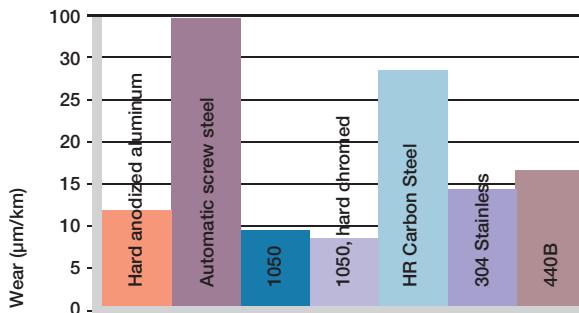

Wear with different shaft materials ( $p = 108 \text{ psi}$ ;  $v = 98 \text{ fpm}$ )

## Chemical Resistance

iglide® GLW plain bearings have a good resistance to chemicals. They are resistant to most lubricants. iglide® GLW is not attacked by most organic and inorganic acids. The moisture absorption of iglide® GLW plain bearings is approximately 1% in standard atmosphere. The saturation limit in water is 5%. This must be taken into account along with other applicable conditions.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Diluted acids	0 to -
Strong acids	-
Diluted alkaline	+
Strong alkaline	0

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® GLW

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

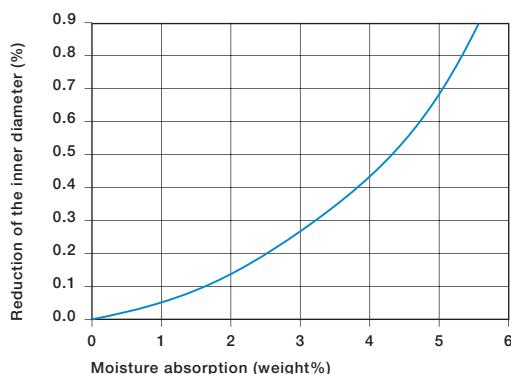

Effect of moisture absorption on iglide® GLW plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch  
mm

17.5

## Radiation Resistance

Plain bearings made from iglide® GLW are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® GLW plain bearings are permanently resistant to UV radiation.

---

## Vacuum

In a vacuum environment, iglide® GLW plain bearings release gases. Use in a vacuum should be tested beforehand.

---

## Electrical Properties


iglide® GLW plain bearings are electrically insulating.

### iglide® GLW

Specific volume resistance	> $10^{11}$ $\Omega$ cm
----------------------------	-------------------------


Surface resistance	> $10^{11}$ $\Omega$
--------------------	----------------------

**Electrical properties of iglide® GLW**

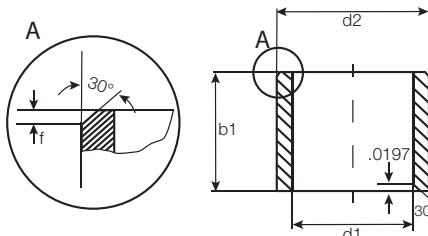

Part Number	d1	d2	b1	I.D. After Pressfit		Housing Bore	Shaft Size	
				Max.	Min.		Max.	Min.
GLWSI-0203-04	1/8	3/16	1/4	.1269	.1251	.1878	.1873	.1243 .1236
GLWSI-0304-04	3/16	1/4	1/4	.1892	.1873	.2503	.2497	.1865 .1858
GLWSI-0304-06	3/16	1/4	3/8	.1892	.1873	.2503	.2497	.1865 .1858
GLWSI-0304-08	3/16	1/4	1/2	.1892	.1873	.2503	.2497	.1865 .1858
GLWSI-0405-04	1/4	5/16	1/4	.2521	.2498	.3128	.3122	.2490 .2481
GLWSI-0405-06	1/4	5/16	3/8	.2521	.2498	.3128	.3122	.2490 .2481
GLWSI-0405-08	1/4	5/16	1/2	.2521	.2498	.3128	.3122	.2490 .2481
GLWSI-0506-04	5/16	3/8	1/4	.3148	.3125	.3753	.3747	.3115 .3106
GLWSI-0506-06	5/16	3/8	3/8	.3148	.3125	.3753	.3747	.3115 .3106
GLWSI-0506-08	5/16	3/8	1/2	.3148	.3125	.3753	.3747	.3115 .3106
GLWSI-0506-12	5/16	3/8	3/4	.3148	.3125	.3753	.3747	.3115 .3106
GLWSI-0607-06	3/8	15/32	3/8	.3773	.3750	.4691	.4684	.3740 .3731
GLWSI-0607-08	3/8	15/32	1/2	.3773	.3750	.4691	.4684	.3740 .3731
GLWSI-0607-12	3/8	15/32	3/4	.3773	.3750	.4691	.4684	.3740 .3731
GLWSI-0608-08	3/8	1/2	1/2	.3783	.3760	.5015	.5010	.3750 .3741
GLWSI-0809-08	1/2	19/32	1/2	.5030	.5003	.5941	.5934	.4990 .4980
GLWSI-0809-12	1/2	19/32	3/4	.5030	.5003	.5941	.5934	.4990 .4980
GLWSI-0809-16	1/2	19/32	1	.5030	.5003	.5941	.5934	.4990 .4980
GLWSI-1011-08	5/8	23/32	1/2	.6280	.6253	.7192	.7184	.6240 .6230
GLWSI-1011-10	5/8	23/32	5/8	.6280	.6253	.7192	.7184	.6240 .6230
GLWSI-1011-12	5/8	23/32	3/4	.6280	.6253	.7192	.7184	.6240 .6230
GLWSI-1011-16	5/8	23/32	1	.6280	.6253	.7192	.7184	.6240 .6230
GLWSI-1214-06	3/4	7/8	3/8	.7541	.7507	.8755	.8747	.7491 .7479
GLWSI-1214-08	3/4	7/8	1/2	.7541	.7507	.8755	.8747	.7491 .7479
GLWSI-1214-12	3/4	7/8	3/4	.7541	.7507	.8755	.8747	.7491 .7479
GLWSI-1214-16	3/4	7/8	1	.7541	.7507	.8755	.8747	.7491 .7479
GLWSI-1214-20	3/4	7/8	1 1/4	.7541	.7507	.8755	.8747	.7491 .7479
GLWSI-1416-08	7/8	1	1/2	.8791	.8757	1.0005	.9997	.8741 .8729
GLWSI-1416-12	7/8	1	3/4	.8791	.8757	1.0005	.9997	.8741 .8729
GLWSI-1416-16	7/8	1	1	.8791	.8757	1.0005	.9997	.8741 .8729
GLWSI-1618-08	1	1 1/8	1/2	1.0041	1.0007	1.1255	1.1247	.9991 .9979
GLWSI-1618-12	1	1 1/8	3/4	1.0041	1.0007	1.1255	1.1247	.9991 .9979
GLWSI-1618-16	1	1 1/8	1	1.0041	1.0007	1.1255	1.1247	.9991 .9979
GLWSI-1618-24	1	1 1/8	1 1/2	1.0041	1.0007	1.1255	1.1247	.9991 .9979
GLWSI-2022-16	1 1/4	1 13/32	1	1.2548	1.2508	1.4068	1.4058	1.2488 1.2472
GLWSI-2022-20	1 1/4	1 13/32	1 1/4	1.2548	1.2508	1.4068	1.4058	1.2488 1.2472
GLWSI-2022-24	1 1/4	1 13/32	1 1/2	1.2548	1.2508	1.4068	1.4058	1.2488 1.2472
GLWSI-2224-20	1 3/8	1 1/2	1 1/4	1.3798	1.3758	1.5318	1.5308	1.3738 1.3722
GLWSI-2224-24	1 3/8	1 1/2	1 1/2	1.3798	1.3758	1.5318	1.5308	1.3738 1.3722
GLWSI-3639-32	2 1/4	2 7/16	2	2.2577	2.2531	2.4377	2.4365	2.2507 2.2489

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




1




inch




mm



r = max. .0197

For tolerance values  
please refer to page 5.4

Part Number	d1	d2	b1	d3	b2	I.D. After Pressfit		Housing Bore		Shaft Size	
						Max.	Min.	Max.	Min.	Max.	Min.
GLWFI-0304-06	3/16	1/4	3/8	.375	.032	.1892	.1873	.2503	.2497	.1865	.1858
GLWFI-0405-06	1/4	5/16	3/8	.500	.032	.2521	.2498	.3128	.3122	.2490	.2481
GLWFI-0506-06	5/16	3/8	3/8	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
GLWFI-0506-08	5/16	3/8	1/2	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
GLWFI-0506-12	5/16	3/8	3/4	.562	.032	.3148	.3125	.3753	.3747	.3115	.3106
GLWFI-0607-06	3/8	15/32	3/8	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
GLWFI-0607-08	3/8	15/32	1/2	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
GLWFI-0607-12	3/8	15/32	3/4	.687	.046	.3773	.3750	.4691	.4684	.3740	.3731
GLWFI-0708-08	7/16	17/32	1/2	.750	.046	.4406	.4379	.5316	.5309	.4365	.4355
GLWFI-0809-08	1/2	19/32	1/2	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
GLWFI-0809-10	1/2	19/32	5/8	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
GLWFI-0809-12	1/2	19/32	3/4	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
GLWFI-0809-16	1/2	19/32	1	.875	.046	.5030	.5003	.5941	.5934	.4990	.4980
GLWFI-0810-08	1/2	5/8	1/2	1.000	.062	.5040	.5013	.6260	.6250	.5000	.4990
GLWFI-0810-10	1/2	5/8	5/8	1.000	.062	.5040	.5013	.6260	.6250	.5000	.4990
GLWFI-0810-12	1/2	5/8	3/4	1.000	.062	.5040	.5013	.6260	.6250	.5000	.4990
GLWFI-0810-16	1/2	5/8	1	1.000	.062	.5040	.5013	.6260	.6250	.5000	.4990
GLWFI-1011-08	5/8	23/32	1/2	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
GLWFI-1011-10	5/8	23/32	5/8	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
GLWFI-1011-12	5/8	23/32	3/4	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
GLWFI-1011-16	5/8	23/32	1	.937	.046	.6280	.6253	.7192	.7184	.6240	.6230
GLWFI-1214-06	3/4	7/8	3/8	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
GLWFI-1214-08	3/4	7/8	1/2	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
GLWFI-1214-10	3/4	7/8	5/8	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
GLWFI-1214-12	3/4	7/8	3/4	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
GLWFI-1214-16	3/4	7/8	1	1.125	.062	.7541	.7507	.8755	.8747	.7491	.7479
GLWFI-1618-12	1	1 1/8	3/4	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GLWFI-1618-16	1	1 1/8	1	1.375	.062	1.0041	1.0007	1.1255	1.1247	.9991	.9979
GLWFI-1820-12	1 1/8	1 1/4	3/4	1.562	.078	1.1288	1.1254	1.2818	1.2808	1.1238	1.1226
GLWFI-2022-20	1 1/4	1 13/32	1 1/4	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GLWFI-2022-24	1 1/4	1 13/32	1 1/2	1.687	.078	1.2548	1.2508	1.4068	1.4058	1.2488	1.2472
GLWFI-2426-16	1 1/2	1 21/32	1	2.000	.078	1.5048	1.5008	1.6568	1.6558	1.4988	1.4972
GLWFI-3235-16	2	2 3/16	1	2.625	.093	2.0052	2.0011	2.1883	2.1871	1.9981	1.9969

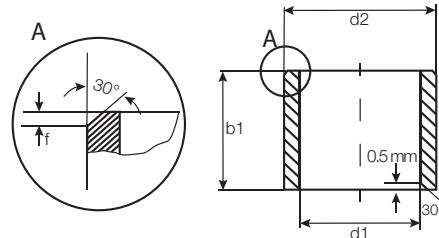


For tolerance values  
please refer to page 5.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance after pressfit in Ø H7	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
					Max.	Min.	Max.	Min.	Max.	Min.
GLWSM-0304-03	3.0	+0.014 +0.054	4.0	3.0	3.054	3.014	4.012	4.000	3.000	2.975
GLWSM-0304-06	3.0	+0.014 +0.054	4.0	6.0	3.054	3.014	4.012	4.000	3.000	2.975
GLWSM-0405-06	4.0	+0.020 +0.068	5.0	6.0	4.068	4.020	5.012	5.000	4.000	3.970
GLWSM-0405-08	4.0	+0.020 +0.068	5.0	8.0	4.068	4.020	5.012	5.000	4.000	3.970
GLWSM-0506-05	5.0	+0.020 +0.068	6.0	5.0	5.068	5.020	6.012	6.000	5.000	4.970
GLWSM-0507-05	5.0	+0.020 +0.068	7.0	5.0	5.068	5.020	7.015	7.000	5.000	4.970
GLWSM-0507-08	5.0	+0.020 +0.068	7.0	8.0	5.068	5.020	7.015	7.000	5.000	4.970
GLWSM-0607-08	6.0	+0.020 +0.068	7.0	8.0	6.068	6.020	7.015	7.000	6.000	5.970
GLWSM-0608-04	6.0	+0.020 +0.068	8.0	4.0	6.068	6.020	8.015	8.000	6.000	5.970
GLWSM-0608-10	6.0	+0.020 +0.068	8.0	10.0	6.068	6.020	8.015	8.000	6.000	5.970
GLWSM-0709-05	7.0	+0.025 +0.083	9.0	5.0	7.083	7.025	9.015	9.000	7.000	6.964
GLWSM-0709-10	7.0	+0.025 +0.083	9.0	10.0	7.083	7.025	9.015	9.000	7.000	6.964
GLWSM-0709-12	7.0	+0.025 +0.083	9.0	12.0	7.083	7.025	9.015	9.000	7.000	6.964
GLWSM-0809-05	8.0	+0.025 +0.083	9.0	5.0	8.083	8.025	9.015	9.000	8.000	7.964
GLWSM-0810-06	8.0	+0.025 +0.083	10.0	6.0	8.083	8.025	10.015	10.000	8.000	7.964
GLWSM-0810-08	8.0	+0.025 +0.083	10.0	8.0	8.083	8.025	10.015	10.000	8.000	7.964
GLWSM-0810-10	8.0	+0.025 +0.083	10.0	10.0	8.083	8.025	10.015	10.000	8.000	7.964
GLWSM-0810-12	8.0	+0.025 +0.083	10.0	12.0	8.083	8.025	10.015	10.000	8.000	7.964
GLWSM-0810-15	8.0	+0.025 +0.083	10.0	15.0	8.083	8.025	10.015	10.000	8.000	7.964
GLWSM-1011-07	10.0	+0.025 +0.083	11.0	7.0	10.083	10.025	11.018	11.000	10.000	9.964
GLWSM-1011-30	10.0	+0.025 +0.083	11.0	30.0	10.083	10.025	11.018	11.000	10.000	9.964
GLWSM-1012-06	10.0	+0.025 +0.083	12.0	6.0	10.083	10.025	12.018	12.000	10.000	9.964
GLWSM-1012-10	10.0	+0.025 +0.083	12.0	10.0	10.083	10.025	12.018	12.000	10.000	9.964
GLWSM-1012-15	10.0	+0.025 +0.083	12.0	15.0	10.083	10.025	12.018	12.000	10.000	9.964
GLWSM-1012-20	10.0	+0.025 +0.083	12.0	20.0	10.083	10.025	12.018	12.000	10.000	9.964
GLWSM-1214-20	12.0	+0.032 +0.102	14.0	20.0	12.102	12.032	14.018	14.000	12.000	11.957
GLWSM-1315-20	13.0	+0.032 +0.102	15.0	20.0	13.102	13.032	15.018	15.000	13.000	12.957
GLWSM-1315-25	13.0	+0.032 +0.102	15.0	25.0	13.102	13.032	15.018	15.000	13.000	12.957
GLWSM-1416-12	14.0	+0.032 +0.102	16.0	12.0	14.102	14.032	16.018	16.000	14.000	13.957
GLWSM-1618-08	16.0	+0.032 +0.102	18.0	8.0	16.102	16.032	18.018	18.000	16.000	15.957
GLWSM-1618-10	16.0	+0.032 +0.102	18.0	10.0	16.102	16.032	18.018	18.000	16.000	15.957
GLWSM-1820-25	18.0	+0.032 +0.102	20.0	25.0	18.102	18.032	20.021	20.000	18.000	17.957
GLWSM-1820-45	18.0	+0.032 +0.102	20.0	45.0	18.102	18.032	20.021	20.000	18.000	17.957
GLWSM-2022-15	20.0	+0.040 +0.124	22.0	15.0	20.124	20.040	22.021	22.000	20.000	19.948
GLWSM-2023-10	20.0	+0.040 +0.124	23.0	10.0	20.124	20.040	23.021	23.000	20.000	19.948
GLWSM-2528-12	25.0	+0.040 +0.124	28.0	12.0	25.124	25.040	28.021	28.000	25.000	24.948

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch  
mm

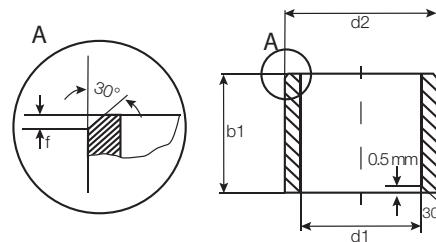

For tolerance values  
please refer to page 5.4

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1	d1-Tolerance	d2	b1	I.D. After Pressfit		Housing Bore		Shaft Size	
		after pressfit in Ø H7		h13	Max.	Min.	Max.	Min.	Max.	Min.
GLWSM-2528-20	25.0	+0.040 +0.124	28.0	20.0	25.124	25.040	28.021	28.000	25.000	24.948
GLWSM-2528-30	25.0	+0.040 +0.124	28.0	30.0	25.124	25.040	28.021	28.000	25.000	24.948
GLWSM-2530-30	25.0	+0.040 +0.124	30.0	30.0	25.124	25.040	30.021	30.000	25.000	24.948
GLWSM-3032-10	30.0	+0.040 +0.124	32.0	10.0	30.124	30.040	32.025	32.000	30.000	29.948
GLWSM-3034-15	30.0	+0.040 +0.124	34.0	15.0	30.124	30.040	34.025	34.000	30.000	29.948
GLWSM-3236-20	32.0	+0.050 +0.150	36.0	20.0	32.150	32.050	36.025	36.000	32.000	31.938
GLWSM-3236-40	32.0	+0.050 +0.150	36.0	40.0	32.150	32.050	36.025	36.000	32.000	31.938
GLWSM-3539-25	35.0	+0.050 +0.150	39.0	25.0	35.150	35.050	39.025	39.000	35.000	34.938
GLWSM-5055-40	50.0	+0.050 +0.150	55.0	40.0	50.150	50.050	55.030	55.000	50.000	49.938
GLWSM-5055-50	50.0	+0.050 +0.150	55.0	50.0	50.150	50.050	55.030	55.000	50.000	49.938



For tolerance values please refer to page 5.4


$r = \text{max. } 0.5$

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 <sup>1)</sup>	d1-Tolerance after Pressfit in Ø H7	d2	d3	b1	b2	I.D. After Pressfit	Housing Bore	Shaft Size
			d13	h13	-0.14	Max.	Min.	Max.	Min.
GLWFM-0405-04	4.0	+0.020 +0.068	5.0	9.0	4.0	0.8	4.068	4.020	5.012 5.000
GLWFM-0607-06	6.0	+0.020 +0.068	7.0	11.0	6.0	0.5	6.068	6.020	7.015 7.000
GLWFM-0608-04	6.0	+0.020 +0.068	8.0	12.0	4.0	1.0	6.068	6.020	8.015 8.000
GLWFM-0810-09	8.0	+0.025 +0.083	10.0	15.0	9.0	1.0	8.083	8.025	10.015 10.000
GLWFM-1011-10	10.0	+0.025 +0.083	11.0	15.0	10.0	0.5	10.083	10.025	11.018 11.000
GLWFM-1012-17	10.0	+0.025 +0.083	12.0	18.0	17.0	1.0	10.083	10.025	12.018 12.000
GLWFM-1214-07	12.0	+0.032 +0.102	14.0	20.0	7.0	1.0	12.102	12.032	14.018 14.000
GLWFM-1214-10	12.0	+0.032 +0.102	14.0	20.0	10.0	1.0	12.102	12.032	14.018 14.000
GLWFM-1214-17	12.0	+0.032 +0.102	14.0	20.0	17.0	1.0	12.102	12.032	14.018 14.000
GLWFM-1214-20	12.0	+0.032 +0.102	14.0	20.0	20.0	1.0	12.102	12.032	14.018 14.000
GLWFM-1315-06	13.0	+0.032 +0.102	15.0	22.0	6.0	1.0	13.102	13.032	15.018 15.000
GLWFM-1416-04	14.0	+0.032 +0.102	16.0	22.0	4.0	1.0	14.102	14.032	16.018 16.000
GLWFM-1416-05	14.0	+0.032 +0.102	16.0	22.0	5.0	1.0	14.102	14.032	16.018 16.000
GLWFM-1416-12	14.0	+0.032 +0.102	16.0	22.0	12.0	1.0	14.102	14.032	16.018 16.000
GLWFM-1618-04	16.0	+0.032 +0.102	18.0	24.0	4.0	1.0	16.102	16.032	18.018 18.000
GLWFM-1618-09	16.0	+0.032 +0.102	18.0	24.0	9.0	1.0	16.102	16.032	18.018 18.000
GLWFM-1820-06	18.0	+0.032 +0.102	20.0	26.0	6.0	1.0	18.102	18.032	20.021 20.000
GLWFM-1820-17	18.0	+0.032 +0.102	20.0	26.0	17.0	1.0	18.102	18.032	20.021 20.000
GLWFM-202328-15	20.0	+0.040 +0.124	23.0	28.0	15.0	1.5	20.124	20.040	23.021 23.000
GLWFM-2730-20	27.0	+0.040 +0.124	30.0	35.0	20.0	1.5	27.124	27.040	30.021 30.000
GLWFM-3034-16	30.0	+0.040 +0.124	34.0	42.0	16.0	2.0	30.124	30.040	34.025 34.000
GLWFM-3539-16	35.0	+0.050 +0.150	39.0	47.0	16.0	2.0	35.150	35.050	39.025 39.000
									35.000 34.938

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



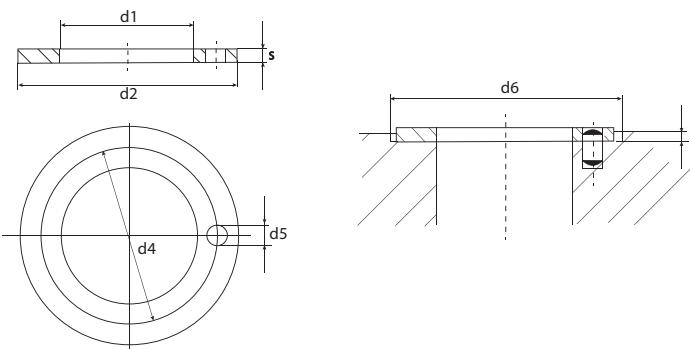

Dimensions according to ISO 3547-1 and special dimensions

Part Number	d1 +0.25	d2 -0.25	s -0.05	d4 -0.12 +0.12	d5 +0.375 +0.125	h +0.2 -0.2	d6 +0.12
GLWTM-0408-005	4.0	8.0	0.5	*	*	*	*
GLWTM-0411-005	4.0	11.0	0.5	*	*	*	*
GLWTM-0620-015	6.0	20.0	1.5	13.0	1.5	1.0	20.0
GLWTM-0713-005	7.0	13.0	0.5	*	*	0.2	13.0
GLWTM-0815-005	8.0	15.0	0.5	*	*	0.2	15.0
GLWTM-0818-010	8.0	18.0	1.0	*	*	0.7	18.0
GLWTM-0818-015	8.0	18.0	1.5	13.0	1.5	1.0	18.0
GLWTM-1018-010	10.0	18.0	1.0	*	*	0.7	18.0
GLWTM-1230-015	12.0	30.0	1.5	*	*	*	*
GLWTM-1426-015	14.0	26.0	1.5	20.0	2.0	1.0	26.0
GLWTM-1630-015	16.0	30.0	1.5	22.0	2.0	1.0	30.0
GLWTM-2036-015	20.0	36.0	1.5	28.0	3.0	1.0	36.0
GLWTM-2442-015	24.0	42.0	1.5	33.0	3.0	1.0	42.0
GLWTM-3254-015	32.0	54.0	1.5	43.0	4.0	1.0	54.0

\* Designed without bore

**igus®**



**iglide® K  
General Purpose**




### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**K S M - 03 04 - 03**

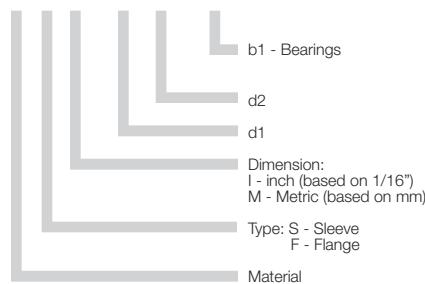

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	197	393
Oscillating	137	275
Linear	591	787

### Usage Guidelines



- When you need a cost effective general purpose bearing
- For use in wet environments
- When good wear resistance at medium loads is required



- When highest wear resistance is necessary
  - iglide® L280
- If high media-resistance is required
  - iglide® X6
- When a high-temperature bearing is needed
  - iglide® H

### Material Data

General Properties	Unit	iglide® K	Testing Method
Density	g/cm³	1.52	
Color		yellow beige	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.6	
Coefficient of friction, dynamic against steel	$\mu$	0.06 - 0.20	
p x v value, max. (dry)	psi x fpm	8,600	

### Mechanical Properties


Modulus of elasticity	psi	507,600	DIN 53457
Tensile strength 68°F	psi	11,600	DIN 53452
Compressive strength	psi	8,702	
Permissible static surface pressure (68°F)	psi	8,702	
Shore D-hardness		72	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	338	
Max. short-term application temperature	°F	464	
Min. application temperature	°F	-40	
Thermal conductivity	[W/m x K]	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	3	DIN 53752

### Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{12}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{12}$	DIN 53482

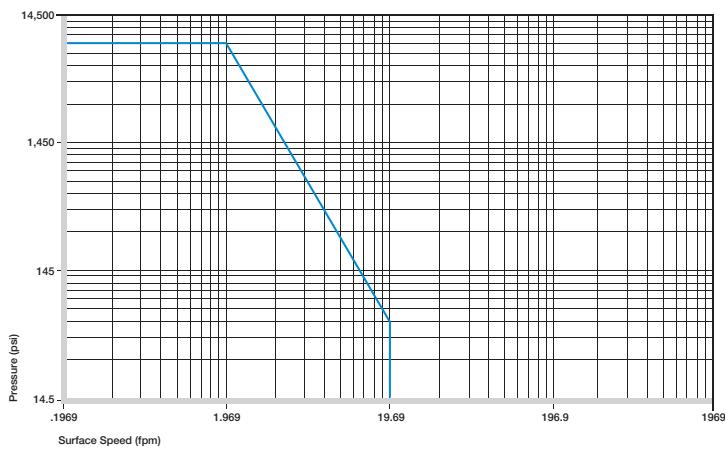

Permissible p x v values for iglide® K running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® K is a wear-resistant universal material. iglide® K is the new general purpose bearing for medium temperatures, low moisture absorption and good environmental resistance.

## Compressive Strength

The graph shows the elastic deformation of iglide® K during radial loading. At the recommended maximum surface pressure of 8,702 psi the deformation is less than 5%. Plastic deformation can occur, this depends on the applied pressure.

- Compressive Strength, Page 1.3



## Permissible Surface Speeds

iglide® K has been developed for low to medium surface speeds. The maximum values shown in the table can only be achieved at low pressure. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice though, this temperature level is rarely reached, due to varying application conditions.


- Surface Speed, Page 1.5
- p x v value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	197	393
Oscillating	137	275
Linear	591	787

## Temperatures

iglide® K plain bearings can be used at temperatures from -40°F up to 338°F. The short-term maximum temperature is 464°F. The ambient temperatures of the application also have an effect on the bearing wear. With increasing temperatures, the wear increases and this effect is significant when temperatures rise over 212°F.

- Application Temperatures, Page 1.7

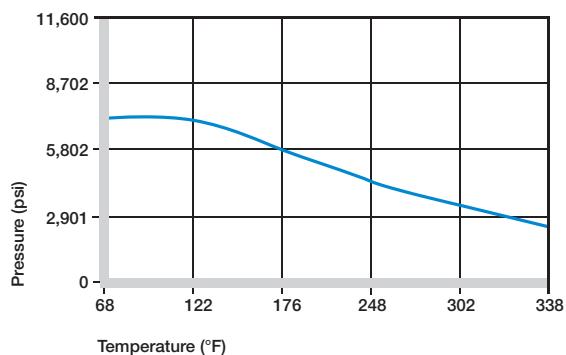

Recommended maximum permissible static surface pressure of iglide® K as a result of the temperature

iglide® K	Application Temperature
Minimum	-40°F
Max. long-term	+338°F
Max. short-term	+464°F
Additional axial securing	+158°F

## Temperature iglide® K


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



## Installation Tolerances

iglide® K plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

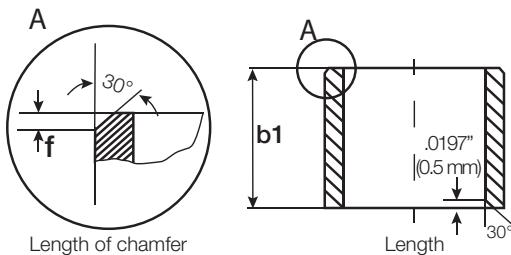


For Inch Size Bearings		
Length Tolerance (b1)	Tolerance (h13)	Length of Chamfer (f) Based on d1
Length (inches)	(inches)	
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

For Metric Size Bearings		
Length Tolerance (b1)	Tolerance (h13)	Length of Chamfer (f) Based on d1
Length (mm)	(μm)	
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. The coefficient of friction decreases with increasing loads, whereas an increase in surface speed causes an increase of the coefficient of friction. The friction and wear are also dependent, to a large degree, on the shaft material. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglide® K a ground surface with an average roughness of 6-8 rms is recommended.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

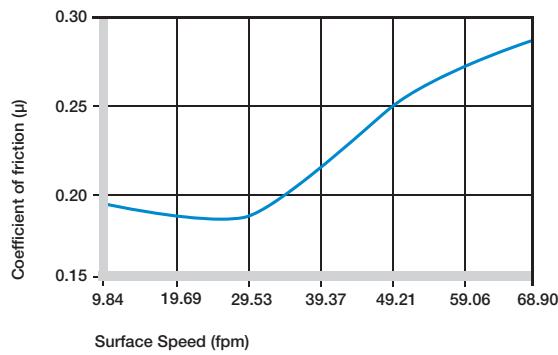


Coefficients of friction of iglide® K as a function of the running speed; p = 108 psi

iglide® K	Coefficient of Friction
Dry	0.06 - 0.21
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® K against steel (Shaft finish = 40 rms, 50 HRC)

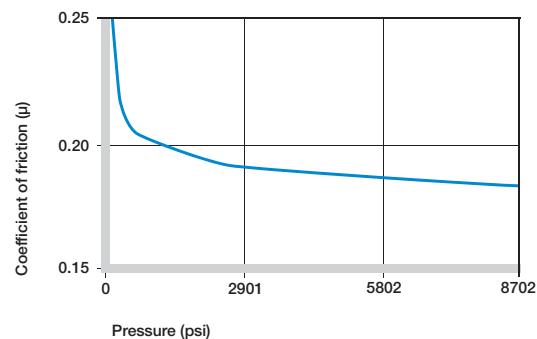

Coefficients of friction of iglide® K as a function of the load, v = 1.96 fpm

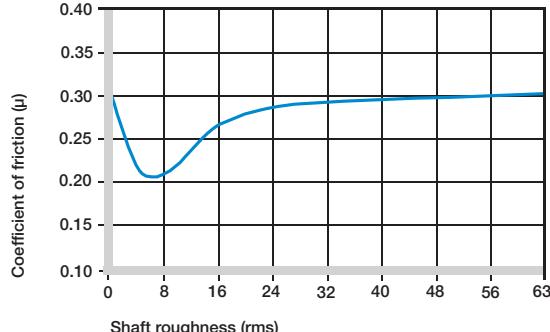


Coefficients of friction of iglide® K as a function of the shaft surface (1050 hard chromed)


## Shaft Materials

The graphs show the results of testing different shaft materials with plain bearings made of iglide® K. The graph below shows that iglide® K can be combined with a large number of different shaft materials. Only hard-chromed shafts are unsuitable. It is important to notice that with increasing loads, the recommended hardness of the shaft increases. Soft shafts tend to wear more easily and thus increase the wear of the overall system, if the loads exceed 290 psi. The comparison of rotational movements to oscillating movements shows that the wear is almost identical at a pressure up to 725 psi. The higher the loads the greater the difference.


► Shaft Materials, Page 1.11

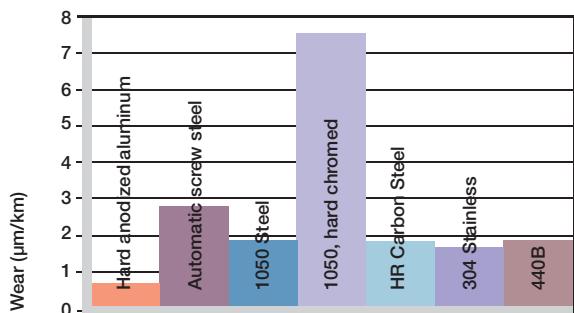

Wear of iglide® K, rotating applications with different shaft materials,  $p = 145$  psi,  $v = 59$  fpm

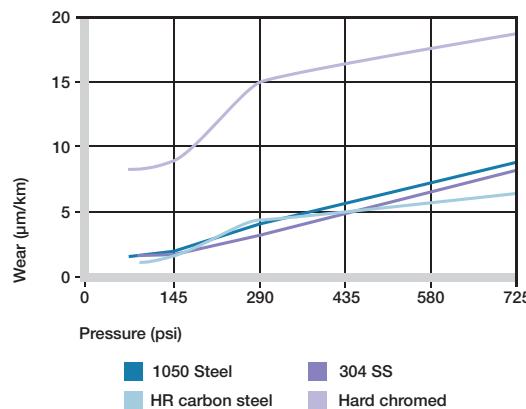

Wear of iglide® K with different shaft materials in rotational applications

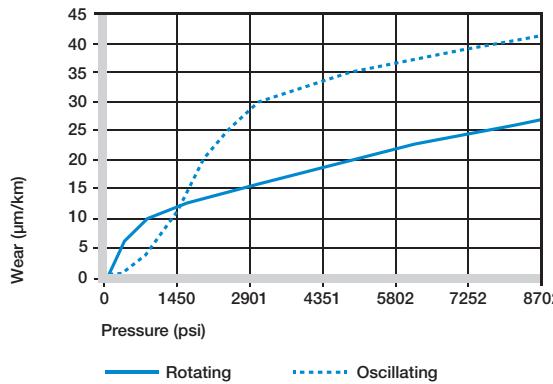

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

## Chemical Resistance


iglide® K plain bearings are resistant to diluted alkalis and very weak acids, as well as fuels and a wide variety of lubricants. The low moisture absorption also permits use in wet or damp environments.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	0
+ resistant, 0 conditionally resistant, - not resistant	


### Chemical resistance of iglide® K

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

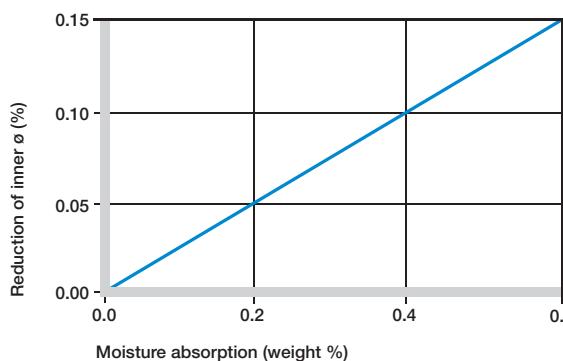

Effect of moisture absorption on iglide® K plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0

inch

mm

## Radiation Resistance

Plain bearings made from iglide® K are radiation resistant up to an intensity of  $5 \times 10^2$  Gy.

---

## UV-Resistance

iglide® K plain bearings become discolored under UV radiation. However, hardness, compressive strength and the wear resistance of the material do not change.

---

## Vacuum

When used in a vacuum environment, the iglide® K plain bearings release moisture as vapor. Therefore, only dehumidified bearings are suitable in a vacuum environment.

---

## Electrical Properties


iglide® K plain bearings are electrically insulating.

**iglide® K**

Specific volume resistance	> $10^{12}$ $\Omega$ cm
Surface resistance	> $10^{12}$ $\Omega$

**Electrical properties of iglide® K**


igus®

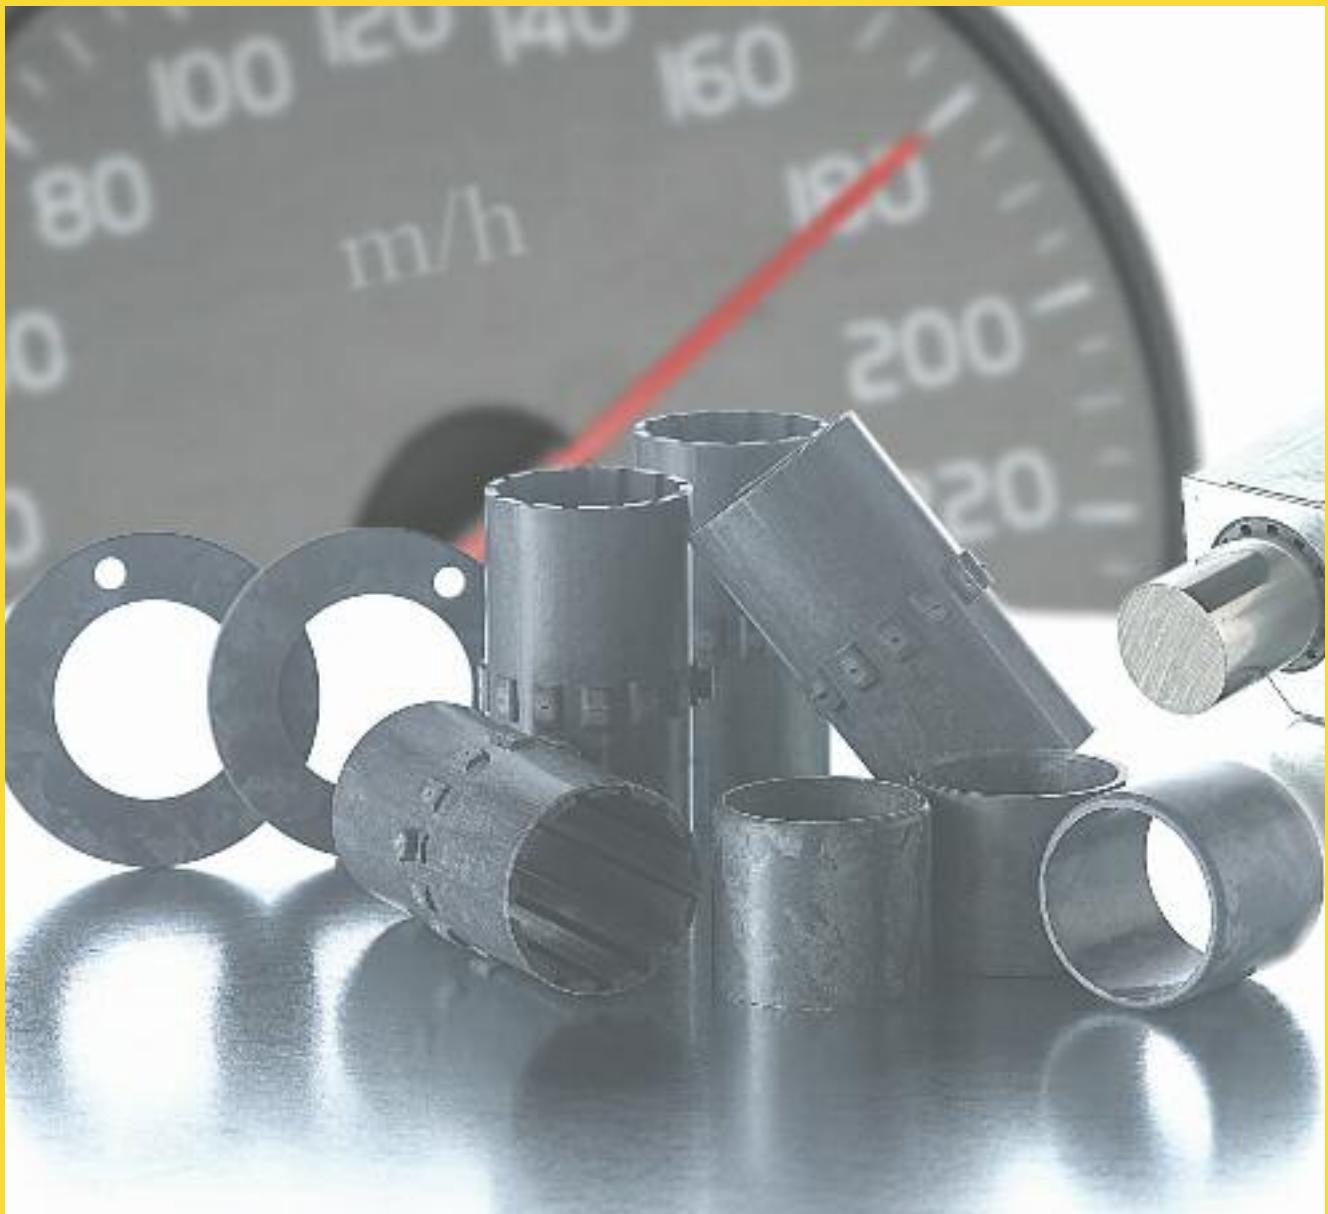

# iglide® J200 Long Distance

**Product Range**

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

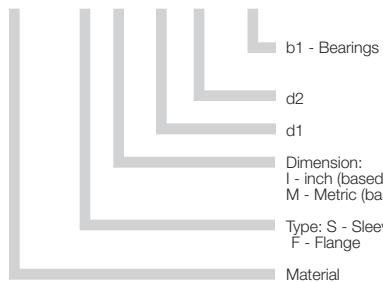**Part Number Structure****Part Number Structure**J200 S M - 03 04 - 03**Permissible Surface Speeds**

	Continuous fpm	Short Term fpm
Rotating	197	295
Oscillating	137	216
Linear	1969	2953

**Usage Guidelines**

- For applications with hard anodized aluminum shafts
- When lowest coefficients of friction are required
- If long service life is required
- If a maintenance-free bearing is needed
- For low wear
- For low to medium loads



- When steel shafts are present
  - iglide® J
  - iglide® L280
- When temperatures are continually higher than 194°F
  - iglide® V400
- When a cost-effective universal bearing is required
  - iglide® G300
  - iglide® P



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

**Material Data**

General Properties	Unit	iglide® J200	Testing Method
Density	g/cm³	1.72	
Color		dark gray	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	0.7	
Coefficient of friction, dynamic against steel	$\mu$	0.11 - 0.17	
p x v value, max. (dry)	psi x fpm	8,600	

**Mechanical Properties**


Modulus of elasticity	psi	406,100	DIN 53457
Tensile strength 68°F	psi	8,412	DIN 53452
Compressive strength	psi	6,237	
Permissible static surface pressure (68°F)	psi	3,336	
Shore D-hardness		70	DIN 53505

**Physical and Thermal Properties**

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	248	
Min. application temperature	°F	-58	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K <sup>-1</sup> x 10 <sup>-5</sup> ]	8	DIN 53752

**Electrical Properties**

Specific volume resistance	$\Omega\text{cm}$	$> 10^8$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^8$	DIN 53482

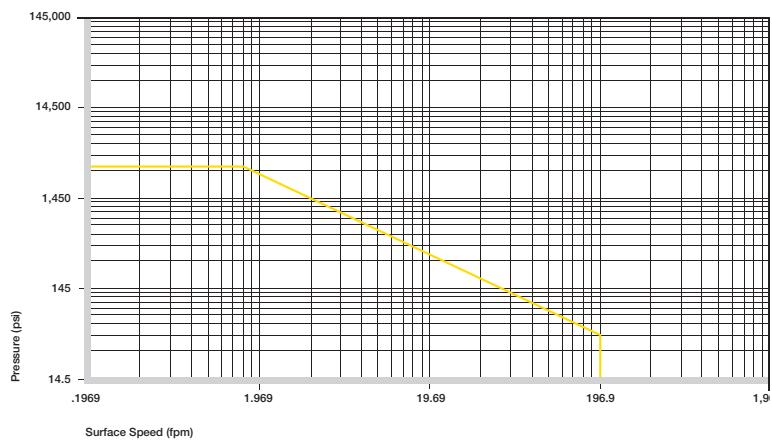


Permissible p x v values for iglide® J200 running dry against a steel shaft, at 68°F

iglide® J200 is a specialist for low friction values and minimal wear with hard anodized aluminum.

## Compressive Strength

The comparison to the other iglide® materials reveals that iglide® J200 plain bearings are more suitable for lower loads. The graph shows the deformation of the material at room temperature to the recommended maximum limit. As with all thermoplastics, the compressive strength decreases with increasing temperature.

- Compressive Strength, Page 1.3

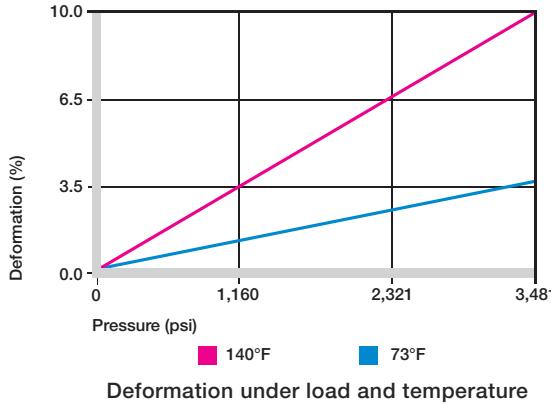

## Permissible Surface Speeds

Due to the very good coefficients of friction, iglide® J200 can be used at high surface speeds. Continuous rotational speeds of 197 fpm are possible. The permissible speeds are even higher in linear movements or in short term operation. For linear movements, speeds of over 2,953 fpm have been successfully tested.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

Continuous      Short Term


	Continuous fpm	Short Term fpm
Rotating	197	295
Oscillating	137	216
Linear	1969	2953

Maximum surface speeds

## Temperatures

Plain bearings made of iglide® J200 were not developed for high temperatures. The maximum permissible temperature of 248°F may not be exceeded. Also, the heat produced by friction has to be added to the ambient temperature. Even from 140°F, the bearings should be secured mechanically, preventing the bearing from moving out of the housing. Also, the wear resistance decreases significantly from 158°F.

- Application Temperatures, Page 1.7

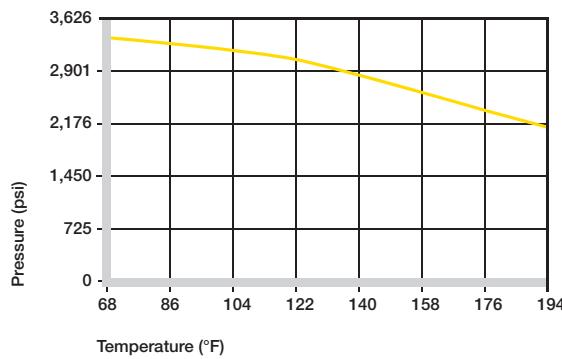

Recommended maximum permissible static surface pressure of iglide® J200 as a result of the temperature

iglide® J200	Application Temperature
Minimum	-58°F
Max. long-term	+194°F
Max. short-term	+248°F
Additional axial securing	+140°F

Temperature iglide® J200

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10


inch

mm

## Installation Tolerances

iglide® J200 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

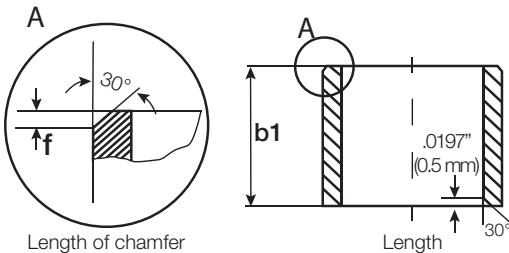

For Inch Size Bearings		
Length Tolerance (b1) (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


For Metric Size Bearings		
Length Tolerance (b1) (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Friction is the principle reason for the use of iglide® J200 plain bearings. The friction of these bearings is more favorable in combination with many shaft materials than that of an other iglide® bearings.

With regard to wear resistance, however, the effect of the shaft is very great. Even at low loads, it's worthwhile to take a look at the extensive results of the tests carried out. The graphs clarify this statement. Up to the maximum pressure of 3,336 psi, the wear resistance of the plain bearings is extremely good, and the bearings are best suited to rotating movements.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

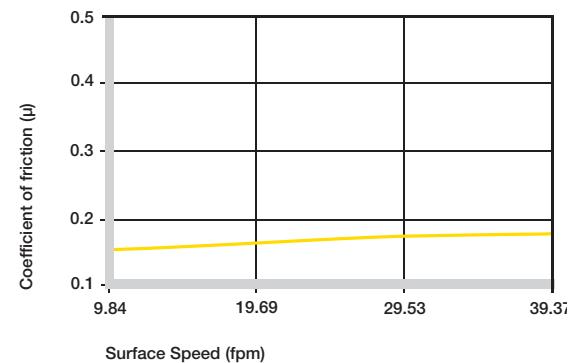


Coefficients of friction of iglide® J200 as a function of the running speed; p = 108 psi

iglide® J200	Coefficient of Friction
Dry	0.11 - 0.17
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® J200 against steel (Shaft finish = 40 rms, 50 HRC)

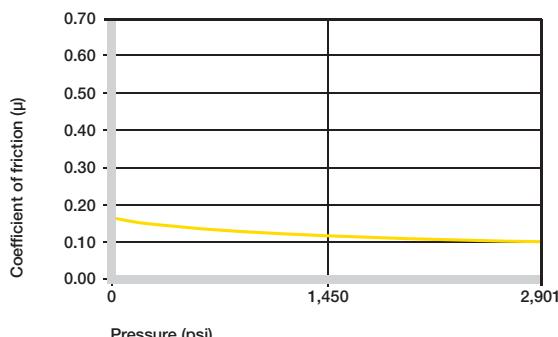

Coefficients of friction of iglide® J200 as a function of the load, v = 1.96 fpm

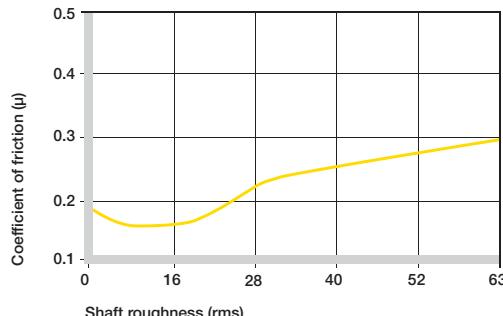


Coefficients of friction of iglide® J200 as a function of the shaft surface (1050 hard chromed)


### Shaft Materials

The shaft material used has a great impact on the wear resistance. In fact, all shaft materials (smooth or hardened) are suitable for use with iglide® J200. However, the best results are achieved with hard anodized aluminum. In particular when used in linear motion, this running surface has proven its value.


► Shaft Materials, Page 1.11

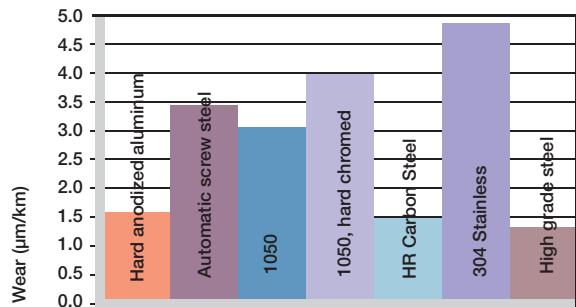

Wear of iglide® J200, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

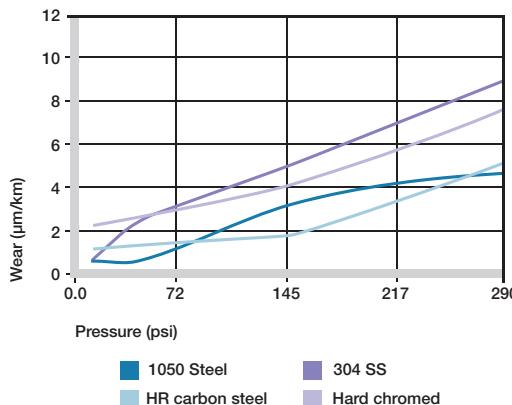

Wear of iglide® J200 with different shaft materials in rotational applications

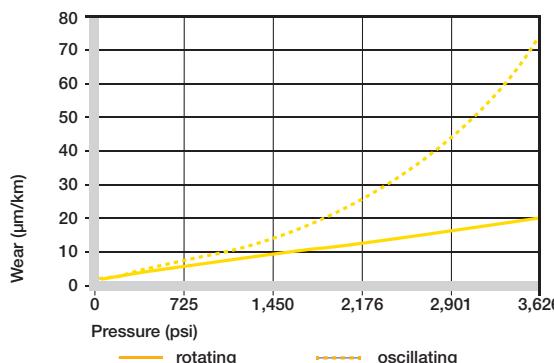

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

### Chemical Resistance


iglide® J200 plain bearings are resistant to diluted alkaline, as well as to solvents and all types of lubricants. The moisture absorption of iglide® J200 plain bearings in standard atmosphere is approximately 0.2%. The saturation limit in water is 0.7%. Due to these low values considering expansion by moisture absorption is only required in extreme cases.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0
+ resistant, 0 conditionally resistant, – not resistant	

#### Chemical resistance of iglide® J200

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

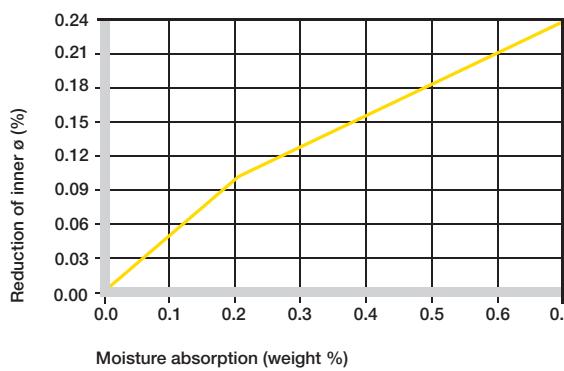

Effect of moisture absorption on iglide® J200 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch  
mm

10

mm

19.5

## Radiation Resistance

Plain bearings made from iglide® J200 are radiation resistant up to an intensity of  $3 \times 10^2$  Gy.

## UV-Resistance

iglide® J200 plain bearings are very resistant to the impact of UV radiation.

## Vacuum

Used in a vacuum is only possible to a limited extent. Also, only dehumidified bearings made from iglide® J200 should be tested in vacuum.

## Electrical Properties

iglide® J200 plain bearings are electrically insulating.

### iglide® J200

Specific volume resistance	> $10^8$ $\Omega$ cm
Surface resistance	> $10^8$ $\Omega$

### Electrical properties of iglide® J200

## Availability

iglide® J200 plain bearings are manufactured to special order.


iglide® J200

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0 + 1.0 inch

mm

mm



## iglide® Plain Bearings J200 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>


igus®



iglide® J260  
Long Distance

**Product Range**

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

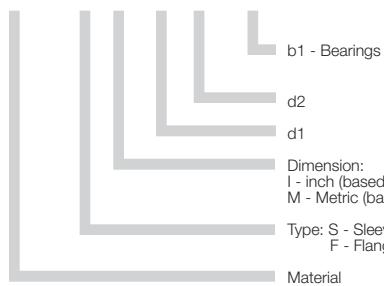**Part Number Structure****Part Number Structure****J260 S M - 03 04 - 03****Permissible Surface Speeds**

	Continuous fpm	Short Term fpm
Rotating	197	393
Oscillating	137	275
Linear	591	787

**Usage Guidelines**

- When plastic shafts are used
- When the temperature rating of iglide® J is not sufficient
- If bearings with low friction are required
- If good wear resistance is required at medium loads
- If good liquid media resistance is required



- When high pressures occur
  - iglide® Z
- When short term temperatures are greater than 248°F
  - iglide® J350
- When a low cost bearing for occasional movements is necessary
  - iglide® J

**Material Data**

General Properties	Unit	iglide® J260	Testing Method
Density	g/cm³	1.35	
Color		yellow	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	0.4	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.20	
p x v value, max. (dry)	psi x fpm	10,000	

**Mechanical Properties**


Modulus of elasticity	psi	319,100	DIN 53457
Tensile strength 68°F	psi	8,702	DIN 53452
Compressive strength	psi	7,252	
Permissible static surface pressure (68°F)	psi	5,802	
Shore D-hardness		77	DIN 53505

**Physical and Thermal Properties**

Max. long-term application temperature	°F	248	
Max. short-term application temperature	°F	284	
Min. application temperature	°F	-148	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	13	DIN 53752

**Electrical Properties**

Specific volume resistance	Ωcm	> 10¹²	DIN IEC 93
Surface resistance	Ω	> 10¹⁰	DIN 53482

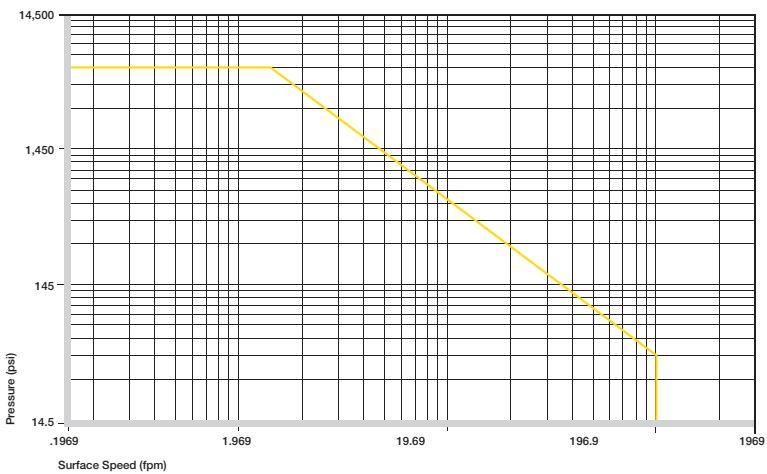

Permissible p x v values for iglide® J260 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® J260 is a perfect material for long service life and best coefficient of friction with special operating conditions such as contact with plastic shafts.

## Compressive Strength

The graph shows the elastic deformation of iglide® J260 during radial loading. At the recommended maximum surface pressure of 5,802 psi the deformation is less than 2.5%. The plastic deformation is minimal up to a pressure of approximately 14,500 psi. However, it is also dependent on the cycle time.

- Compressive Strength, Page 1.3

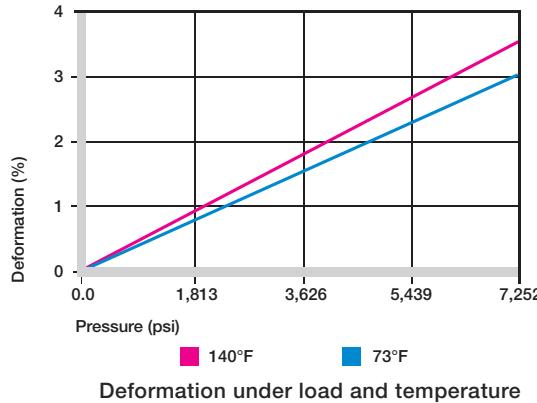

## Permissible Surface Speeds

iglide® J260 has been developed for low to medium surface speeds. The maximum values shown in the table can only be achieved at low pressure. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice though, this temperature level is rarely reached, due to varying application conditions.

- Surface Speed, Page 1.5
- p x v value, Page 1.6


	Continuous fpm	Short Term fpm
Rotating	197	393
Oscillating	137	275
Linear	591	787

Maximum surface speeds

## Temperatures

iglide® J260 plain bearings can be used at temperatures from -148°F up to 248°F. The short-term maximum temperature is 284°F. The temperature in an application also has an effect on the bearing wear. With increasing temperatures, the wear increases and this effect is significant when temperatures rise over 176°F.

- Application Temperatures, Page 1.7

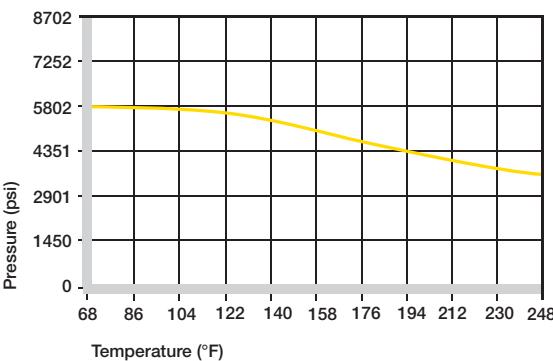

Recommended maximum permissible static surface pressure of iglide® J260 as a result of the temperature

iglide® J260	Application Temperature
Minimum	-148°F
Max. long-term	+248°F
Max. short-term	+284°F
Additional axial securing	+176°F

Temperature iglide® J260

iglide® J260

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10


inch

mm

## Installation Tolerances

iglide® J260 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

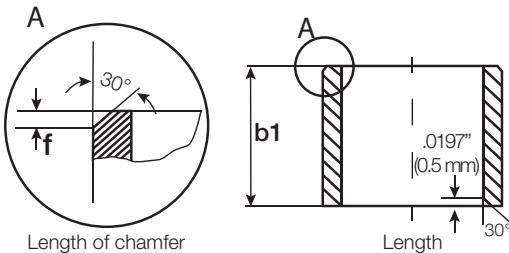

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. The coefficient of friction decreases with increasing loads, whereas an increase in surface speed causes an increase of the coefficient of friction. The friction and wear are also dependant, to a large degree, on the shaft material. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglide® J260 a ground surface with an average roughness of 32 rms is recommended.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

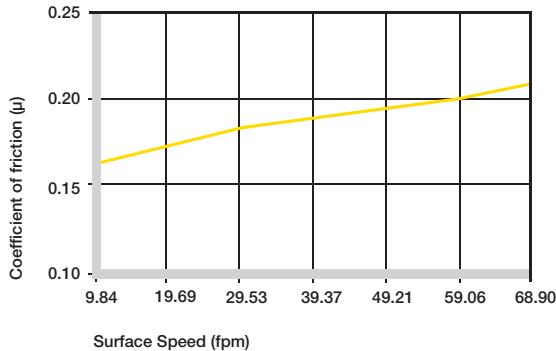


Coefficients of friction of iglide® J260 as a function of the running speed; p = 108 psi


### iglide® J260      Coefficient of Friction

Dry	0.06 - 0.20
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® J260 against steel (Shaft finish = 40 rms, 50 HRC)

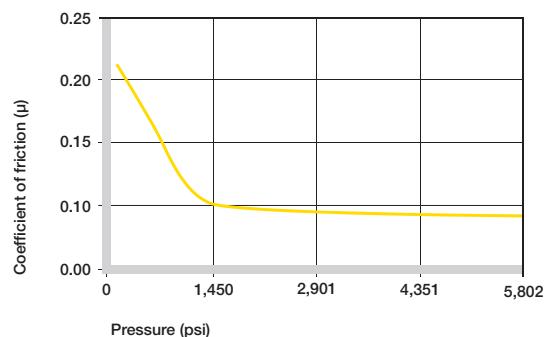

Coefficients of friction of iglide® J260 as a function of the load, v = 1.96 fpm

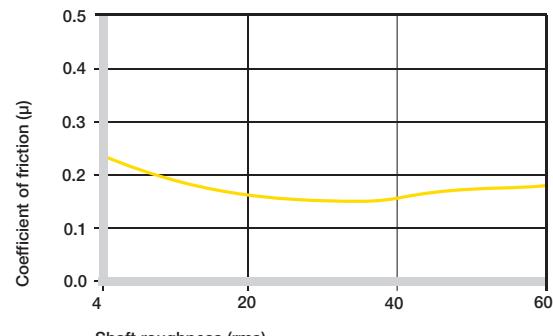


Coefficients of friction of iglide® J260 as a function of the shaft surface (1050 hard chromed)


## Shaft Materials

The graphs show the results of testing different shaft materials with plain bearings made of iglide® J260. The graph below shows that iglide® J260 can be combined with various shaft materials. The hard anodized aluminum shafts perform the best at low loads, but iglide® J260 bearings show good service life even on simple 1050 stainless steel and hard chromed shafts. In this connection it is important to note that with increasing loads the recommended hardness of the shaft increases. The soft shafts tend to wear more easily and therefore increase the wear of the overall system, if the loads exceed 290 psi. The graph top right shows that with increasing load the wear on hard-chromed shafts and 304 stainless rises less strongly than on 1050 and HR carbon steel shafts. The comparison of rotation and oscillating in the graph lower right makes it very clear where iglide® J260 bearings are best used, especially in rotary operations.


► Shaft Materials, Page 1.11

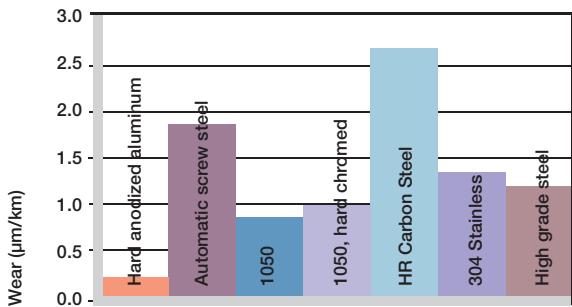

Wear of iglide® J260, rotating applications with different shaft materials,  $p = 145 \text{ psi}$ ,  $v = 59 \text{ fpm}$

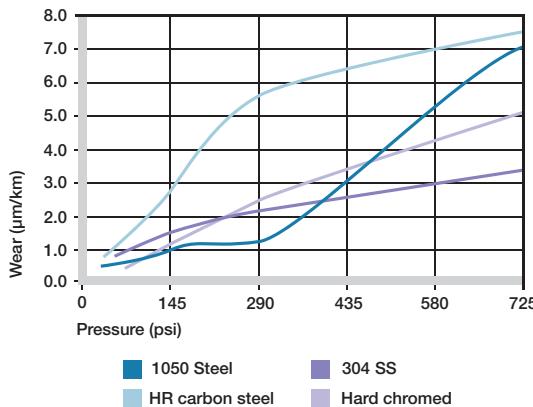

Wear of iglide® J260 with different shaft materials in rotational applications

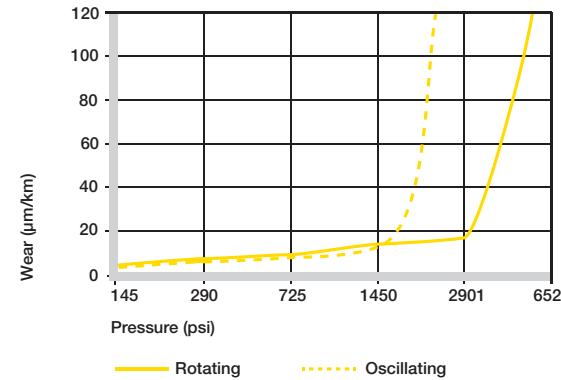

Wear with different shaft materials, oscillating and rotating movement  $p = 290 \text{ psi}$

## Chemical Resistance


iglide® J260 plain bearings are resistant to diluted alkalis, hydrocarbons and alcohols. The very low moisture absorption also permits use in wet or damp environments.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	0 to –
Fuels	–
Weak acids	–
Strong acids	–
Weak alkaline	+ to 0
Strong alkaline	+ to 0
+ resistant, 0 conditionally resistant, – not resistant	

### Chemical resistance of iglide® J260


All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

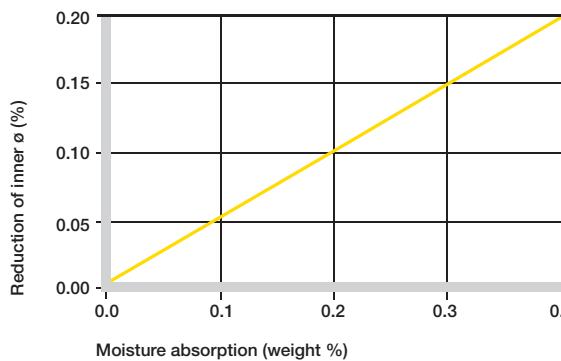


Effect of moisture absorption on iglide® J260 plain bearings

iglide® J260

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10

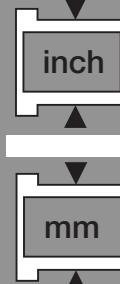

## Radiation Resistance

Plain bearings made from iglide® J260 are radiation resistant up to an intensity of  $3 \times 10^2$  Gy.

## UV-Resistance

iglide® J260 plain bearings are partially resistant to UV radiation.

## Vacuum

In a vacuum, any moisture absorbed in the material would be outgassed. For this reason only dehumidified iglide® J260 are suitable for vacuum use.

## Electrical Properties

iglide® J260 plain bearings are electrically insulating.

### iglide® J260

Specific volume resistance	> $10^{12}$ $\Omega$ cm
Surface resistance	> $10^{10}$ $\Omega$

### Electrical properties of iglide® J260


iglide® J260

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0 + 1.0 inch

mm

mm



## iglide® Plain Bearings J260 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

igus®



iglide® J3  
Long Distance


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**J3 S M - 03 04 - 03**

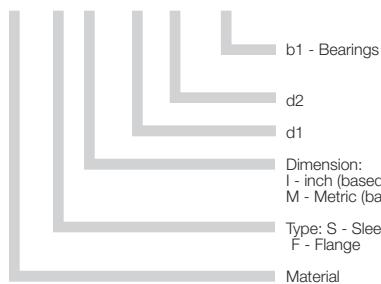

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	591
Oscillating	216	413
Linear	1575	1969

### Usage Guidelines



- If wear resistance (rotating or oscillating) of iglide® J should be optimized
- If a very low coefficient of friction dry running is necessary
- If high wear resistance at low temperatures is required
- If low moisture absorption is requested
- If good liquid media resistance is required



- If you need a wear resistant bearing for linear motion
  - iglide® J
- If permanent temperatures exceed 194°F
  - iglide® J260
- If radial surface pressure is higher than 5,076 psi
  - iglide® L280

### Material Data

General Properties	Unit	iglide® J3	Testing Method
Density	g/cm³	1.42	
Color		yellow	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.3	
Coefficient of friction, dynamic against steel	$\mu$	0.06 - 0.20	
p x v value, max. (dry)	psi x fpm	14,000	

### Mechanical Properties


Modulus of elasticity	psi	391,600	DIN 53457
Tensile strength 68°F	psi	10,150	DIN 53452
Compressive strength	psi	8,702	
Permissible static surface pressure (68°F)	psi	6,527	
Shore D-hardness		73	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	248	
Min. application temperature	°F	-58	
Thermal conductivity	[W/m x K]	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	13	DIN 53752

### Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{12}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{12}$	DIN 53482

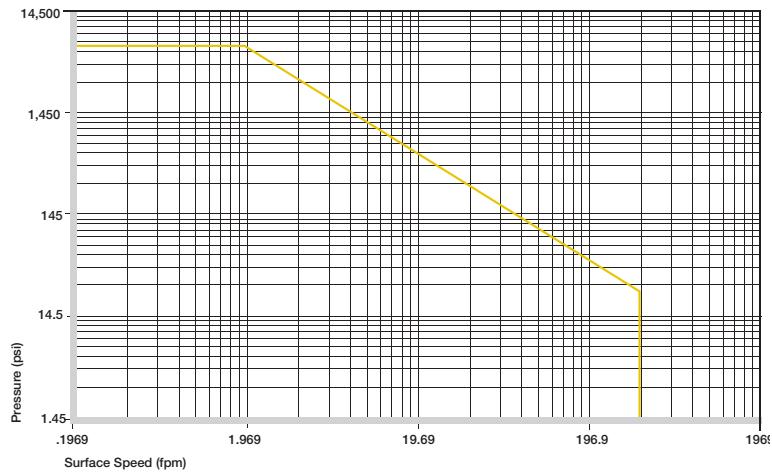

Permissible p x v values for iglide® J3 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® J3 is our new material with increased wear resistance at low to medium loads and high speeds. The service life is up to 300% higher than in iglide® J - the proven top endurance runner material.

## Compressive Strength

The graph shows the elastic deformation of iglide® J3 with radial loads. Under the maximum recommended surface pressure of 5,802 psi, the deformation is less than 6%. The plastic deformation is minimal up to a pressure of approximately 14,500 psi. The possible plastic deformation depends on the applied pressure, as well as other external factors.

- Compressive Strength, Page 1.3

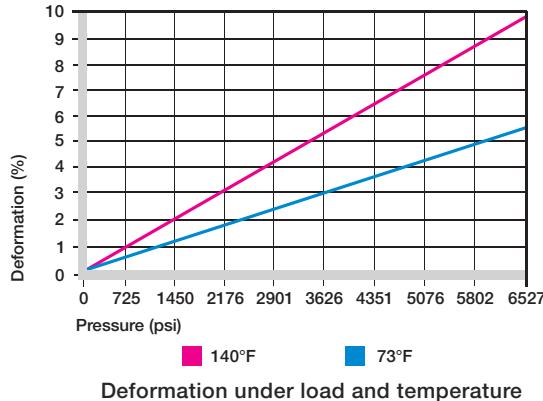

## Permissible Surface Speeds

iglide® J3 has been developed for medium to high surface speeds. The maximum values shown in the table can only be achieved at low pressure. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice though, this temperature level is rarely reached, due to varying application conditions.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

iglide® J3 plain bearings can be used at temperatures from -58°F up to 194°F. The short-term maximum temperature is 248°F. The temperature in an application also has an effect on the bearing wear. With increasing temperatures, the wear increases and this effect is significant when temperatures rise over 194°F.


- Application Temperatures, Page 1.7

iglide® J3	Application Temperature
Minimum	-58°F
Max. long-term	+194°F
Max. short-term	+248°F
Additional axial securing	+140°F

Temperature iglide® J3

	Continuous fpm	Short Term fpm
Rotating	295	591
Oscillating	216	413
Linear	1575	1969

### Maximum surface speeds

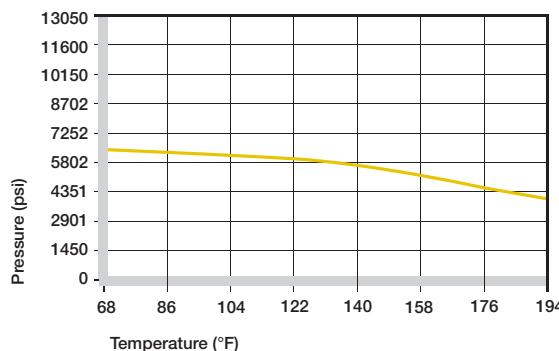

Recommended maximum permissible static surface pressure of iglide® J3 as a result of the temperature

iglide® J3

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




1



## Installation Tolerances

iglide® J3 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

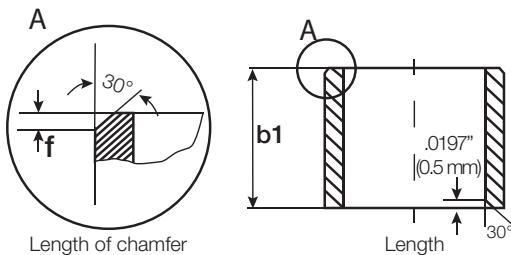

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. The coefficient of friction decreases with increasing loads, as it shows a clear minimum at surface speeds up to 29 fpm. The friction and wear are also dependant, to a large degree, on the shaft material. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. For iglide® J3 a ground surface with an average roughness 4 to 12 rms is recommended.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

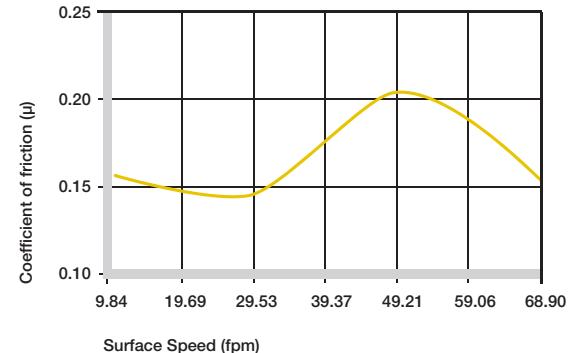


Coefficients of friction of iglide® J3 as a function of the running speed; p = 108 psi


### iglide® J3      Coefficient of Friction

Dry	0.06 - 0.20
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® J3 against steel (Shaft finish = 40 rms, 50 HRC)

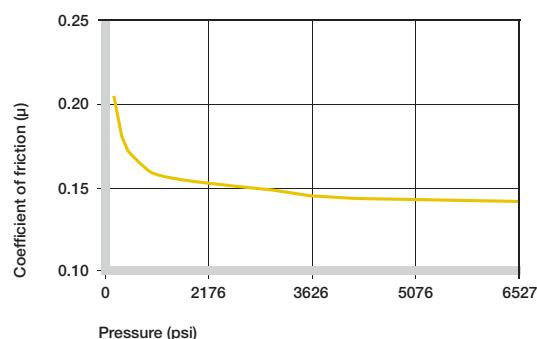

Coefficients of friction of iglide® J3 as a function of the load, v = 1.96 fpm

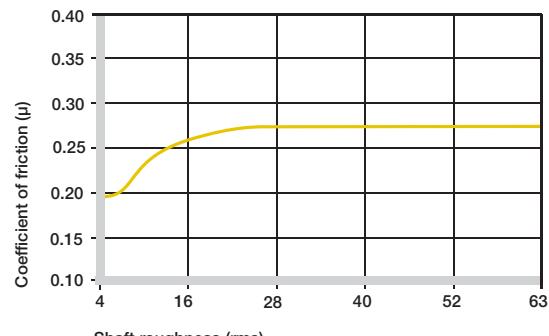


Coefficients of friction of iglide® J3 as a function of the shaft surface (1050 hard chromed)


### Shaft Materials

The graphs show the results of testing different shaft materials with plain bearings made of iglide® J3. The graph below shows that iglide® J3 can be combined with various shaft materials. At low pressures, hard anodized aluminum shafts, 440B Steel and 1050 steel shafts proved to be the best. But even in combination with other shaft materials, except for free cutting steel, iglide® J3 bearings achieve excellent wear values. The graph to the right shows that the difference between shaft materials increase with increasing loads. Hard chromed or 304 stainless shafts are best at pressures from 290 psi in rotation movement. The graph below right shows rotating and oscillating tests in comparison. With higher load, the wear increases more for rotating than for oscillating movements.


► Shaft Materials, Page 1.11

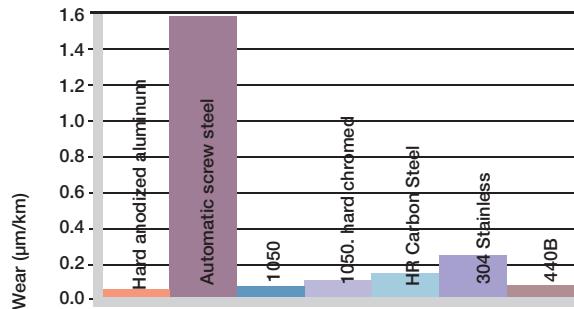

Wear of iglide® J3, rotating applications with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

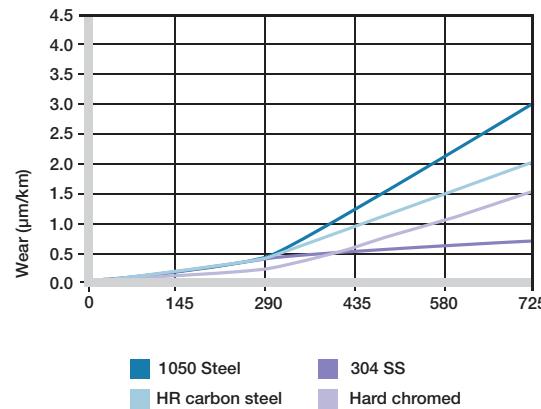

Wear of iglide® J3 with different shaft materials in rotational applications

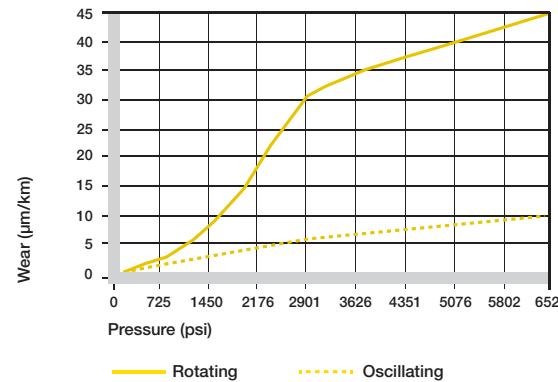

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

### Chemical Resistance

iglide® J3 bearings are resistant to diluted alkalis and very weak acids as well as fuels and all kinds of lubricants. The low humidity absorption allows them to be used in wet or humid environments. iglide® J3 bearings are also resistant to conventional detergents used in the food industry.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, – not resistant

### Chemical resistance of iglide® J3


All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

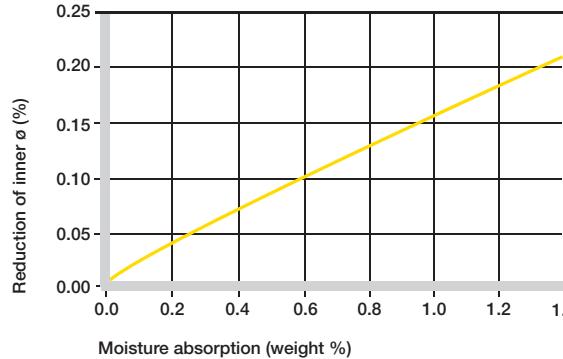


Effect of moisture absorption on iglide® J3 plain bearings

iglide® J3

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10  
0

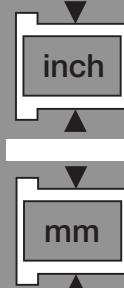

## Radiation Resistance

Plain bearings made from iglide® J3 are radiation resistant up to an intensity of  $1 \times 10^4$  Gy.

## UV-Resistance

iglide® J3 plain bearings become discolored under UV radiation. However, hardness, compressive strength and the wear resistance of the material do not change.

## Vacuum

In vacuum applications, any absorbed moisture content is outgassed. For this reason only dehumidified iglide® J3 bearings are suitable for use in a vacuum.

## Electrical Properties

iglide® J3 plain bearings are electrically insulating.


### iglide® J3

Specific volume resistance	> $10^{12}$ $\Omega$ cm
Surface resistance	> $10^{12}$ $\Omega$

### Electrical properties of iglide® J3

iglide® J3

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

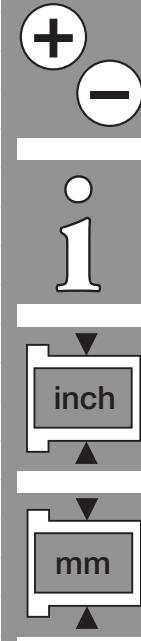

J3



## iglide® Plain Bearings J3 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® J3

igus®



iglide® J350  
Long Distance

# iglide® Plain Bearings J350 - Technical Data


## Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

## Part Number Structure

### Part Number Structure

**J350 S M - 03 04 - 03**

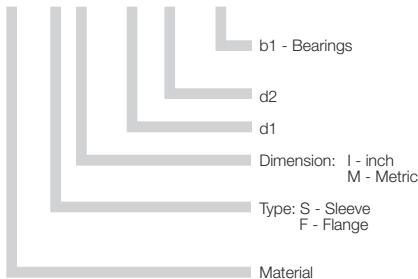

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	256	591
Oscillating	197	453
Linear	787	1575

## Usage Guidelines



- If a high wear resistant bearing for rotating movement at medium and high loads is required
- If an economic bearing is required for use at high temperatures
- If pressfit up to 302°F is necessary
- If high wear resistance is required at high loads
- If the bearing is exposed to shock loading
- Excellent coefficient of friction against steel



- If low friction is required
  - iglide® J
- If permanent temperatures exceed 356°F
  - iglide® T500
- When a cost effective bearing with a low friction is needed
  - iglide® D
  - iglide® R
- With high rotational speeds
  - iglide® J



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

## Material Data

General Properties	Unit	iglide® J350	Testing Method
Density	g/cm³	1.44	
Color		yellow	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.6	
Coefficient of friction, dynamic against steel	$\mu$	0.10 - 0.20	
p x v value, max. (dry)	psi x fpm	13,000	

## Mechanical Properties


Modulus of elasticity	psi	290,100	DIN 53457
Tensile strength 68°F	psi	7,977	DIN 53452
Compressive strength	psi	8,702	
Permissible static surface pressure (68°F)	psi	8,702	
Shore D-hardness		80	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	356	
Max. short-term application temperature	°F	428	
Min. application temperature	°F	-148	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	7	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{13}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{10}$	DIN 53482

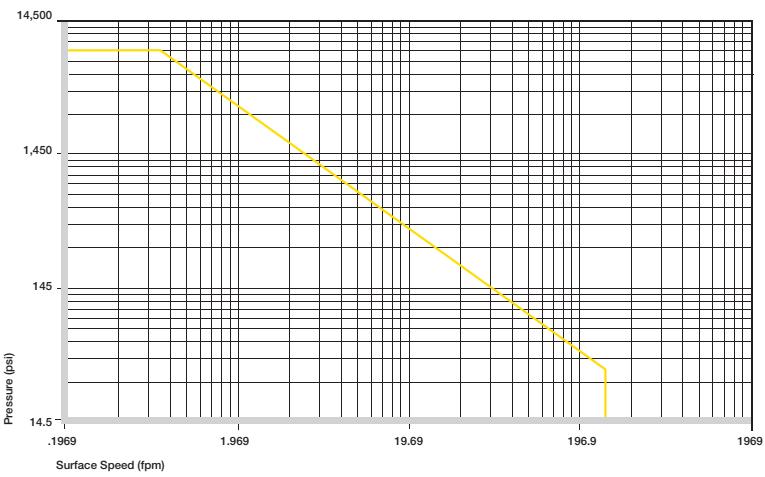


Permissible p x v values for iglide® J350 running dry against a steel shaft, at 68°F

An outstanding bearing for rotating applications - and for a wide range of different shaft materials. With iglide® J350 bearings, the lifetime can often be increased for applications between 145 psi and 7,252 psi. In addition, the high temperature resistance makes it a very versatile material.

## Compressive Strength

iglide® J350 bearings are adequate for medium and high loads. The graph shows the elastic deformation under different temperatures. At the recommended maximum surface pressure of 8702 psi the deformation is less than 6%.

- Compressive Strength, Page 1.3

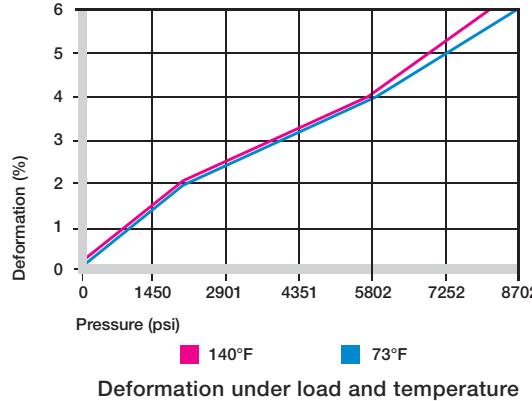

## Permissible Surface Speeds

iglide® J350 has been developed for low and medium speeds in rotating and oscillating use. The wear rate is much better with rotating movement.

iglide® J350 plain bearings can also be used for linear movement.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

The temperature resistance of iglide® J350 allows universal applications in many different industries. The short term maximum temperature is +428°F. At temperatures above +302°F the bearing should be mechanically fixed in the bore. Higher temperatures may result in a loss of the pressfit of the plain bearings, potentially allowing the bearing to drift within the housing bore.


The wear-rate of iglide® J350 bearings changes very little at high temperatures. In some cases, the wear even decreases at +212°F. Generally, the wear figures between +68°F and +302°F are very similar.

The iglide® J350 is a highly wear-resistant bearing material, which can also be used at higher temperatures. The combination of excellent tribological and thermal properties fills a gap in the group of long life materials.

- Application Temperatures, Page 1.7

	Continuous fpm	Short Term fpm
Rotating	256	591
Oscillating	197	453
Linear	787	1575

Maximum surface speeds

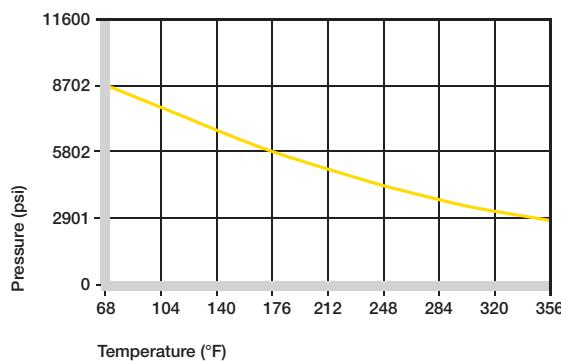

Recommended maximum permissible static surface pressure of iglide® J350 as a result of the temperature


## iglide® J350 Application Temperature

iglide® J350	Application Temperature
Minimum	-148°F
Max. long-term	+356°F
Max. short-term	+428°F
Additional axial securing	+302°F

## Temperature iglide® J350

iglide® J350

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

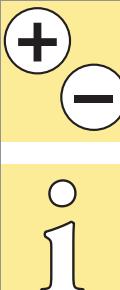


inch

mm

## Installation Tolerances

iglide® J350 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

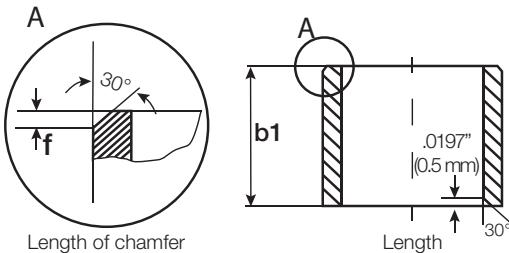

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The coefficient of friction of iglide® J350 in dry operation on a steel shaft is very good. It is even lower at high speed, which makes the material very suitable for permanently dry-running application at high rotation speed. iglide® J350 bearings are clearly superior to other bearing materials in rotating applications over 290 psi. The lifetime of iglide® J350 can be several times higher.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

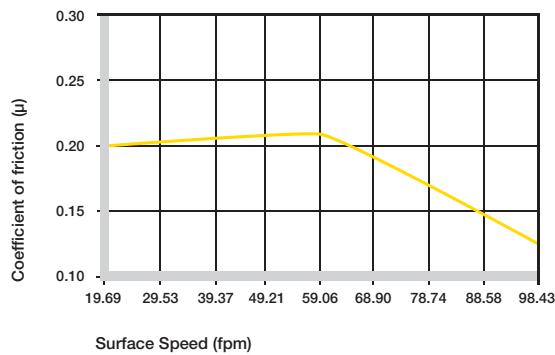


Coefficients of friction of iglide® J350 as a function of the running speed; p = 108 psi

iglide® J350	Coefficient of Friction
Dry	0.10 - 0.20
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® J350 against steel (Shaft finish = 40 rms, 50 HRC)

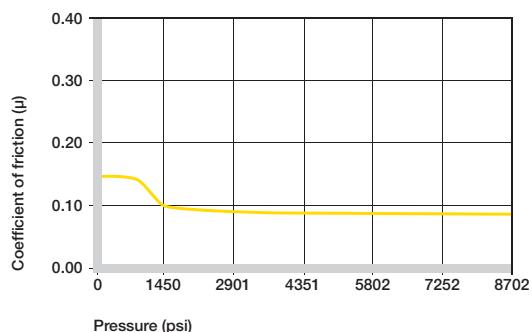

Coefficients of friction of iglide® J350 as a function of the load, v = 1.96 fpm

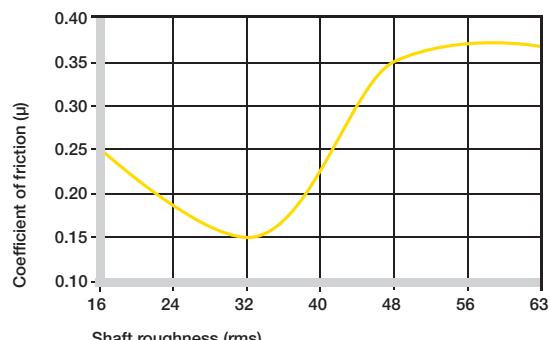


Coefficients of friction of iglide® J350 as a function of the shaft surface (1050 hard chromed)

## Shaft Materials

The graphs show results of testing different shaft materials with plain bearings made of iglide® J350. iglide® J350 plain bearings can be combined with various shaft materials.

One shaft – bearing combination stands out when looking at the wear results of the test: iglide® J350 with 304 stainless steel. Not many bearing materials are suitable for use with this rather difficult 304 stainless steel material and achieve good wear results. Also, iglide® J350 shows good properties with hard-anodized aluminum shafts. If the shaft material you plan on using is not shown in these test results, please contact us.

► Shaft Materials, Page 1.11

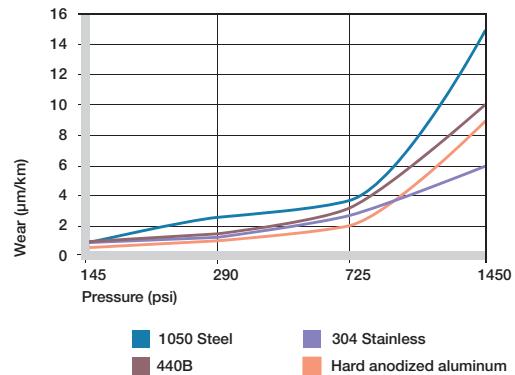

Wear of iglide® J350, oscillating movement of different shaft materials according to applied load

## Chemical Resistance


iglide® J350 plain bearings are resistant to diluted alkalis and acids, alcohols, cleaning agents and lubricants. iglide® J350 will be attacked by esters, ketones, chlorinated hydrocarbons, and other solvents.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+ to 0
Greases, oils without additives	+
Fuels	+
Weak acids	+
Strong acids	+ to 0
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	

### Chemical resistance of iglide® J350

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

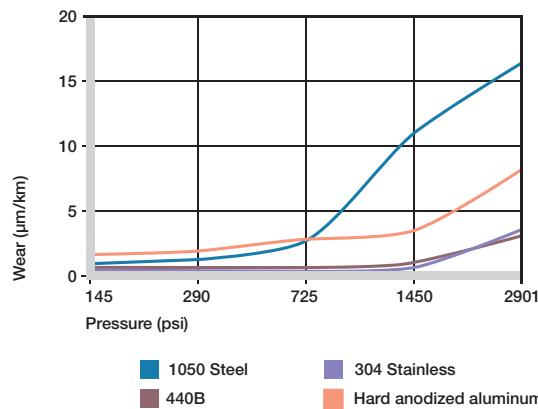


Wear of iglide® J350 with different shaft materials in rotational applications as a function of the pressure

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm

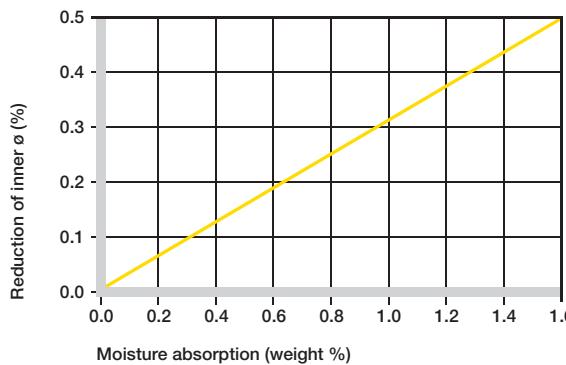

Effect of moisture absorption on iglide® J350 plain bearings

## Radiation Resistance

Plain bearings made from iglide® J350 are radiation resistant up to an intensity of  $2 \times 10^2$  Gy.

## UV-Resistance

iglide® J350 plain bearings are conditionally resistant to UV radiation.

## Vacuum

iglide J350 plain bearings outgas in a vacuum. Use in a vacuum environment is only possible with dehumidified bearings.

## Electrical Properties

iglide® J350 plain bearings are electrically insulating.

### iglide® J350

Specific volume resistance	> $10^{13}$ $\Omega$ cm
Surface resistance	> $10^{10}$ $\Omega$

### Electrical properties of iglide® J350

iglide® J350


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1.

inch


mm



## iglide® Plain Bearings J350 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>


igus®

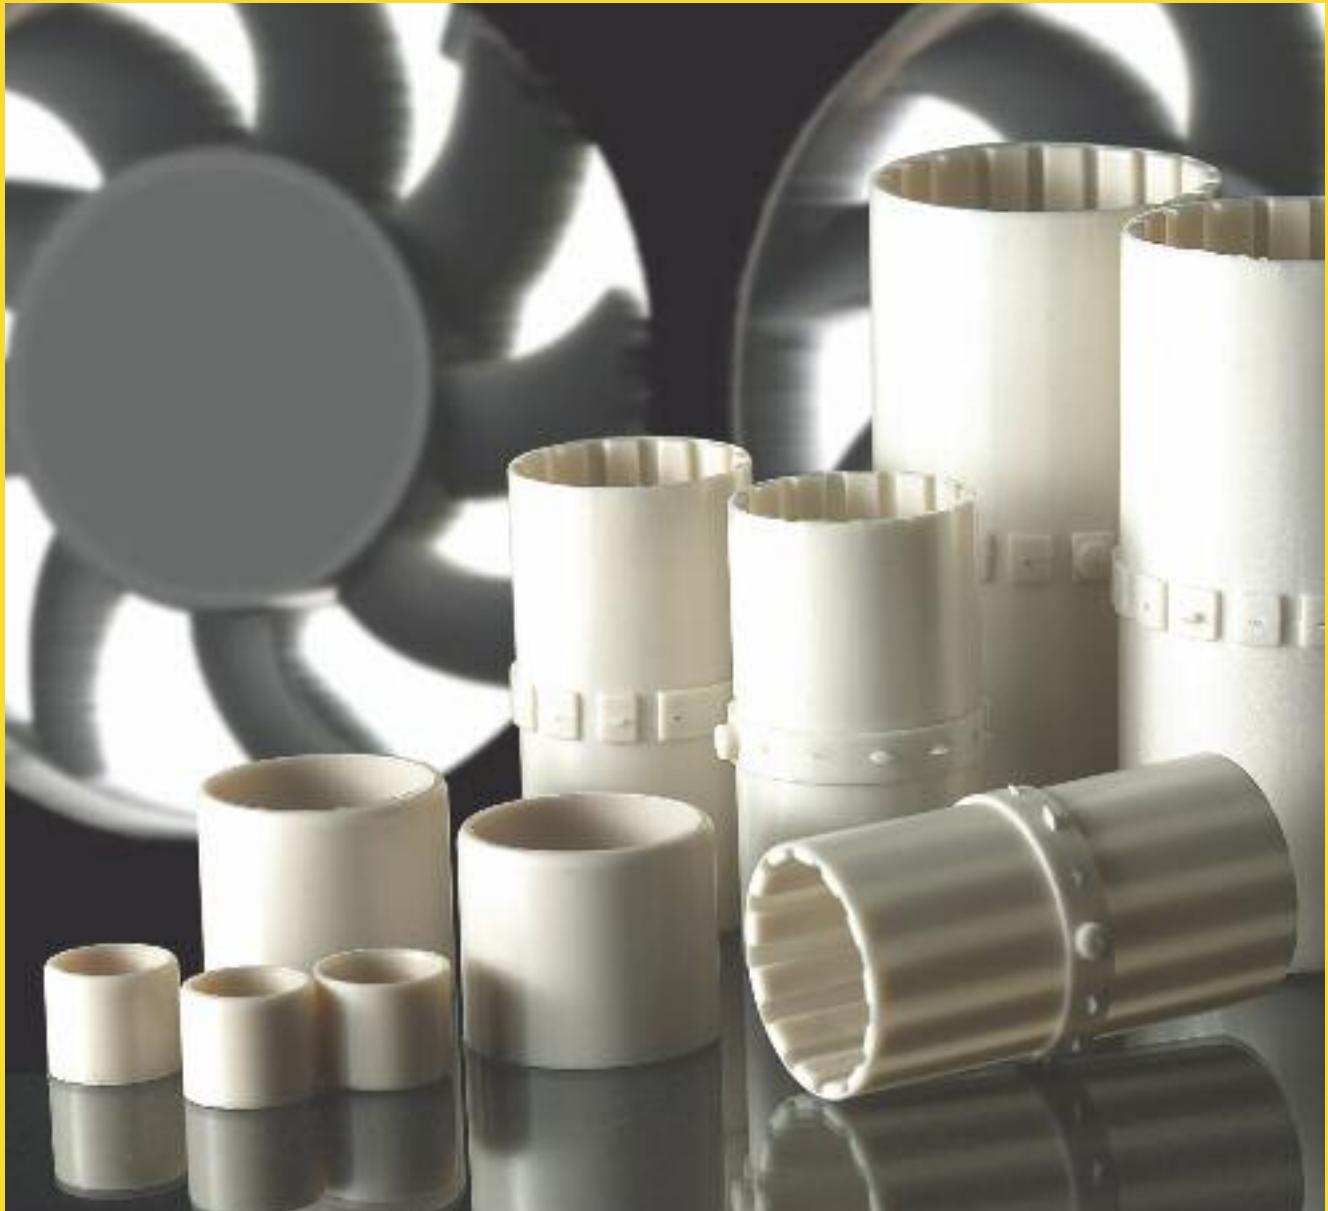

iglide® L250  
Long Distance

**Product Range**

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

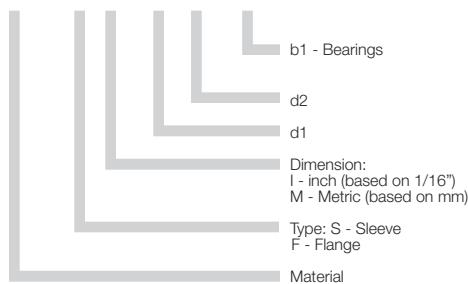**Part Number Structure****Part Number Structure**L250 S M - 03 04 - 03**Permissible Surface Speeds**

	Continuous fpm	Short Term fpm
Rotating	197	295
Oscillating	137	216
Linear	393	591

**Usage Guidelines**

- For rotating applications at high speed
- If highest service life is required
- Low load applications
- If low noise level is required
- For very low coefficients of friction



- When high pressure loads occur
  - iglide® Q
  - iglide® L280
- When sustained temperatures above 194°F is a condition
  - iglide® V400
- When low moisture absorption is required
  - iglide® H1
  - iglide® J

**Material Data**

General Properties	Unit	iglide® L250	Testing Method
Density	g/cm³	1.50	
Color		beige	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.7	DIN 53495
Max. moisture absorption	% weight	3.9	
Coefficient of friction, dynamic against steel	μ	0.08 - 0.19	
p x v value, max. (dry)	psi x fpm	11,500	

**Mechanical Properties**


Modulus of elasticity	psi	282,800	DIN 53457
Tensile strength 68°F	psi	9,718	DIN 53452
Compressive strength	psi	6,817	
Permissible static surface pressure (68°F)	psi	6,527	
Shore D-hardness		68	DIN 53505

**Physical and Thermal Properties**

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	356	
Min. application temperature	°F	-40	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	10	DIN 53752

**Electrical Properties**

Specific volume resistance	Ωcm	> 10¹⁰	DIN IEC 93
Surface resistance	Ω	> 10¹¹	DIN 53482

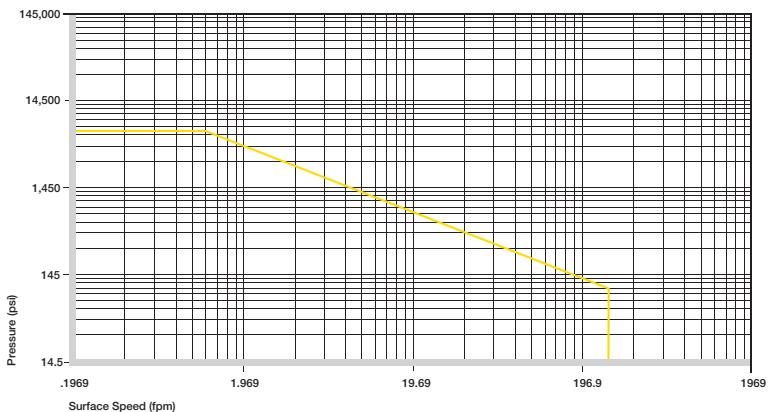

Permissible p x v values for iglide® L250 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® L250 is a bearing material for high rotary speeds and low coefficients of friction. The iglide® L250 material can feature these advantages particularly with low loads. Applications which feature these advantages are fans, small motors, fast-running sensors or the magnet technology.

## Compressive Strength

With increasing temperatures, the compressive strength of iglide® L250 plain bearings decreases. The Graph shows this inverse relationship. However, at the long term maximum temperature of +194°F the permissible surface pressure is almost 2901 psi.

- Compressive Strength, Page 1.3

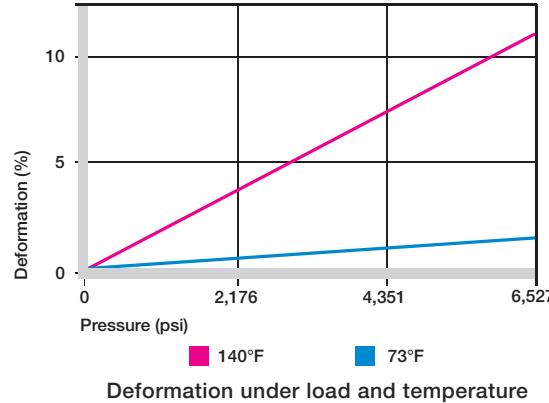

## Permissible Surface Speeds

iglide® L250 has been developed especially for high surface speeds with low loads. Besides the physical limit, which is preset by the heating of the bearing, the coefficients of wear also act limitingly if rapidly high glide paths emerge at high peripheral speeds and the permitted wear limit is thus reached earlier. The great advantages of the iglide® L250 bearings are seen right here. The wear rate is very low, thus making the material an ideal solution for extreme glide paths. The maximum speeds are show in the table to the right.

- Surface Speed, Page 1.5
- p x v value, Page 1.6


## Temperatures

iglide® L250 plain bearings can be used at temperatures from -40°F up to 194°F. The short-term maximum temperature is 356°F. Note that a mechanical securing of the bearing is recommended from temperatures of 131°F. Higher temperatures can also cause the bearing to lose its pressfit seating and move in the housing.

- Application Temperatures, Page 1.7

iglide® L250	Application Temperature
Minimum	-40°F
Max. long-term	+194°F
Max. short-term	+356°F
Additional axial securing	+131°F

Temperature iglide® L250

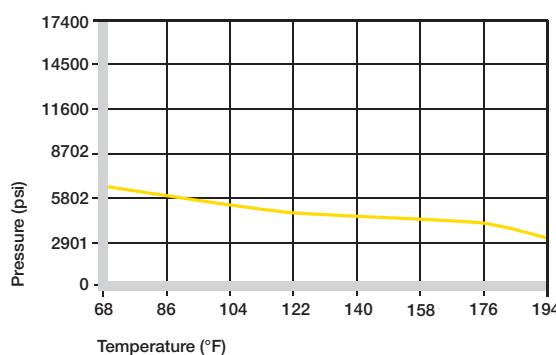

Recommended maximum permissible static surface pressure of iglide® L250 as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




1  
inch

mm

## Installation Tolerances

iglide® L250 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

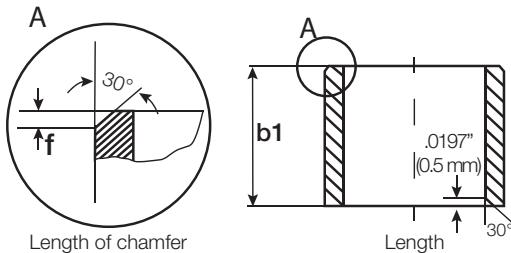

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

### For Metric Size Bearings


Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Low coefficients of friction are a big influence on the excellent characteristics of iglide® L250 plain bearings.

The best pairing of iglide® L250 bearings is with 304 stainless steel shafts where coefficients of friction of 0.14 are already attained at low loads. Coefficients of friction below 0.1 have already been measured for values below 1,450 psi. In order to convey the excellent wear values to the application, loads in excess of 725 psi should be avoided.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

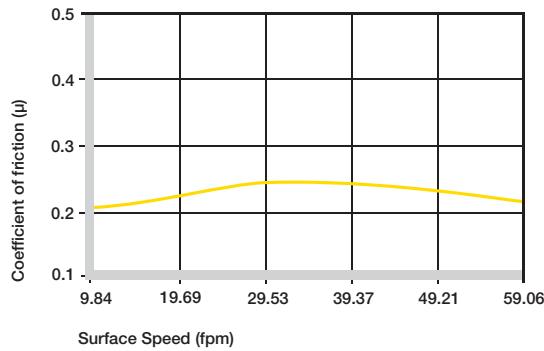


Coefficients of friction of iglide® L250 as a function of the running speed; p = 108 psi

iglide® L250	Coefficient of Friction
Dry	0.08 - 0.19
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® L250 against steel (Shaft finish = 40 rms, 50 HRC)

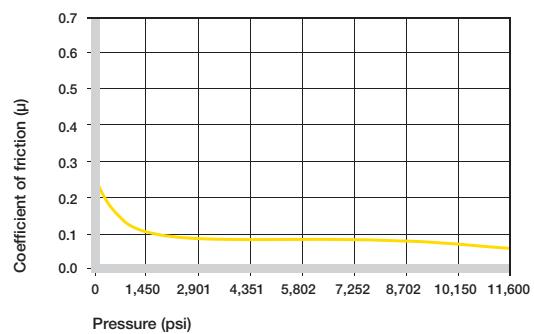

Coefficients of friction of iglide® L250 as a function of the load, v = 1.96 fpm

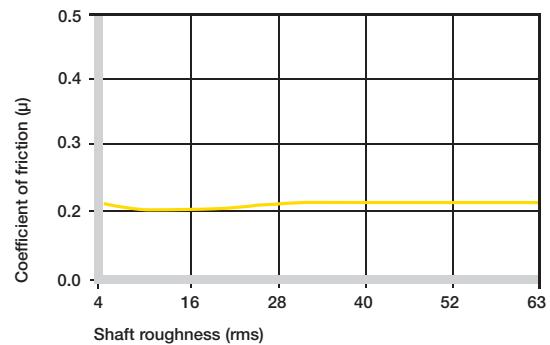


Coefficients of friction of iglide® L250 as a function of the shaft surface (1050 hard chromed)


## Shaft Materials

As shown in the graphs, a variety of shafts can be used at low loads and low rotation. The good coefficients of friction are maintained across a wide range of recommended shaft roughness values. With regards to loads greater than 145 psi the shaft material selection becomes more important.


► Shaft Materials, Page 1.11

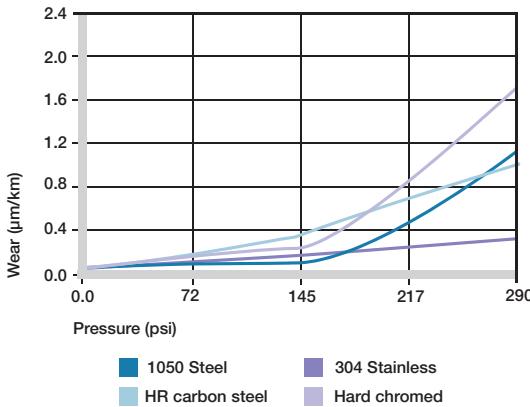

Wear of iglide® L250 with different shaft materials in rotational applications

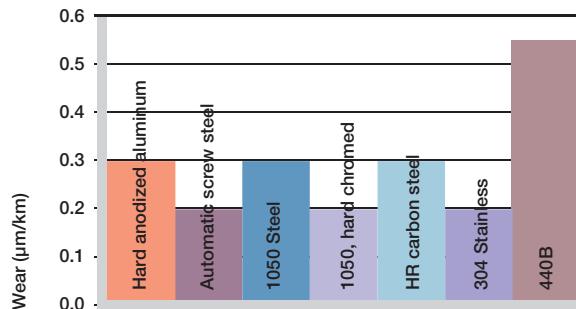

Wear of iglide® L250, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

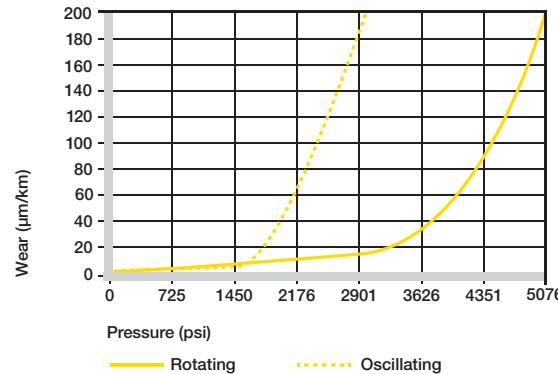

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

## Chemical Resistance


iglide® L250 bearings are resistant to diluted alkalis and very weak acids as well as solvents and all types of lubricants.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	0
+ resistant, 0 conditionally resistant, - not resistant	

### Chemical resistance of iglide® L250

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

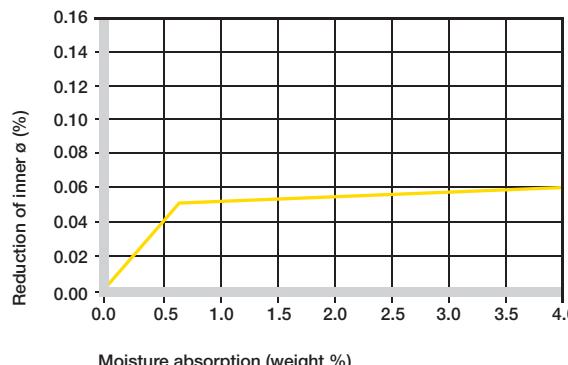


Effect of moisture absorption on iglide® L250 plain bearings

iglide® L250

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10  
inch  
mm

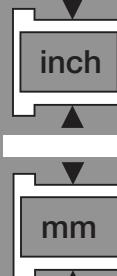

## Radiation Resistance

Plain bearings made from iglide® L250 are radiation resistant up to an intensity of  $3 \times 10^4$  Gy. Higher radiation affects the material and may result in a significant decrease in mechanical properties.

## UV-Resistance

When subjected to UV radiation, iglide® L250 plain bearings become discolored. However, hardness, compressive strength and the wear resistance of the material are not effected.

## Vacuum

In vacuum applications, any absorbed moisture content is outgassed. For this reason only dehumidified iglide® L250 bearings are suitable for use in a vacuum.

## Electrical Properties

iglide® L250 plain bearings are electrically insulating.

### iglide® L250

Specific volume resistance	> $10^{10}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® L250

iglide® L250

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1.

inch

mm

L250



## iglide® Plain Bearings L250 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® L250

igus®



iglide® D  
Long Distance




### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**D S M - 03 04 - 03**

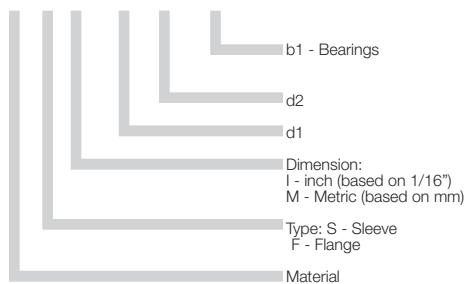

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	591
Oscillating	216	413
Linear	1575	1969

### Usage Guidelines



- When very low coefficients of friction are needed
- For high speeds
- For low loads
- When a highly cost-effective bearing is needed



- When high pressures occur
  - iglide® G300
- When the parts must be free from silicone
  - iglide® J
  - iglide® R
- When temperatures continuously exceed 194°F
  - iglide® G300
  - iglide® P

### Material Data

General Properties	Unit	iglide® D	Testing Method
Density	g/cm <sup>3</sup>	1.40	
Color		green	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.1	
Coefficient of friction, dynamic against steel	μ	0.08 - 0.26	
p x v value, max. (dry)	psi x fpm	8,700	

### Mechanical Properties


Modulus of elasticity	psi	290,100	DIN 53457
Tensile strength 68°F	psi	10,440	DIN 53452
Compressive strength	psi	10,150	
Permissible static surface pressure (68°F)	psi	3,336	
Shore D-hardness		78	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	230	
Min. application temperature	°F	-58	
Thermal conductivity	[W/m x K]	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K <sup>-1</sup> x 10 <sup>-5</sup> ]	11	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10 <sup>14</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>14</sup>	DIN 53482

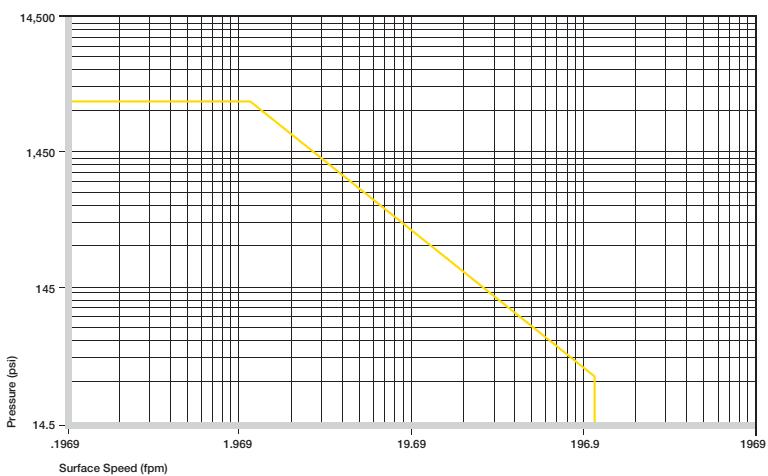

Permissible p x v values for iglide® D running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

In the development of iglide® D as a bearing material, high performance and a very low price were the top requirements. In particular, low coefficients of friction were needed at high speeds when running dry. Plain bearings made of iglide® D are supported by a combination of solid lubricants. This material containing silicone achieves excellent low friction values in dry operation and runs with virtually no stick slip.

## Compressive Strength

iglide® D plain bearings were developed for low to average radial loads. The graph shows the elastic deformation of iglide® D for radial loads. At the recommended maximum surface pressure of 3,336 psi, the deformation is approximately 3%. Plastic deformation is not detectable up to this value. However, it is also dependent on the service time.

- Compressive Strength, Page 1.3

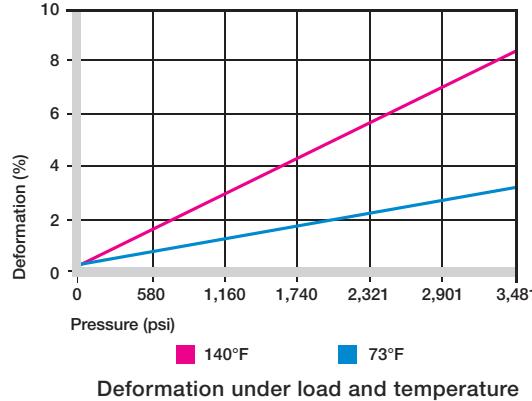

## Permissible Surface Speeds

iglide® D plain bearings are used at high surface speeds. For linear movements, short-term speeds up to 1,969 fpm are permissible. Please note that the given maximum values can only be achieved at the lowest pressure loads. These values show the speed at which friction causes a temperature increase to the maximum permitted.

- Surface Speed, Page 1.5
- p x v value, Page 1.6


	Continuous fpm	Short Term fpm
Rotating	295	591
Oscillating	216	413
Linear	1575	1969

Maximum surface speeds

## Temperatures

The maximum permissible short-term temperature is 230°F, and the long-term application temperature is 194°F. With increasing temperatures, the compression resistance of iglide® D plain bearings decreases. The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear. With increasing temperatures, the wear increases.

- Application Temperatures, Page 1.7

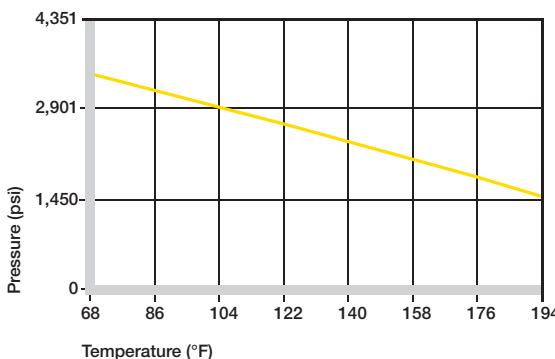

Recommended maximum permissible static surface pressure of iglide® D as a result of the temperature


iglide® D	Application Temperature
Minimum	-58°F
Max. long-term	+194°F
Max. short-term	+230°F
Additional axial securing	+122°F

## Temperature iglide® D

## Installation Tolerances

iglide® D plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

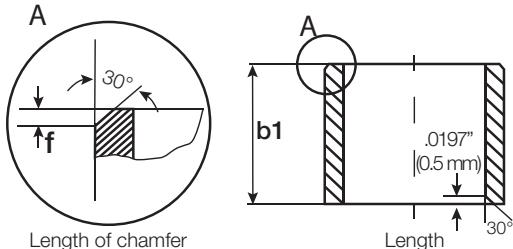

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

In the same way as the wear resistance, the coefficient of friction decreases with increasing load. In contrast, higher speeds have little effect on the coefficient of friction of iglide® D plain bearings. iglide® D is especially suitable for applications in which high p x v values are predominantly caused by the high speed, and not so much by the surface pressure. The coefficient of friction of iglide® D plain bearings depends greatly on the shaft roughness. In the rms range between 16-24, the coefficient of friction reaches its optimal value. For values above and below this range, the friction of the bearing system increases quickly. Other shaft materials can be used without a large loss of tribological performance. Even with non-metallic shafts, good results were obtained in tests. Ceramic and plastic shafts can also be used.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

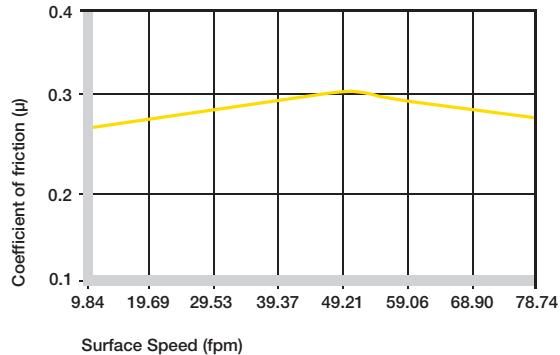


Coefficients of friction of iglide® D as a function of the running speed; p = 108 psi

iglide® D	Coefficient of Friction
Dry	0.08 - 0.26
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® D against steel (Shaft finish = 40 rms, 50 HRC)

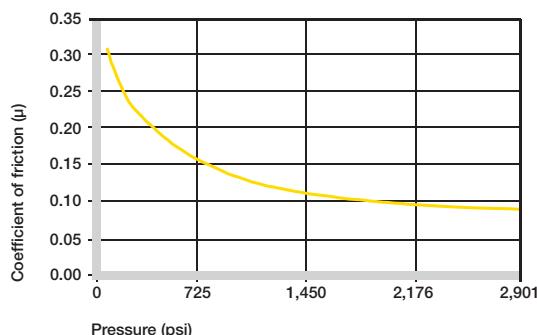

Coefficients of friction of iglide® D as a function of the load, v = 1.96 fpm

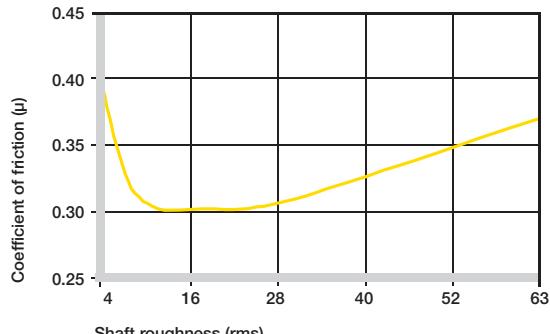

Coefficients of friction of iglide® D as a function of the shaft surface (1050 hard chromed)

### Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® D.

In the low load range, the hard chromed shaft is the most suitable material for iglide® D plain bearings. At loads greater than 290 psi, shafts made of 1050 hardened and ground steel as well as 304 stainless steel increase wear resistance.


For oscillating operation, the 1050 hardened and ground steel shafts and the 304 stainless steel shafts can be used in the low load range.

If the shaft material you plan to use is not contained in the test results presented here, please contact us.


► Shaft Materials, Page 1.11

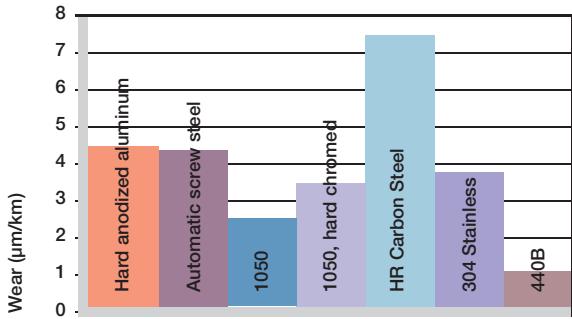

Wear of iglide® D, rotating applications with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

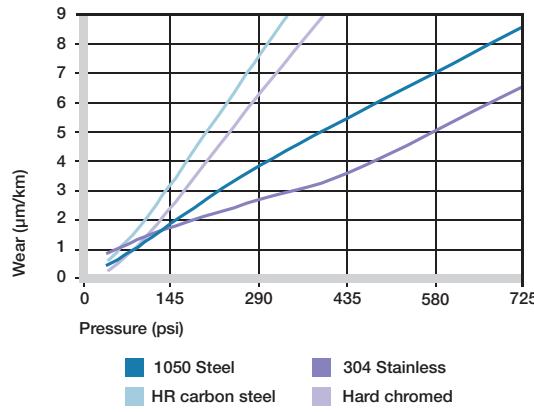

Wear of iglide® D with different shaft materials in rotational applications

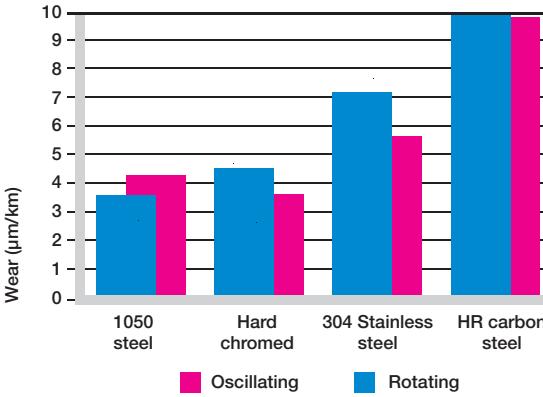

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

### Chemical Resistance

iglide® D plain bearings are resistant to very weak acids, diluted alkalis, fuel and all types of lubricants.

The moisture absorption of iglide® D plain bearings is approximately 0.2% in standard atmosphere. The saturation limit in water is 1%. This low moisture absorption allows for design in wet environments.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, – not resistant

### Chemical resistance of iglide® D


All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

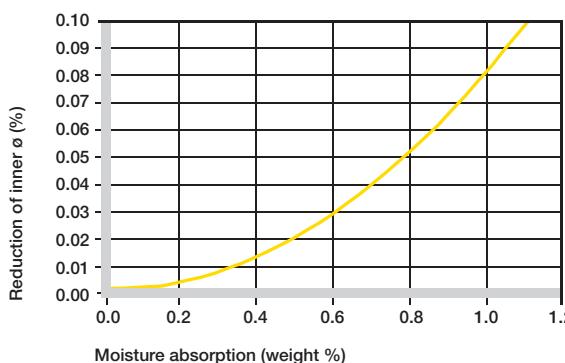

Effect of moisture absorption on iglide® D plain bearings

iglide® D

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

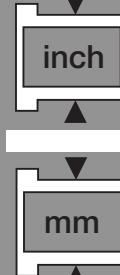

## Radiation Resistance

Plain bearings made from iglide® D are radiation resistant up to an intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® D plain bearings are resistant to UV radiation, but the tribological properties are reduced by permanent exposure.

---

## Vacuum

In vacuum environment, iglide® D plain bearings release gases. It is only possible to use iglide® D in a vacuum to a limited extent.

---

## Electrical Properties

iglide® D plain bearings are electrically insulating.

### iglide® D

Specific volume resistance	> $10^{14}$ $\Omega$ cm
Surface resistance	> $10^{14}$ $\Omega$

### Electrical properties of iglide® D

---

## Availability

iglide® D plain bearings are manufactured to special order. For high volume applications please request iglide® D plain bearings as an alternative to iglide® J.

igus®



iglide® D  
Long Distance




### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**D S M - 03 04 - 03**

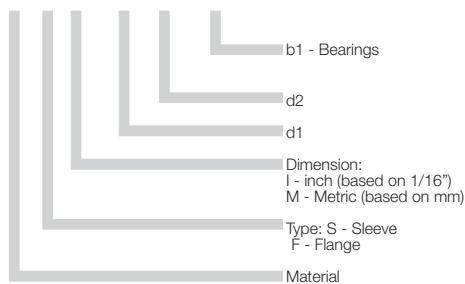

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	591
Oscillating	216	413
Linear	1575	1969

### Usage Guidelines



- When very low coefficients of friction are needed
- For high speeds
- For low loads
- When a highly cost-effective bearing is needed



- When high pressures occur
  - iglide® G300
- When the parts must be free from silicone
  - iglide® J
  - iglide® R
- When temperatures continuously exceed 194°F
  - iglide® G300
  - iglide® P

### Material Data

General Properties	Unit	iglide® D	Testing Method
Density	g/cm <sup>3</sup>	1.40	
Color		green	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.1	
Coefficient of friction, dynamic against steel	μ	0.08 - 0.26	
p x v value, max. (dry)	psi x fpm	8,700	

### Mechanical Properties


Modulus of elasticity	psi	290,100	DIN 53457
Tensile strength 68°F	psi	10,440	DIN 53452
Compressive strength	psi	10,150	
Permissible static surface pressure (68°F)	psi	3,336	
Shore D-hardness		78	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	230	
Min. application temperature	°F	-58	
Thermal conductivity	[W/m x K]	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K <sup>-1</sup> x 10 <sup>-5</sup> ]	11	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10 <sup>14</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>14</sup>	DIN 53482

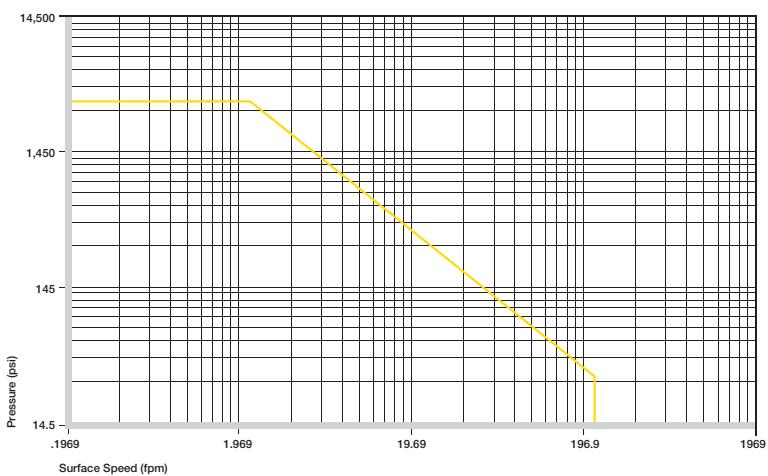

Permissible p x v values for iglide® D running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

In the development of iglide® D as a bearing material, high performance and a very low price were the top requirements. In particular, low coefficients of friction were needed at high speeds when running dry. Plain bearings made of iglide® D are supported by a combination of solid lubricants. This material containing silicone achieves excellent low friction values in dry operation and runs with virtually no stick slip.

## Compressive Strength

iglide® D plain bearings were developed for low to average radial loads. The graph shows the elastic deformation of iglide® D for radial loads. At the recommended maximum surface pressure of 3,336 psi, the deformation is approximately 3%. Plastic deformation is not detectable up to this value. However, it is also dependent on the service time.

- Compressive Strength, Page 1.3

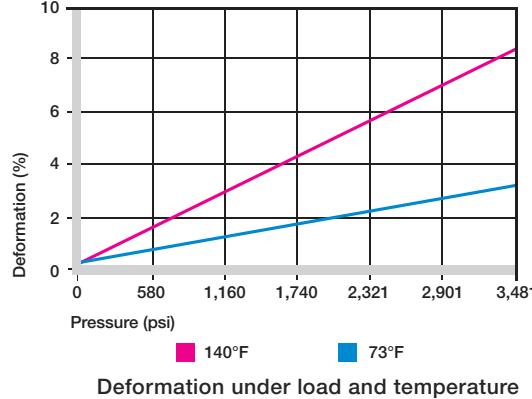

## Permissible Surface Speeds

iglide® D plain bearings are used at high surface speeds. For linear movements, short-term speeds up to 1,969 fpm are permissible. Please note that the given maximum values can only be achieved at the lowest pressure loads. These values show the speed at which friction causes a temperature increase to the maximum permitted.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

Continuous      Short Term


	fpm	fpm
Rotating	295	591
Oscillating	216	413
Linear	1575	1969

Maximum surface speeds

## Temperatures

The maximum permissible short-term temperature is 230°F, and the long-term application temperature is 194°F. With increasing temperatures, the compression resistance of iglide® D plain bearings decreases. The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear. With increasing temperatures, the wear increases.


- Application Temperatures, Page 1.7

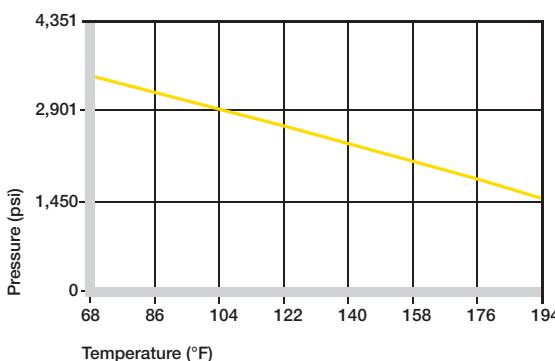


Recommended maximum permissible static surface pressure of iglide® D as a result of the temperature

iglide® D	Application Temperature
Minimum	-58°F
Max. long-term	+194°F
Max. short-term	+230°F
Additional axial securing	+122°F

Temperature iglide® D




1  
inch

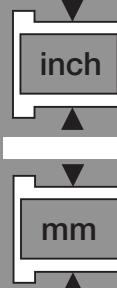

## Installation Tolerances

iglide® D plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

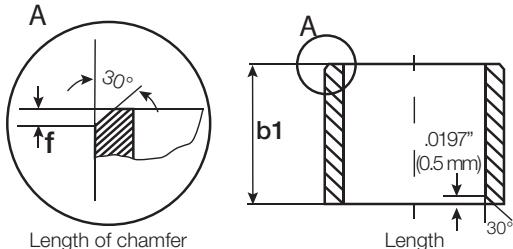

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

In the same way as the wear resistance, the coefficient of friction decreases with increasing load. In contrast, higher speeds have little effect on the coefficient of friction of iglide® D plain bearings. iglide® D is especially suitable for applications in which high p x v values are predominantly caused by the high speed, and not so much by the surface pressure. The coefficient of friction of iglide® D plain bearings depends greatly on the shaft roughness. In the rms range between 16-24, the coefficient of friction reaches its optimal value. For values above and below this range, the friction of the bearing system increases quickly. Other shaft materials can be used without a large loss of tribological performance. Even with non-metallic shafts, good results were obtained in tests. Ceramic and plastic shafts can also be used.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

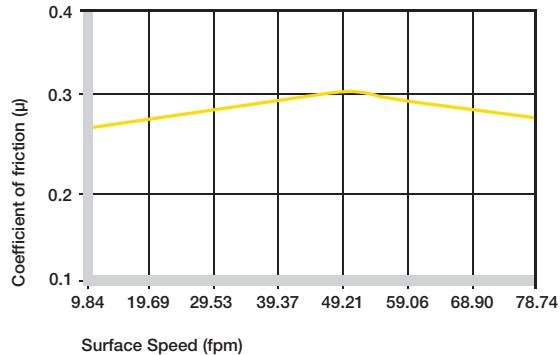


Coefficients of friction of iglide® D as a function of the running speed; p = 108 psi

iglide® D	Coefficient of Friction
Dry	0.08 - 0.26
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® D against steel (Shaft finish = 40 rms, 50 HRC)

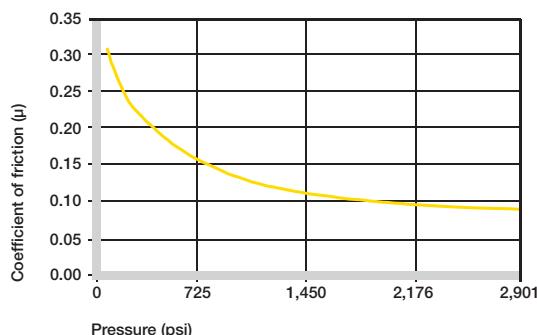

Coefficients of friction of iglide® D as a function of the load, v = 1.96 fpm

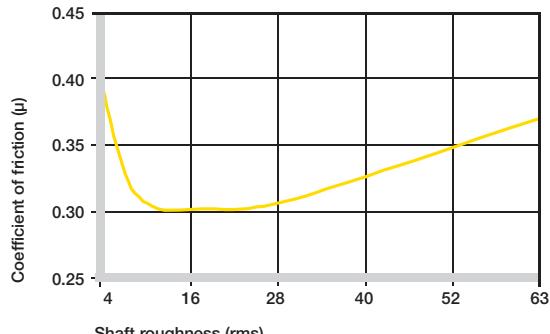

Coefficients of friction of iglide® D as a function of the shaft surface (1050 hard chromed)

### Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® D.

In the low load range, the hard chromed shaft is the most suitable material for iglide® D plain bearings. At loads greater than 290 psi, shafts made of 1050 hardened and ground steel as well as 304 stainless steel increase wear resistance.


For oscillating operation, the 1050 hardened and ground steel shafts and the 304 stainless steel shafts can be used in the low load range.

If the shaft material you plan to use is not contained in the test results presented here, please contact us.


► Shaft Materials, Page 1.11

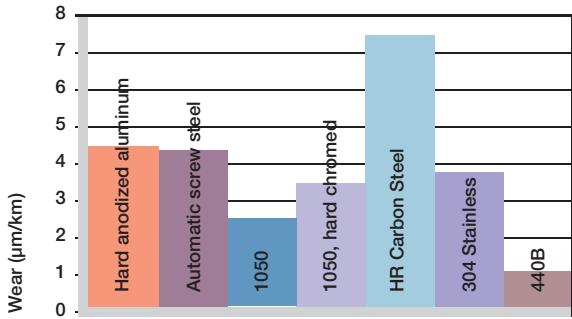

Wear of iglide® D, rotating applications with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

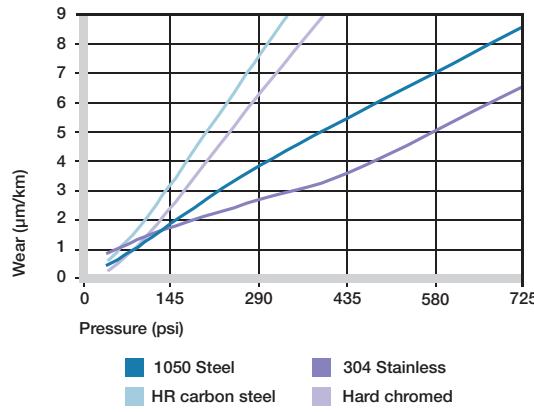

Wear of iglide® D with different shaft materials in rotational applications

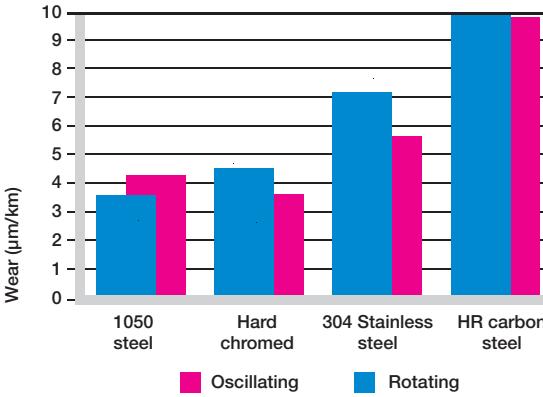

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

### Chemical Resistance

iglide® D plain bearings are resistant to very weak acids, diluted alkalis, fuel and all types of lubricants.

The moisture absorption of iglide® D plain bearings is approximately 0.2% in standard atmosphere. The saturation limit in water is 1%. This low moisture absorption allows for design in wet environments.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, – not resistant

### Chemical resistance of iglide® D

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

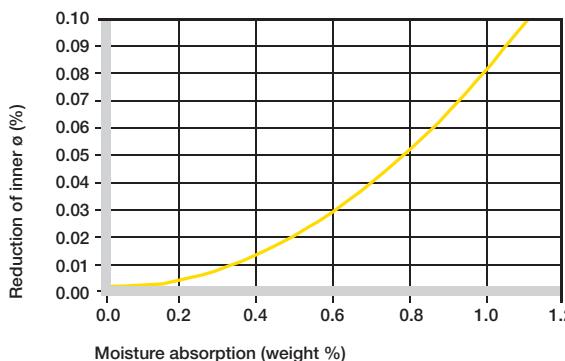

Effect of moisture absorption on iglide® D plain bearings

iglide® D

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.

inch

mm

## Radiation Resistance

Plain bearings made from iglide® D are radiation resistant up to an intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® D plain bearings are resistant to UV radiation, but the tribological properties are reduced by permanent exposure.

---

## Vacuum

In vacuum environment, iglide® D plain bearings release gases. It is only possible to use iglide® D in a vacuum to a limited extent.

---

## Electrical Properties

iglide® D plain bearings are electrically insulating.

### iglide® D

Specific volume resistance	> $10^{14}$ $\Omega$ cm
Surface resistance	> $10^{14}$ $\Omega$

### Electrical properties of iglide® D

---

## Availability

iglide® D plain bearings are manufactured to special order. For high volume applications please request iglide® D plain bearings as an alternative to iglide® J.

**igus®**



**iglide® H  
Media Resistance**


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**H S M - 03 04 - 03**

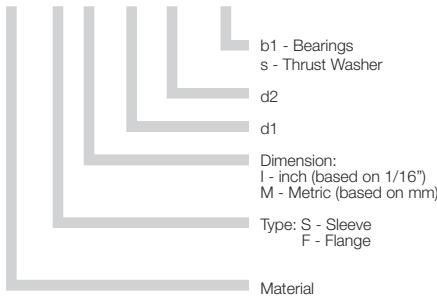

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	196	295
Oscillating	137	216
Linear	590	787

### Usage Guidelines



- For use underwater
- When high temperature resistance is necessary
- For high mechanical loading
- For use with chemicals



- When high wear resistance is needed
  - iglide® H370
- For the maximum pressure at higher temperatures
  - iglide® T500
  - iglide® Z

### Material Data

General Properties	Unit	iglide® H	Testing Method
Density	g/cm³	1.71	
Color		gray	
Max. moisture absorption at 73°F / 50% r.h.	% weight	< 0.1	DIN 53495
Max. moisture absorption	% weight	0.3	
Coefficient of friction, dynamic against steel	μ	0.07 - 0.20	
p x v value, max. (dry)	psi x fpm	39,000	

### Mechanical Properties


Modulus of elasticity	psi	1,813,000	DIN 53457
Tensile strength at 68°F	psi	25,380	DIN 53452
Compressive strength	psi	11,750	
Permissible static surface pressure (68°C)	psi	13,050	
Shore D-hardness		87	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	392	
Max. short-term application temperature	°F	464	
Min. application Temperature	°F	-40	
Thermal conductivity	W/m x K	0.6	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	4	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	< 10⁵	DIN IEC 93
Surface resistance	Ω	< 10²	DIN 53482

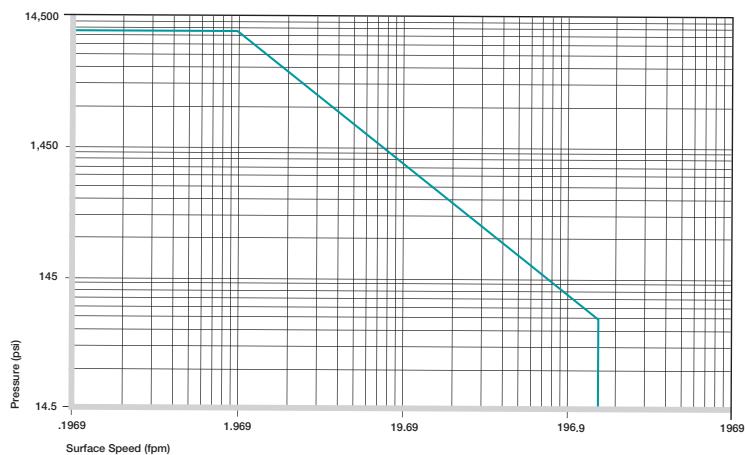

Permissible p x v value for iglide® H running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

The iglide® H is a fiber reinforced thermoplastic material that was developed especially for applications in high humidity or underwater. Plain bearings made from iglide® H can be used completely lubricant free. In wet areas, the surrounding media acts as an additional lubricant.

## Compressive Strength

The graph shows the elastic deformation of iglide® H for radial loads. At the recommended surface pressure of 13,050 psi, the deformation is approximately 2.5% at room temperature.

- Compressive Strength, Page 1.3

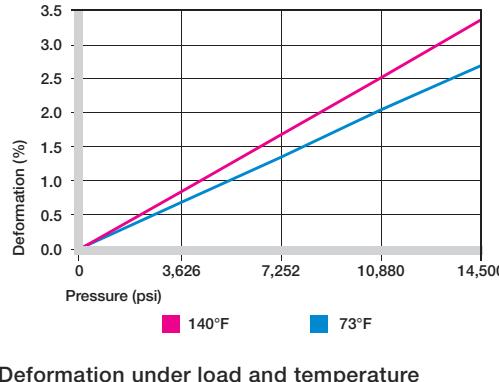

## Permissible Surface Speeds

The maximum permissible surface speed depends whether the temperature at the bearing surface increases too greatly. iglide® H is suitable for continuous running speeds of 196 fpm (rotating) to 590 fpm (linear). Linear movements allow higher running speeds since a larger area of the shaft contributes to cooling.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

iglide® H is an extremely temperature-resistant material. With a maximum permissible short-term temperature of 464°F, iglide® H plain bearings may be used in heat treated applications at low loads.


With increasing temperatures, the compressive strength of iglide® H plain bearings decreases. The graph to the right shows this relationship.

The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear.

- Application Temperatures, Page 1.7

	Continuous fpm	Short Term fpm
Rotating	196	295
Oscillating	137	216
Linear	590	787

**Maximum surface speeds**

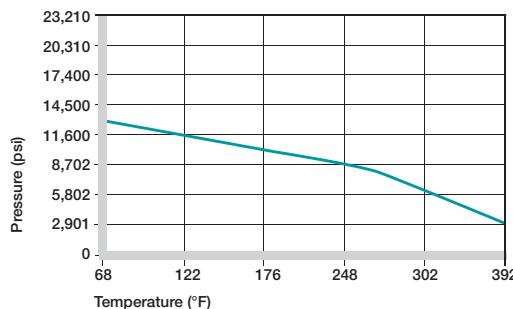



**Recommended permissible maximum static surface pressure of iglide® H as a result of the temperature**

iglide® H	Application Temperature
Minimum	- 40°F
Max. long-term	+392°F
Max. short-term	+464°F
Additional axial securing	+248°F

**Temperature limits for iglide® H**

iglide® H


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

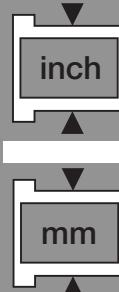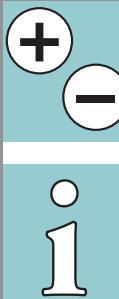

## Installation Tolerances

iglide® H plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

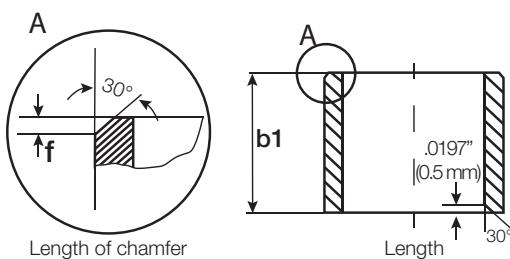

### For Inch Size Bearings

Length (inches)	Length Tolerance (b1)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"	
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"	
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"	
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"	
1.1811 to 1.9685	-0.0000 / -0.0154		
1.9685 to 3.1496	-0.0000 / -0.0181		

### For Metric Size Bearings


Length (mm)	Length Tolerance (b1)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm	
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm	
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm	
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm	
> 18 to 30	-0 / -330		
> 30 to 50	-0 / -390		
> 50 to 80	-0 / -460		

## Friction and Wear

Similar to wear resistance, the coefficient of friction  $\mu$  also changes with the load. Notice that the coefficient of friction  $\mu$  is slightly reduced with the increase in the surface speed, when the pressure stays the same.

Since the shaft material also has a large effect on the friction and wear, correct shaft selection is important for iglide® H. Shafts that are smoother than 4 rms increase the coefficient of friction. For applications with high loads, we recommend hardened and ground surfaces with an average roughness range of 12-16 rms.


- Coefficients of Friction and Surface, Page 1.8
- Wear Resistance, Page 1.9

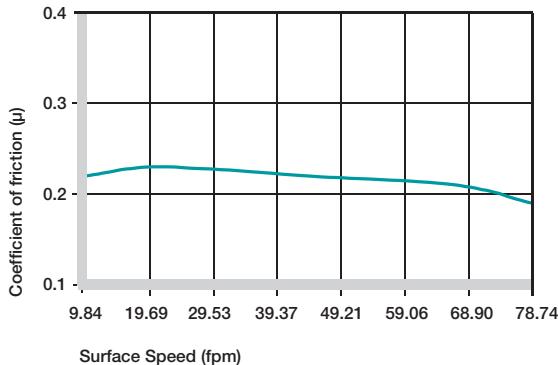


Coefficients of friction for iglide® H as a result of the surface speed; p = 108 psi

iglide® H	Coefficient of Friction
Dry	0.07 - 0.20
Grease	0.09
Oil	0.04
Water	0.04


Coefficients of friction for iglide® H against steel (Shaft finish = 40 rms, 50 HRC)

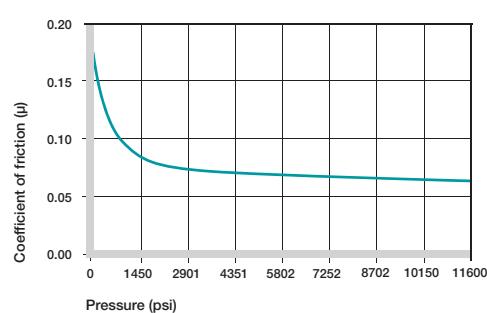

Coefficients of friction for iglide® H as a result of the load, v = 1.97 fpm

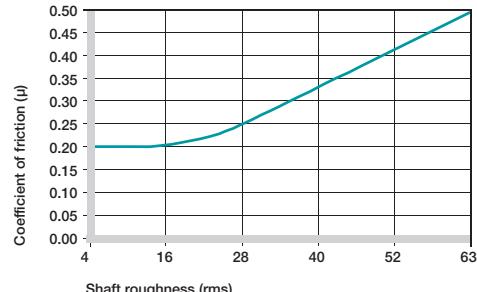

Coefficient of friction of iglide® H as a result of the shaft surface (shaft Cold Rolled Steel)




### Shaft Materials

The graphs show results of testing different shaft materials with plain bearings made of iglide® H. The results clearly show that in rotating and oscillating applications the correct shaft selection is critical.


For rotating applications, shafts made of 1050 hardened, ground steel and HR Carbon steel show the best wear values, the 3030 stainless steel shaft is best suited for oscillating movements. Also, hard chromed shafts with iglide® H bearings are only recommended for low loads.

If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft materials, Page 1.11

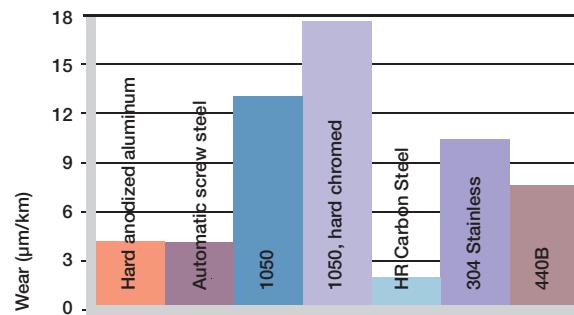

Wear of iglide® H, rotating application with different shaft materials,  $p=108$  psi,  $v=98$  fpm

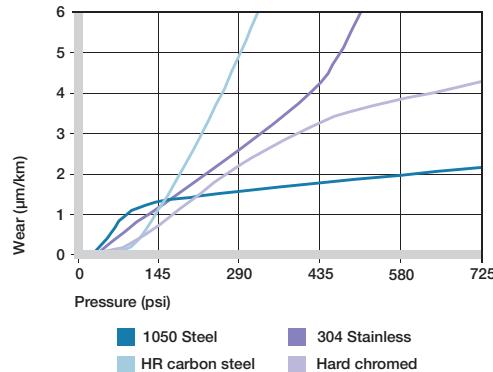

Wear of iglide® H with different shaft materials in rotating applications

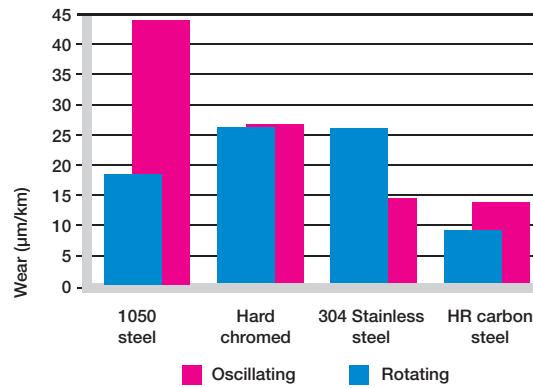

Wear for oscillating and rotating applications with different shaft materials  $p = 290$  psi

### Chemical Resistance

iglide® H plain bearings have a good chemical resistance. Even aggressive chemicals can act as lubricants. Plain bearings made of iglide® H are not resistant to hot, oxidizing acids.

The moisture absorption of iglide H plain bearings is below 0.1% in standard atmosphere. The saturation limit in water is 0.3%. iglide® H does not swell and therefore is very well suited for use in wet surroundings


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+ to 0
Strong acids	+ to -
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	


#### Chemical resistance of iglide® H

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0





## Radiation Resistance

iglide® H withstands both neutron and gamma particle radiation up to an intensity of  $2 \times 10^2$  Gy

## UV-Resistance

iglide® H plain bearings are only conditionally resistant against UV radiation. Under the effects of weathering, the surface of iglide® H becomes rougher, and the compressive strength of the material decreases.

## Vacuum

For use in a vacuum environment, it must be taken into account that a small amount of moisture is released as vapor.

## Electrical Properties


iglide® H plain bearings are electrically conducting.

### iglide® H

Specific volume resistance	< $10^5$ $\Omega$ cm
Surface resistance	< $10^2$ $\Omega$

### Electrical properties of iglide® H

**igus®**

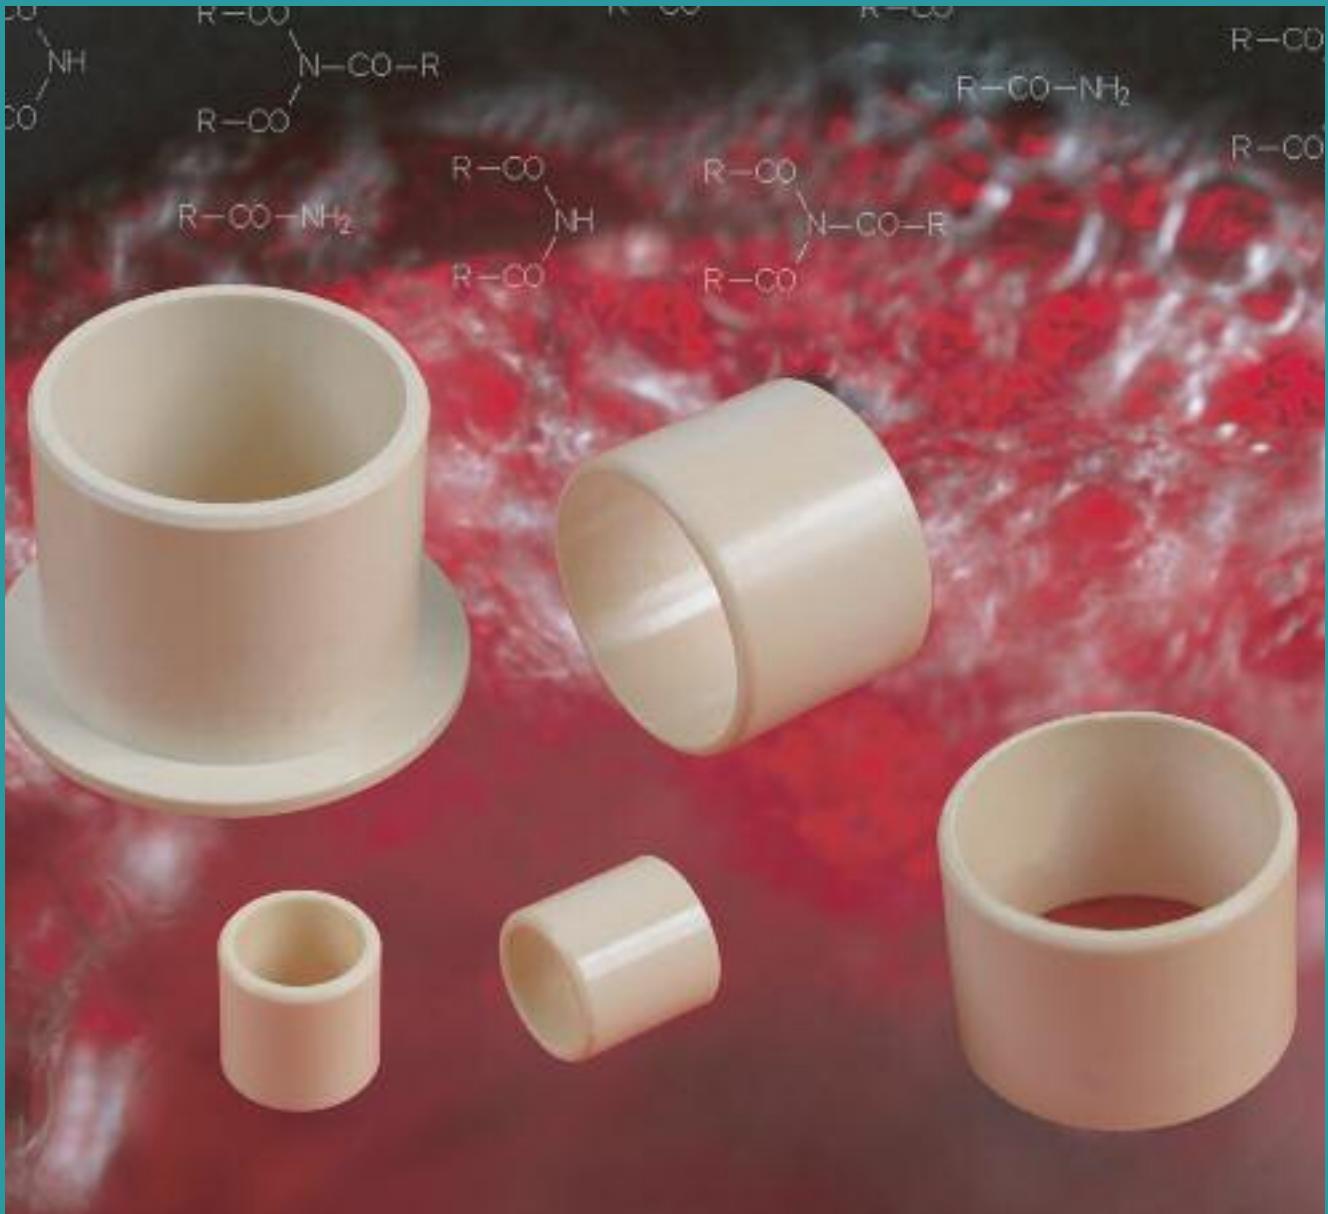

# iglide® H1 Media Resistance


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**H1 S M - 06 08 - 06**

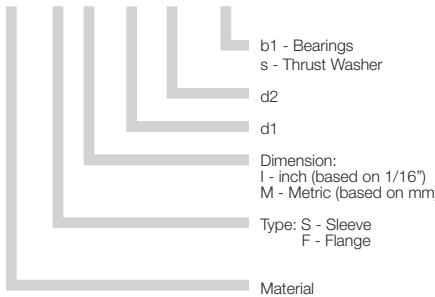

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	393	492
Oscillating	196	295
Linear	984	1378

### Usage Guidelines



- When extreme service life is required under the influence of temperature and humidity
- When low coefficients of friction at high temperature are important
- When regular aggressive cleaning is required (splashes, steam blasting)



- When the best universal chemical resistance is required
  - iglide® T500
- When a cost-effective high-temperature bearing is needed, not the ideal wear resistance
  - iglide® H2
- When an FDA-compliant plain bearing with high temperature resistance is required
  - iglide® A500

### Material Data

General Properties	Unit	iglide® H1	Testing Method
Density	g/cm³	1.53	
Color		cream	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.3	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.20	
p x v value, max. (dry)	psi x fpm	22,800	

### Mechanical Properties


Modulus of elasticity	psi	406,100	DIN 53457
Tensile strength at 68°F	psi	7,977	DIN 53452
Compressive strength	psi	11,310	
Permissible static surface pressure (68°C)	psi	11,600	
Shore D-hardness		77	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	392	
Max. short-term application temperature	°F	464	
Min. application Temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	6	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10¹²	DIN IEC 93
Surface resistance	Ω	>10¹¹	DIN 53482

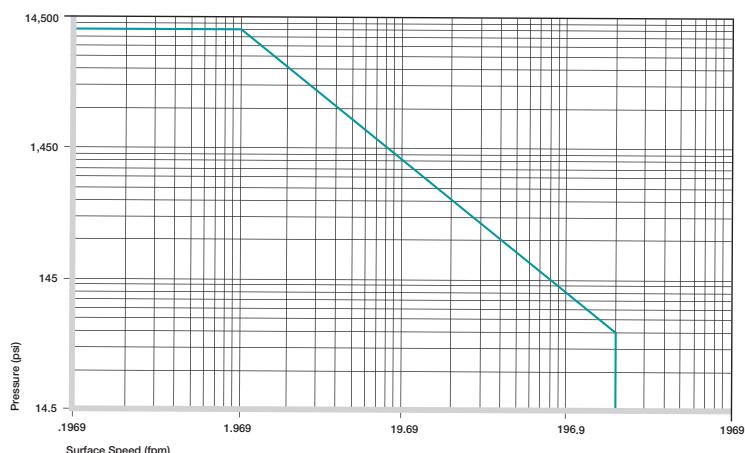

Permissible p x v value for iglide® H1 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® H1 is the first choice when service life is required in extreme environmental conditions. Extreme wear resistance is coupled with excellent resistance to temperatures and chemicals - not only in the packaging and food industries but also the automotive industry.

### Compressive Strength

The graph shows the elastic deformation of iglide® H for radial loads. Among the iglide® materials, iglide® H1 has the greatest elasticity. This is beneficial in applications with edge loads and is the reason for the higher mechanical loss factor that indicates the vibration dampening capacity of a material.

- Compressive Strength, Page 1.3

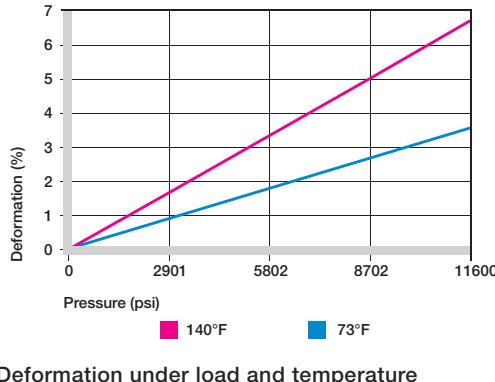

### Permissible Surface Speeds

Due to the excellent coefficients of friction, rotating surface speeds up to 393 fpm are possible with iglide® H1 plain bearings in dry operation. Linear speeds up to 984 fpm can be achieved. The speeds stated in the table are limit values for the lowest bearing loads. With higher loads, the permitted speed drops with the extent of an increase in load due to the limitations given by the p x v value.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

### Temperatures

iglide® H1 is an extremely temperature-resistant material. With a maximum permissible short-term temperature of 464°F, iglide® H1 plain bearings may be used in heat treated applications at low loads. With increasing temperatures, the compressive strength of iglide® H1 plain bearings decreases. The graph to the right shows this relationship.

The ambient temperatures prevalent in the bearing system also have an effect on the bearing wear.

- Application Temperatures, Page 1.7


iglide® H1	Application Temperature
Minimum	- 40°F
Max. long-term	+392°F
Max. short-term	+464°F
Additional axial securing	+176°F

Temperature limits for iglide® H1

Continuous      Short Term  
fpm                fpm



Rotating	393	492
Oscillating	196	295
Linear	984	1378

Maximum surface speeds

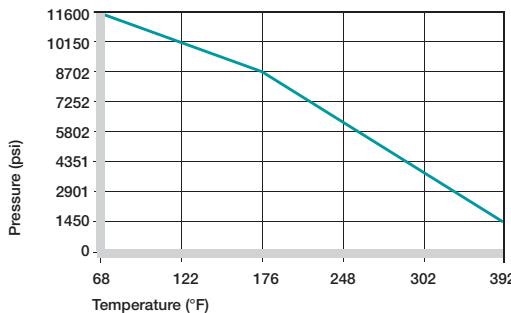

Recommended permissible maximum static surface pressure of iglide® H1 as a result of the temperature


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

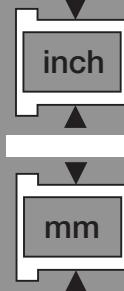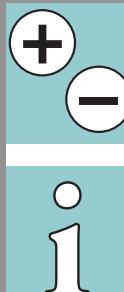

## Installation Tolerances

iglide® H1 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

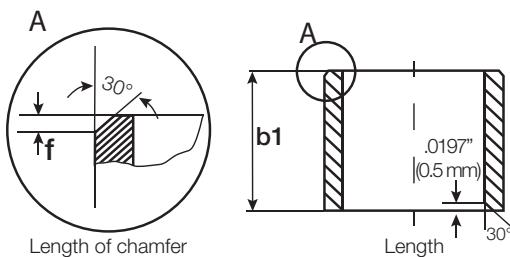

### For Inch Size Bearings

Length (inches)	Length Tolerance (b1)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"	
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"	
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"	
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"	
1.1811 to 1.9685	-0.0000 / -0.0154		
1.9685 to 3.1496	-0.0000 / -0.0181		


### For Metric Size Bearings

Length (mm)	Length Tolerance (b1)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm	
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm	
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm	
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm	
> 18 to 30	-0 / -330		
> 30 to 50	-0 / -390		
> 50 to 80	-0 / -460		

## Friction and Wear

The coefficient of friction alters in the same way as the wear resistance with increasing load and wear. At constant load the coefficient of friction  $\mu$  increases with the speed. At constant speed the coefficient of friction reduces with increasing load, and then almost constant values result from 5,802 psi onwards. As the counter sliding surface has a large influence on friction and wear, the choice of the appropriate shaft can be decisive. Shafts smoother than  $R_a = 0.1 \mu\text{m}$  raise the coefficient of friction. For applications with high loads we recommend hardened and smooth surfaces with an average surface finish of 12-16 rms.


- Coefficients of Friction and Surface, Page 1.8
- Wear Resistance, Page 1.9

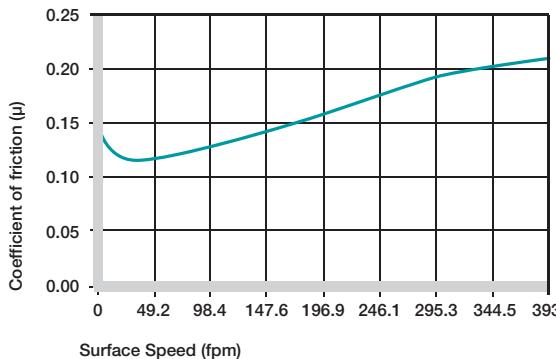


Coefficients of friction for iglide® H1 as a result of the surface speed;  $p = 108$  psi

iglide® H	Coefficient of Friction
Dry	0.06 - 0.20
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction for iglide® H1 against steel (Shaft finish = 40 rms, 50 HRC)

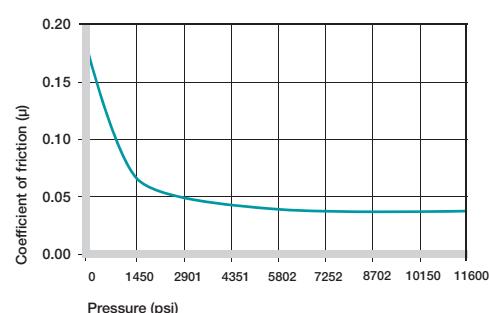

Coefficients of friction for iglide® H1 as a result of the load,  $v = 1.97$  fpm

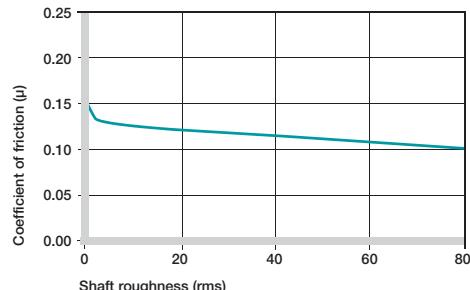


Coefficient of friction of iglide® H1 as a result of the shaft surface (1050 hard chromed)

### Shaft Materials


The graphs show results of testing different shaft materials with plain bearings made of iglide® H1. iglide® H1 bearings display a distinctly different behavior with different shaft materials in rotating and pivoting applications. In rotating applications, the 440B and 304 stainless shafts are superior to the aluminum HC and 1050 steel shafts especially with high loads. In pivoting applications, the lowest wear rates were measured with aluminum HC and 304 stainless shafts. With most shafts, the rotation wear rates were somewhat lower than the pivoting wear rates.

If the shaft material you plan to use is not contained in this list, please contact us.


► Shaft materials, Page 1.11

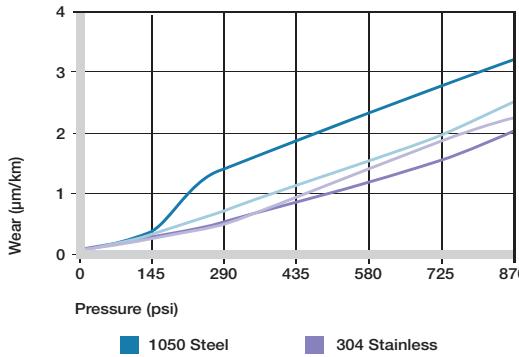

Wear of iglide® H1 with different shaft materials in rotating applications

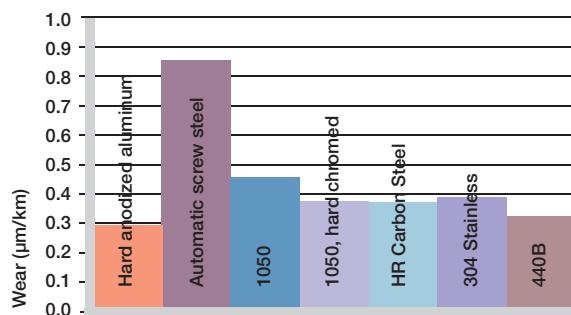

Wear of iglide® H1, rotating application with different shaft materials,  $p=108$  psi,  $v=98$  fpm

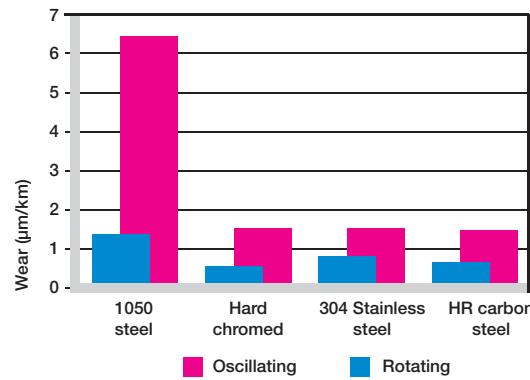

Wear for oscillating and rotating applications with different shaft materials  
 $p = 290$  psi

### Chemical Resistance

iglide® H1 plain bearings have a good chemical resistance and chemicals can even act as lubricants. Plain bearings made of iglide® H are not resistant to hot, oxidizing acids and some other particularly aggressive chemicals.

The moisture absorption of iglide H1 plain bearings is approximately 0.1% in standard atmosphere. The saturation limit in water is 0.3%. Therefore, iglide® H1 is very well suited for use in wet surroundings


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+ to 0
Strong acids	+ to -
Weak alkaline	+
Strong alkaline	+ to -
+ resistant, 0 conditionally resistant, - not resistant	

#### Chemical resistance of iglide® H1

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0



mm





## UV-Resistance

iglide® H1 plain bearings are only conditionally resistant against UV radiation. The surface of iglide® H1 becomes coarser and the wear increases under the influence of atmospheric conditions.

## Vacuum

Note that for use in a vacuum environment, water elements, even if only minimal, should be degassed.

## Electrical Properties

iglide® H1 plain bearings are electrically insulating.

### iglide® H1

Specific volume resistance	> $10^{12}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® H1

**igus®**



# iglide® H2 Media Resistance


### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

### Part Number Structure

#### Part Number Structure

**H2 S M - 06 08 - 06**

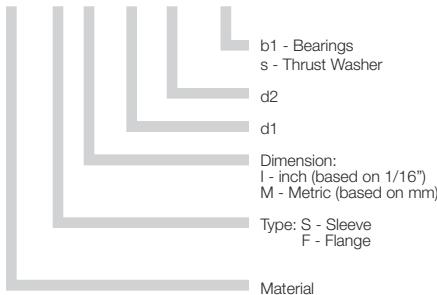

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	177	196
Oscillating	118	137
Linear	492	590

### Usage Guidelines



- For underwater use
- When a cost-effective bearing for high temperatures is desired
- For applications with fuels, oils, etc.
- When resistance to chemicals is needed



- When the highest wear resistance is required
  - iglide® H1
  - iglide® H4
  - iglide® L280
- When vibration dampening is necessary
  - iglide® M250
  - iglide® B
- When electrical conductivity of the bearing is necessary
  - iglide® H
  - iglide® HH370
  - iglide® F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

### Material Data

General Properties	Unit	iglide® H2	Testing Method
Density	g/cm³	1.72	
Color		brown	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.2	
Coefficient of friction, dynamic against steel	μ	0.07 - 0.30	
p x v value, max. (dry)	psi x fpm	16,500	

### Mechanical Properties


Modulus of elasticity	psi	1,494,000	DIN 53457
Tensile strength at 68°F	psi	30,460	DIN 53452
Compressive strength	psi	15,810	
Permissible static surface pressure (68°C)	psi	15,950	
Shore D-hardness		88	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	392	
Max. short-term application temperature	°F	464	
Min. application Temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	4	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	> 10¹⁵	DIN IEC 93
Surface resistance	Ω	> 10¹⁴	DIN 53482

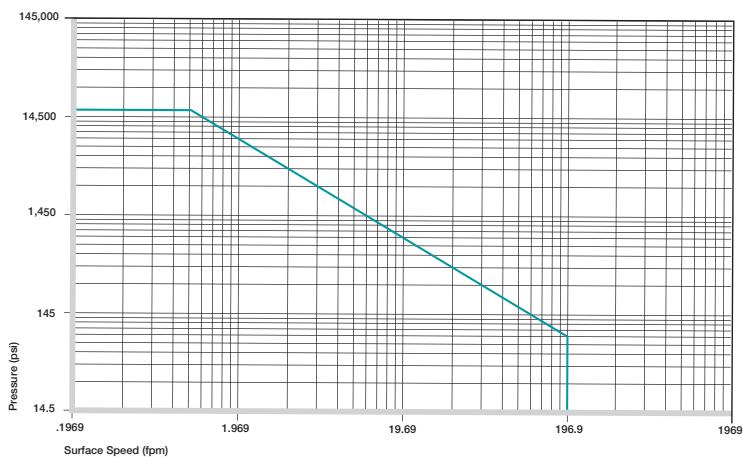


Permissible p x v value for iglide® H2 running dry against a steel shaft, at 68°F

iglide® H2 plain bearings are used mostly for economic reasons. A mixture of solid lubricants reduces the coefficient of friction and enhances the wear resistance. iglide® H2 Plain bearings are self-lubricating and suitable for all types of movements.

### Compressive Strength

The graph shows the elastic deformation of iglide® H2 for radial loads. At the recommended surface pressure of 15,950 psi, the deformation is below 3% at room temperature. The values for tensile and compressive strength are higher than those of iglide® H at room temperature.

- Compressive Strength, Page 1.3

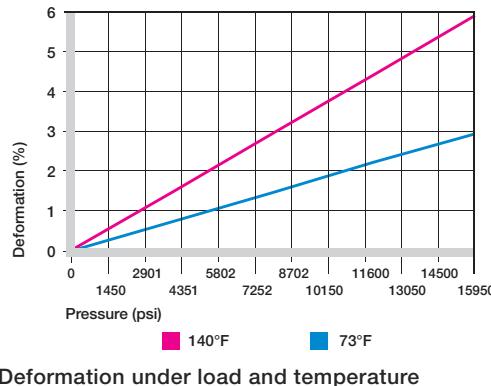

### Permissible Surface Speeds

In the development of iglide® H2 cost considerations and mechanical resistance were the main issues. The permissible surface speeds of these bearings are rather low, which limits the use to primarily slow movements or intermittent operations.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

Continuous      Short Term  
fpm                fpm

Rotating	177	196
Oscillating	118	137
Linear	492	590


Maximum surface speeds

### Temperatures

iglide® H2 is a material with an extremely high resistance to temperature. The maximum permissible short-term temperature of 464°F. iglide® H2 plain bearings may be used in heat treated applications at low loads.

With increasing temperatures, the compressive strength of iglide® H2 plain bearings decreases at a greater rate than that of iglide® H. The graph to the right shows this relationship.

- Application Temperatures, Page 1.7

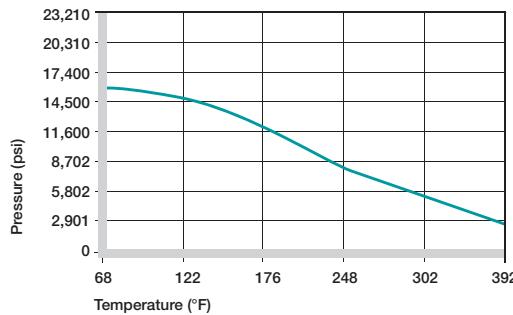

Recommended permissible maximum static surface pressure of iglide® H2 as a result of the temperature

iglide® H2	Application Temperature
Minimum	- 40°F
Max. long-term	+392°F
Max. short-term	+464°F
Additional axial securing	+230°F

Temperature limits for iglide® H2

iglide® H2

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1


inch

mm

## Installation Tolerances

iglide® H2 plain bearings are oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

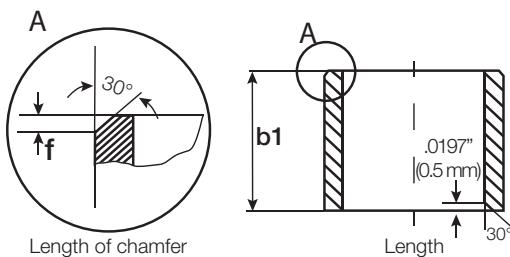

### For Inch Size Bearings

Length (inches)	Length Tolerance (b1)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"	
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"	
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"	
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"	
1.1811 to 1.9685	-0.0000 / -0.0154		
1.9685 to 3.1496	-0.0000 / -0.0181		

### For Metric Size Bearings

Length (mm)	Length Tolerance (b1)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm	
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm	
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm	
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm	
> 18 to 30	-0 / -330		
> 30 to 50	-0 / -390		
> 50 to 80	-0 / -460		


## Friction and Wear

The coefficients of friction of iglide® H2 plain bearings change with different surface speeds, loads and roughness, as indicated in the graphs below.

With regard to hardened steel shafts, the coefficient of friction of iglide® H2 bearings drops considerably as load increases to the higher range (>4,351 psi)

The brittle nature of the material explains why iglide® H2 bearings are sensitive to rough shafts. Smoother shafts (4 rms) do not increase the friction of the system.


- Coefficients of Friction and Surface, Page 1.8
- Wear Resistance, Page 1.9

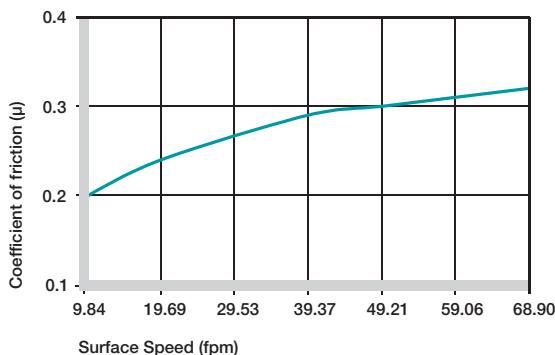


Coefficients of friction for iglide® H2 as a result of the surface speed; p = 108 psi

iglide® H	Coefficient of Friction
Dry	0.07 - 0.30
Grease	0.09
Oil	0.04
Water	0.04

Coefficients of friction for iglide® H2 against steel (Shaft finish = 40 rms, 50 HRC)

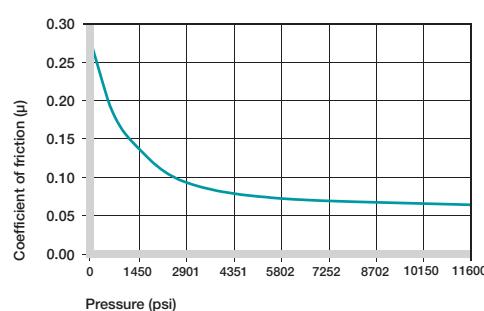

Coefficients of friction for iglide® H2 as a result of the load, v = 1.97 fpm

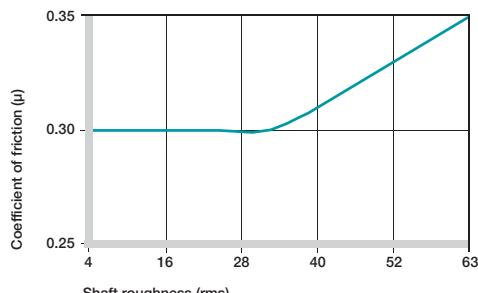


Coefficient of friction of iglide® H2 as a result of the shaft surface (1050 hard chromed)


### Shaft Materials

When studying the wear resistance of iglide® H2, it must be repeated that these bearings have been developed for high static temperature resistance. The wear resistance does not compare with the values of iglide® H370 for any bearing/shaft combination. iglide® H2 bearings should not be combined with hard chromed shafts. Shafts made from 1050 hardened and ground steel and 303 stainless are significantly better, as shown in the graphs. If you wish to use shaft materials that are not listed please contact us. The results for other shaft/bearing combinations are often available.


► Shaft materials, Page 1.11

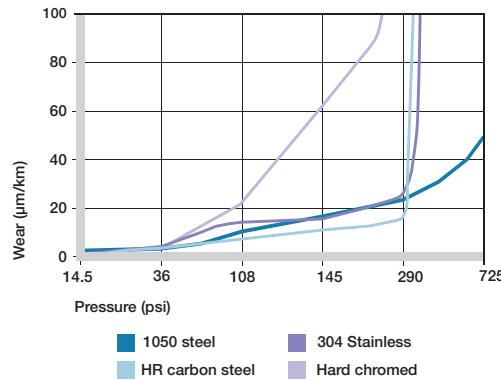

Wear of iglide® H2 with different shaft materials in rotating applications

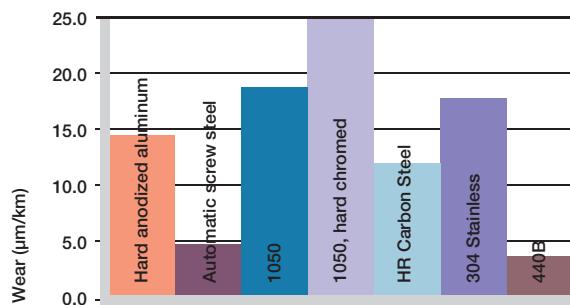

Wear of iglide® H2, rotating application with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

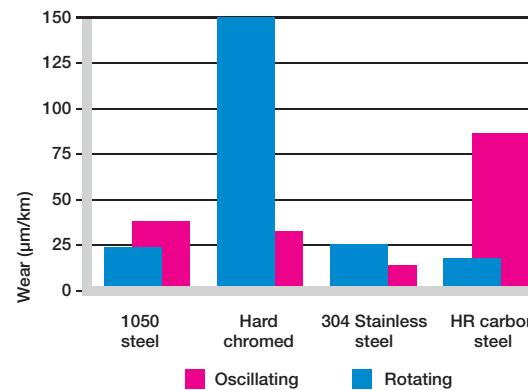

Wear for oscillating and rotating applications with different shaft materials  
 $p = 290$  psi

### Chemical Resistance

iglide® H2 bearings have a good resistance against chemicals. They are resistant to most lubricants.

The iglide® H2 is not affected by most weak organic and inorganic acids.

► Chemical Table, Page 1.16



Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+ to 0
Strong acids	+ to -
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	

#### Chemical resistance of iglide® H2

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

iglide® H2

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

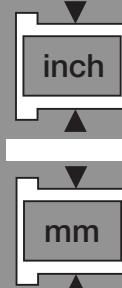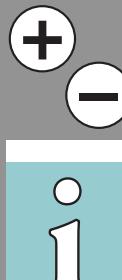



## Radiation Resistance

iglide® H2 plain bearings withstands neutron and gamma particle radiation without detectable losses of its excellent mechanical properties. Plain bearings made of iglide® H2 are resistant to radiation up to an intensity of  $2 \times 10^2$  Gy.

## UV-Resistance

iglide® H2 plain bearings change under the influence of UV radiation and other weathering effects. The surface becomes rougher and the compressive strength decreases. The use of iglide® H2 in applications that are permanently exposed to weathering should be tested.

## Vacuum

In a vacuum environment, small moisture components are released as vapor. It is possible to use iglide® H2 in a vacuum.

## Electrical Properties

Unlike iglide® H and H370 plain bearings, iglide® H2 are electrically insulating.

### iglide® H2

Specific volume resistance	> $10^{15}$ Ωcm
Surface resistance	> $10^{14}$ Ω


### Electrical properties of iglide® H2

## Availability

iglide® H2 plain bearings are manufactured to special order. Please request iglide® H2 bearings as an alternative to iglide® H and iglide® H370 in high volume applications.

igus®

482° F

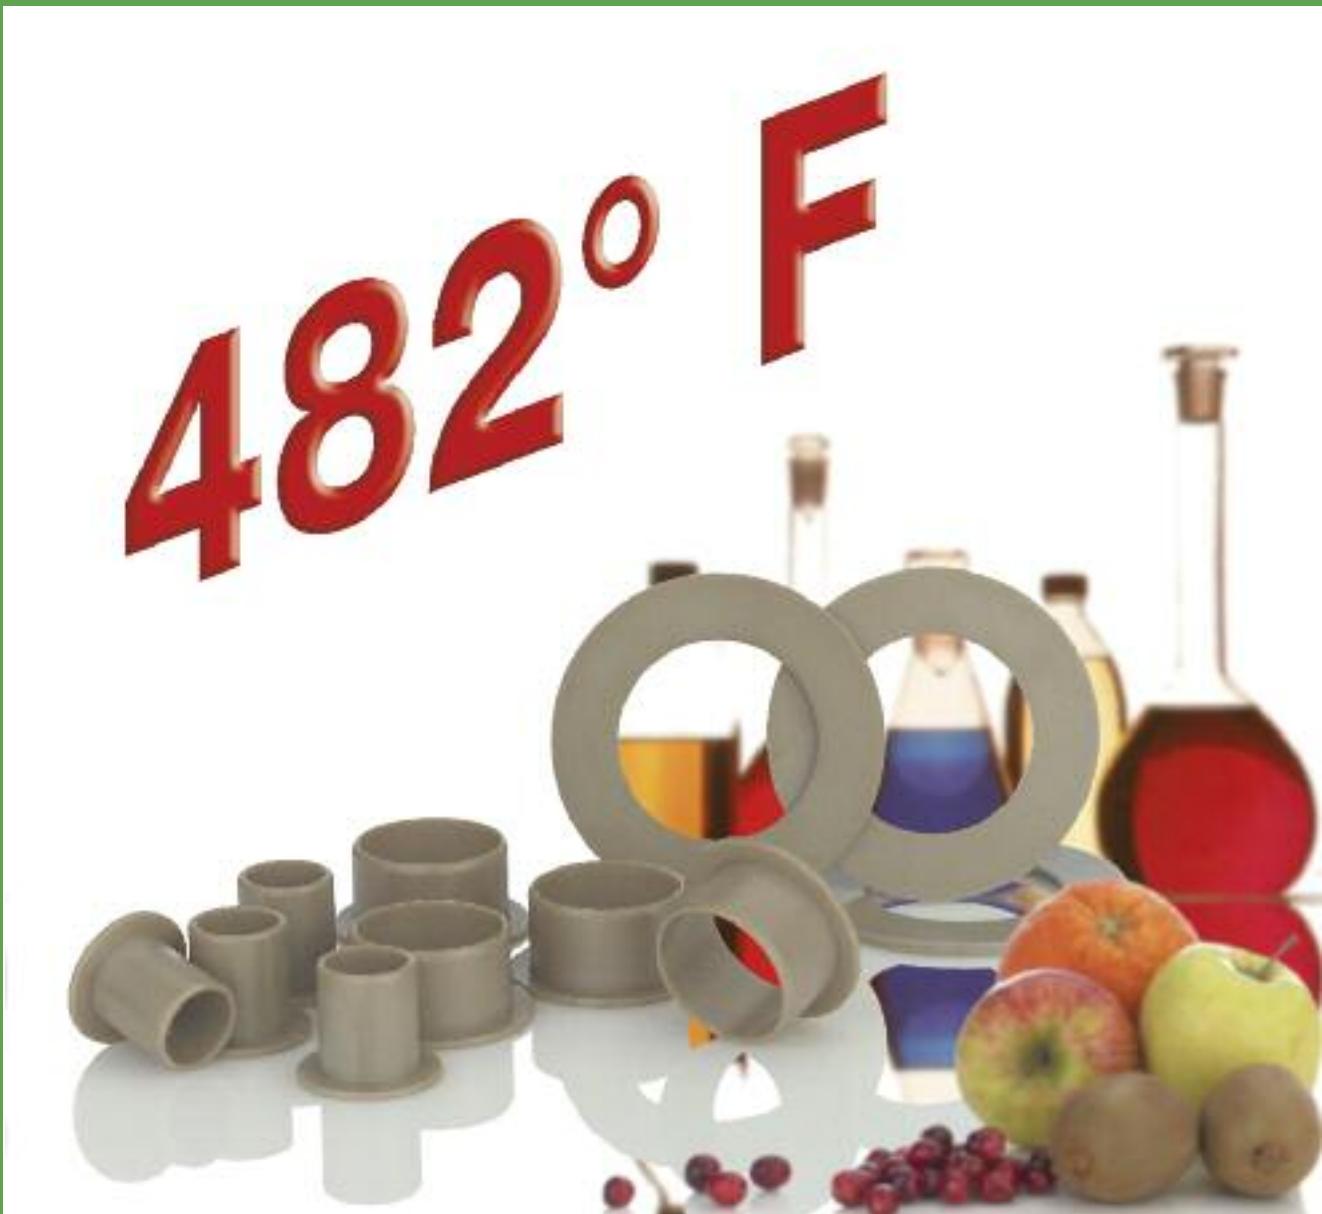


iglide® A500  
Food Applications

**Product Range**

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Metric sizes from (1.5 - 150 mm)

**Part Number Structure**

## Part Number Structure

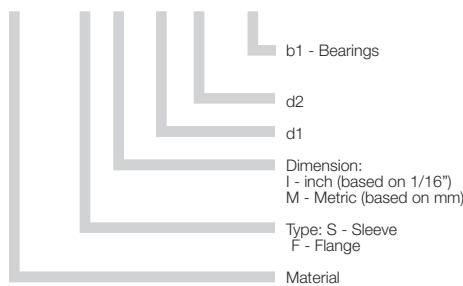A500 S M - 05 07 - 05**Permissible Surface Speeds**

	Continuous fpm	Short Term fpm
Rotating	118	196
Oscillating	78	137
Linear	196	393

**Usage Guidelines**

- When your bearing comes in direct contact with food
- When compliance with FDA is required
- When good abrasion resistance is needed
- When excellent chemical resistance is needed
- When high temperature FDA compliant material is needed



- When the highest wear resistance is required
  - iglide® T500, Z
  - iglide® Z
- If no resistance to temperature or chemicals is required
  - iglide® A180
  - iglide® A200
- When a cost-effective universal bearing is desired
  - iglide® G300
  - iglide® P



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

**Material Data**

General Properties	Unit	iglide® A500	Testing Method
Density	g/cm³	1.28	
Color		brown	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	0.5	
Coefficient of friction, dynamic against steel	$\mu$	0.26 - 0.41	
p x v value, max. (dry)	psi x fpm	8,000	

**Mechanical Properties**


Modulus of elasticity	psi	522,100	DIN 53457
Tensile strength 68°F	psi	20,310	DIN 53452
Compressive strength	psi	17,110	
Permissible static surface pressure (68°F)	psi	17,400	
Shore D-hardness		83	DIN 53505

**Physical and Thermal Properties**

Max. long-term application temperature	°F	482	
Max. short-term application temperature	°F	572	
Min. application temperature	°F	-148	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	9	DIN 53752

**Electrical Properties**

Specific volume resistance	$\Omega\text{cm}$	$> 10^{14}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{13}$	DIN 53482

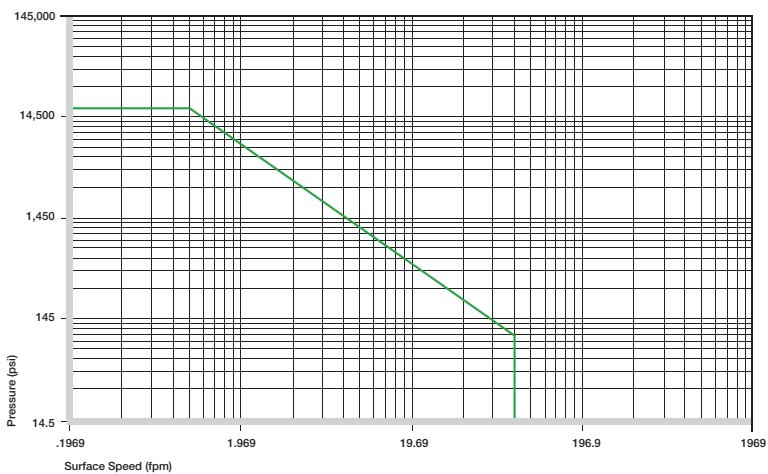

Permissible p x v values for iglide® A500 running dry against a steel shaft, at 68°F



iglide® A500 is FDA compliant


Plain bearings made of iglide® A500 can be exposed to extremely high temperatures and consist of materials suitable for direct contact with food (FDA compliant). They have an exceptional resistance to chemicals and are appropriate for medical equipment.

## Compressive Strength

Although iglide® A500 is a very flexible material it features excellent compressive strength, even at high temperatures. The graph shows the recommended maximum surface pressure of the bearings against temperature. This combination of high strength and high flexibility gives real benefits in applications involving vibrations and edge loadings.

Due to the fact that the wear of the plain bearings rapidly increases from pressures of 1,450 to 2,901 psi, we recommend to thoroughly check applications above these values

- Compressive Strength, Page 1.3

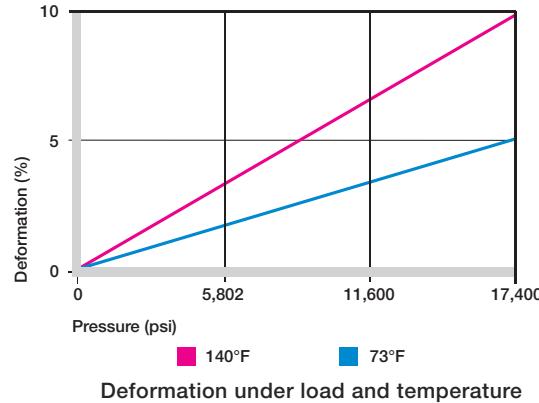

## Permissible Surface Speeds

Due to its high temperature resistance, iglide® A500 also allows for high surface speeds. However, the coefficient of friction continues to increase at these high speeds, resulting in a greater heating of the bearings. Test results show that iglide® A500 plain bearings are more resistant to wear in oscillating movements; the permissible p x v values are also higher in oscillating operation.

- Surface Speed, Page 1.5

- p x v value, Page 1.6


## Temperatures

The short term permissible highest application temperature is 572°F. The compressive strength of iglide® A500 plain bearings decreases with increasing temperatures. The graph illustrates this relationship.

- Application Temperatures, Page 1.7

	Continuous fpm	Short Term fpm
Rotating	118	196
Oscillating	78	137
Linear	196	393

**Maximum surface speeds**

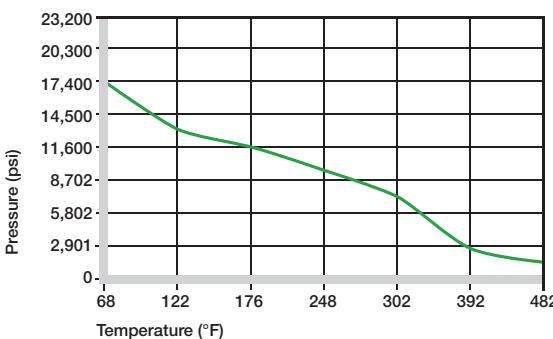

**Recommended maximum permissible static surface pressure of iglide® A500 as a result of the temperature**

iglide® A500	Application Temperature
Minimum	-148°F
Max. long-term	+482°F
Max. short-term	+572°F
Additional axial securing	+266°F

**Temperature iglide® A500**



1.0


inch

mm

## Installation Tolerances

iglide® A500 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

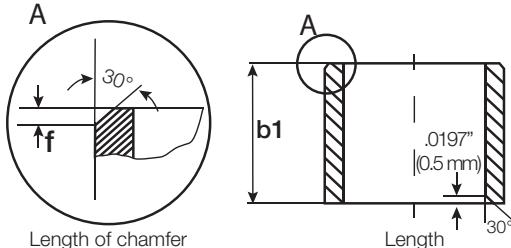

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The coefficient of friction depends on the load acting on the bearing. The coefficient of friction  $\mu$  at first highly decreases with increasing load. The most favorable coefficient of friction is attained from approximately 1,450 psi. However, friction and wear depend, to a large extent, on the running surface. Therefore, shafts that are too smooth not only increase the coefficient of friction, but can also increase the wear of the bearings. Ground surfaces with an average medium roughness range of 16 to 38 rms are the most suitable.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

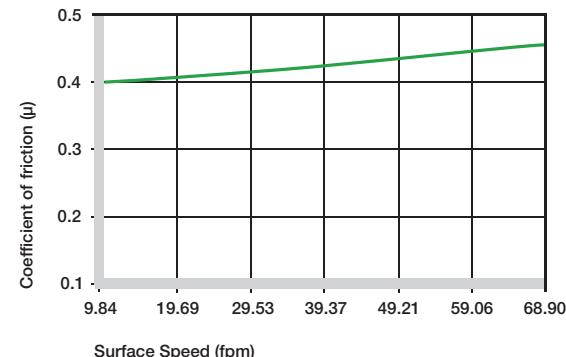


Coefficients of friction of iglide® A500 as a function of the running speed; p = 108 psi

iglide® A500	Coefficient of Friction
Dry	0.10 - 0.40
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® A500 against steel (Shaft finish = 40 rms, 50 HRC)

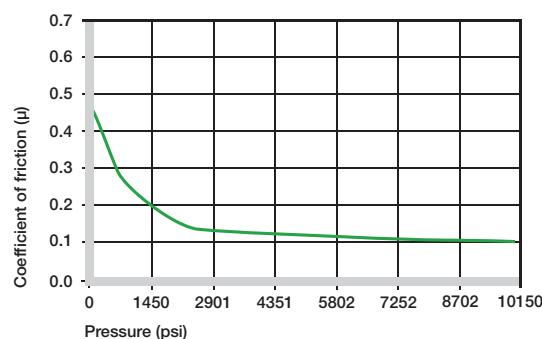

Coefficients of friction of iglide® A500 as a function of the load, v = 1.96 fpm

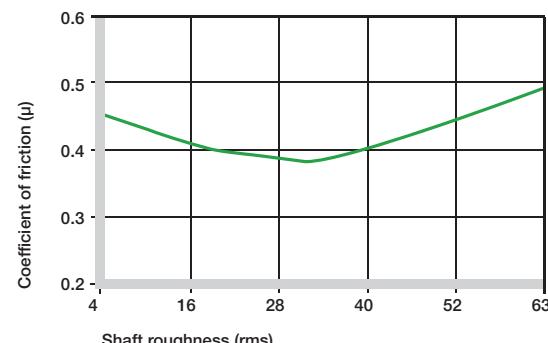


Coefficients of friction of iglide® A500 as a function of the shaft surface (1050 hard chromed)

## Shaft Materials


The graphs illustrate the results of testing done with various shaft materials in combination with iglide® A500 bearings. iglide® A500 against a hard-chromed shaft in a rotational manner is interesting. Up to approximately 290 psi, the wear of this combination is unaffected by the load.

With regard to oscillating movements against shafts of 1050 steel, the wear resistance is better than that of rotation under the same pressure. If the shaft material you intend to use is not included in these graphs please contact us.


► Shaft Materials, Page 1.11

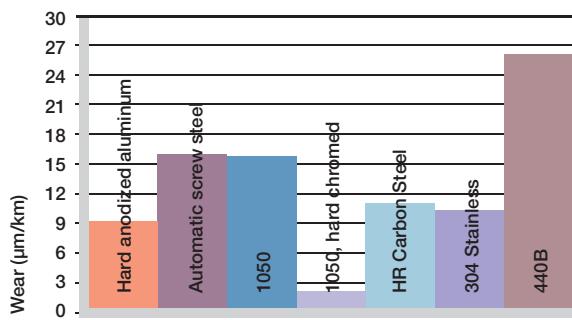

Wear of iglide® A500, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

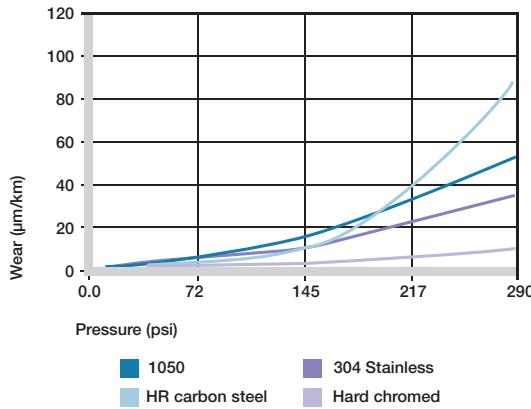

Wear of iglide® A500 with different shaft materials in rotational applications

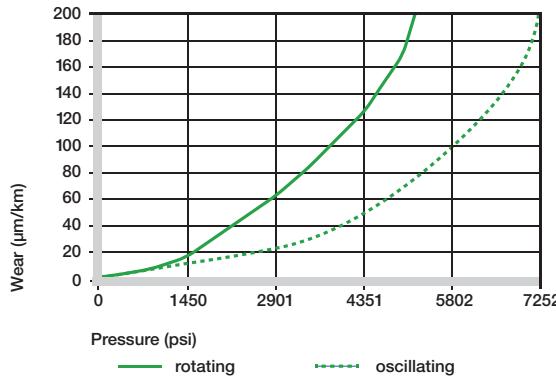

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

## Chemical Resistance


iglide® A500 plain bearings feature an excellent resistance with regards to detergents, greases, oils, bases and acids. The moisture absorption of iglide® A500 plain bearings is only 0.5% when saturated.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+
Strong acids	+
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	



### Chemical resistance of iglide® A500

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

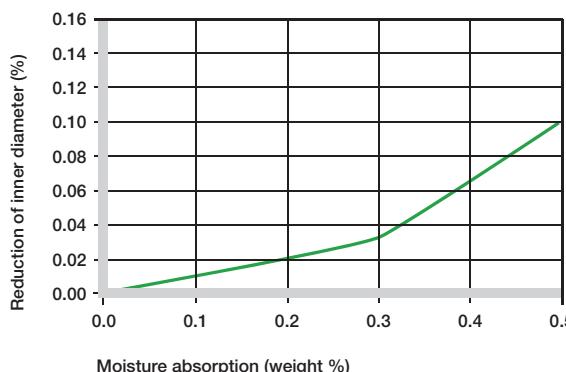

Effect of moisture absorption on iglide® A500 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

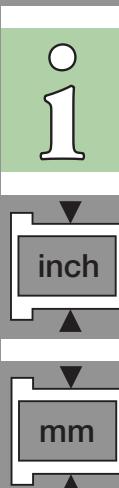

## Radiation Resistance

Plain bearings made from iglide® A500 rank among the most radiation resistant products in the iglide® range. The bearings are resistant up to a radiation intensity of  $2 \times 10^4$  Gy. Higher radiation affects the material and can result in the loss of basic mechanical characteristics.

## UV-Resistance

To a large extent, iglide® A500 plain bearings are resistant to UV radiation.

## Vacuum

In a vacuum environment, iglide® A500 plain bearings can only be used to a limited degree.

## Electrical Properties

iglide® A500 plain bearings are electrically insulating.

### iglide® A500

Specific volume resistance	> $10^{14}$ $\Omega$ cm
Surface resistance	> $10^{13}$ $\Omega$

### Electrical properties of iglide® A500

**igus®**



# iglide® A290 Food Applications


## Product Range

- Standard Styles:  
Sleeve, Flange and Thrust Washer
- Custom shapes and sizes available
- Inner diameters:  
Metric sizes from (3 - 50 mm)

## Part Number Structure

### Part Number Structure

A290 S M - 03 04 - 03

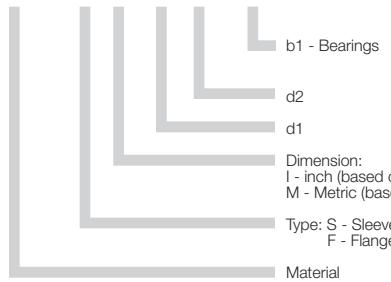

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	590	787

## Usage Guidelines



- When your bearing comes in direct contact with food
- For low speeds
- When quiet operation is important
- When good abrasion resistance is needed
- When very good mechanical properties are required
- When a physiologically safe bearing is needed



- When FDA compliance is required
  - iglide® A180, A200, A500
- When high wear resistance is required
  - iglide® L280
- When temperatures are continuously greater than 284°F
  - iglide® A500
  - iglide® H
  - iglide® T500
- When a cost-effective universal bearing is required
  - iglide® G300

## Material Data

General Properties	Unit	iglide® A290	Testing Method
Density	g/cm³	1.41	
Color		white	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.7	DIN 53495
Max. moisture absorption	% weight	7.3	
Coefficient of friction, dynamic against steel	$\mu$	0.13 - 0.40	
p x v value, max. (dry)	psi x fpm	6,600	

## Mechanical Properties


Modulus of elasticity	psi	1,276,000	DIN 53457
Tensile strength 68°F	psi	36,260	DIN 53452
Compressive strength	psi	13,200	
Permissible static surface pressure (68°F)	psi	10,150	
Shore D-hardness		88	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	284	
Max. short-term application temperature	°F	356	
Min. application temperature	°F	-40	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K <sup>-1</sup> x 10 <sup>-5</sup> ]	7	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{11}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{11}$	DIN 53482

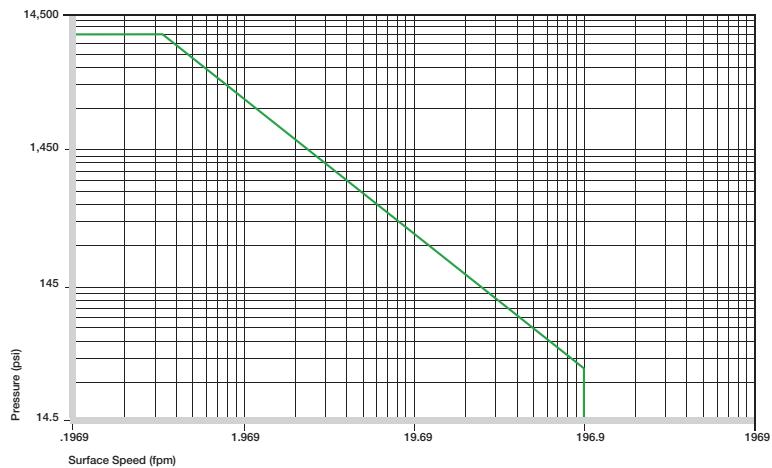

Permissible p x v values for iglide® A290 running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

BfR


iglide® A290 complies with the  
requirements of the BfR for  
contact with food

iglide® A290 bearings are a further development for use in the food and pharmaceutical industry. When compared to iglide® A200 bearings, the tribological properties are considerably improved.

## Compressive Strength

iglide® A290 plain bearings have a recommended maximum surface pressure of 10,150 psi. At this load, the deformation at room temperature is only 2.5%. Plastic deformation is close to zero up to this load. However, it is also affected by the cycle time.

- Compressive Strength, Page 1.3

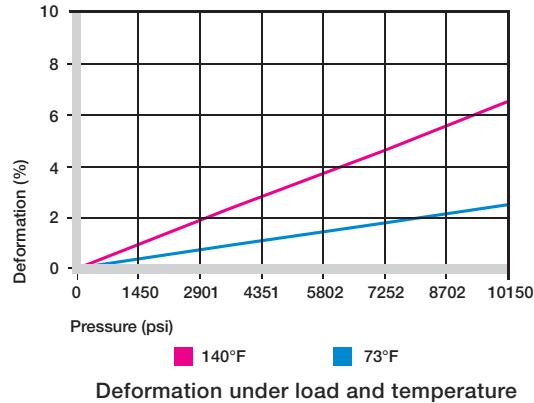

## Permissible Surface Speeds

iglide® A290 is suitable for low surface speeds. Because of the relatively high friction rate in the low load range, plain bearings made of iglide® A290 heat up more than other bearings. At high speed, the friction additionally increases.

- Surface Speed, Page 1.5
- p x v value, Page 1.6


	Continuous fpm	Short Term fpm
Rotating	196	393
Oscillating	137	275
Linear	590	787

Maximum surface speeds

## Temperatures

The maximum permissible short-term temperature is 356°F. With an increase in temperature, the compressive strength of iglide® A290 plain bearings decreases. The graph shows this relationship. The ambient temperatures prevalent in the bearing system also have an effect on wear. With rising temperatures, an increase in wear results. From temperatures of 248°F, this effect becomes significant.

- Application Temperatures, Page 1.7

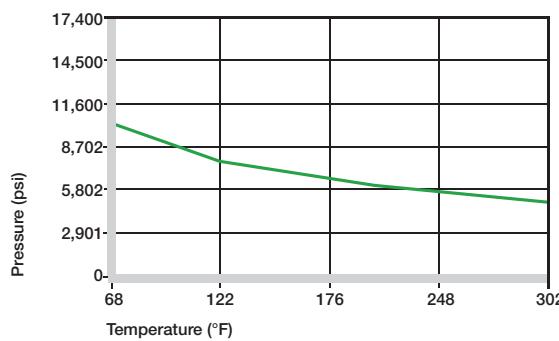

Recommended maximum permissible static surface pressure of iglide® A290 as a result of the temperature

iglide® A290	Application Temperature
Minimum	-40°F
Max. long-term	+284°F
Max. short-term	+356°F
Additional axial securing	+230°F

Temperature iglide® A290

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




10  
○



## Installation Tolerances

iglide® A290 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

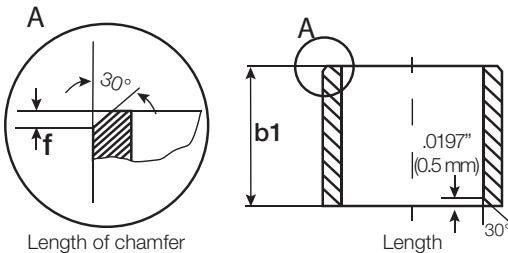

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 /-0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 /-0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 /-0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 /-0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 /-0.0154	
1.9685 to 3.1496	-0.0000 /-0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 /-140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 /-180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 /-220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 /-270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 /-330	
> 30 to 50	-0 /-390	
> 50 to 80	-0 /-460	

## Friction and Wear

Just as the wear resistance, the coefficient of friction  $\mu$  also changes with the load. With increasing speeds and a constant load, the coefficient of friction constantly increases. On the other hand, for increasing load and a constant speed, an inverse relationship is shown in the graphs. To a large extent, friction and wear are dependent on the shaft material. Shafts that are too smooth increase both the coefficient of friction and the wear of the bearing. iglide® A290 proves to be relatively resistant to shaft surfaces. iglide® A290 plain bearings have a coefficient of friction  $\mu$  around 0.4 for an average roughness of Ra = 16 to 64 rms.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

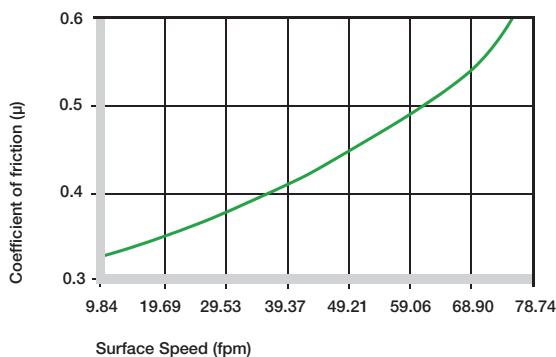


Coefficients of friction of iglide® A290 as a function of the running speed; p = 108 psi


### iglide® A290      Coefficient of Friction

Dry	0.13 - 0.40
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® A290 against steel (Shaft finish = 40 rms, 50 HRC)

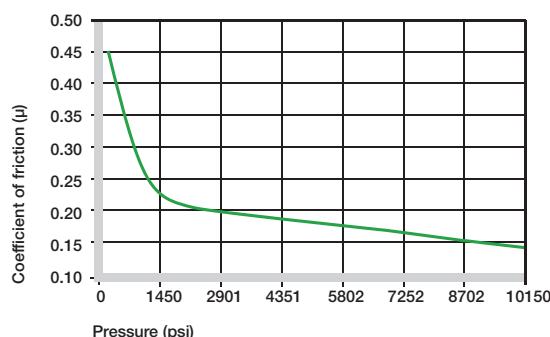

Coefficients of friction of iglide® A290 as a function of the load, v = 1.96 fpm

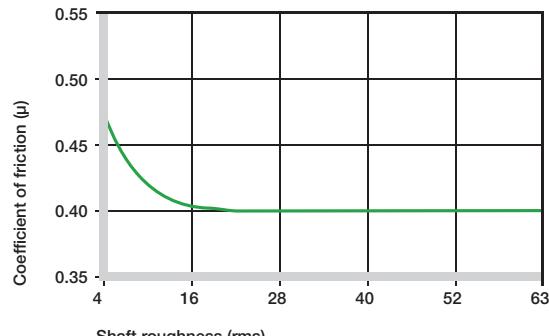


Coefficients of friction of iglide® A290 as a function of the shaft surface (1050 hard chromed)

## Shaft Materials

The graphs show the results of testing different shaft materials with iglide® A290 plain bearings. The improved tribological properties compared to iglide® A200 are also reflected in the wear values. For low loads, the differences in wear resistance for iglide® A290 with different shaft materials is very pronounced. The graph shows that with increasing loads, the advantage of hard chromed shafts increases. Hard chromed shafts are also well suited for oscillating applications, frequently found in packaging machines. Other hardened surfaces are also recommended for oscillating movements, for example 1050 hardened and ground steel.


► Shaft Materials, Page 1.11

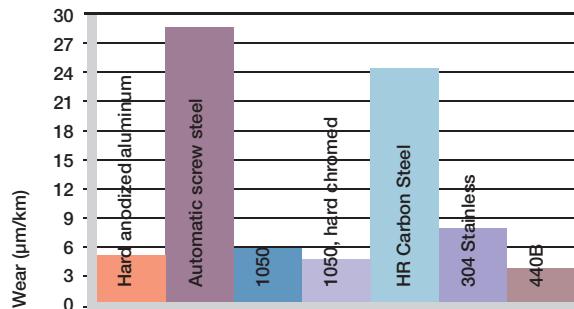

Wear of iglide® A290, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm



Wear of iglide® A290 with different shaft materials in rotational applications

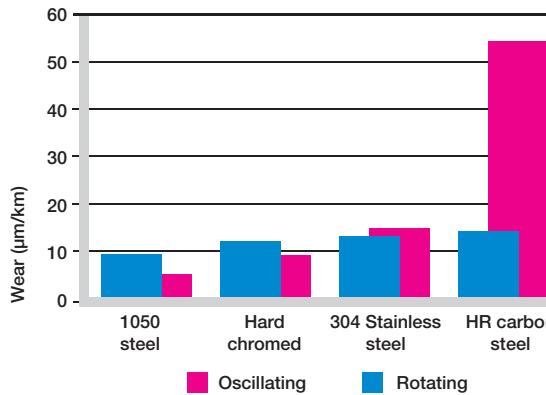

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

## Chemical Resistance

iglide® A290 plain bearings have a good chemical resistance. They are resistant to most lubricants. iglide® A290 is also resistant to most weak organic and inorganic acids.

The moisture absorption of iglide® A290 bearings is approximately 1.7% in standard atmosphere. The saturation limit in water is 7.3%. This is a disadvantage that must be taken into account with regard to applications in moist or wet environments. If you have questions concerning the tolerances in wet applications, please contact us.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® A290

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

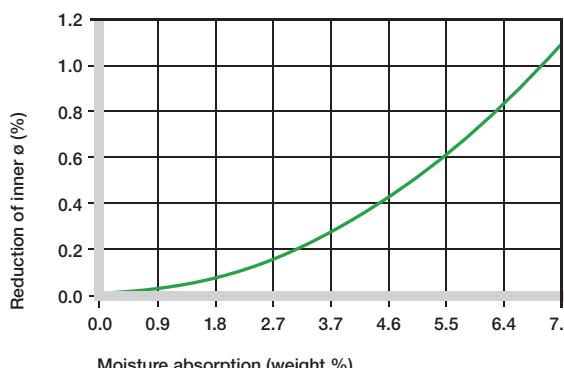

Effect of moisture absorption on iglide® A290 plain bearings

## Radiation Resistance

Plain bearings made from iglide® A290 are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

## UV-Resistance

iglide® A290 is partially resistant to UV radiation, certain tribological properties can be affected.

## Vacuum

In a vacuum environment, iglide® A290 plain bearings have limited use due to the high moisture absorption.

## Electrical Properties

iglide® A290 plain bearings are electrically insulating.

### iglide® A290

Specific volume resistance	> $10^{11}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® A290

**igus®**



**iglide® T220  
Food Applications**


## Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available

## Part Number Structure

### Part Number Structure

T220 S M - 03 04 - 03

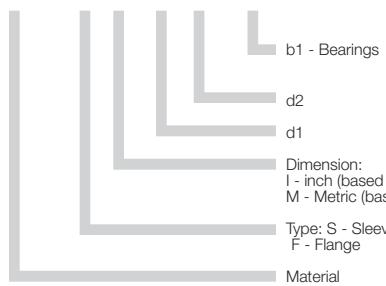

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	78	196
Oscillating	59	137
Linear	196	393

## Usage Guidelines



- When bearings need to be free of substances that are not permitted for applications in the tobacco industry



- When a cost-effective universal bearing is required
  - iglide® G300
  - iglide® M250
- When highest wear resistance and low pressure load is necessary
  - iglide® J
- If the bearing should be free merely from PTFE and silicon
  - iglide® C
  - iglide® R



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

## Material Data

General Properties	Unit	iglide® T220	Testing Method
Density	g/cm³	1.28	
Color		white	
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	0.5	
Coefficient of friction, dynamic against steel	$\mu$	0.20 - 0.32	
p x v value, max. (dry)	psi x fpm	8,000	

## Mechanical Properties


Modulus of elasticity	psi	261,100	DIN 53457
Tensile strength 68°F	psi	9,427	DIN 53452
Compressive strength	psi	7,977	
Permissible static surface pressure (68°F)	psi	5,802	
Shore D-hardness		76	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	212	
Max. short-term application temperature	°F	320	
Min. application temperature	°F	-40	
Thermal conductivity	[W/m x K]	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	[K⁻¹ x 10⁻⁵]	11	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega\text{cm}$	$> 10^{10}$	DIN IEC 93
Surface resistance	$\Omega$	$> 10^{10}$	DIN 53482

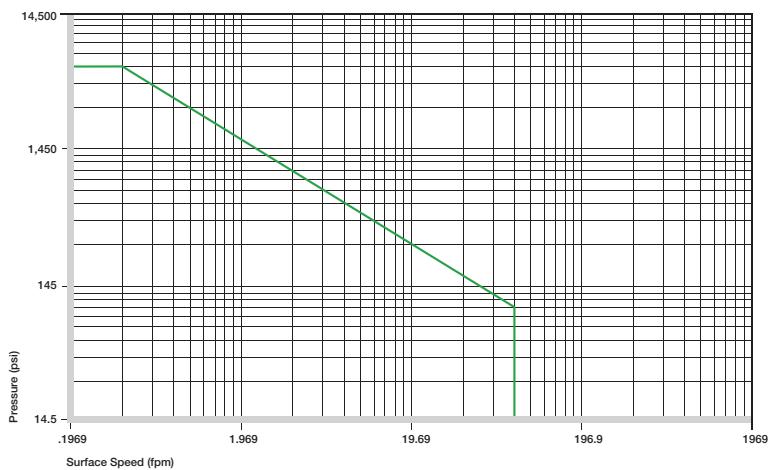


Permissible p x v values for iglide® T220 running dry against a steel shaft, at 68°F

iglide® T220 is a special material which meets the requirements for use in the tobacco processing industry. The material is free of undesirable and prohibited ingredients, as required by well-known manufacturers of tobacco products.

## Compressive Strength

iglide® T220 plain bearings can be stressed to the permissible limit of 6,527 psi. The load, however, has an impact on the wear of the bearings. The permissible load is further limited by increasing temperatures.

- Compressive Strength, Page 1.3

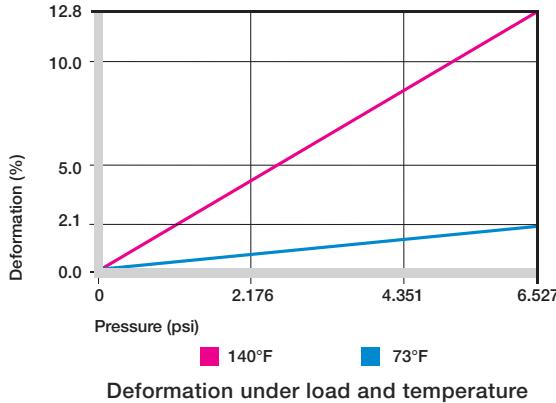

## Permissible Surface Speeds

The maximum speed of iglide® T220 plain bearings in continuous rotation is 78 fpm. The frictional heat generated define the permissible speeds. From this it follows that in intermittent service or in linear movements, higher speeds can be attained.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	78	196
Oscillating	59	137
Linear	196	393

**Maximum surface speeds**


## Temperatures

iglide® T220 plain bearings can be continuously used up to 212°F. Temporarily, temperatures up to 320°F are permissible. The elasticity of the bearings depends on the temperature. 140°F already results in a clear increase in elasticity. Usually iglide® T220 bearings will need to be mechanically secured in the housing when being used at temperatures over 140°F. Please contact us if you have questions concerning the plain bearings and their use.

- Application Temperatures, Page 1.7

iglide® T220	Application Temperature
Minimum	-40°F
Max. long-term	+212°F
Max. short-term	+320°F
Additional axial securing	+122°F

Temperature iglide® T220

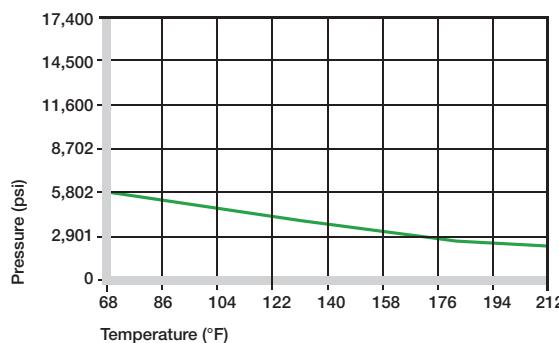

Recommended maximum permissible static surface pressure of iglide® T220 as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



10



inch




mm

## Installation Tolerances

iglide® T220 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

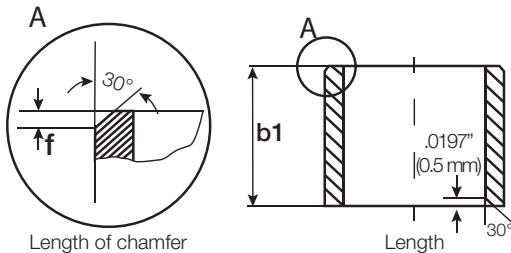


For Inch Size Bearings		
Length Tolerance (b1) (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

For Metric Size Bearings		
Length Tolerance (b1) (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

This material was developed in strict compliance with the specific requirements of the tobacco processing industry. This eliminated the use of friction reducing additives, which means that the friction and wear values of iglide® T220 plain bearings fall well behind those of other iglide® materials.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

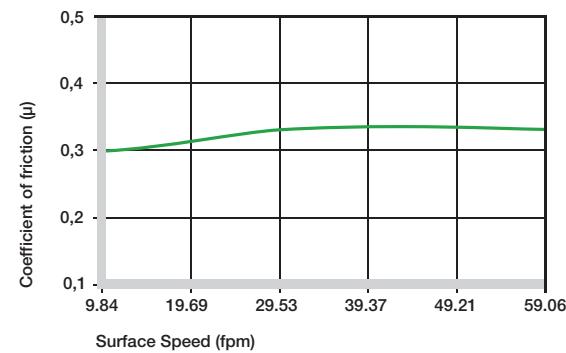


Coefficients of friction of iglide® T220 as a function of the running speed; p = 108 psi

iglide® T220	Coefficient of Friction
Dry	0.20 - 0.32
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® T220 against steel (Shaft finish = 40 rms, 50 HRC)

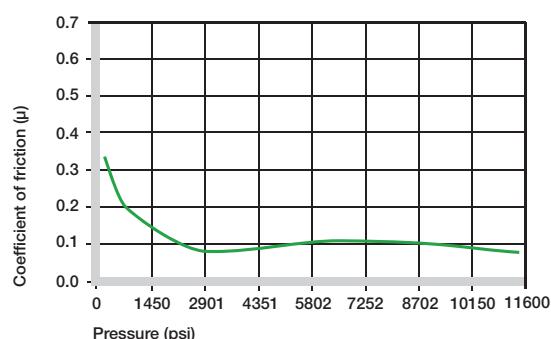

Coefficients of friction of iglide® T220 as a function of the load, v = 1.96 fpm

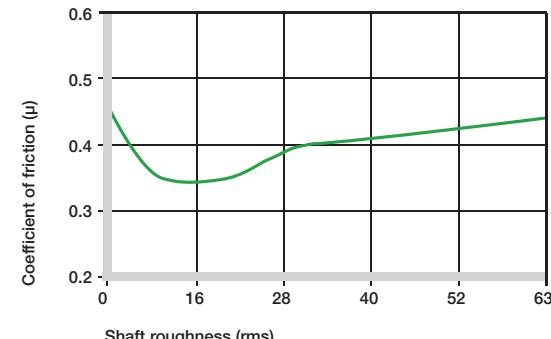


Coefficients of friction of iglide® T220 as a function of the shaft surface (1050 hard chromed)


### Shaft Materials

The graphs show the wear resistance results of testing different shaft materials with iglide® T220 plain bearings. If recommendations are observed, the service life of a bearing application can be considerably improved. The graph shows that the bearings react with a heavy increase in wear when load is increased. Therefore it should be noted that the load should be kept below 725 psi by the correct dimensioning of the bearing.


► Shaft Materials, Page 1.11

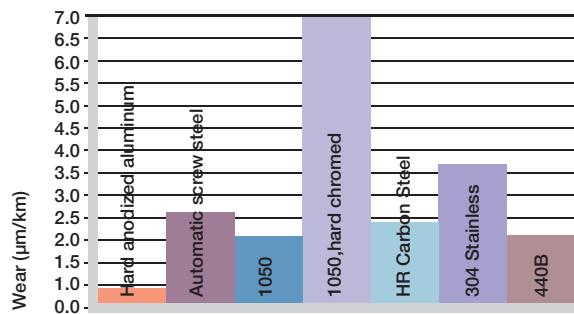

Wear of iglide® T220, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

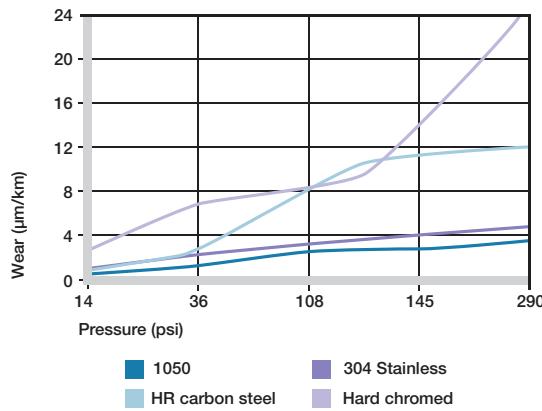

Wear of iglide® T220 with different shaft materials in rotational applications

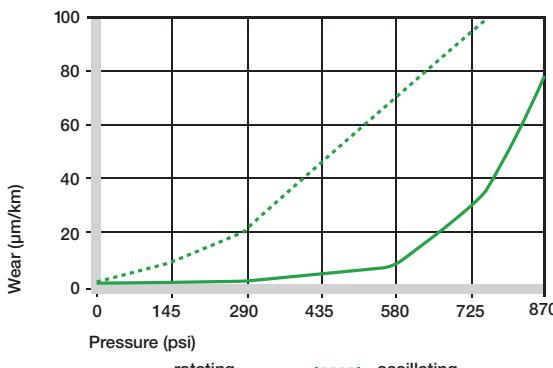

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

### Chemical Resistance

iglide® T220 plain bearings are resistant to strongly diluted alkaline and very weak acids. The moisture absorption of iglide® T220 plain bearings is approximately 0.3% in standard atmosphere. The saturation limit in water is 0.5%. These values are so low that consideration of expansion by moisture is only required under extreme circumstances.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	-
Greases, oils without additives	+
Fuels	+
Weak acids	0
Strong acids	-
Weak alkaline	-
Strong alkaline	-

+ resistant, 0 conditionally resistant, - not resistant

#### Chemical resistance of iglide® T220

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

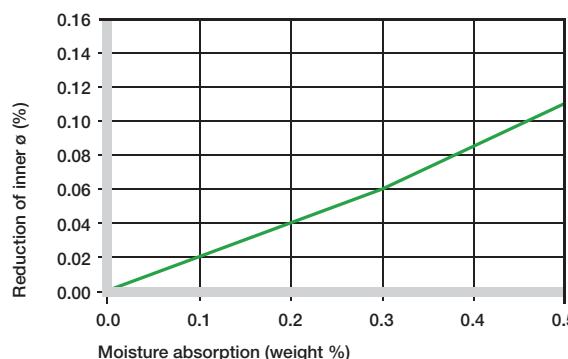

Effect of moisture absorption on iglide® T220 plain bearings

## Radiation Resistance

Plain bearings made from iglide® T220 are radiation resistant up to an intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® T220 are not resistant to the impact of UV radiation.

---

## Vacuum

Applications in a vacuum are only possible to a limited extent. Only dehumidified iglide® T220 bearings should be tested in a vacuum.

---

## Electrical Properties

iglide® T220 plain bearings are electrically insulating.

### iglide® T220

Specific volume resistance	> $10^{10}$ $\Omega$ cm
Surface resistance	> $10^{10}$ $\Omega$


### Electrical properties of iglide® T220

---

## Availability

iglide® T220 plain bearings are manufactured to special order.

**igus®**

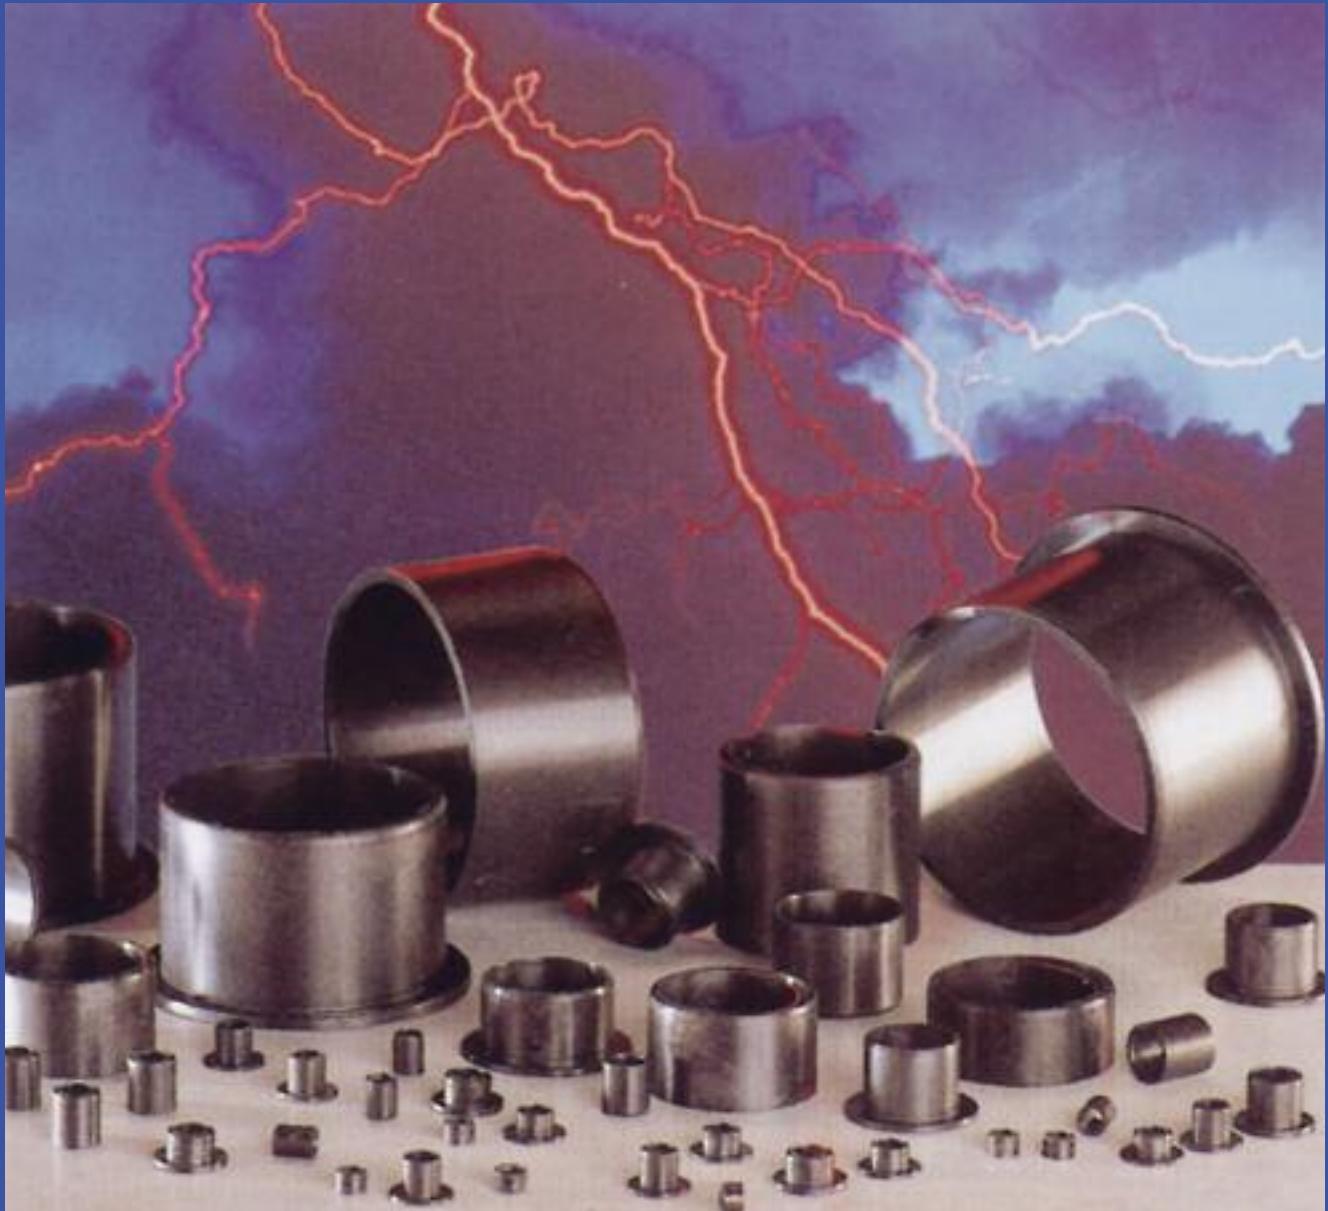

# iglide® F Special Applications




### Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available
- Inner diameters:  
Metric sizes from 3 - 70 mm

### Part Number Structure

#### Part Number Structure

**F S M- 02 03 - 03**

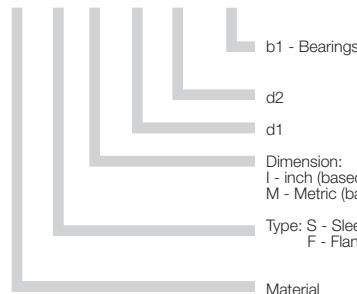

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	295
Oscillating	118	216
Linear	590	1181

### Usage Guidelines



- When the electrical conductivity is especially important
- For high static loads



- When mechanical reaming of the wall surface is necessary
  - iglide® M250
- When the highest wear resistance is needed
  - iglide® L280
- When very low coefficients of friction in dry running
  - iglide® T500, M250

### Material Data

General Properties	Unit	iglide® F	Testing Method
Density	g/cm <sup>3</sup>	1.25	
Color		black	
Max. moisture absorption at 73°F/50% r.h.	% weight	1.8	DIN 53495
Max. moisture absorption	% weight	8.4	
Coefficient of friction, dynamic against steel	μ	0.10 - 0.39	
p x v value, max. (dry)	psi x fpm	9,700	

### Mechanical Properties


Modulus of elasticity	psi	1,682,000	DIN 53457
Tensile strength at 68°F	psi	37,710	DIN 53452
Compressive strength	psi	14,210	
Permissible static surface pressure (68°F)	psi	15,230	
Shore D-hardness		84	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	284	
Max. short-term application temperature	°F	356	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.65	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	12	DIN 53752

### Electrical Properties

Specific volume resistance	Ωcm	< 10 <sup>3</sup>	DIN IEC 93
Surface resistance	Ω	< 10 <sup>2</sup>	DIN 53482

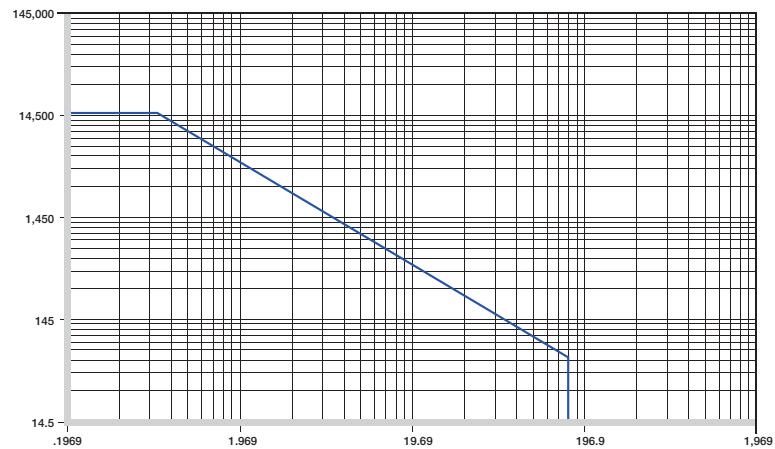

Permissible p x v values for iglide® F running dry against a steel shaft, at 68°F



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system




Bearings made of iglide® F are suitable for application in direct contact with foods. Therefore, they are the ideal solution for bearing positions on machines for the food and packaging industries, the medical equipment manufacturing, for small equipment for households, etc.

## Compressive Strength

At room temperature, they can handle loads up to 15,225 psi. The graph shows the elastic deformation of iglide® F for radial loads. At the maximum permissible load of approximately 15,225 psi, the deformation is less than 3.5%. A plastic deformation is minimal up to this pressure load.

- Compressive Strength, Page 1.3

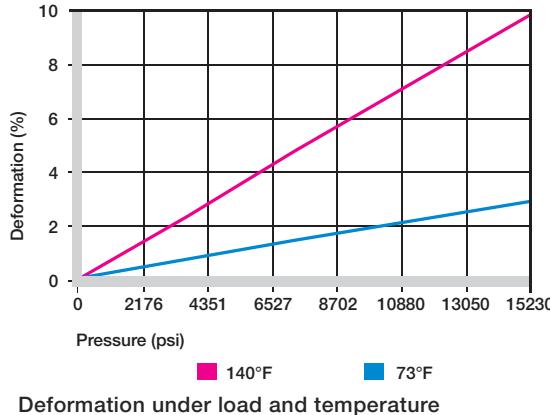

## Permissible Surface Speeds

The maximum permissible surface speeds depend on the operating time and type of movement. A plain bearing is stressed the most during long-lasting rotational movements. Here, the maximum speed for iglide® F plain bearings is 118 fpm.

The maximum values given in the table can only be achieved at the lowest surface pressure. In practice, these limit values are rarely achieved due to varying application conditions.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

The ambient temperatures greatly affect the properties of plain bearings. The maximum permissible short-term temperature is 356°F. In long-term operation, 284°F may not be exceeded.

With increasing temperatures, the compressive strength of iglide® F plain bearings decreases. Graph 12.3 shows this relationship. The wear also increases.


- Application Temperatures, Page 1.7

iglide® F	Application Temperature
Minimum	-40°F
Max. long-term	+284°F
Max. short-term	+356°F
Additional axial securing	+221°F

Temperature iglide® A200

	Continuous fpm	Short Term fpm
Rotating	157	295
Oscillating	118	216
Linear	590	1181

Maximum surface speeds

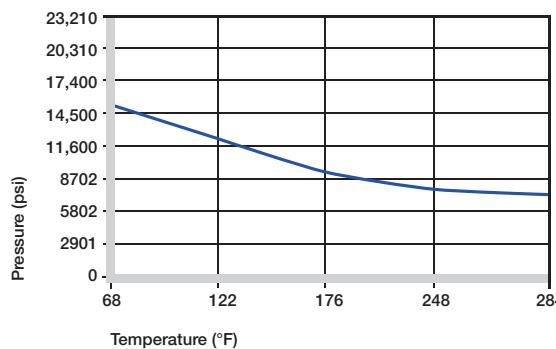


Recommended maximum permissible static surface pressure of iglide® F as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




1.



## Installation Tolerances

iglide® F plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings. Please contact an iglide® technical expert for support.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

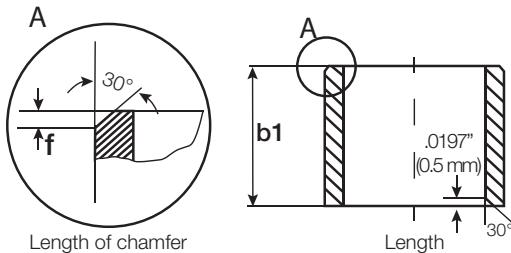

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

Similar to wear resistance, the coefficient of friction also changes with the load. Friction and wear are also dependent to a large degree on the shafting partner. Shafts that are too smooth not only increase the coefficient of friction, they can also increase the wear of the bearing. For iglide® F a ground surface with an average roughness of 20 rms is recommended for the shaft.

- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

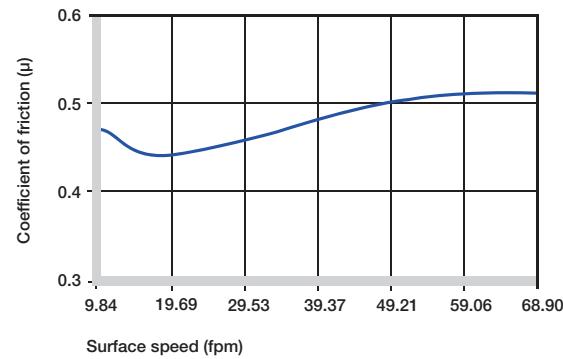


Coefficients of friction of iglide® F as a function of the running speed; p = 108 psi


### iglide® A200      Coefficient of Friction

Dry	0.08 - 0.15
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® F against steel (Shaft finish = 40 rms, 50 HRC)

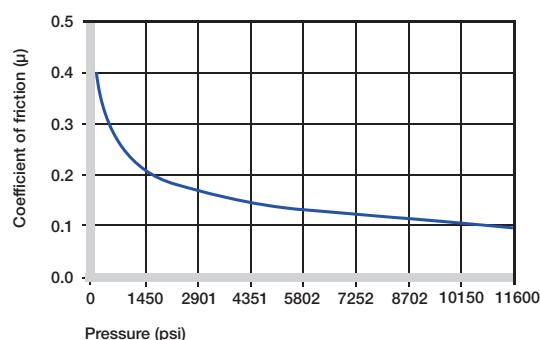

Coefficients of friction of iglide® F as a function of the load, v = 0.01 m/s

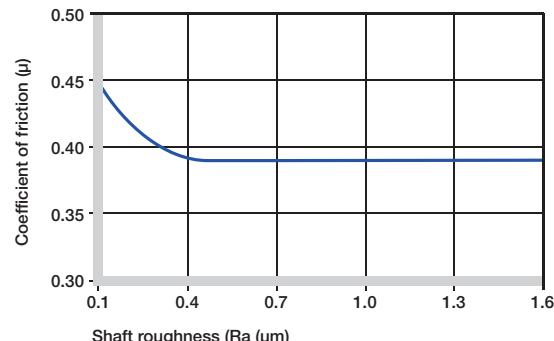

Coefficients of friction of iglide® F as a function of the shaft surface (1050 hard chromed)


### Shaft Materials

The graphs show results of testing different shaft materials with plain bearings made of iglide® F.


In the lowest load range, the hard-chromed shaft proves to be the best partner in rotating applications with iglide® F plain bearings.

The behavior is different in oscillating movements. With much higher wear values than for rotation, the 303 Stainless Steel shaft and the hard-chromed shaft are better than the Cold Rolled Steel shaft even at 290 psi. If the shaft material you plan to use is not contained in this list, please contact us


► Shaft Materials, Page 1.11

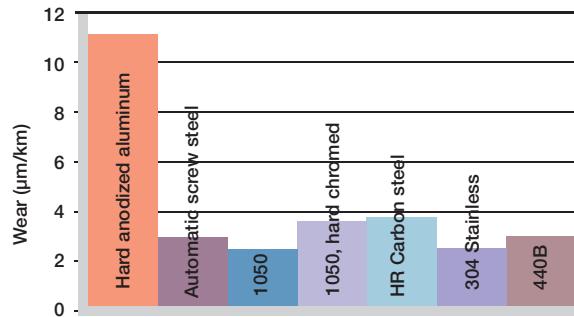

Wear of iglide® F, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

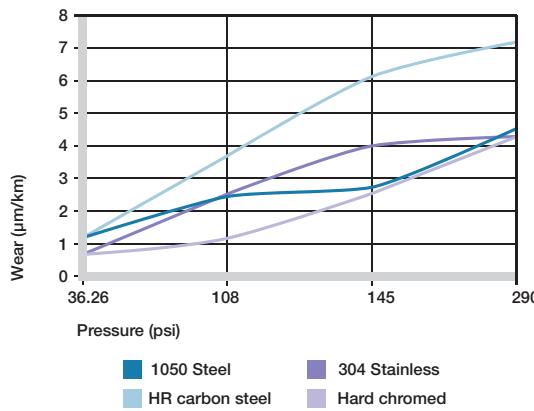

Wear of iglide® F with different shaft materials in rotational applications, as a function of the pressure

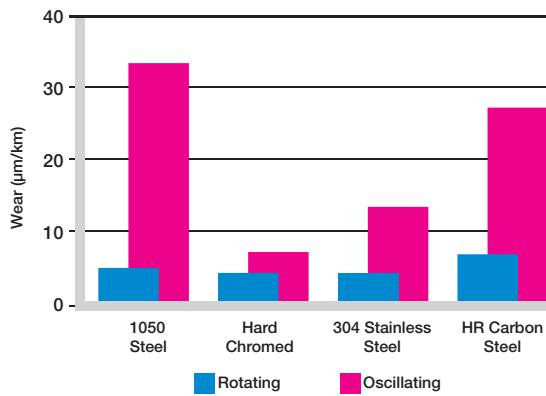

Wear with different shaft materials, oscillating and rotating movement  $p = 290$  psi

### Chemical Resistance

iglide® F plain bearings have good chemical resistance. They have a high resistance to lubricants, even at high temperatures (around 248°F). Thus, iglide® F plain bearings are especially suited for applications that must run under lubrication - possibly because of different structural components.

iglide® F is not attacked by most weak organic and inorganic acids.

The moisture absorption of iglide® F plain bearings is approximately 1.8% in standard atmosphere. The saturation limit in water is 8.4%. This must be taken into account along with the other applicable conditions.


► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	+ to 0

+ resistant, 0 conditionally resistant, - not resistant


### Chemical resistance of iglide® F

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

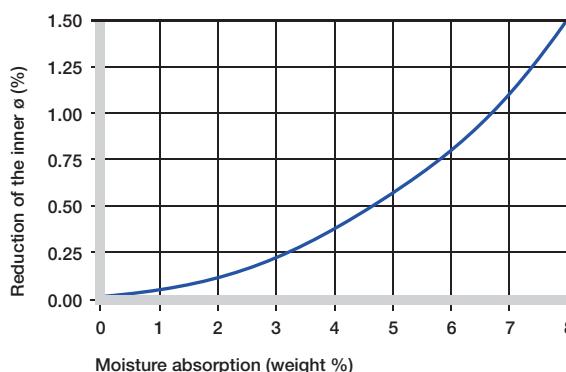

Effect of moisture absorption on iglide® F plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

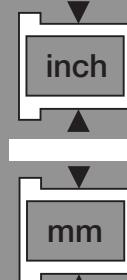

## Radiation Resistance

Plain bearings made from iglide® F are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® F plain bearings are permanently resistance to UV radiation.

---

## Vacuum

In a vacuum environment, existing moisture is released as vapor. Therefore, only dehumidified bearings made of iglide® F are suitable for the vacuum.

---

## Electrical Properties

In contrast to most other iglide® materials, iglide® F plain bearings are electrically conducting.

### iglide® F

Specific volume resistance	> $10^3$ $\Omega$ cm
Surface resistance	> $10^2$ $\Omega$

### Electrical properties of iglide® F

**igus®**



# iglide® H4 Special Applications




## Product Range

- Standard Styles:  
Sleeve, Flange
- Custom shapes and sizes available
- Inner diameters:  
Metric sizes from 3 - 70 mm

## Part Number Structure

### Part Number Structure

**H4 S M - 04 05 - 04**

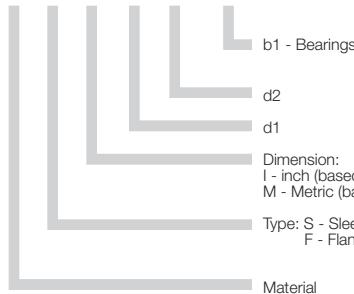

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	197	295
Oscillating	138	216
Linear	197	393

## Usage Guidelines



- For applications with fuel, oil, etc.
- When high wear resistance is required
- For low coefficients of friction
- For high temperature resistance from -40°F to 392°F
- For high chemical resistance



- For underwater use
  - iglide® H370
- When a cost-effective universal bearing is required
  - iglide® G300
- When you need a temperature- and media-resistant bearing for static applications
  - iglide® H2

## Material Data

General Properties	Unit	iglide® H4	Testing Method
Density	g/cm³	1.79	
Color		Brown	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.1	DIN 53495
Max. moisture absorption	% weight	0.2	
Coefficient of friction, dynamic against steel	$\mu$	0.08 - 0.25	
p x v value, max. (dry)	psi x fpm	19,500	

## Mechanical Properties


Modulus of elasticity	psi	1,088,000	DIN 53457
Tensile strength at 68°F	psi	17,400	DIN 53452
Compressive strength	psi	7,252	
Permissible static surface pressure (68°F)	psi	9,427	
Shore D-hardness		80	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	392	
Max. short-term application temperature	°F	464	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	5	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega$ cm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	$\Omega$	> 10 <sup>12</sup>	DIN 53482

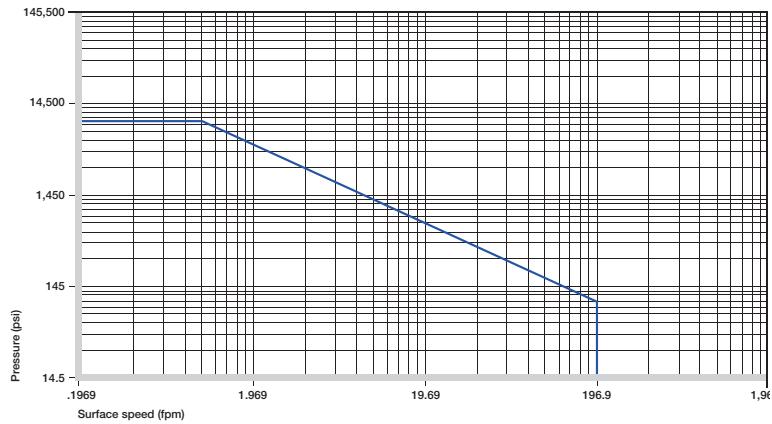

Permissible p x v values for iglide® H4 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® H4 plain bearings are designed for applications which require a high load capacity, good resistance to wear, excellent temperature resistance, all combined with an economic price. With this material temperatures up to 392°F can be achieved, pressures up to 9,427 psi can be applied, and good resistance to chemicals is shown. Solid lubricants lower the coefficient of friction and support the wear resistance. When compared with the iglide® H2 plain bearing material, most mechanical and tribological properties have been considerably improved. iglide® H4 plain bearings are self-lubricating and suitable for all types of motion.

## Compressive Strength

The graph shows the elastic deformation of iglide® H4 when subjected to radial loads. Among the iglide® H materials, iglide® H4 is the one with the lowest modulus of elasticity. This is beneficial for applications with edge loads and presents the reason for a higher mechanical loss factor, identifying the vibration dampening capacity of a material. Where a high static compressive strength is concerned, the other iglide® H bearing types are advantageous.

- Compressive Strength, Page 1.3

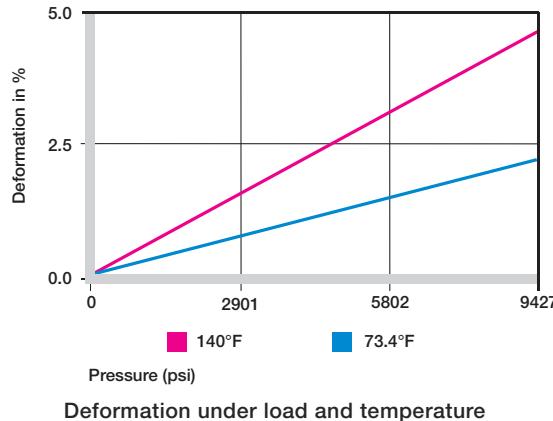

## Permissible Surface Speeds

Compared to the iglide® H2 plain bearings, which are also cost-effective, iglide® H4 shows a greatly reduced coefficient of friction. This explains the higher permissible surface speeds that can be achieved with these bearings. When running dry, constant speeds of up to 138 fpm are possible.

The speeds specified in the table are limit values for the lowest bearing loads. In the case of higher loads, the permissible speed decreases with increasing load due to the limitations defined by the p x v value.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

## Temperatures

iglide® H4 is a temperature resistant material. The short-term maximum permissible temperature is 464°F, and therefore allows for the use of iglide® H4 plain bearings in applications where the bearings for instance undergo a drying process without further loading. The compressive strength of iglide® H4, however, decreases with increasing temperatures.

The graph clarifies this relationship. At these high temperatures, the additional frictional heat in the bearing system has to be considered.


- Application Temperatures, Page 1.7

iglide® H4	Application Temperature
Minimum	-40°F
Max. long-term	+392°F
Max. short-term	+464°F
Additional axial securing	+230°F

## Temperature iglide® H4


	Continuous fpm	Short Term fpm
Rotating	197	295
Oscillating	138	216
Linear	197	393

Maximum surface speeds

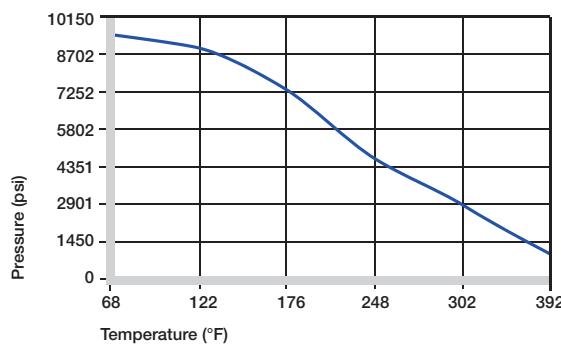

Recommended maximum permissible static surface pressure of iglide® H4 as a result of the temperature

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.  
•


inch

mm

## Installation Tolerances

iglide® H4 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings. Please contact an iglide® technical expert for support.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

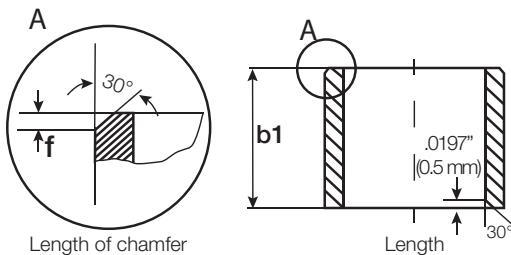

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

The coefficient of friction of iglide® H4 plain bearings is very low. However, it must be noted that a sliding surface which is too rough causes friction to increase. We recommend a shaft roughness range of 4 to 16 rms. The coefficient of friction of iglide® H4 plain bearings is only dependent on the surface speed to a minor degree. The pressure on the bearing has a greater effect, when increasing the pressure on the bearing the coefficient of friction can be reduced to 0.08.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

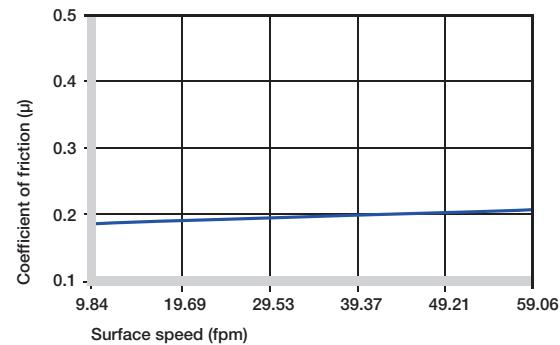


Coefficients of friction of iglide® H4 as a function of the running speed; p = 108 psi

iglide® A200	Coefficient of Friction
Dry	0.08 - 0.25
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® H4 against steel (Shaft finish = 40 rms, 50 HRC)

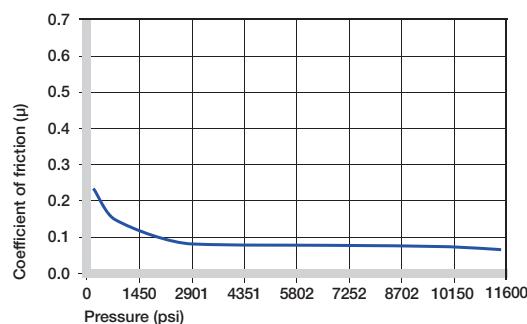

Coefficients of friction of iglide® H4 as a function of the load, v = 1.96 fpm

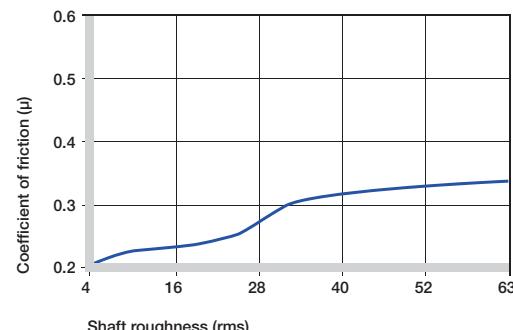


Coefficients of friction of iglide® H4 as a function of the shaft surface (1050 hardened and ground steel)


### Shaft Materials

As well as being an economic bearing, iglide® H4 offers further savings when the shaft material is selected. Many alternatives are possible, although the correct shaft is also dependent on the type of application. There is no general rule to say if iglide® H4 is better with hard or soft shafts. However, it is true that oscillating applications produce better wear results than rotating applications. When used in rotation, the wear rate increases significantly from pressures of 1450 psi.


► Shaft Materials, Page 1.11

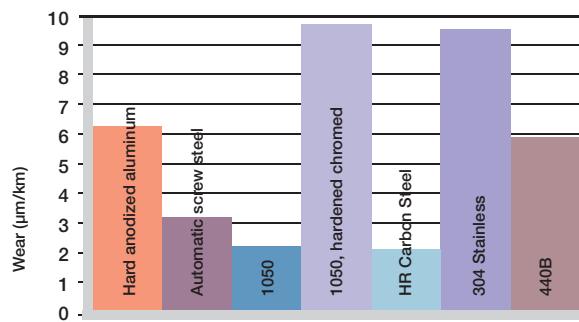

Wear of iglide® H4, rotating applications with different shaft materials,  $p = 108$  psi,  $v = 98$  fpm

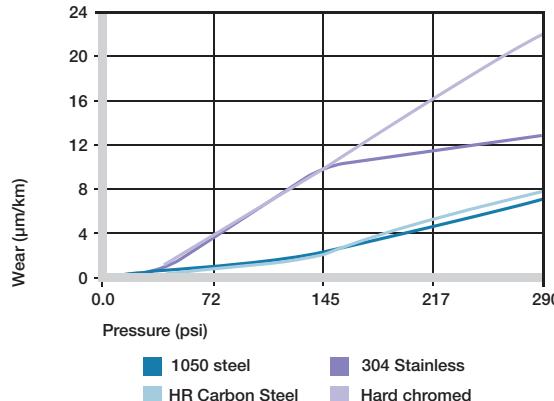

Wear of iglide® H4 with different shaft materials in rotational applications, as a function of the pressure

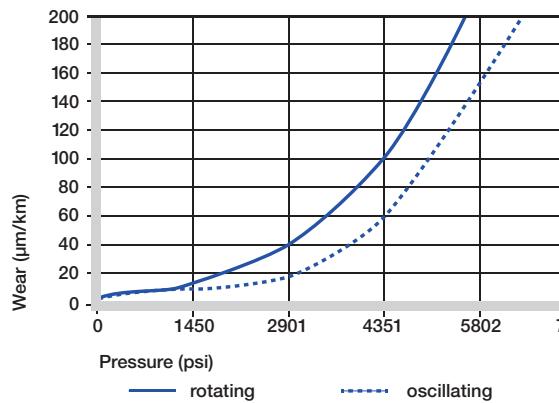

Wear for oscillating and rotating applications with shaft material 1050 hard chromed and ground steel, as a function of the pressure

### Chemical Resistance


iglide® H4 plain bearings feature good chemical resistance. They are resistant to most lubricants. iglide® H4 is not affected by most light organic and inorganic acids. The moisture absorption of iglide® H4 plain bearings is below 0.1% in standard atmosphere. The saturation limit in water is 0.2%. iglide® H4 is therefore and ideal material for wet environments.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	+ to 0
Strong acids	+ to -
Weak alkaline	+
Strong alkaline	+
+ resistant, 0 conditionally resistant, - not resistant	



#### Chemical resistance of iglide® H4

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

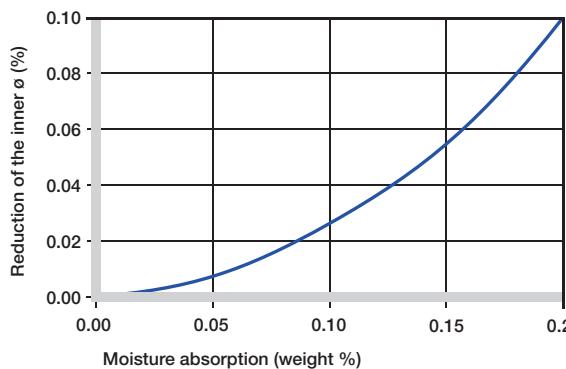

Effect of moisture absorption on iglide® H4 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

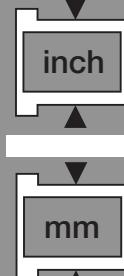



## Radiation Resistance

iglide® H4 withstands neutron radiation as well as gamma radiation without noticeable losses of its excellent mechanical characteristics. iglide® H4 plain bearings are radiation resistant up to a radiation intensity of  $2 \times 10^2$  Gy.

## UV-Resistance

iglide® H4 plain bearings change under the influence of UV radiation and other climatic influences. The surface gets rougher, and the compressive strength decreases. The use of iglide® H4 in applications directly exposed to atmospheric conditions should therefore be tested.

## Vacuum

In a vacuum environment, existing moisture will outgas. Due to the low moisture absorption of iglide® H4, this means that use in a vacuum is usually possible.

## Electrical Properties

Unlike iglide® H and iglide® H370, iglide® H4 is electrically insulating

### iglide® H4

Specific volume resistance	> $10^{13}$ Ωcm
Surface resistance	> $10^{12}$ Ω

### Electrical properties of iglide® H4

**igus®**



# **iglide® N54**

## **Special Applications**


## Product Range

- Standard Styles:  
Sleeve and Flange
  - Custom shapes and sizes available
  - Inner diameters:  
Metric sizes from 6 - 20 mm

## Part Number Structure

## Part Number Structure

N54 S M- 03 04 - 05

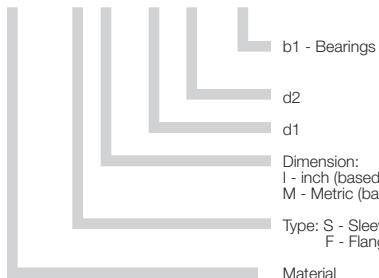

- b1 - Bearings
- d2
- d1
- Dimension:  
I - inch (based on 1/16")  
M - Metric (based on mm)
- Type: S - Sleeve  
F - Flange
- Material

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	295
Oscillating	118	216
Linear	197	393

## Usage Guidelines



- For applications with infrequent movements and low to medium loads
  - If environmental concerns are present



- If a universal standard stock part is requested  
➤ **iglide® G300**
  - If high motion frequency and continuous movement are present  
➤ **iglide® J**
  - If there are increased temperatures  
➤ **iglide® J350**

## Material Data

General Properties	Unit	iglide® N54	Testing Method
Density	g/cm <sup>3</sup>	1.13	
Color		Green	
Max. moisture absorption at 73°F/50% r.h.	% weight	1.6	DIN 53495
Max. moisture absorption	% weight	3.6	
Coefficient of friction, dynamic against steel	μ	0.15 - 0.23	
p x v value, max. (dry)	psi x fpm	14,000	

## Mechanical Properties


Modulus of elasticity	psi	261,000	DIN 53457
Tensile strength at 68°F	psi	10,150	DIN 53452
Compressive strength	psi	4,351	
Permissible static surface pressure (68°F)	psi	8,700	
Shore D-hardness		74	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	176	
Max. short-term application temperature	°F	248	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> × 10 <sup>-5</sup>	9	DIN 53752

## Electrical Properties

Specific volume resistance	$\Omega \text{cm}$	$< 10^{13}$	DIN IEC 93
Surface resistance	$\Omega$	$< 10^{11}$	DIN 53482

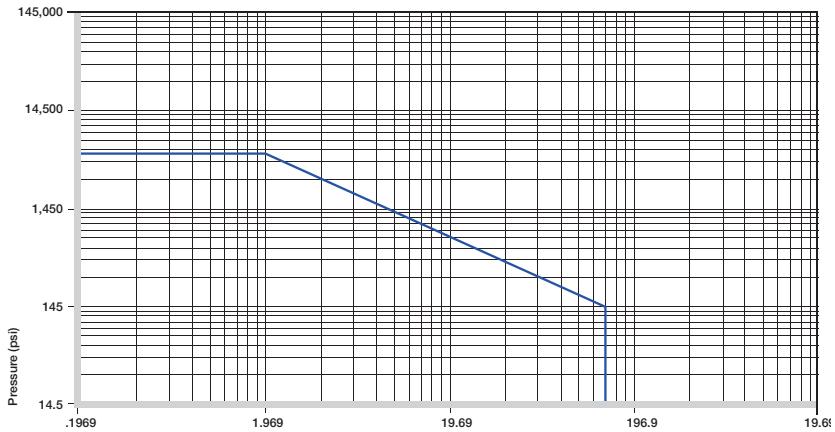

Permissible p x v values for iglide® N54 running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® N54 is the first iglide® material based largely in biopolymers. In addition to the already assured lubricant-free properties of iglide® materials, this is one further contribution to positive environmental stewardship. The good coefficients of friction in conjunction with holding times ensure that these materials have a permanent place in the iglide® product range.

## Compressive Strength

The compressive strength of iglide® N54 bearings decreases with increasing temperatures. The graph clarifies this relationship. At the long-term permitted application temperature of 248°F, the permitted surface pressure still amounts to 210,000. The graph shows the elastic deformation of iglide® N54 at radial loads.

- Compressive Strength, Page 1.3

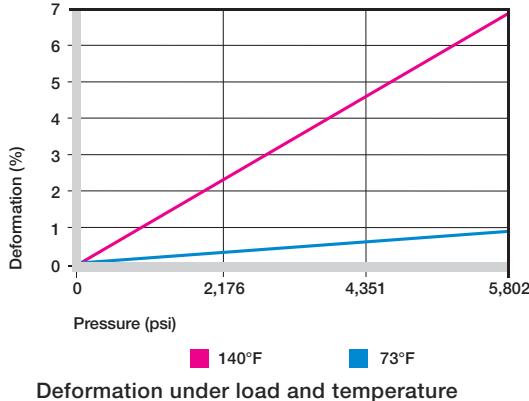

## Permissible Surface Speeds

Even if the typical applications for iglide® N54 plain bearings are more commonly for intermittent service, depending on the type of motion, the maximum attainable speeds can be quite high. The speeds stated in the table are limit values for the lowest bearing loads. As loads increase, the admissible speed is reduced with higher loads due to the limitations of the  $p v$  value.

- Surface Speed, Page 1.5
- $p \times v$  value, Page 1.6

	Continuous fpm	Short Term fpm
Rotating	157	295
Oscillating	118	216
Linear	197	393

**Maximum surface speeds**


## Temperatures

The short-term admissible temperature limit is +248°F, thus permitting the use of iglide® N54 plain bearings in all applications with elevated ambient temperatures. However, the compressive strength of iglide® N54 bearings decreases as temperatures increase. The additional frictional heat in the bearing system should be taken into account when considering the temperature limits.

- Application Temperatures, Page 1.7


iglide® N54	Application Temperature
Minimum	-40°F
Max. long-term	+176°F
Max. short-term	+248°F
Additional axial securing	+122°F

## Temperature iglide® N54

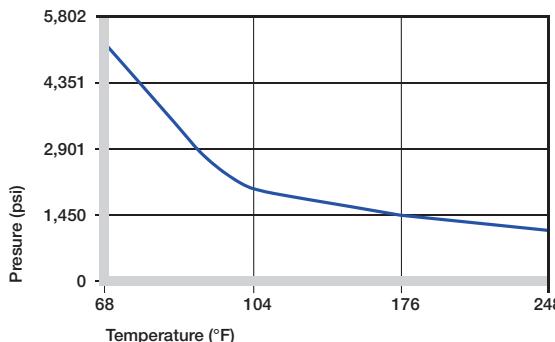

Recommended maximum permissible static surface pressure of iglide® N54 as a result of the temperature


PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

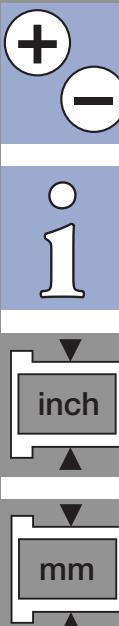

## Installation Tolerances

iglide® N54 plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings. Please contact an iglide® technical expert for support.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

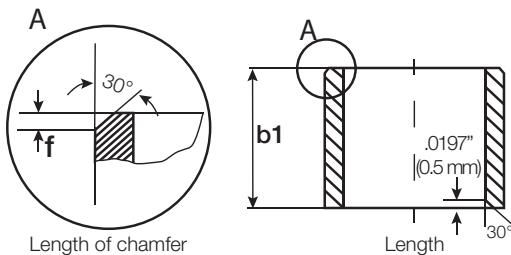

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	

### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	


## Friction and Wear

iglide® N54 has a low coefficient of friction. However it must be noted that a gliding partner with a rough surface finish increases the friction. We recommend shaft surface finishes of 4 to 16 rms.

The coefficient of friction of iglide® N54 bearings is only marginally dependent on the surface speed.

The influence of the load is greater; an increase in load lowers the coefficient of friction up to 0.08.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

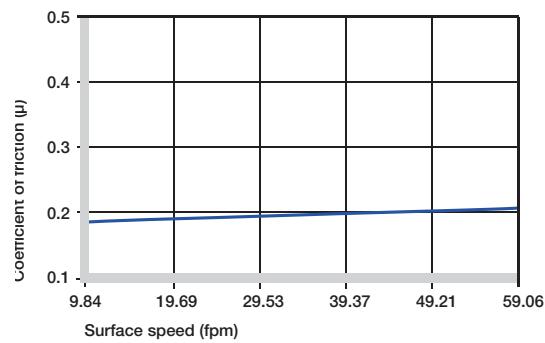


Coefficients of friction of iglide® N54 as a function of the running speed; p = 145 psi

iglide® N54	Coefficient of Friction
Dry	0.15 - 0.35
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® N54 against steel (Shaft finish = 40 rms, 50 HRC)

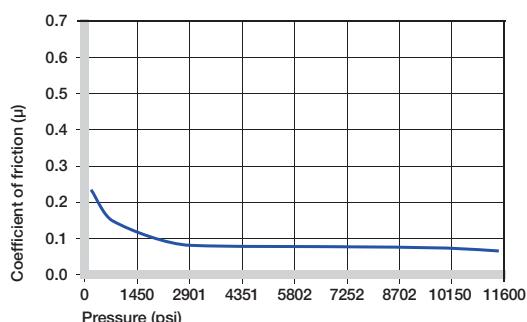

Coefficients of friction of iglide® N54 as a function of the load, v = 1.96 fpm

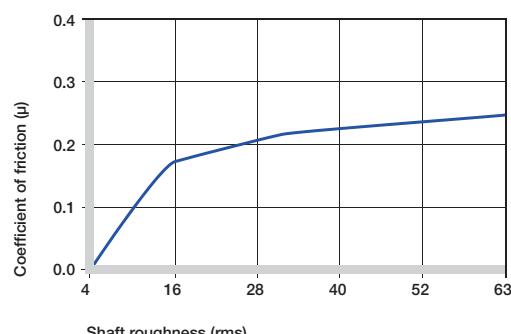


Coefficients of friction of iglide® N54 as a function of the shaft surface (1050 hard chromed and ground steel)


### Shaft Materials

It is important to select a suitable shaft material. As a rule, iglide® N54 is better suited for hard or soft shafts, but hard shaft surfaces tend to have better holding times. Starting at loads 145 psi, wear increases measurably and continuously.


► Shaft Materials, Page 1.11

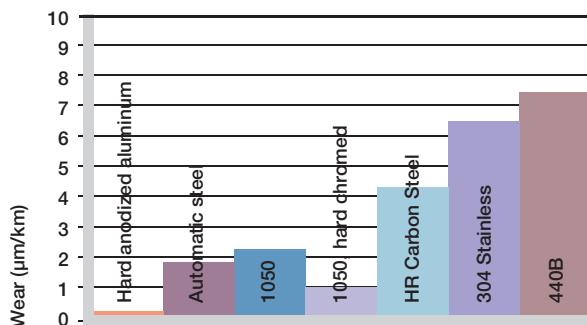

Wear of iglide® N54, rotating applications with different shaft materials,  $p = 145$  psi,  $v = 59$  fpm

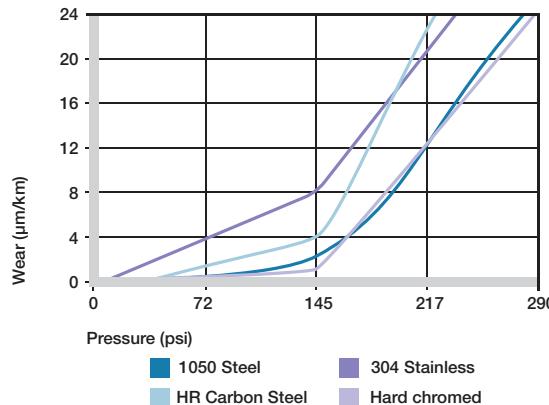

Wear of iglide® N54 with different shaft materials in rotational applications, as a function of the pressure

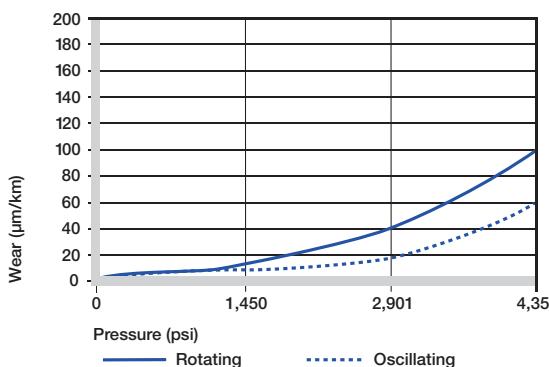

Wear for oscillating and rotating applications with shaft material 1050 hard chromed and ground steel, as a function of the pressure

### Chemical Resistance


iglide® N54 plain bearings have good resistance to chemicals. They are resistant to most lubricants. iglide® N54 is not impaired by most weak organic and inorganic acids and bases.

► Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to +
Strong acids	-
Weak alkaline	+
Strong alkaline	0
+ resistant, 0 conditionally resistant, - not resistant	

### Chemical resistance of iglide® N54

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

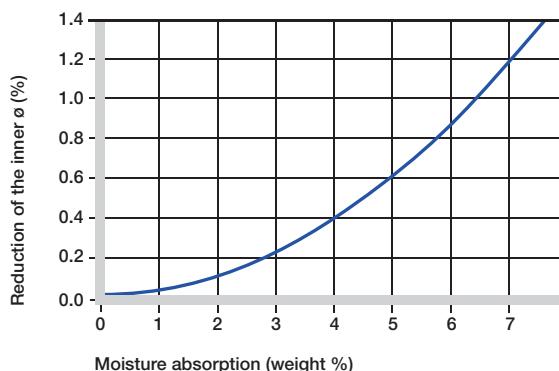

Effect of moisture absorption on iglide® N54 plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0  
inch

mm

## Radiation Resistance

iglide® N54 plain bearings can be used with restrictions when exposed to radiation. iglide® N54 plain bearings are radiation resistant to a radiation intensity of  $1 \times 10^4$  Gy.

## UV-Resistance

iglide® N54 plain bearings are resistant to the impact of UV radiation

## Vacuum

The low water elements degas in the vacuum. Applications under vacuum conditions are possible with restrictions.

## Electrical Properties

iglide® N54 plain bearings are electrically insulating.

### iglide® N54

Specific volume resistance	> $10^{13}$ $\Omega$ cm
Surface resistance	> $10^{11}$ $\Omega$

### Electrical properties of iglide® N54

**igus®**



# iglide® UW Special Applications




## Product Range

- Standard Styles:  
Sleeve and Flange
- Custom shapes and sizes available
- Inner diameters:  
Metric sizes from 3 - 20 mm

## Part Number Structure

## Part Number Structure

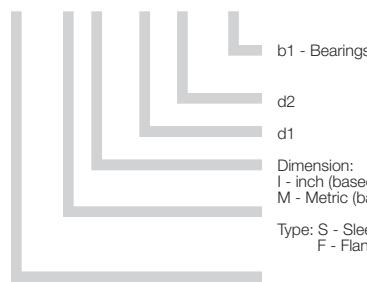**UW S M - 03 04 - 05**

## Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	98	295
Oscillating	78	216
Linear	393	590

## Usage Guidelines



- For underwater applications and in liquid media
- For low loads
- For high speeds
- For extreme wear resistance in media-lubricated continuous operation



- When temperatures are continuously higher than 194°F  
➤ iglide® UW500
- When high loads are present  
➤ iglide® H370  
➤ iglide® UW500  
➤ iglide® T500
- When only dry operation is feasible  
➤ iglide® J

## Material Data

General Properties	Unit	iglide® UW	Testing Method
Density	g/cm <sup>3</sup>	1.52	
Color		Black	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.2	DIN 53495
Max. moisture absorption	% weight	0.8	
Coefficient of friction, dynamic against steel	μ	0.15 - 0.35	
p x v value, max. (dry)	psi x fpm	2,800	

## Mechanical Properties


Modulus of elasticity	psi	1,392,000	DIN 53457
Tensile strength at 68°F	psi	13,050	DIN 53452
Compressive strength	psi	10,150	
Permissible static surface pressure (68°F)	psi	5,802	
Shore D-hardness		78	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. short-term application temperature	°F	230	
Min. application temperature	°F	-58	
Thermal conductivity	W/m x K	0.60	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	6	DIN 53752

## Electrical Properties

Specific volume resistance	Ωcm	< 10 <sup>5</sup>	DIN IEC 93
Surface resistance	Ω	< 10 <sup>5</sup>	DIN 53482

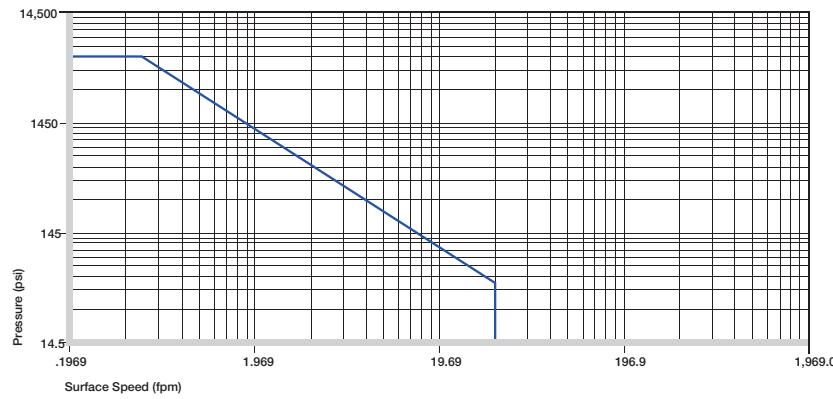

Permissible p x v values for iglide® UW running dry against a steel shaft, at 68°F




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® UW plain bearings are designed for underwater applications at temperatures well below 212°F. For application temperatures above this limit, the plain bearings made from iglide® UW500 are preferred. Although iglide® UW was developed for applications in fluids, it is also well suited for 'dry' applications. This is particularly important with regard to applications with dry run as well as using fluids. In practice, this type of application is often seen. Throughout this chapter, when the properties of iglide® UW are described, the conditions are running dry unless otherwise noted.

## Compressive Strength

The graph shows the permissible bearing loads at the respective temperatures. It can be said that iglide® UW plain bearings are not very suitable for high loads. Normally in underwater applications there is no question of high loads being present. It is also important to note that the wear rate increases significantly from loads of 725 psi.

- Compressive Strength, Page 1.3

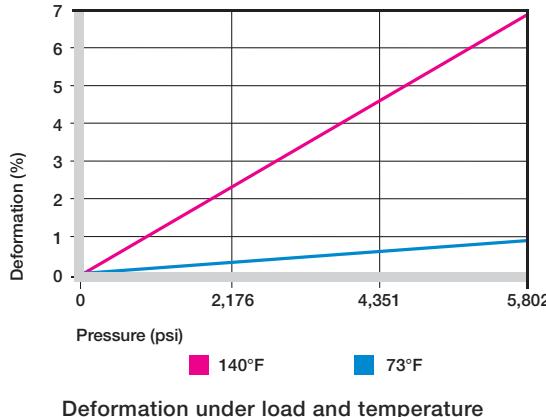

## Permissible Surface Speeds

iglide® UW shows good results when running dry as well as in fluids. When running underwater the bearing is lubricated hydro-dynamically, and surface speeds in excess of 393 fpm can be achieved.

When running dry, short term surface speeds up to 295 fpm can be achieved.

- Surface Speed, Page 1.5
- p x v value, Page 1.6


	Continuous fpm	Short Term fpm
Rotating	98	295
Oscillating	78	216
Linear	393	590

Maximum surface speeds

## Temperatures

iglide® UW plain bearings are recommended for the low temperature range. The bearing temperature can be up to 194°F, although the frictional heat must also be considered, especially when running dry. In underwater applications, the fluid aids heat dissipation, so in this case the temperature of the fluid is of greater importance.

- Application Temperatures, Page 1.7

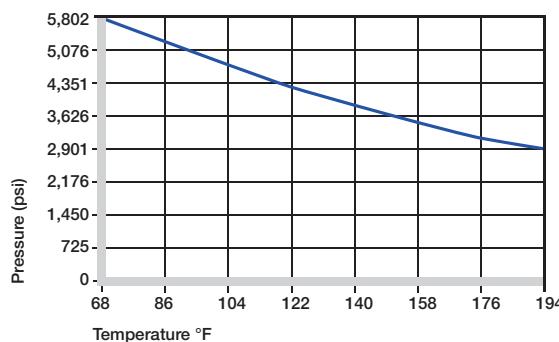

Recommended maximum permissible static surface pressure of iglide® UW as a result of the temperature

iglide® UW	Application Temperature
Minimum	-58°F
Max. long-term	+194°F
Max. short-term	+230°F
Additional axial securing	+176°F

## Temperature iglide® UW

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




1.  
•



## Installation Tolerances

iglide® UW plain bearings are meant to be oversized before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide® plain bearings. Please contact an iglide® technical expert for support.

- See Tolerance Table, Page 1.14
- Testing Methods, Page 1.15

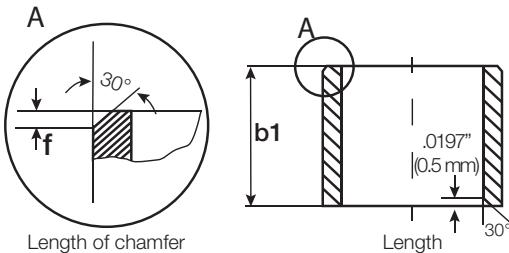

### For Inch Size Bearings

Length (inches)	Tolerance (h13) (inches)	Length of Chamfer (f) Based on d1
0.1181 to 0.2362	-0.0000 / -0.0071	f = .012 → d <sub>1</sub> .040" - .236"
0.2362 to 0.3937	-0.0000 / -0.0087	f = .019 → d <sub>1</sub> > .236" - .472"
0.3937 to 0.7086	-0.0000 / -0.0106	f = .031 → d <sub>1</sub> > .472" - 1.18"
0.7086 to 1.1811	-0.0000 / -0.0130	f = .047 → d <sub>1</sub> > 1.18"
1.1811 to 1.9685	-0.0000 / -0.0154	
1.9685 to 3.1496	-0.0000 / -0.0181	


### For Metric Size Bearings

Length (mm)	Tolerance (h13) (μm)	Length of Chamfer (f) Based on d1
1 to 3	-0 / -140	f = 0.3 → d <sub>1</sub> 1 - 6 mm
> 3 to 6	-0 / -180	f = 0.5 → d <sub>1</sub> > 6 - 12 mm
> 6 to 10	-0 / -220	f = 0.8 → d <sub>1</sub> > 12 - 30 mm
> 10 to 18	-0 / -270	f = 1.2 → d <sub>1</sub> > 30 mm
> 18 to 30	-0 / -330	
> 30 to 50	-0 / -390	
> 50 to 80	-0 / -460	

## Friction and Wear

When running underwater, the friction coefficient will be considerably lower than when running dry. At low loads when running dry, the coefficient of friction can increase to 0.4, but at higher loads this decreases to 0.1. The shaft should not be too smooth to avoid a high adhesion effect and therefore generate an increase in friction. For information regarding the surface finish of shafts when running underwater, please contact igus®.


- Coefficients of Friction and Surfaces, Page 1.8
- Wear Resistance, Page 1.9

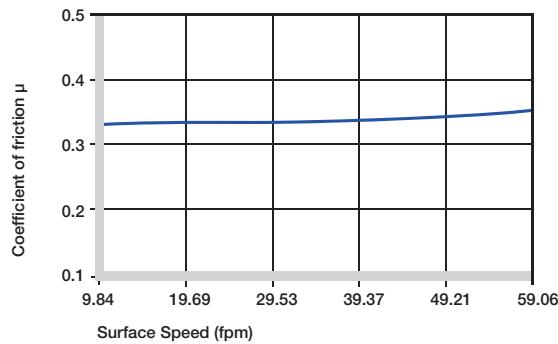


Coefficients of friction of iglide® UW as a function of the running speed; p = 108 psi

iglide® UW	Coefficient of Friction
Dry	0.15 - 0.35
Grease	0.09
Oil	0.04
Water	0.04

Coefficient of friction of iglide® UW against steel (Shaft finish = 40 rms, 50 HRC)

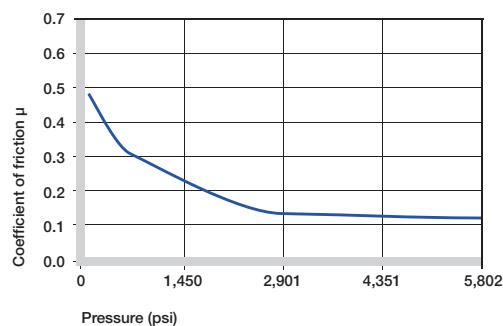

Coefficients of friction of iglide® UW as a function of the load, v = 1.96 fpm

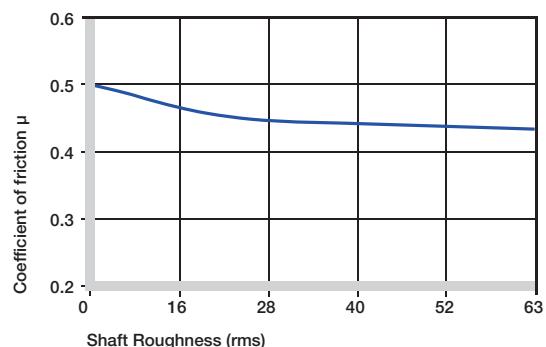


Coefficients of friction of iglide® UW as a function of the shaft surface (1050 hard chromed and ground steel)

### Shaft Materials


The effect of the type of shaft material used with iglide® UW plain bearings at low loads is small, as shown in the graph below. However, the graph to the right shows that the shaft material selection becomes more significant at higher loads.

For more questions concerning a specific running surface, please contact an igus® technical sales associate.


- ▶ Shaft Materials, Page 1.11

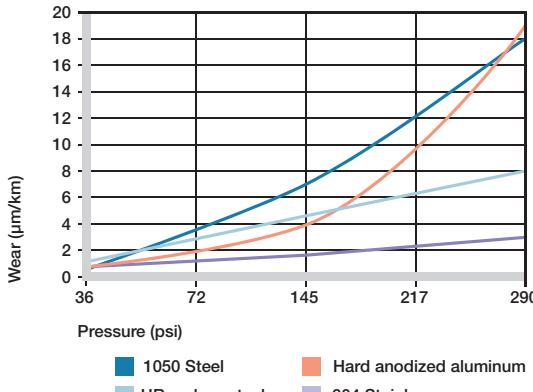

Wear of iglide® UW with different shaft materials in rotational applications, as a function of the pressure

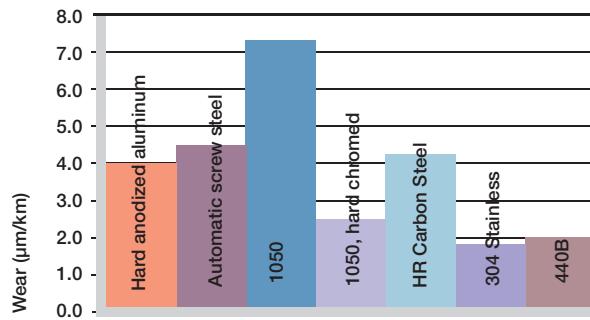

Wear of iglide® UW, rotating applications with different shaft materials,  $p=108$  psi,  $v=98$  fpm

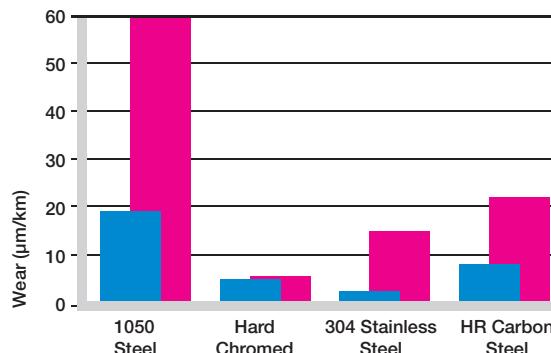

Wear for oscillating and rotating applications with shaft material 1050 hard chromed and ground steel, as a function of the pressure

### Chemical Resistance

iglide® UW plain bearings are resistant to diluted alkaline and very weak acids, as well as to solvents and all types of lubricants. The moisture absorption of iglide® UW plain bearings is approximately 0.2% in standard atmosphere. The saturation in water is 0.8%. These values are so low that considering expansion by moisture absorption is only required under extreme conditions.


- ▶ Chemical Table, Page 1.16

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to –
Strong acids	–
Weak alkaline	+
Strong alkaline	+ to 0

+ = resistant, 0 = conditionally resistant, – = not resistant


#### Chemical resistance of iglide® UW

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

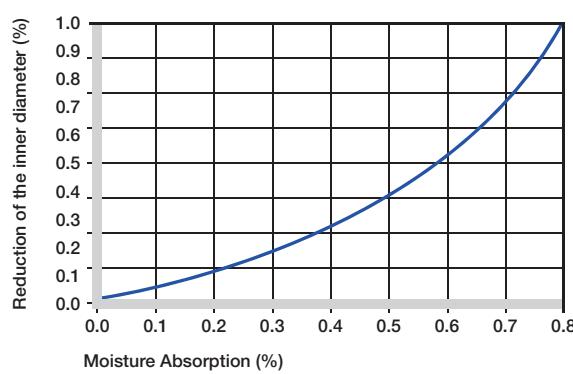

Effect of moisture absorption on iglide® UW plain bearings

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



## Radiation Resistance

iglide® UW plain bearings are radiation resistant to a radiation intensity of  $3 \times 10^2$  Gy.

---

## UV-Resistance

iglide® UW plain bearings are resistant to the impact of UV radiation

---

## Vacuum

Applications in a vacuum are only possible to a limited extent. Only dehumidified bearings of iglide® UW should be tested in a vacuum.

---

## Electrical Properties

iglide® UW plain bearings are conductive.

### iglide® UW

Specific volume resistance	< $10^5$ $\Omega$ cm
Surface resistance	< $10^5$ $\Omega$

### Electrical properties of iglide® UW

igus®



xiros®



**Ball Bearings**  
iglide® B180  
PA cage  
Stainless steel balls  
Inch - [Page 35.8](#)  
Metric - [Page 35.10](#)



**Ball Bearings**  
iglide® B180  
PA cage  
Glass balls  
Inch - [Page 35.9](#)  
Metric - [Page 35.11](#)



**Ball Bearings**  
iglide® B180  
PE cage  
Stainless steel balls  
[Page 35.12](#)



**Ball Bearings**  
iglide® A500  
PA cage  
Stainless steel balls  
[Page 35.13](#)



**Ball Bearings**  
iglide® A500  
PEEK cage  
Stainless steel balls  
[Page 35.14](#)



**Ball Bearings**  
iglide® A500  
PEEK cage  
Glass balls  
[Page 35.15](#)



**Ball Bearings**  
iglide® A500  
PEEK cage  
PAI balls  
[Page 35.16](#)



**Ball Bearings**  
iglide® C160  
PP cage  
Stainless steel balls  
[Page 35.17](#)



**Ball Bearings**  
iglide® C160  
PP cage  
Glass balls  
[Page 35.18](#)



**Ball Bearings**  
iglide® D180  
PA cage  
Stainless steel balls  
[Page 35.19](#)



**Ball Bearings**  
iglide® D180  
PA cage  
Glass balls  
[Page 35.20](#)



**Ball Bearings**  
iglide® F180  
PA cage  
Stainless steel balls  
[Page 35.21](#)



**Ball Bearings**  
iglide® D180  
Double row, PA cage  
Stainless steel balls  
[Page 35.22](#)



**Ball Bearings**  
iglide® D180  
Double row, PA cage  
Glass balls  
[Page 35.23](#)



**Ball Bearings**  
iglide® B180  
PA cage  
Stainless steel balls  
with cover plate  
[Page 35.24](#)



**Ball Bearings**  
iglide® B180  
PA cage  
Glass balls  
with cover plate  
[Page 35.25](#)



**Slewing Ring Bearings**  
iglide® B180  
Stainless steel balls or  
Glass balls  
[Page 35.26](#)



**Axial Ball Bearing**  
iglide® B180  
Stainless steel balls  
[Page 35.27](#)



**Axial Ball Bearing**  
iglide® B180  
Glass balls  
[Page 35.28](#)



**Ball Transfer Unit**  
iglide® B180  
POM balls  
[Page 35.29](#)



**ESTM Pillow Block**  
iglide® B180  
Stainless steel or  
Glass balls, Fixed  
[Page 35.30](#)



**ESTM Pillow Block**  
iglide® B180  
Stainless steel or  
Glass balls, Pivoting  
[Page 35.31](#)



**EFSM 4-Bolt Flange**  
iglide® B180  
Stainless steel or  
Glass balls  
[Page 35.32](#)



**EFOM 2-Bolt Flange**  
iglide® B180  
Stainless steel or  
Glass balls  
[Page 35.33](#)



## Thermoforming Machine

In this thermoforming machine for coffee-cream portion packs, xiros® plastic ball bearings are used for their high chemical resistance.



## Indexing Table

This indexing table is used to test metal balls for cracks and dimensional accuracy. xiros® plastic ball bearings are used here as wheels for the trolley.



## Wet Film Thickness Gage

This precision tester for accurate and rapid measurement of all liquid paint, coatings, oil coatings and adhesives is equipped with a durable and solvent resistant xiros® B180 ball bearing.



## Film Guide Rollers

There is no contamination of the films through lubricants, due to the use of maintenance-free xiros® flange bearings.



## Model Plane

The use of remote controlled model aircraft is being tested and demonstrated as a remote sensing platform at the Institute of Space Systems (IRS). Due to the extreme low weight requirements, the xiros® flange bearings are used here.



## Small Robot

The wheels of this little low cost robot are two xiros® B180 plastic ball bearings. These ensure a totally maintenance-free, lubricant-free and easily functioning application.



## iglide® Bearings xiros® - Technical Data


### Product Range

- Available in 3 materials
- 10 product types are available
- Inner diameters:  
Metric sizes from 3 - 60 mm

### Part Number Structure

#### Part Number Structure

##### B 6004 A 1 G DR

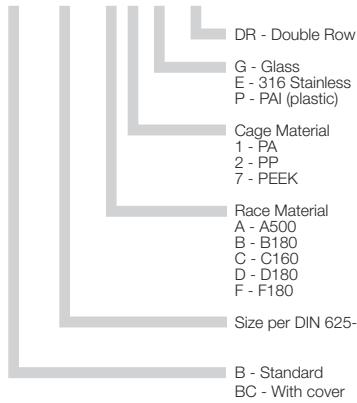

### Temperatures

	Minimum	Maximum
A500	-148°F (PEEK)	+302°F
	-40°F (PAI)	+302°F
B180	-40°F	+176°F
C160	-40°F	+176°F
D180	-58°F	+176°F
F180	-58°F	+176°F

### Usage Guidelines



- For rotational speeds that exceed the limits of a plain bearing
- When corrosion resistance is required
- For temperatures up to 302°F (depending on material)
- When chemical resistance is required
- If non-magnetic ball bearings are needed
- When FDA compliance is needed (A500 with PEEK cage) (B180 with PE cage)



- For high loads at high speeds
- When very tight clearances are required

iglide® xiros® ball bearing open up fields of application for plastic bearings. The inner and outer races of the iglide® xiros® are made from high performance iglide® materials. The corrosion-free balls are made from stainless steel. Glass balls are also available for maximum corrosion resistance. xiros® made from the A500 material is temperature-resistant up to 302°F, while the xiros® from the B180 material is designed for temperatures up to 176°F.



### Material Table

General Properties	Unit	iglide® Materials				
		A500	B180	C160	D180	F180
Density	g/cm³	1.28	1.41	1.11	1.24	1.33
Color		Brown	Cream	opaque	blue	black
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	0.3	0.1	0.5	0.5
Max. moisture absorption	% weight	0.5	1.3	0.2	1.4	1.4

### Mechanical Properties

Modulus of elasticity	psi	522,100	348,090	275,571	130	975
Tensile strength at 68°F	psi	20,300	10,587	5,076	*	*
Shore D-hardness		83	74	67	51	69

### Electrical Properties

Specific volume resistance	Ωcm	> 10¹⁴	10¹³	10¹⁴	10¹⁴	10⁹ (t)
Surface resistance	Ω	> 10¹³	10¹²	10¹⁴	10¹⁴	10⁹ (t)

†) Depends on component geometry

### Chemical resistance

	A500	B180	C160	D180	F180	igumid G
Alcohol	+	+	+	+ to 0	+ to 0	+ to 0
Hydrocarbons	+	+	+ to 0	+	+	+
Greases, oils without additives	+	+	+	+	+	+
Fuels	+	+	+ to 0	+	+	+
Diluted acids	+	0 to -	+	+ to 0	+ to 0	0 to -
Strong acids	+	-	+ to 0	0	0	-
Diluted alkaline	+	+	+	+ to 0	+ to 0	+
Strong alkaline	+	+ to 0	+	+ to 0	+ to 0	0

### Recommendation of tolerance for bore and shaft at xiros® radial ball bearings

We recommend a H7-tolerance of the housing bore of xiros® radial ball bearings and a h6-tolerance of the shaft. For further questions about the dimensioning of the bore and the shaft please contact us.



xiros® polymer ball bearings are comprised of a variety of different product materials. No xiros® part requires any additional lubrication. Other advantages are (depending on the design):


- Maintenance-free
- Light weight
- Free from metal (when using glass and plastic balls)
- Non-magnetic
- Chemical resistant
- Corrosion resistant
- Electrically insulating
- FDA-compliant
- Predictable lifetime

The predictability of xiros® polymer ball bearing is one of the most important advantages. Based on the results of many wear tests, the user can calculate the lifetime of the xiros® polymer ball bearings using the xiros® expert system.



### Design

The xiros® polymer ball bearings are single-row grooved ball bearings based on DIN 625. The lubricant-free and maintenance-free ball bearings consist of four components:

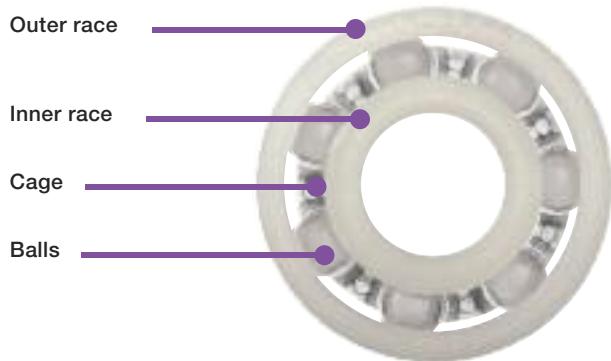

### The Outer- and Inner Race

The suitability of a xiros® polymer ball bearings is largely determined by the materials of the two races. These are made from igus® tribopolymers to maximize service life and minimize friction. You can choose from three different materials and they allow different values of application temperature, chemical resistance and loading. Please refer to the Material Data Table on the previous page for details about general, mechanical and electrical properties.

### The Cage

The cage materials in xiros® ball bearings should also be taken into consideration. The different materials differ greatly in terms of chemical resistance and temperature abilities.

### The Balls

The ball materials differ significantly. In addition to 316 stainless steel balls, we also offer glass and plastic versions. The difference in ball materials has an effect on mass, which in turn affects smoothness, weight and chemical resistance.

Stainless steel balls are both cost-effective and chemical resistant, but also have the highest weight of the three options.

Glass balls offer a metal-free solution. They offer high chemical resistance and lower weight.

Plastic balls are the lowest weight of the three options. Plastic balls are quiet and also, depending on which race material is used, offer excellent chemical resistance.

### Pillow Block and Flange Bearings

This range is made up by combining xiros® polymer ball bearing with the igubal® pillow block and flange bearings, resulting in a higher flexibility in terms of installation of the bearings. The pre-finished bearing housing makes it easy for the user to use these maintenance-free components. Both flanged and pillow block designs are available as fixed or pivoting.

The difference between the two options is that the pivoting type can compensate for shaft and/or bearing misalignment. A spherical outer race is pressed into the bearing housing, ensuring self aligning action.



## Application Areas


In contrast to metallic ball bearings, xiros® plastic ball bearings run without any lubrication. Applications requiring cleanroom, chemical resistance or need to be contaminant-free in industries such as medical, food, packaging, electronics and many more are a perfect area for the xiros® ball bearings.

## Development and Tests


Through numerous tests the race materials were optimized. The plastics igus® developed for use with xiros® ball bearings allow higher speeds, greater loads, and longer service life. Plastic ball bearing technology will continue to advance, especially with igus® experience and development of tribological plastic materials.

In the igus® test laboratory the life and wear of xiros® plastic ball bearings was and continues to be tested. In addition to the actual material comparison, tests indicate these experiments also answer questions about the impact of external influences such as temperature, humidity or dust.


The material combinations for bearing races, balls and cages are tested in the igus® test laboratory for a variety of loads and speeds. Thus, the application-specific selection of the suitable bearing and a Lifetime calculation is possible.

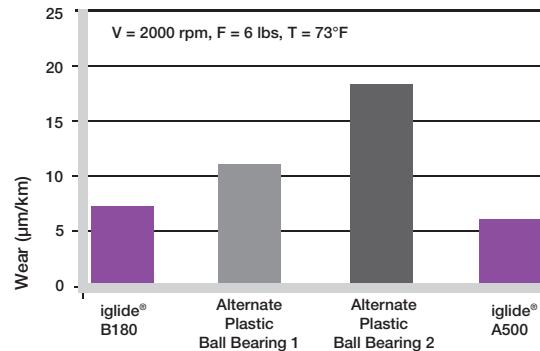

Wear test in igus® laboratory

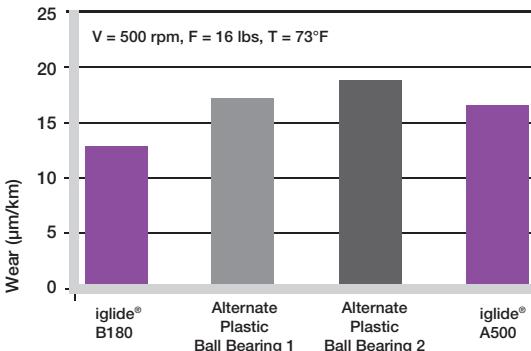

Wear test in igus® laboratory

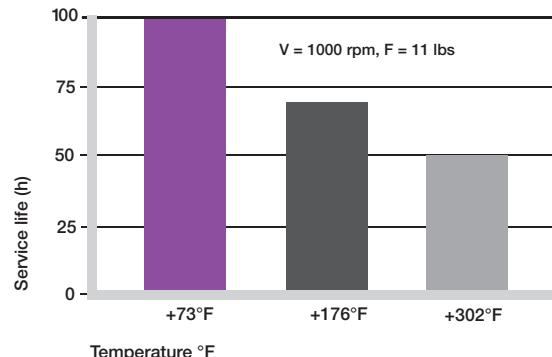

Service life of iglide® A500 plastic ball bearings at different ambient temperatures, dry

## Predictability

As part of the development of xiros® polymer ball bearing tests are carried out continuously. The extreme number of test results make it very difficult to present this information in one table.

It is for this reason that igus has developed the online life calculator, which uses real test results to give an accurate calculation.



Test benches for xiros® plastic ball bearings at igus® laboratory



Races


- 1 xiros® A500
- 2 xiros® B180
- 3 xiros® C160
- 4 xiros® D180
- 5 xiros® F180

Cages

- 6 PA
- 7 PEEK
- 8 PP

Balls

- 9 E - Steel
- 10 G - Glass
- 11 P - PAI

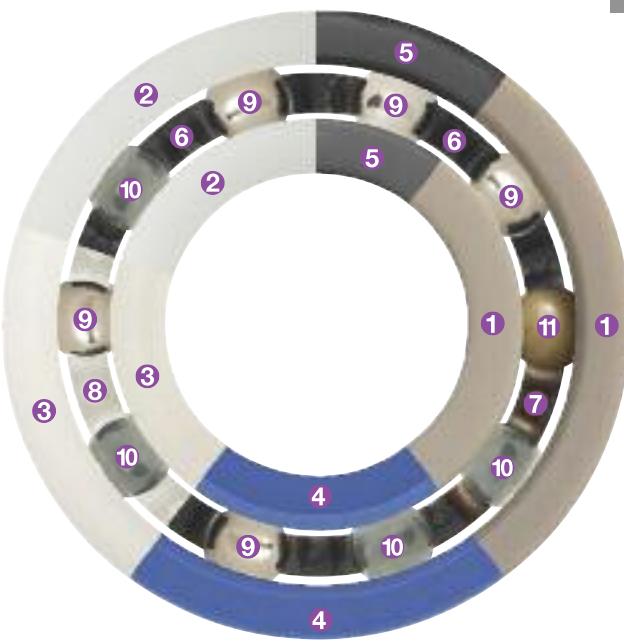

Inner & outer race material

xiros® B180

Cost-effective

Cost effective

xiros® A500

At High Temperature

With chemicals,  
FDA and high  
temperatures

xiros® C160

With chemicals,  
temperatures up to  
+176°F and for  
underwater use

xiros® D180

High rotation  
speed

xiros® F180

Electrically  
conductive  
ESD  
protection

Application Sectors

PA

PE

PA

PEEK

PP

PA

PA

Cage material

E

G

E

E

G

E

E

No metal

Cost-effective

No metal

With high temperatures

FDA compliant

Depending on media:  
cost-effective

Wear resistant

Conductive

E

E

E

G

G

E

E

Page

Inch - 35.8  
Metric - 35.10  
Inch - 35.9  
Metric - 35.11

35.12

35.13

35.14

35.15

35.16


35.17

35.18

35.19

35.20

35.21

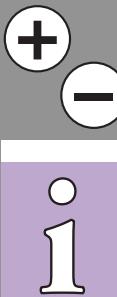



**igus®**

## xiros® Ball Bearings B180 Material, PA Cage Stainless Steel Balls, inch


xiros® B180 plastic ball bearings are for use with temperatures up to 176°F. The specially developed material iglide® B180 provides significantly longer lifetimes at a lower cost.

iglide® xiros



iglide® B180 PA cage,  
Stainless Steel Balls

Temperature range  
-40°F to +176°F

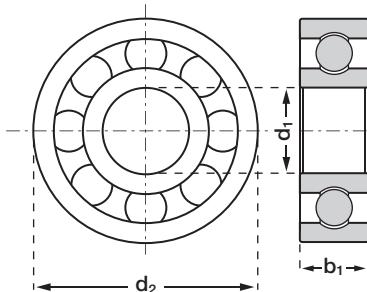

### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (in)	Outer-Ø d2 (in)	Width b1 (in)
BI123612B1E	B180	PA	316 SS	3/8	1-1/8	3/8
BI326416B1E	B180	PA	316 SS	1	2	1/2

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

### Technical Data

Part number	Max. Static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
BI123612B1E	64	19	27	1900	4.9
BI326416B1E	117	54	80	1050	27.3

# xiros® Ball Bearings

## B180 Material, PA Cage

### Glass Balls, inch

**igus®**




xiros® B180 plastic ball bearings are for use with temperatures up to 176°F. The specially developed material iglide® B180 provides significantly longer lifetimes at a lower cost.



iglide® B180 PA cage,  
Glass Balls

Temperature range  
-40°F to +176°F

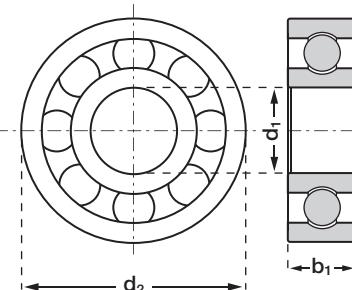


#### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
BI123612B1G	B180	PA	Glass	3/8	1-1/8	3/8
BI326416B1G	B180	PA	Glass	1	2	1/2


#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
BI123612B1G	64	19	27	1900	4.9
BI326416B1G	117	54	80	1050	27.3

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





**igus®**

## xiros® Ball Bearings B180 Material, PA Cage Stainless Steel Balls, mm


xiros® B180 plastic ball bearings are for use with temperatures up to 176°F. The specially developed material iglide® B180 provides significantly longer lifetimes at a lower cost.

iglide® xiros



iglide® B180 PA cage,  
Stainless Steel Balls

Temperature range  
-40°F to +176°F

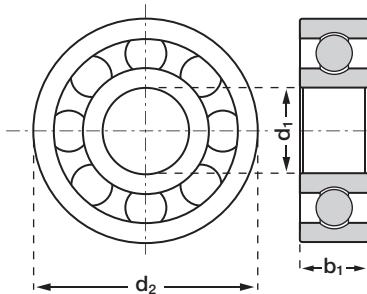

### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623B1E	B180	PA	316 SS	3	10	4
B624B1E	B180	PA	316 SS	4	13	5
B625B1E	B180	PA	316 SS	5	15	5
B626B1E	B180	PA	316 SS	6	19	6
B608B1E	B180	PA	316 SS	8	22	7
B6000B1E	B180	PA	316 SS	10	26	8
B6001B1E	B180	PA	316 SS	12	28	8
B6003B1E	B180	PA	316 SS	17	35	10
B6004B1E	B180	PA	316 SS	20	42	12
B6005B1E	B180	PA	316 SS	25	47	12
B6006B1E	B180	PA	316 SS	30	55	13
B6007B1E	B180	PA	316 SS	35	62	14
B6008B1E	B180	PA	316 SS	40	68	15
B6009B1E	B180	PA	316 SS	45	75	16
B6010B1E	B180	PA	316 SS	50	80	16
B6011B1E	B180	PA	316 SS	55	90	18
B6012B1E	B180	PA	316 SS	60	95	18

### Technical Data

Part number	Max. Static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623B1E	7	6	8	4,500	0.4
B624B1E	9	10	7	3700	1.0
B625B1E	17	9	13	3,100	1.0
B626B1E	21	11	16	2,600	2.2
B608B1E	37	13	19	2,200	3.9
B6000B1E	64	19	27	1,900	6.1
B6001B1E	71	24	33	1,750	6.9
B6003B1E	81	40	56	1,400	11.1
B6004B1E	90	47	66	1,150	20.2
B6005B1E	117	54	81	1,050	23.9
B6006B1E	144	63	94	900	35.0
B6007B1E	162	72	108	800	47.0
B6008B1E	180	78	117	750	56.3
B6009B1E	202	85	126	650	71.5
B6010B1E	214	88	130	600	83.1
B6011B1E	225	90	135	550	125.2
B6012B1E	247	94	144	500	129.6

# xiros® Ball Bearings

## B180 Material, PA Cage

### Glass Balls, mm

**igus®**




xiros® B180 plastic ball bearings are for use with temperatures up to 176°F. The specially developed material iglide® B180 provides significantly longer lifetimes at a lower cost.



iglide® B180 PA cage,  
Glass Balls

Temperature range  
-40°F to +176°F

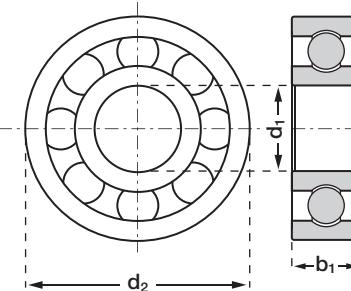

#### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623B1G	B180	PA	Glass	3	10	4
B624B1G	B180	PA	Glass	4	13	5
B625B1G	B180	PA	Glass	5	15	5
B626B1G	B180	PA	Glass	6	19	6
B608B1G	B180	PA	Glass	8	22	7
B6000B1G	B180	PA	Glass	10	26	8
B6001B1G	B180	PA	Glass	12	28	8
B6003B1G	B180	PA	Glass	17	35	10
B6004B1G	B180	PA	Glass	20	42	12
B6005B1G	B180	PA	Glass	25	47	12
B6006B1G	B180	PA	Glass	30	55	13
B6007B1G	B180	PA	Glass	35	62	14
B6008B1G	B180	PA	Glass	40	68	15
B6009B1G	B180	PA	Glass	45	75	16
B6010B1G	B180	PA	Glass	50	80	16
B6011B1G	B180	PA	Glass	55	90	18
B6012B1G	B180	PA	Glass	60	95	18

#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623B1G	7	6	8	4,500	0.3
B624B1G	9	10	7	3700	1.0
B625B1G	17	9	13	3,100	1.0
B626B1G	21	11	16	2,600	1.7
B608B1G	37	13	19	2,200	2.6
B6000B1G	64	19	27	1,900	4.0
B6001B1G	71	24	33	1,750	4.5
B6003B1G	81	40	56	1,400	7.9
B6004B1G	90	47	66	1,150	13.6
B6005B1G	117	54	81	1,050	16.7
B6006B1G	144	63	94	900	24.2
B6007B1G	162	72	108	800	31.3
B6008B1G	180	78	117	750	39.1
B6009B1G	202	85	126	650	48.6
B6010B1G	214	88	130	600	56.4
B6011B1G	225	90	135	550	84.4
B6012B1G	247	94	144	500	85.6

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1.

▼

mm

▲



**igus®**

# xiros® Ball Bearings B180 Material, PE Cage Stainless Steel Balls, mm - FDA Compliant


xiros® B180 plastic ball bearings are now FDA compliant. The specially developed material iglide® B180 provides significantly longer lifetimes at a lower cost and can now be used wherever unpackaged foodstuffs are processed. They can be used in temperatures up to 176°F.

iglide® xiros



iglide® B180 PE cage,  
Stainless Steel Balls

Temperature range  
-40°F to +176°F

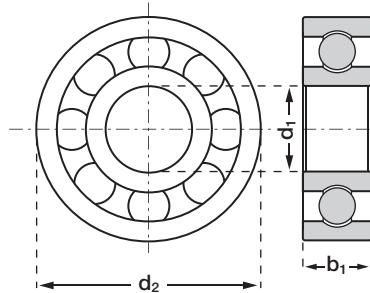

PEEK cages, inner and outer races made  
from FDA compliant polymers

## Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623B5E	B180	PE	316 SS	3	10	4
B624B5E	B180	PE	316 SS	4	13	5
B625B5E	B180	PE	316 SS	5	15	5
B626B5E	B180	PE	316 SS	6	19	6
B608B5E	B180	PE	316 SS	8	22	7
B6000B5E	B180	PE	316 SS	10	26	8
B6001B5E	B180	PE	316 SS	12	28	8
B6002B5E	B180	PE	316 SS	15	32	9
B6003B5E	B180	PE	316 SS	17	35	10
B6004B5E	B180	PE	316 SS	20	42	12
B6005B5E	B180	PE	316 SS	25	47	12

## Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623B5E	7	6	8	4,500	0.4
B624B5E	9	7	10	3,700	1.0
B625B5E	17	9	13	3,100	1.6
B626B5E	21	11	16	2,600	2.2
B608B5E	37	13	19	2,200	3.9
B6000B5E	64	19	27	1,900	6.1
B6001B5E	71	24	33	1,750	6.9
B6002B5E	76	33	44	1,600	8.9
B6003B5E	81	40	56	1,400	11.1
B6004B5E	90	47	66	1,150	20.2
B6005B5E	117	54	81	1,050	23.9

# xiros® Ball Bearings

## A500 Material, PA Cage

### Stainless Steel Balls, mm

**igus®**



xiros® polymer ball bearings with the combination of PA cage and stainless steel balls are the economic alternative of the iglide® A500 product range, when temperature is merely up to 302°F and no chemicals are in use.




iglide® A500, PA cage,  
Stainless Steel Balls

#### Special properties

- For temperatures up to 302°F
- Maximum chemical resistance

Temperature range  
-40°F to +302°F

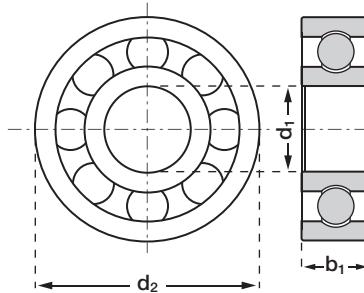


#### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623A1E	A500	PA	316 SS	3	10	4
B626A1E	A500	PA	316 SS	6	19	6
B608A1E	A500	PA	316 SS	8	22	7
B6000A1E	A500	PA	316 SS	10	26	8
B6002A1E	A500	PA	316 SS	15	32	9
B6004A1E	A500	PA	316 SS	20	42	12


#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623A1E	9	7	9	5,000	0.4
B626A1E	28	13	18	3,200	2.3
B608A1E	50	16	22	2,700	3.7
B6000A1E	85	23	31	2,100	6.0
B6002A1E	99	36	38	1,600	9.1
B6004A1E	146	56	78	1,300	19.4

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





**igus®**

## xiros® Ball Bearings A500 Material, PEEK Cage Stainless Steel Balls , mm

xiros® plastic ball bearings open up new application areas for plastic roller bearings. After the 2007 market launch, the lifetime of the high-temperature option with iglide® A500 inner and outer races could be clearly raised by up 5 times.




iglide® A500, PEEK cage,  
Stainless Steel Balls

### Special properties

- For temperatures up to 302°F
- Maximum chemical resistance

Temperature range  
-40°F to +302°F

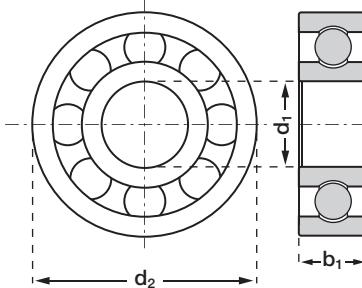

PEEK cages, inner and outer races made  
from FDA compliant polymers

### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623A7E	A500	PEEK	316 SS	3	10	4
B626A7E	A500	PEEK	316 SS	6	19	6
B608A7E	A500	PEEK	316 SS	8	22	7
B6000A7E	A500	PEEK	316 SS	10	26	8
B6002A7E	A500	PEEK	316 SS	15	32	9
B6004A7E	A500	PEEK	316 SS	20	42	12

### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623A7E	9	7	9	5,000	0.4
B626A7E	28	13	18	3,200	2.3
B608A7E	50	16	22	2,700	3.7
B6000A7E	85	23	31	2,100	6.0
B6002A7E	99	36	38	1,600	9.1
B6004A7E	146	56	78	1,300	19.4

# xiros® Ball Bearings

## A500 Material, PEEK Cage

### Glass Balls, mm

**igus®**



xiros® plastic ball bearings in combination with a PEEK cage and glass balls are often used in environments where high chemical resistance is necessary and should be free of stainless steel components.




iglide® A500, PEEK cage,  
Glass Balls

#### Special properties

- For temperatures up to 302°F
- Maximum chemical resistance

Temperature range  
-148°F to +302°F

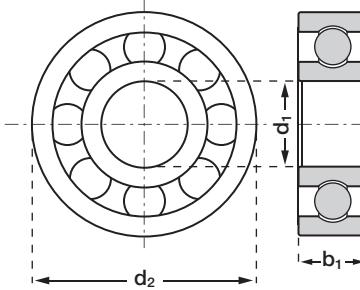

#### Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623A7G	A500	PEEK	Glass	3	10	4
B626A7G	A500	PEEK	Glass	6	19	6
B608A7G	A500	PEEK	Glass	8	22	7
B6000A7G	A500	PEEK	Glass	10	26	8
B6002A7G	A500	PEEK	Glass	15	32	9
B6004A7G	A500	PEEK	Glass	20	42	12


#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623A7G	9	7	9	5,000	0.3
B626A7G	28	13	18	3,200	1.6
B608A7G	50	16	22	2,700	2.4
B6000A7G	85	23	31	2,100	3.8
B6002A7G	99	36	38	1,600	5.2
B6004A7G	146	56	78	1,300	13.2

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





**igus®**

# xiros® Ball Bearings A500 Material, PEEK Cage PAI Balls, mm

iglide® plastic ball bearings are also available with plastic balls. At low loads the wear resistance can be improved by a factor of 3.





## Special properties

- Improved wear resistance
- Lightest weight
- For temperatures up to 302°F
- Maximum chemical resistance

iglide® A500, PEEK cage,  
PAI Balls

Temperature range  
-148°F to +302°F

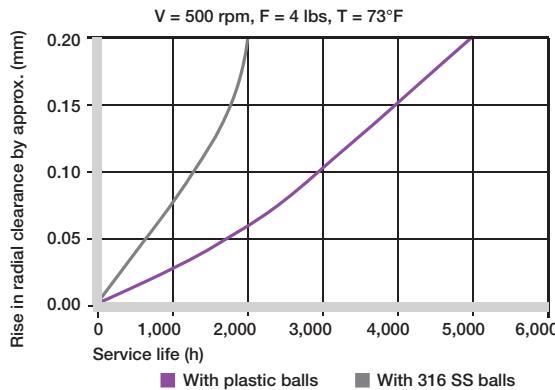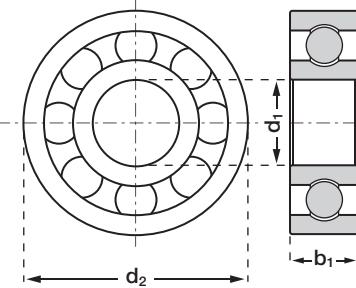

## Dimensions (mm)

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B626A7P	A500	PEEK	PAI	6	19	6
B608A7P	A500	PEEK	PAI	8	22	7
B6000A7P	A500	PEEK	PAI	10	26	8
B6002A7P	A500	PEEK	PAI	15	32	9
B6004A7P	A500	PEEK	PAI	20	42	12

## Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B626A7P	7	3	4	3,200	1.4
B608A7P	12	4	6	2,700	2.2
B6000A7P	21	5	8	2,100	3.4
B6002A7P	27	7	9	1,800	5.6
B6004A7P	36	14	20	1,300	11.7

# xiros® Ball Bearings

## C160 Material, PP Cage

### Stainless Steel Balls, mm

**igus®**




The ball bearing material iglide® C160 is cost-effective and very resistant to chemicals. iglide® C160 can be used with temperatures up to 176°F.



iglide® C160, PP cage,  
Stainless Steel Balls

Temperature range  
32°F to +176°F

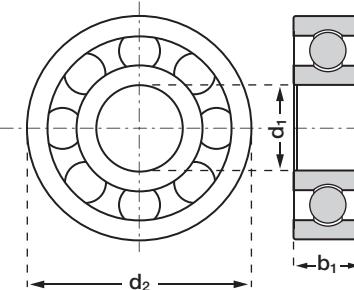

#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623C2E	C160	PP	316 SS	3	10	4
B626C2E	C160	PP	316 SS	6	19	6
B608C2E	C160	PP	316 SS	8	22	7
B6000C2E	C160	PP	316 SS	10	26	8
B6002C2E	C160	PP	316 SS	15	32	9
B6003C2E	C160	PP	316 SS	17	35	10

#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623C2E	2	4	6	4,500	0.3
B626C2E	6	9	13	2,600	2.1
B608C2E	11	11	15	2,200	3.4
B6000C2E	19	15	21	1,900	5.6
B6002C2E	22	26	35	1,600	8.1
B6003C2E	25	32	45	1,400	9.3

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

-

1

mm



**igus®**

# xiros® Ball Bearings

## C160 Plastic Ball Bearings


### PP Cage, Glass Balls, mm

xiros® plastic ball bearings in combination with a PEEK cage and glass balls are often used in environments where high chemical resistance is necessary and should be free of stainless steel components.



iglide® C160, PP cage,  
Glass Balls

Temperature range  
32°F to +176°F

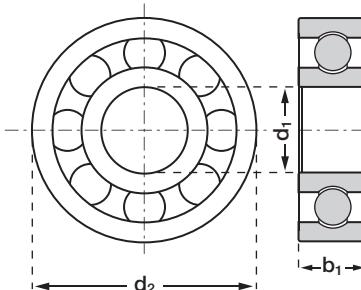

#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623C2G	C160	PP	Glass	3	10	4
B626C2G	C160	PP	Glass	6	19	6
B608C2G	C160	PP	Glass	8	22	7
B6000C2G	C160	PP	Glass	10	26	8
B6002C2G	C160	PP	Glass	15	32	9
B6003C2G	C160	PP	Glass	17	35	10

#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623C2G	2	4	6	4,500	0.3
B626C2G	6	9	13	2,600	1.4
B608C2G	11	11	15	2,200	2.2
B6000C2G	19	15	21	1,900	3.5
B6002C2G	22	26	35	1,600	4.2
B6003C2G	25	32	45	1,400	5.1

# xiros® Ball Bearings


## D180 Plastic Ball Bearings

### PA Cage, Stainless Steel Balls, mm

**igus®**




xiros® D180 plastic ball bearings made of the newly developed iglide® D180 material are specially suited for high rotating speeds. They are extremely wear resistant and achieve a very high lifetime.

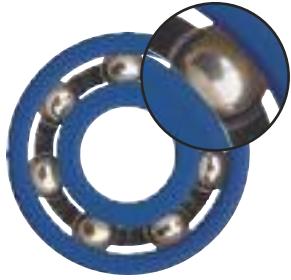

iglide® D180, PA cage,  
Stainless Steel Balls

Temperature range  
-58°F to +176°F

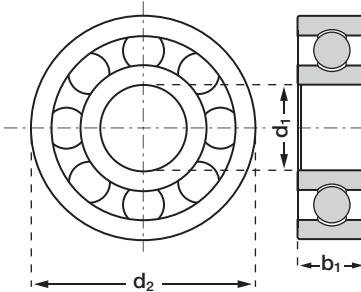


#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623D1E	D180	PA	316 SS	3	10	4
B626D1E	D180	PA	316 SS	6	19	6
B608D1E	D180	PA	316 SS	8	22	7
B6000D1E	D180	PA	316 SS	10	26	8


#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623D1E	2	.45	2.5	5,000	0.4
B626D1E	6	2.9	6.7	4,500	2.0
B608D1E	11	4.5	9.4	4,300	3.7
B6000D1E	19	5.8	12	4,200	6.1

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0






xiros® D180 plastic ball bearings made of the newly developed iglide® D180 material are specially suited for high rotating speeds. They are extremely wear resistant and achieve a very high lifetime.



iglide® D180, PA cage,  
Glass Balls

Temperature range  
-58°F to +176°F

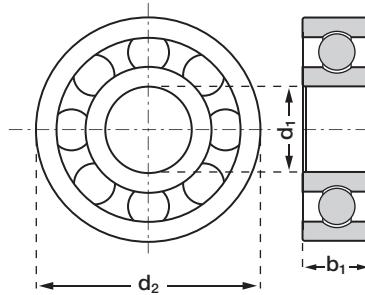

#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623D1G	D180	PA	Glass	3	10	4
B626D1G	D180	PA	Glass	6	19	6
B608D1G	D180	PA	Glass	8	22	7
B6000D1G	D180	PA	Glass	10	26	8

#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623D1G	2	.45	2.5	5,000	0.4
B626D1G	6	2.9	6.7	4,500	2.0
B608D1G	11	4.5	9.4	4,300	3.7
B6000D1G	19	5.8	12	4,200	6.1

# xiros® Ball Bearings

## F180 Plastic Ball Bearings

### PA Cage, Stainless Steel Balls, mm

**igus®**




The xiros®F180 plastic ball bearings offer a lubrication- and maintenance-free solution to protect the products against electrostatic discharges during the production process. They can be used up to 176°F and offer a long service life.



iglide® D180, PA cage,  
Stainless Steel Balls

Temperature range  
-58°F to +176°F

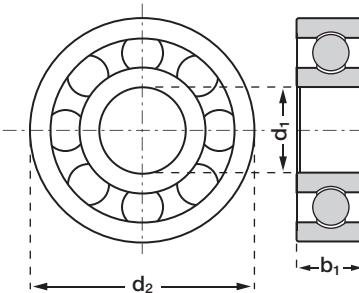


#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B623F1E	F180	PA	316 SS	3	10	4
B626F1E	F180	PA	316 SS	6	19	6
B608F1E	F180	PA	316 SS	8	22	7
B6000F1E	F180	PA	316 SS	10	26	8
B6003F1E	F180	PA	316 SS*	17	35	10
B6004F1E	F180	PA	316 SS*	20	42	12


#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B623F1E	2	4	5	4,600	0.4
B626F1E	11	9	15	2,500	2.0
B608F1E	15	13	18	2,300	3.8
B6000F1E	18	16	24	2,000	5.9
B6003F1E	39	34	50	1,400	10.7
B6004F1E	45	39	58	1,200	13.4

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.







The double row design of the B180 plastic ball bearings is less expensive than two comparable single rows and are tribologically optimized. With a double row design higher loads can be taken in by the simultaneous mounting of just one component. They can be used in temperatures up to 176°F and are made in combination with stainless steel balls.



iglide® B180, PA cage,  
Stainless Steel Balls

Temperature range  
-40°F to +176°F

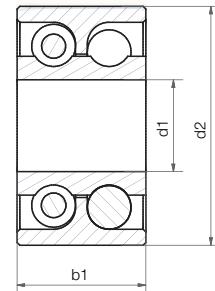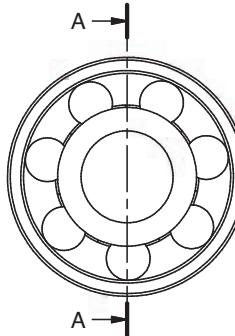

#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B6000B1EDR	B180	PA	316 SS	10	26	14
B6004B1EDR	B180	PA	316 SS	20	42	20

#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B6000B1EDR	180	36	51	1700	11
B6004B1EDR	247	78	119	1020	36

# xiros® Double Row Ball Bearings

## B180 Plastic Ball Bearings

### PA Cage, Glass Balls, mm

**igus®**





The double row design of the B180 plastic ball bearings is less expensive than two comparable single rows and are tribologically optimized. With a double row design higher loads can be taken in by the simultaneous mounting of just one component. They can be used in temperatures up to 176°F and are made in combination with glass balls.



iglide® B180, PA cage,  
Glass Balls

Temperature range  
-40°F to +176°F

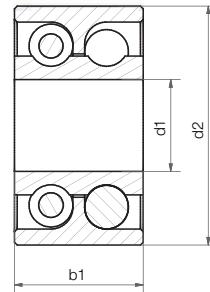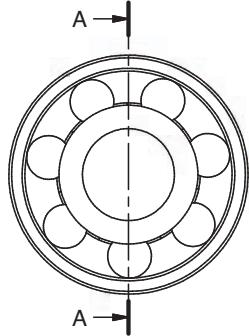

#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
B6000B1GDR	B180	PA	Glass	10	26	14
B6004B1GDR	B180	PA	Glass	20	42	20

#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
B6000B1GDR	180	36	51	1700	11
B6004B1GDR	247	78	119	1020	36

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.   
+   
I

mm



**igus®**

## xiros® Ball Bearings B180 Material, PA Cage Stainless Steel Balls with Cover Plate


xiros® plastic ball bearings made of iglide® B180 with cover to prevent the penetration of dirt and other abrasive particles. The one-sided cover is fixed to the inner race. The other side is protected by the enclosed ball cage.

iglide® xiros



### Special properties

- Dirt-repellent
- Balls protected by cover plate

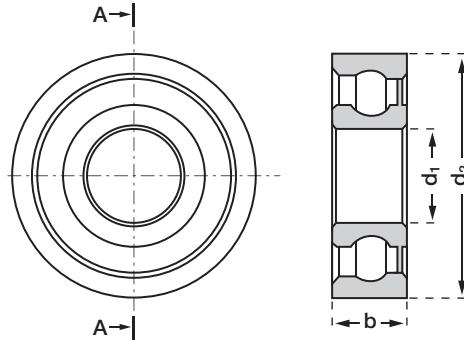

iglide® B180, PA cage, Stainless Steel Balls with Cover Plate

Temperature range  
-40°F to +176°F

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
BC623B1E	B180	PA	316 SS	3	10	4
BC626B1E	B180	PA	316 SS	6	19	6
BC608B1E	B180	PA	316 SS	8	22	7
BC6000B1E	B180	PA	316 SS	10	26	8
BC6001B1E	B180	PA	316 SS	12	28	8
BC6003B1E	B180	PA	316 SS	17	35	10
BC6004B1E	B180	PA	316 SS	20	42	12

### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
BC623B1E	7	6	8	4,500	0.4
BC626B1E	21	11	16	2,600	2.5
BC608B1E	37	13	19	2,200	4.0
BC6000B1E	64	19	27	1,900	6.3
BC6001B1E	71	24	33	1,750	7.1
BC6003B1E	81	40	56	1,400	11.5
BC6004B1E	90	47	66	1,150	19.7

# xiros® Ball Bearings

## B180 Material, PA Cage

### Glass Balls with Cover Plate

**igus®**





xiros® plastic ball bearings made of iglide® B180 with cover to prevent the penetration of dirt and other abrasive particles. The one-sided cover is fixed to the inner race. The other side is protected by the enclosed ball cage.



#### Special properties

- Dirt-repellent
- Balls protected by cover plate

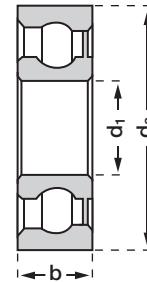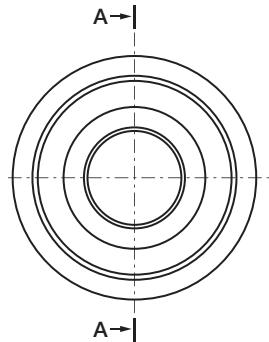

iglide® B180, PA cage, Stainless Steel Balls with Cover Plate

Temperature range  
-40°F to +176°F


#### Dimensions and materials

Part number	Race Material	Cage Material	Ball Material	Inner-Ø d1 (mm)	Outer-Ø d2 (mm)	Width b1 (mm)
BC623B1G	B180	PA	Glass	3	10	4
BC626B1G	B180	PA	Glass	6	19	6
BC608B1G	B180	PA	Glass	8	22	7
BC6000B1G	B180	PA	Glass	10	26	8
BC6001B1G	B180	PA	Glass	12	28	8
BC6003B1G	B180	PA	Glass	17	35	10
BC6004B1G	B180	PA	Glass	20	42	12


#### Technical Data

Part number	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)	Weight (g)
BC623B1G	7	6	8	4,500	0.4
BC626B1G	21	11	16	2,600	1.8
BC608B1G	37	13	19	2,200	2.7
BC6000B1G	64	19	27	1,900	4.1
BC6001B1G	71	24	33	1,750	4.7
BC6003B1G	81	40	56	1,400	8.4
BC6004B1G	90	47	66	1,150	14.2

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





**igus®**

# xiros® Ball Bearings

## B180 Slewing Ring Bearings

### Stainless Steel or Glass Balls

The combination of stainless steel balls with plastic inner and outer races results in maintenance-free dry operation with low coefficients of friction. The xiros® slewing ring bearing can be used in temperatures up to 176°F.

iglide® xiros


Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>



iglide® B180, PP cage,  
Stainless Steel Balls

iglide® B180, PP cage,  
Glass Balls

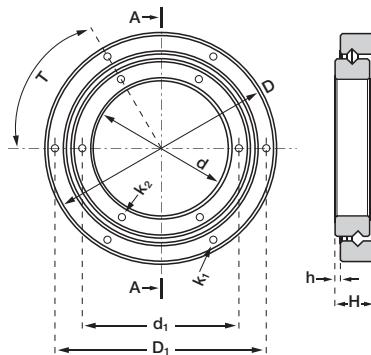

#### Special properties

- Lightweight
- Cost-effective

#### Part Number Structure

**BRT 60 G**



Ball Material  
G - Glass  
E - 316 Stainless  
Inner diameter  
xiros® slewing ring

#### Dimensions and materials

Part number	Balls	D	D1	d	d1	H	h	T	K1 Ø	K2 Ø
<b>Stainless Steel Balls</b>										
BRT60E	316 SS	100	90	60	68	17.5	2.5	60	3.3	3.3
BRT100E	316 SS	160	150	100	110	20	5	60	6.4	6.4
<b>Glass Balls</b>										
BRT60G	Glass	100	90	60	68	17.5	2.5	60	3.3	3.3
BRT100G	Glass	160	150	100	110	20	5	60	6.4	6.4

#### Technical Data

Part number	Static Load (lbs)	Dynamic Load (lbs)	Max Speed (rpm)	Weight (g)
<b>Stainless Steel Balls</b>				
BRT60E	180	56	250	111.9
BRT100E	248	94	250	251
<b>Glass Balls</b>				
BRT60G	180	56	250	98.3
BRT100G	248	94	250	231

# xiros® Plastic Axial Ball Bearings

## B180 Material

### Stainless Steel Balls

igus®




xiros® plastic axial ball bearings offers the advantage of higher load bearing capacities and is completely maintenance-free and corrosion resistant. The xiros® axial ball bearings are available for use in up to 176°F in combination with stainless steel balls.



iglide® B180  
Stainless Steel Balls

Temperature range  
-40°F to +176°F

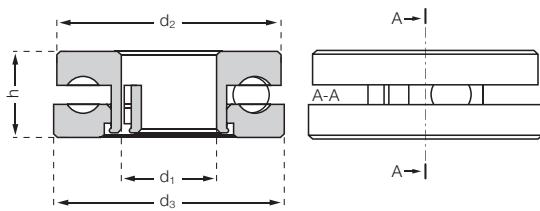


#### Dimensions and materials

Part number	Balls	d1	d2	d3	h
Stainless Steel Balls					
BA51100BE	316 SS	10	23.5	24	9
BA51104BE	316 SS	20	34.5	35	10

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0  
+  
I



#### Technical Data

Part number	Static Load (lbs)	Dynamic Load (lbs)	Max Speed (rpm)	Weight (g)
Stainless Steel Balls				
BA51100BG	45	56	600	6.9
BA51104BG	146	182	460	14




xiros® plastic axial ball bearings offers the advantage of higher load bearing capacities and is completely maintenance-free and corrosion resistant. The xiros® axial ball bearings are available for use in up to 176°F in combination with glass balls.



**iglide® B180  
Stainless Steel Balls**

Temperature range  
-40°F to +176°F

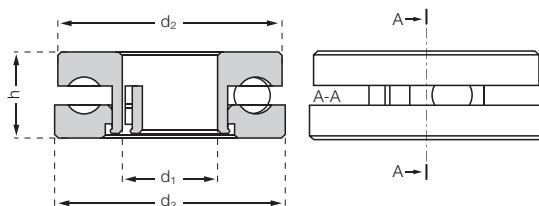

#### Dimensions and materials

Part number	Balls	$d_1$	$d_2$	$d_3$	$h$
Glass Balls					
BA51100BE	Glass	10	23.5	24	9
BA51104BE	Glass	20	34.5	35	10

#### Technical Data

Part number	Static Load (lbs)	Dynamic Load (lbs)	Max Speed (rpm)	Weight (g)
Glass Balls				
BA51100BG	45	56	600	6.9
BA51104BG	146	182	460	14

# xiros® Ball Bearings B180 Material, Plastic Ball Transfer Unit

igus®



xiros® plastic ball transfer unit made of iglide® B180 for the lubricant-free transport of sensitive product. The support ball is mounted inside the housing on many smaller balls, in order to optimize the running behavior. The entire structure of the plastic ball caster consists of plastic components.



iglide® B180  
POM Balls



## Special properties

- Lubrication- and maintenance-free
- Corrosion-resistant and non-magnetic
- Temperature resistant up to 176°F

Temperature range  
-40°F to +176°F

## Part Number Structure

**BT 515 B POM**

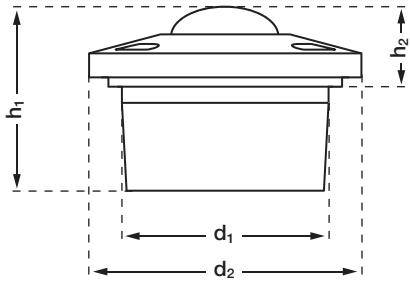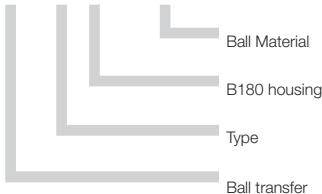


## Dimensions and materials

Part number	Ball	d1	D2	h1	h2	Axial Load Capacity (lbs)	Weight (g)
BT505BPOM	POM	10.4	12	8.38	4.28 +/- 0.2 mm	8	0.94
BT515BPOM	POM	24	31	21	9.8	18	8.7
BT522BPOM	POM	36	45	30	9.8	25	28.8

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0  
+  
I






**igus®**

# xiros® Ball Bearings B180 Material, ESTM Pillow Block, fixed Stainless Steel or Glass Balls, mm

iglide® xiros

xiros® pillow block bearings with stainless steel balls are a combination of xiros® plastic ball bearings and igubal® housings

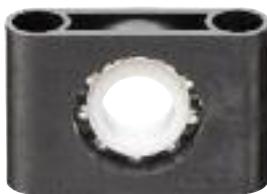

iglide® B180, igumid G  
PA cage, Stainless Steel Balls

iglide® B180, igumid G  
PA cage, Glass Balls

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

## Special properties

- Totally corrosion resistance
- Lubrication- and maintenance-free
- Non-magnetic and washable
- Predictable lifetime
- Compact design
- Low weight
- Electrically insulating


## Temperature range

- xiros® B180, -40°F to +176 °F
- xiros® A500, -40°F to +248 °F

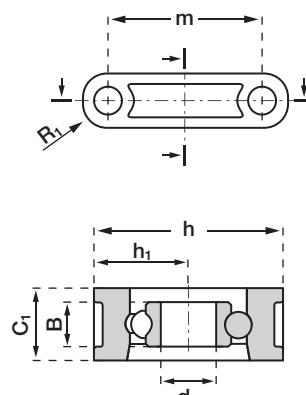

## Part Number Structure

**ESTM 1 F 06 B E**

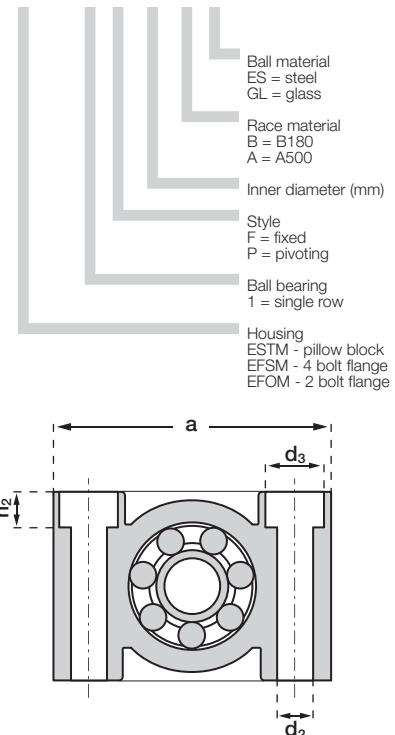

## Dimensions (mm)

Part No.*	Inner Ø d	Ø Bore d2	d3	h	h1	h2	a	m	C1	B	R1
<b>Stainless Steel Balls</b>											
ESTM1F06BE	6	5.5	5.5	22	11	—	36	26	10	6	5.0
ESTM1F10BE	10	6.6	10.6	34	17	6.4	50	37	13	8	6.5
ESTM1F20BE	20	9.0	14.0	48	24	8.06	72	54	18	12	9.0
<b>Glass Balls</b>											
ESTM1F06BG	6	5.5	5.5	22	11	—	36	26	10	6	5.0
ESTM1F10BG	10	6.6	10.6	34	17	6.4	50	37	13	8	6.5
ESTM1F20BG	20	9.0	14.0	48	24	8.06	72	54	18	12	9.0

## Technical Data

Part No.*	Max. Static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Max. Speed (rpm)	Weight (g)
<b>Stainless Steel Balls</b>					
ESTM1F06BE	21	11	16	2,600	7.7
ESTM1F10BE	64	19	27	1,900	20.2
ESTM1F20BE	90	47	66	1,150	54.1
<b>Glass Balls</b>					
ESTM1F06BG	21	11	16	2,600	6.7
ESTM1F10BG	64	19	27	1,900	18.2
ESTM1F20BG	90	47	66	1,150	47.7

\*For temperatures up to +248°F order with A500 material.

For example:

ESTM1F08AE with stainless steel balls

ESTM1F08AG with glass balls

# xiros® Ball Bearings

## B180 material, ESTM Pillow Block, pivoting Stainless Steel or Glass Balls, mm

xiros® pillow block bearings with stainless steel balls are a combination of xiros® plastic ball bearings and igubal® housings. The pivoting option allows for the compensation of misalignments.



iglide® B180, igumid G  
PA cage, Stainless Steel Balls





iglide® B180, igumid G  
PA cage, Glass Balls

### Special properties

- Totally corrosion resistance
- Lubrication- and maintenance-free
- Non-magnetic and washable
- Predictable lifetime
- Compact design
- Low weight
- Electrically insulating

### Temperature range

- xiros® B180, -40°F to +176 °F
- xiros® A500, -40°F to +248 °F

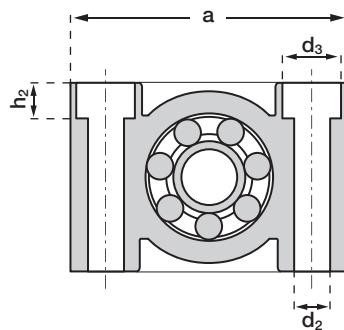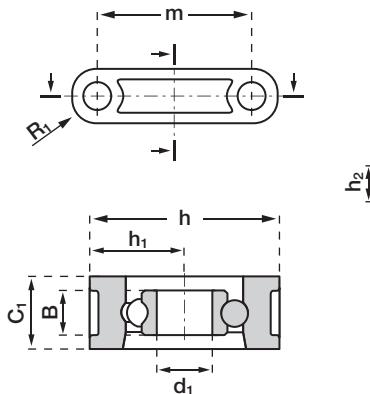

### Dimensions (mm)

Part No.*	Inner Ø d	Ø Bore d2	d3	h	h1	h2	a	m	C1	B	R1
<b>Stainless Steel Balls</b>											
ESTM1P08BE	8	6.6	10.6	34	17	6.4	50	37	13	7	6.5
ESTM1P10BE	10	9.0	14.0	40	20	8.6	62	46	16	8	8.0
ESTM1P12BE	12	9.0	14.0	48	24	8.6	72	54	18	10	9.0
<b>Glass Balls</b>											
ESTM1P08BG	8	6.6	10.6	34	17	6.4	50	37	13	7	6.5
ESTM1P10BG	10	9.0	14.0	40	20	8.6	62	46	16	8	8.0
ESTM1P12BG	12	9.0	14.0	48	24	8.6	72	54	18	10	9.0

### Technical Data

Part No.*	Max. Static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Max. Speed (rpm)	Max. Pivoting Angle	Weight (g)
<b>Stainless Steel Balls</b>						
ESTM1P08BE	37	13	19	2,200	5°	19.6
ESTM1P10BE	64	19	27	1,900	5°	32.9
ESTM1P12BE	70	24	33	1,750	5°	54.8
<b>Glass Balls</b>						
ESTM1P08BG	37	13	19	2,200	5°	18.2
ESTM1P10BG	64	19	27	1,900	5°	30.3
ESTM1P12BG	70	24	33	1,750	5°	52.8

\*For temperatures up to +248°F order with A500 material.

For example:

ESTM1P08AE with stainless steel balls


ESTM1P08AG with glass balls

igus®



### Part Number Structure

ESTM 1 F 06 B E

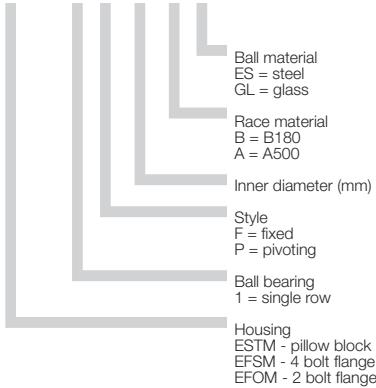

iglide® xiros®

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

mm



**igus®**

# xiros® Ball Bearings EFSM 4-Bolt Flange, B180 Material Stainless Steel or Glass Balls, mm

xiros® flange bearings with stainless steel or glass balls are a combination of xiros® plastic ball bearings and igubal® housings. The new angle-compensating xiros® was developed for the maintenance-free application in conveyor belts, cam rollers and support housings. The light, corrosion-free and anti-magnetic bearing needs no oil or grease and compensates for misalignments caused by tiltings and/or tolerances.

iglide® xiros




iglide® B180, igumid G  
PA cage, Stainless Steel Balls  
or Glass Balls

## Temperature range

- xiros® B180, -40°F to +176 °F
- xiros® A500, -40°F to +248 °F


## Special properties

- Compensation for misalignments
- Totally corrosion resistant
- Lubrication- and maintenance-free
- Non-magnetic and washable
- Predictable lifetime
- Compact design
- Low weight
- Electrically insulating

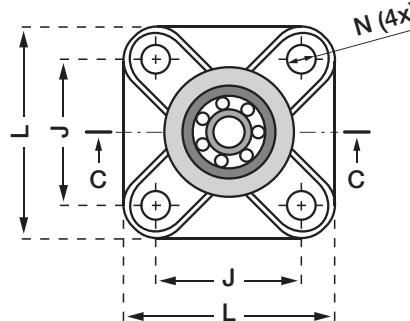

## Part Number Structure

EFSM 1 F 06 B E

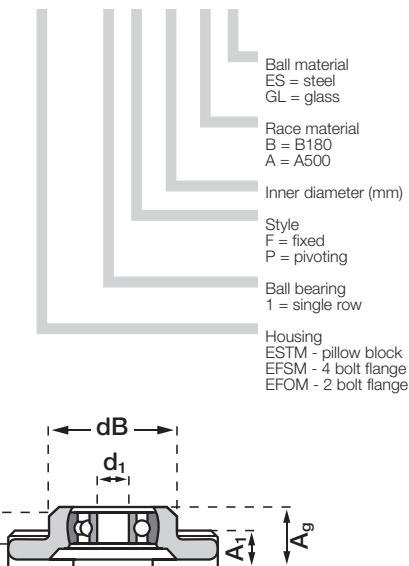

## Dimensions (mm)

Part No.*	Inner Ø d1	dB	L	J	A1	Ag	N	Max. Pivoting angle
<b>Stainless Steel Balls</b>								
EFSM1P08BE	8	32.5	52	36	9	15.5	6.4	5°
EFSM1P10BE	10	40.0	65	45	11	18.8	8.4	5°
EFSM1P12BE	12	48.0	74	52	14	23.5	8.4	5°
<b>Glass Balls</b>								
EFSM1P08BG	8	32.5	52	36	9	15.5	6.4	5°
EFSM1P10BG	10	40.0	65	45	11	18.8	8.4	5°
EFSM1P12BG	12	48.0	74	52	14	23.5	8.4	5°

## Technical Data

Part No.*	Max. Static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Max. Speed (rpm)	Weight (g)
<b>Stainless Steel Balls</b>					
EFSM1P08BE	37	13	19	2,200	25.2
EFSM1P10BE	64	19	27	1,900	48.8
EFSM1P12BE	70	24	33	1,750	80.0
<b>Glass Balls</b>					
EFSM1P08BG	37	13	19	2,200	25.2
EFSM1P10BG	64	19	27	1,900	48.8
EFSM1P12BG	70	24	33	1,750	80.0

\*For temperatures up to +248°F order with A500 material.

For example:

EFSM1P08AE with stainless steel balls

EFSM1P08AG with glass balls

# xiros® Ball Bearings

## EFOM 2-Bolt Flange

### B180 Material, Stainless Steel or Glass Balls, mm

**igus®**



xiros® flange bearings with stainless steel or glass balls are a combination of xiros® plastic ball bearings and igubal® housings. The new angle-compensating xiros® was developed for the maintenance-free application in conveyor belts, cam rollers and support housings. The light, corrosion-free and anti-magnetic bearing needs no oil or grease and compensates for misalignments caused by tiltings and/or tolerances



**iglide® B180, igumid G  
PA cage, Stainless Steel Balls  
or Glass Balls**

#### Temperature range


- xiros® B180, -40°F to +176 °F
- xiros® A500, up to +248 °F

#### Special properties

- Compensation for misalignments
- Totally corrosion resistant
- Lubrication- and maintenance-free
- Non-magnetic and washable
- Predictable lifetime
- Compact design
- Low weight
- Electrically insulating



#### Part Number Structure

**EFOM 1 F 06 B E**

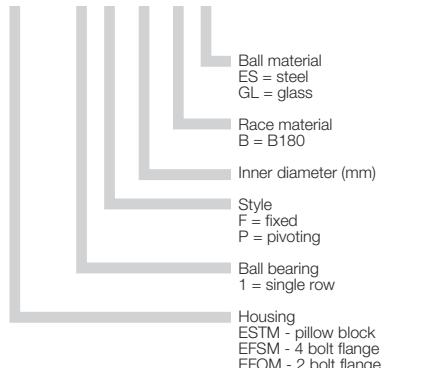

#### Dimensions (mm)

Part No.*	Inner Ø d1	dB	L	J	A1	Ag	N	Max. Pivoting angle
<b>Stainless Steel Balls</b>								
EFOM1P08BE	8	32	72.6	38	10	15,5	6.4 x 10.1	5°
EFOM1P10BE	10	40	89.0	47	11	18,8	8.4 x 12.5	5°
EFOM1P12BE	12	48.5	101.0	58.5	14	23,5	8.4 x 12.5	5°
<b>Glass Balls</b>								
EFOM1P08BG	8	32	72.6	38	10	15,5	6.4 x 10.1	5°
EFOM1P10BG	10	40	89.0	47	11	18,8	8.4 x 12.5	5°
EFOM1P12BG	12	48.5	101.0	58.5	14	23,5	8.4 x 12.5	5°

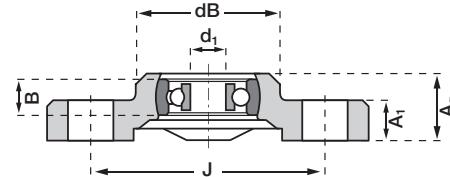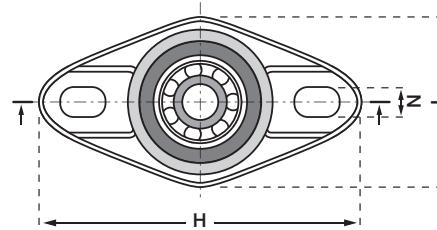

#### Technical Data

Part No.*	Max. static load axial (lbs)	Static load rating (lbs)	Dynamic load rating (lbs)	Maximum speed (rpm)
<b>Stainless Steel Balls</b>				
EFOM1P08BE	37	13	19	2,200
EFOM1P10BE	64	19	27	1,900
EFOM1P12BE	70	24	33	1,750
<b>Glass Balls</b>				
EFOM1P08BG	37	13	19	2,200
EFOM1P10BG	64	19	27	1,900
EFOM1P12BG	70	24	33	1,750

\*For temperatures up to +248°F order with A500 material.

For example:

EFOM1P08AE with stainless steel balls

EFOM1P08AG with glass balls

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

I

1

▼

mm

▲



**igus®**

**iglide® Bearings  
xiros® - Notes**

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® xiros

igus®



iglide® PRT




### Product Range

- Available in 3 Styles
- Inner diameters:  
Metric sizes from 20 - 300 mm

### Part Number Structure

#### Part Number Structure

#### PRT - 01 - 30 - ES

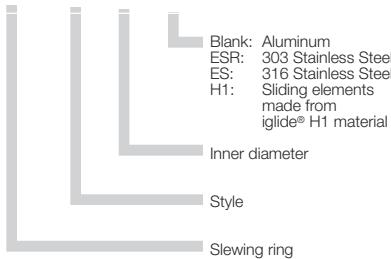

### Maximum Speed

Part No.	Max rpm
PRT-02-20	250
PRT-02-30	200
PRT-02-60	120
PRT-01-20	300
PRT-01-30	250
PRT-01-60	200
PRT-01-100	150
PRT-01-150	100
PRT-01-200	80
PRT-01-300	50

### Usage Guidelines



- When a ready-to-install solution is needed
- When a robust and corrosion resistant bearing unit with high load capacity is needed
- For high moments
- For use in dirty environments
- For maintenance-free applications without lubrication
- For slow to medium speeds



- For fast rotations
- When there is not enough driving torque at high loads
- When extreme precision is needed

iglide® PRT is a slewing ring bearing with the proven advantage of igus® plastic bearings. The iglide® J sliding elements are completely maintenance-free and lubrication-free. All the housing components are made of aluminum (except style 02, which has iglide® J4 head rings), and all the parallel surfaces of iglide® J sliding elements are hard anodized. All the fixing screws are made of stainless steel. The PRT slewing rings are available on request in stainless steel.





### Load

iglide® PRT slewing rings have varying load capacities depending on the type of load. All data can be used for both horizontal and lateral assembly. For cantilevered loads please see eccentric load chart on page 36.3 for required torque. Also feel free to contact our technical sales department for any application assistance.

See the chart on page 36.3 for load capabilities of the standard -01 version and page 36.5 for the load capabilities of the lightweight -02 version.



### Radial Load

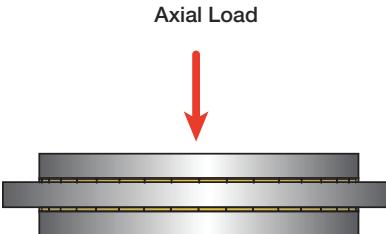




## Dimensions


Part No.	Weight	Axial Load		Radial Load		Max. rpm	Rigidity		Max. Permissible tilting moment
		static	dynamic	static	dynamic		dry	axial N/µm	
PRT-01-20	0.40	3370	900	517	135	300	80	10	73
PRT-01-30	0.88	6,070	1,573	1,124	337	250	100	50	147
PRT-01-60	2.43	11,240	3,372	2,248	674	200	300	65	590
PRT-01-100	2.87	12,364	3,596	3,596	1,124	150	400	65	1,106
PRT-01-150	4.85	17,984	5,620	5,620	1,798	100	450	65	1,475
PRT-01-200	7.05	22,480	6,744	7,868	2,248	80	500	65	2,802
PRT-01-300	16.75	33,721	20,232	10,116	6,069	50	500	65	3,687

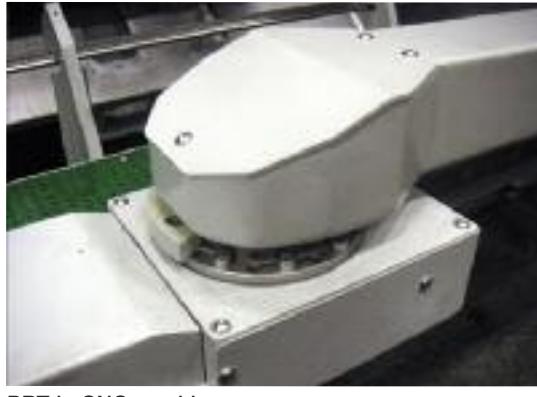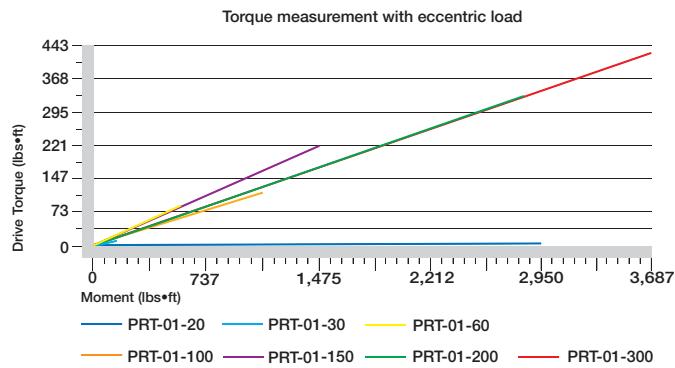

PRT in CNC machine

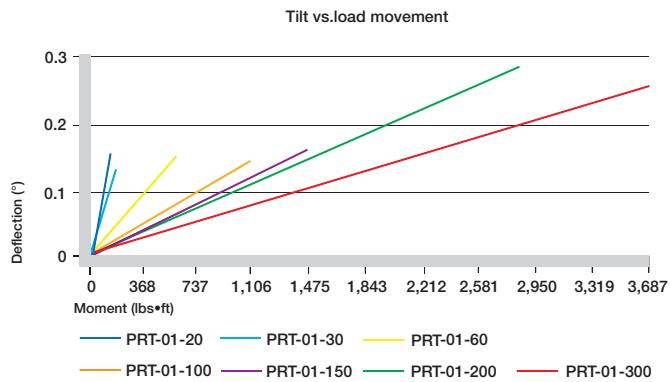

PRT in welding plant


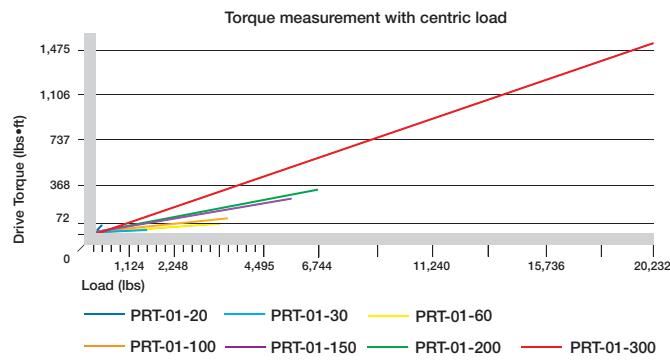


All load values assume the PRT is assembled with socket head screws (strength class 8.8) on the outside pitch circle diameter. For the assembly of the PRT the screws have to be inserted to a minimum thread depth of 2x the amount of the bores in the outer ring. All data can be used for both lateral and horizontal assembly.

- PRT-01-20: M4, min. 6 screws
- PRT-01-30: M4, min. 8 screws
- PRT-01-60: M5, min. 10 screws
- PRT-01-100: M5, min. 12 screws
- PRT-01-150: M5, min. 12 screws
- PRT-01-200: M6, min. 12 screws
- PRT-01-300: M8, min. 12 screws

iglide® PRT

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

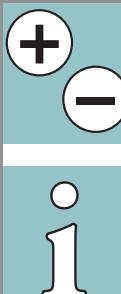




**igus®**

## iglide® Bearings PRT - Slewing Ring Bearing, Style 01

iglide® PRT



Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

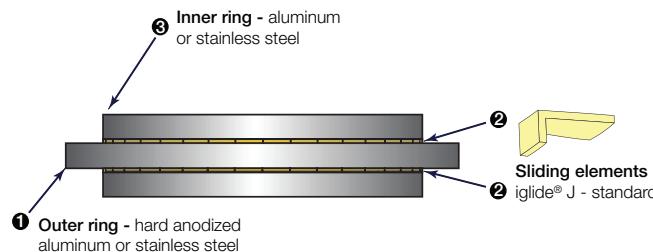

### Advantages

- High rigidity
- Easy to install, iglide® J sliding pads
- High wear resistance
- Available in aluminum or stainless steel

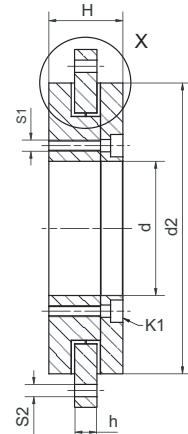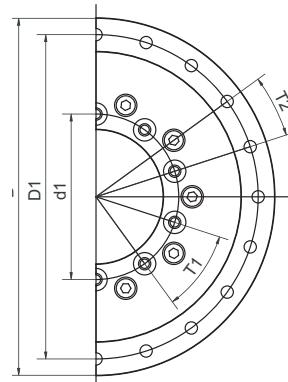

### Dimensions (mm)

Part No.	D*	D1	d1	d	d2	H	h	T1	T2	S1	S2	K1	R1	R2	B
PRT-01-20	80	70	31	20	60	24	8	3 x 120°	6 x 60°	M4	4.5	DIN 7984 M4	30	20	3.5
PRT-01-30	100	91	42.5	30	82	29	10	8 x 45°	8 x 45°	M4	4.5	DIN 7984 M4	41	29	4.5
PRT-01-60	160	145	74	60	130	33	10	10 x 36°	20 x 18°	M5	5.5	DIN 912 M5	65	51.5	4.5
PRT-01-100	185	170	112	100	160	34	12	12 x 30°	16 x 22.5°	M5	5.5	DIN 912 M5	80	69	5.5
PRT-01-150	250	235	165	150	220	35	12	12 x 30°	16 x 22.5°	M5	5.5	DIN 912 M5	110	96.5	5.5
PRT-01-200	300	285	215	200	274	38	15	12 x 30°	16 x 22.5°	M6	6.6	DIN 912 M6	137	124	7.0
PRT-01-300	450	430	320	300	410	42	15	12 x 30°	16 x 22.5°	M8	9.0	DIN 7984 M8	205	186.6	7.0

To order the 316 stainless steel option please add the suffix 'ES' to the end of the part number. Example: PRT-01-60ES


To order the 303 stainless steel option please add the suffix 'ESR' to the end of the part number. Example: PRT-01-60ESR (standard stainless option. Other options are available, please call igus® for more information. \*Tolerance according to DIN ISO 2768 mK

### iglide® PRT Slewing Ring Bearing, High Temperature, Style 01



### Advantages

- Suitable up to 356°F, high chemical resistance
- For all 7 standard dimensions of style 01
- Body in aluminum or stainless steel, sliding parts in iglide® H1

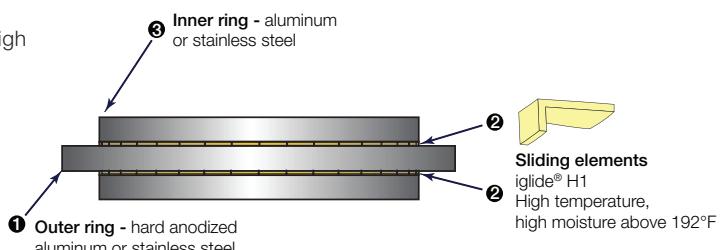

### Dimensions (mm)

Part No.	D*	D1	d1	d	d2	H	h	T1	T2	S1	S2	K1	R1	R2	B
PRT-01-20-H1	80	70	31	20	60	24	8	3 x 120°	6 x 60°	M4	4.5	DIN 7984 M4	30	20	3.5
PRT-01-30-H1	100	91	42.5	30	82	29	10	8 x 45°	8 x 45°	M4	4.5	DIN 7984 M4	41	29	4.5
PRT-01-60-H1	160	145	74	60	130	33	10	10 x 36°	20 x 18°	M5	5.5	DIN 912 M5	65	51.5	4.5
PRT-01-100-H1	185	170	112	100	160	34	12	12 x 30°	16 x 22.5°	M5	5.5	DIN 912 M5	80	69	5.5
PRT-01-150-H1	250	235	165	150	220	35	12	12 x 30°	16 x 22.5°	M5	5.5	DIN 912 M5	110	96.5	5.5
PRT-01-200-H1	300	285	215	200	274	38	15	12 x 30°	16 x 22.5°	M6	6.6	DIN 912 M6	137	124	7.0
PRT-01-300-H1	450	430	320	300	410	42	15	12 x 30°	16 x 22.5°	M8	9.0	DIN 7984 M8	205	186.6	7.0


To order the H1 with 316 stainless steel option please add the suffix 'HES' to the end of the part number. Example: PRT-01-60HES

To order the H1 with 303 stainless steel option please add the suffix 'HESR' to the end of the part number. Example: PRT-01-60HESR (standard stainless option. \* Tolerance according to DIN ISO 2768 mK

# iglide® Bearings


## PRT - Slewing Ring Bearing, Style 02

**igus®**

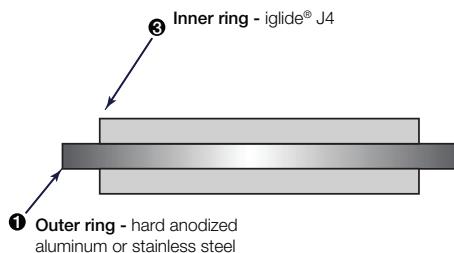

### Advantages

- Lightweight
- Outer ring made from hard anodized Aluminum or stainless steel
- iglide® J4 inner rings – sliding against the outer ring without lubrication
- Low cost

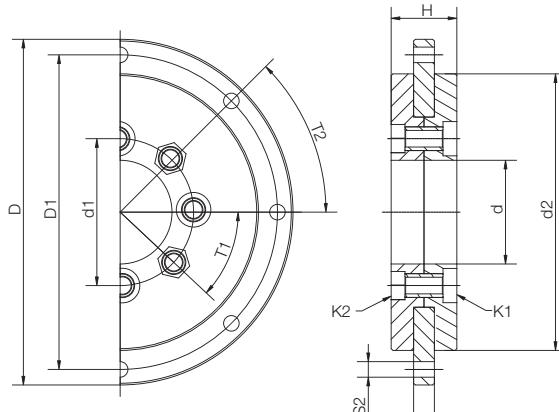

Outer ring available  
in stainless steel  
as an option.  
Inner rings made  
from iglide® J4

### Dimensions (mm)

Part No.	D	D1	d1	d	d2	H	h	T1	T2	S2	K1 For Screw	K2 For Screw
PRT-02-20-AL	80	70	31	20	60	16	5	6 x 60°	6 x 60°	4.5	DIN 6912-172 M5	DIN 439-A2 M5
PRT-02-30-AL	100	91	42.5	30	80	19	6	8 x 45°	8 x 45°	4.5	DIN 7984 M5	DIN 439 M5A2
PRT-02-60-AL	160	145	86.5	60	130	30	10	6 x 60°	20 x 18°	5.5	DIN 931 M5x25	DIN 934 M5

Please add "ES" to the Part No. for stainless steel (316 SS)


Properties	Unit	PRT-02-20-AL	PRT-02-30-AL	PRT-02-60-AL
Weight	lbs	0.22	0.44	1.54
Max. axial load, static	lbf	2,923	5,620	10,116
Max. axial load, dynamic	lbf	899	1,574	2,698
Max. radial load, static	lbf	450	562	2,248
Max. radial load, dynamic	lbf	112	157	630
Max. rotational speed dry running	1/min	250	200	120
Max. permissible tilting moment	lbs•ft	45	74	148

## PRT - Slewing Ring Bearing, FDA Compliant, Style 02



### Advantages

- For use in the food technology with inner rings made from FDA-compliant material iglide® A180
- The stainless steel outer ring and the material iglide® A180 are suitable for the direct contact with food, pharmaceuticals and humidity.
- Low profile and low weight
- Easy to install
- Totally lubrication-free

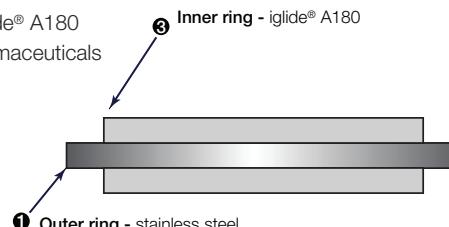


### Dimensions (mm)

Part No.	D	D1	d1	d	d2	H	h	T1	T2	S2	K1 for screw	K2 for screw
PRT-02-30-ES-A180	100	91	42.5	30	80	19	6	8x45	8x45	4.5	DIN 7984 M5	DIN 439-A2 M5

\*Part available by special request

iglide® PRT

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1






**igus®**

# iglide® Bearings PRT - Slewing Ring Bearing, Toothed Outer Ring

iglide® PRT

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

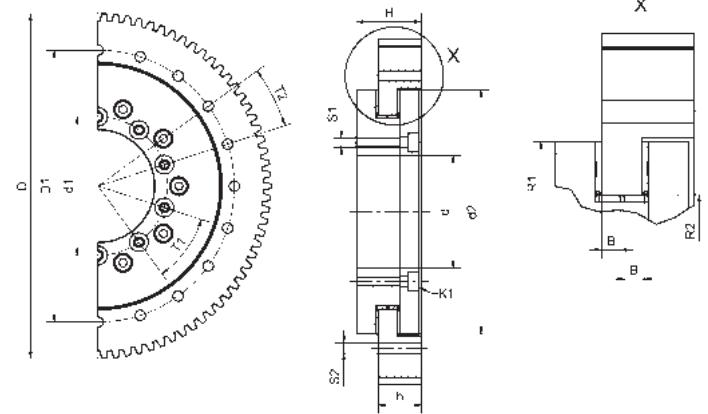

Geared PRT's are now the standard for driving a PRT by belt, rack, or pinion gear. There are 4 different gear options offered in hard anodized aluminum.

- Maintenance- and lubrication-free
- Ready to fit
- Robust and corrosion-resistant

## Dimensions (mm)


Part No.	D1 (mm)	d1 (mm)	d (mm)	d2 (mm)	h (mm)	T1 (°)	T2 (°)	S1	S2	K1	R1 (mm)	R2 (mm)	B (mm)	H (mm)
PRT-30-	91	42.5	30	82	21	8 x 45	8 x 45	M4	4.5	DIN 912 M4	41	29.0	4.5	(30.4)
PRT-60-	145	74.0	60	130	23	10 x 36	20 x 18	M5	5.5	DIN 912 M5	65	51.5	4.5	(34.5)
PRT-100-	170	112.0	100	160	25	12 x 30	16 x 22.5	M5	5.5	DIN 912 M5	80	69.0	5.5	(36.0)
PRT-150-	235	165.0	150	220	25	12 x 30	16 x 22.5	M5	5.5	DIN 912 M5	110	96.5	5.5	(37.5)
PRT-200-	285	215.0	200	274	30	12 x 30	16 x 22.5	M6	7.0	DIN 912 M6	137	124.0	7.0	(41.5)
PRT-300-	430	320.0	300	410	30	12 x 30	16 x 22.5	M8	9.0	DIN 912 M8	205	186.5	8.5	(46.5)

Fill in the box with the required toothed belt profile from below.

Example: PRT-30-ST


### Spur gearing DIN 3967

(ST)

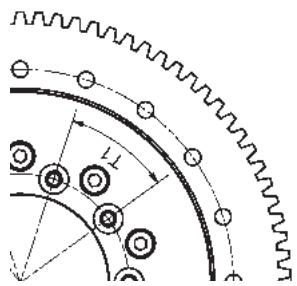


### Toothed belt profile

(AT10)

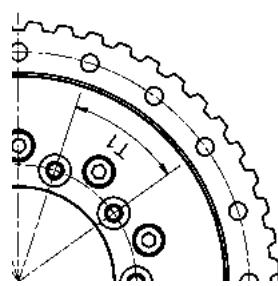


### Toothed belt profile

(T10)

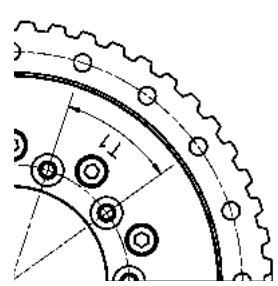

### Toothed belt profile

(HTD8M)

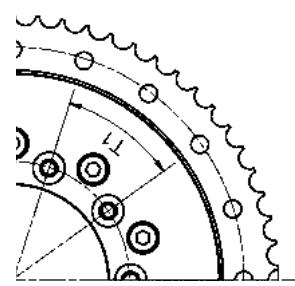

Part No.	m modulus	z # of Teeth	D (mm)
...-ST	2	54 (112)	
...-ST	2	90 (184)	
...-ST	2	96 (196)	
...-ST	2	126 (256)	
...-ST	2	152 (308)	
...-ST	3	152 (462)	

Part No.	z # of Teeth	D (mm)
....AT10	34 (106.4)	
....AT10	52 (163.8)	
....AT10	60 (189.2)	
....AT10	80 (252.9)	
....AT10	96 (303.9)	
....AT10	144 (456.7)	

Part No.	z # of Teeth	D (mm)
....T10	34 (106.4)	
....T10	52 (163.8)	
....T10	60 (189.2)	
....T10	80 (252.9)	
....T10	96 (303.9)	
....T10	144 (456.7)	

Part No.	z # of Teeth	D (mm)
....HTD8M	42 (105.6)	
....HTD8M	66 (166.7)	
....HTD8M	72 (189.2)	
....HTD8M	100 (253.3)	
....HTD8M	120 (304.3)	
....HTD8M	180 (457.1)	

# iglide® Bearings

## PRT - Slewing Ring Bearing


### Style 01 with Squared Flange

**igus®**



The smallest PRT slewing ring bearing in size 20 is also available with space-saving square flange for direct mounting on flat surfaces.

- No intake hole necessary
- No separate spacer required
- Fixed only with 4 screws

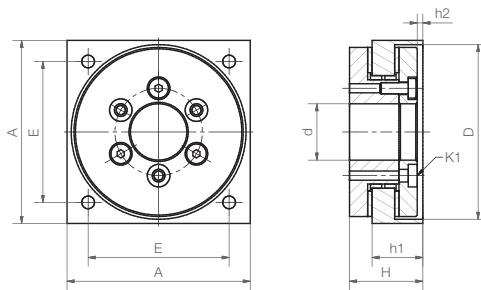

#### Dimensions (mm)


Part No.	d	D	A	E	H	h1 (°)	h2 (°)
PRT-01-20-SQ	20	62	65	50	26	18	2

## PRT - Slewing Ring Bearing, With Head Ring for Clamping



PRT-01-30 with head ring including clamping function for 30h7 toleranced shafts or other structures to be clamped.

- For easy handling structures
- Quick and easy installation
- Maximum tightening torque

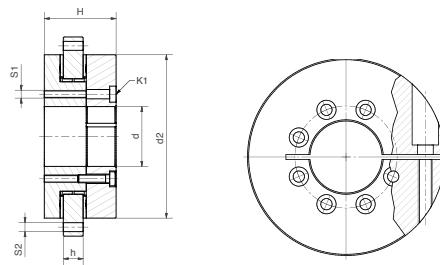

#### Dimensions (mm)

Part No.	D	D1	d1	d	d2	H	h	T1	T2	S1	S2	K1 for screw
PRT-01-30-C	100	91	42.5	30	80	19	6	8x45	8x45	M4	4.5	DIN 7984 M5

iglide® PRT

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1. + I

mm



**igus®**

# iglide® Bearings PRT - Slewing Ring Bearing, Accessories

iglide® PRT


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

## Drive plate



- For quick and easy drive coupling

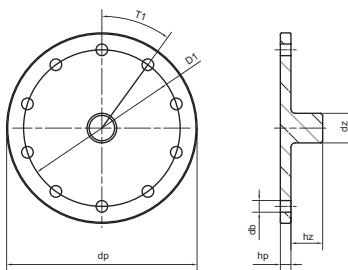

Picture shows PRT with fitted drive plate


Part No.	dp (mm)	hp (mm)	dz (mm)	hz (mm)	D1 (mm)	T1 (°)	db (mm)
PRT-AZ-30	55	5	10	15	42.5	8 x 45	4.5
PRT-AZ-60	90	5	14	15	74	10 x 36	5.5
PRT-AZ-100ES	125	8	20	20	112	12 x 30	5.5
PRT-AZ-150ES	180	10	20	20	165	12 x 30	4.5
PRT-AZ-200ES	230	10	20	20	215	12 x 30	7

Drive plates for the -100, -150 and the -200 are made from 303SS to meet their load capacity

## Mounting rings



- Easier, more flexible mounting
- No bore in the mounting face necessary

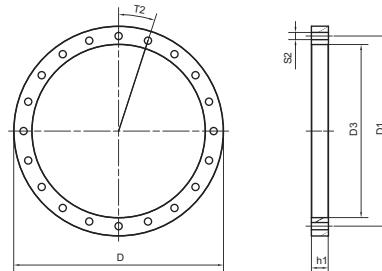


Picture shows PRT with fitted distance ring

Part No.	D (mm)	D1 (mm)	T2 (°)	S2 (mm)	D3 (mm)	h1 (mm)
PRT-01-30-DR	100	91	8 x 45	4.5	84	11
PRT-01-60-DR	160	145	20 x 18	5.5	132	13
PRT-01-100-DR	185	170	16 x 22.5	5.5	162	13
PRT-01-150-DR	250	235	16 x 22.5	5.5	222	13
PRT-01-200-DR	300	285	16 x 22.5	7.0	276	13
PRT-01-300-DR	450	430	16 x 22.5	9.0	412	15

## Plastic Mounting rings





- Lightweight
- No bore in the mounting face necessary

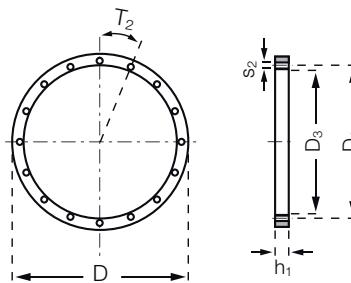

Part No.	D (mm)	D1 (mm)	T2 (°)	S2 (mm)	D3 (mm)	h1 (mm)
PRT-01-30-DRP	100	91	8 x 45	4.5	84	11
PRT-01-60-DRP	160	145	20 x 18	5.5	132	13
PRT-01-100-DRP	185	170	16 x 22.5	5.5	162	13



### Hand clamp

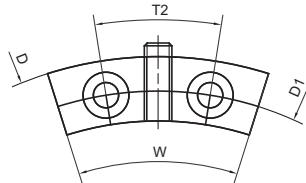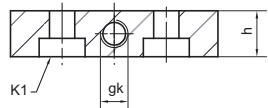


Picture shows PRT with fitted manual clamp

- With .75 lbs · ft screw torque a holding torque up to 7lbs · ft is possible
- Easy to screw onto outer ring

Part No.	D (mm)	D1 (mm)	T2 (°)	K1	h (mm)	gk	W (°)
PRT-HK-30	100	91	8 x 45	4.5	8	M5	60
PRT-HK-60	160	145	20 x 18	DIN 7984 M5	10	M6	35
PRT-HK-100*	205	185	16 x 22.5	DIN 7984 M5	12	M6	40
PRT-HK-200*	320	300	16 x 22.5	DIN 7984 M6	15	M6	40

\* Required with large outer rings

### PRT with Large outer ring



Part No.	D (mm)	D1 (mm)	d1 (mm)	T1 (°)	T2 (°)
PRT-01-100-G	205	185	112	12 x 30	16 x 22.5
PRT-01-200-G	320	300	215	12 x 30	16 x 22.5

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0 + -

mm



**igus®**

**iglide® Bearings  
PRT - Notes**

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® PRT

igus®



iglide® Clip




## Product Range

- Inner diameters:  
Inch sizes from 3/16 - 1 in.  
Metric sizes from 3 - 25 mm
- For sheet metal thicknesses:  
Inch sizes from .040 - .135 in.  
Metric sizes from 2, 3 and 4mm

## Part Number Structure

### Part Number Structure

**M C I - 03 - 04**

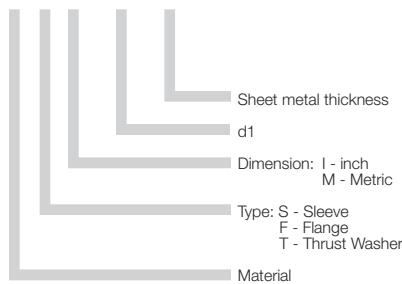

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	393
Oscillating	118	275
Linear	492	984

## Advantages

- Secured with the double flange design
- Maintenance-free and self-lubricating
- Good wear resistance
- Smooth operation
- Low noise
- Used for both rotational and linear movements
- Expansion possible due to slot design
- Material: iglide® M250

## Special Properties

iglide clip bearings are manufactured out of the wear-resistant material iglide M250. iglide M250 is a plain bearing material with strong wear-resistance at average loads. The bearings are self-lubricating and can be used dry. The bearings can be lubricated if desired. The iglide M250 material is resistant to all common lubricants.



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® clip bearings are designed specifically for putting shafts through sheet metal plates. For this reason, the bearings have flanges located on both ends. The bearings are secured in the sheet metal plate on both sides after installation.

The clip bearings are slit at an angle, so installation of the bearings is possible from one side. After installation, the bearing opens and forms a lining for the bore hole in the metal plate. The shaft prevents the clip bearing from detaching from the housing. Even during axial movement, the bearing remains secured in the housing.

In addition, the lateral slit can compensate for bearing expansions due to temperature or moisture. During expansion, the slit width decreases, and changes so the bearing clearance is minimized.

The flange diameter on the smaller side is made to ensure that housings with larger tolerances can be properly secured.

## Material Table

General Properties	Unit	iglide® M250	Testing Method
Density	g/cm³	1.14	
Color		charcoal	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.4	DIN 53495
Max. moisture absorption	% weight	7.6	
Coefficient of friction, dynamic against steel	μ	0.1 - 0.3	
p x v value, max. (dry)	psi x fpm	3,400	

## Mechanical Properties

Modulus of elasticity	psi	391,600	DIN 53457
Tensile strength at 68°F	psi	16,240	DIN 53452
Compressive strength	psi	7,540	
Permissible static surface pressure (68°F)	psi	2,901	
Shore D-hardness		79	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	176	
Max. application temperature, short-term	°F	338	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	10	DIN 53752

## Electrical Properties


Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹¹	DIN 53482



A wide range of Clip bearings are available in both inch and metric sizes

## Compressive Strength

The permissible static load of iglide Clip bearings at room temperature is 2610 psi. Due to the possibility of high tolerances in the housing bore, the clip bearing has a high compressive strength even for punched holes. For bearing surfaces that are very small, the vibration-dampening properties and the resistance to edge loads are especially important.

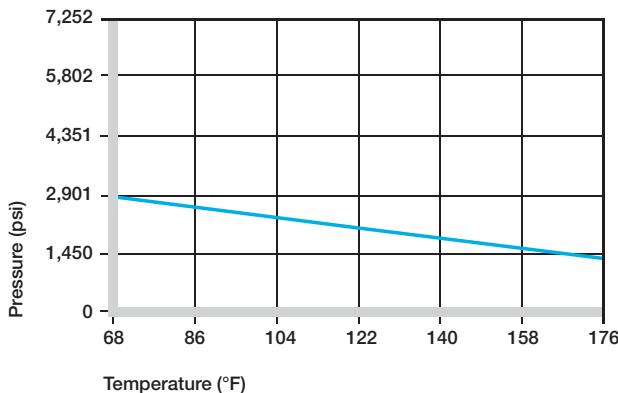

Permissible static surface pressure as a result of the operating temperature for clip bearings made of iglide® M250

## Surface Speeds

Clip bearings are extremely wear-resistant in slow rotating, oscillating, and axial movements. The maximum surface speeds for the different movements are the same as for the iglide® M250 material (See adjacent table).

With lubrication during installation or continuous lubrication, the permissible speeds can be increased.

	Continuous fpm	Short Term fpm
Rotating	157	393
Oscillating	118	275
Linear	492	984

Maximum running speeds

## Operating Temperatures

For operating temperatures up to 176°F, iglide® clip bearings display high wear resistance.

Even in the cold, the plain bearings remain elastic and wear-resistant.

iglide® M250	Application Temperature
Minimum	- 40°F
Max. Long-term	+ 176°F
Max. Short-term	+ 338°F

Temperature limits for iglide® M250

## Installation

For installation, the plain bearings are pressed together on the side with the large flange. The angled slit makes the bearing spiral-shaped so that it can be placed easily into the metal plate.

The slit also compensates for expansions of the circumference. In this way, a tight clearance is possible with the clip bearings. The recommended clearance allows a nominal size shaft to turn easily. The Clip bearing can also rotate within the housing bore.



iglide® Clip

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.0





igus®


# iglide® Plain Bearings

## Clip - Inch

iglide® Clip - Inch


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

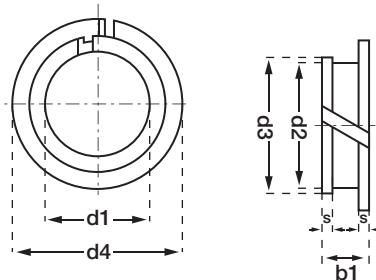

Part Number	d1	d2	d3	d4	s	b1	ID of Bearing in Housing	Recommended Sheet Metal Thickness
MCI-03-01	3/16	0.2343	1/4	5/16	0.032	0.1380	.1885	.040/.075
MCI-03-02	3/16	0.2343	1/4	5/16	0.032	0.2000	.1885	.072/.135
MCI-04-01	1/4	0.3125	11/32	7/16	0.032	0.1380	.2510	.040/.075
MCI-04-02	1/4	0.3125	11/32	7/16	0.032	0.2000	.2510	.072/.135
MCI-05-01	5/16	0.3750	13/32	1/2	0.032	0.1380	.3135	.040/.075
MCI-05-02	5/16	0.3750	13/32	1/2	0.032	0.2000	.3135	.072/.135
MCI-06-01	3/8	0.4375	15/32	9/16	0.032	0.1380	.3760	.040/.075
MCI-06-02	3/8	0.4375	15/32	9/16	0.032	0.2000	.3760	.072/.135
MCI-07-01	7/16	0.5000	17/32	5/8	0.032	0.1380	.4385	.040/.075
MCI-07-02	7/16	0.5000	17/32	5/8	0.032	0.2000	.4385	.072/.135
MCI-08-01	1/2	0.5625	19/32	11/16	0.032	0.1380	.5010	.040/.075
MCI-08-02	1/2	0.5625	19/32	11/16	0.032	0.2000	.5010	.072/.135
MCI-08-03	1/2	0.5625	19/32	11/16	0.032	0.248	0.5010	0.183/0.12
MCI-10-01	5/8	0.6875	23/32	7/8	0.032	0.1380	.6260	.040/.075
MCI-10-02	5/8	0.6875	23/32	7/8	0.032	0.2000	.6260	.072/.135
MCI-12-01	3/4	0.8125	27/32	1	0.032	0.1380	.7510	.040/.075
MCI-12-02	3/4	0.8125	27/32	1	0.032	0.2000	.7510	.072/.135

Part Number	Recommended Housing Bore		Recommended Shaft Size	
	Max.	Min.	Max.	Min.
MCI-03-01	0.2414	0.2343	0.1875	0.1865
MCI-03-02	0.2414	0.2343	0.1875	0.1865
MCI-04-01	0.3212	0.3125	0.2500	0.2490
MCI-04-02	0.3212	0.3125	0.2500	0.2490
MCI-05-01	0.3834	0.3750	0.3125	0.3115
MCI-05-02	0.3834	0.3750	0.3125	0.3115
MCI-06-01	0.4481	0.4375	0.3750	0.3740
MCI-06-02	0.4481	0.4375	0.3750	0.3740
MCI-07-01	0.5106	0.5000	0.4375	0.4365
MCI-07-02	0.5106	0.5000	0.4375	0.4365
MCI-08-01	0.5731	0.5625	0.5000	0.4990
MCI-08-02	0.5731	0.5625	0.5000	0.4990
MCI-08-03	0.5731	0.5625	0.5000	0.4990
MCI-10-01	0.6981	0.6875	0.6250	0.6240
MCI-10-02	0.6981	0.6875	0.6250	0.6240
MCI-12-01	0.8255	0.8125	0.7500	0.7490
MCI-12-02	0.8255	0.8125	0.7500	0.7490

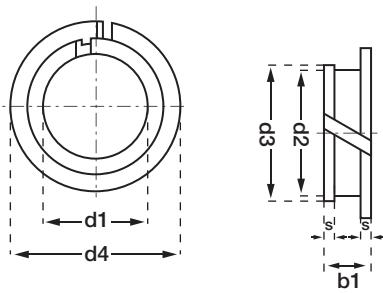

Part Number	d1	d2	d3	d4	s	b1	ID of Bearing in Housing	Recommended Sheet Metal Thickness
MCM-03-02	3	4.2	4.8	6	0.6	3.2	3.025	2.34/1.45
MCM-03-03	3	4.2	4.8	6	0.6	4.2	3.025	3.13/2.87
MCM-04-02	4	5.2	5.9	7	0.6	3.2	4.025	2.34/1.45
MCM-04-03	4	5.2	5.9	7	0.6	4.2	4.025	3.13/2.87
MCM-05-02	5	6.2	6.8	8	0.6	3.2	5.025	2.34/1.45
MCM-05-03	5	6.2	6.8	8	0.6	4.2	5.025	3.13/2.87
MCM-06-02	6	7.2	7.8	11	0.6	3.2	6.025	2.34/1.45
MCM-06-03	6	7.2	7.8	11	0.6	4.2	6.025	3.13/2.87
MCM-06-04	6	7.2	7.8	11	0.6	5.2	6.025	4.40/4.00
MCM-07-03	7	9	9.8	13	0.8	4.6	7.025	3.13/2.87
MCM-08-02	8	9.6	10.4	13	0.8	3.6	8.025	2.34/1.45
MCM-08-03	8	9.6	10.4	13	0.8	4.6	8.025	3.13/2.87
MCM-09-02	9	10.6	11.4	14	0.8	3.6	9.025	2.34/1.45
MCM-10-02	10	11.6	12.4	15	0.8	3.6	10.025	2.34/1.45
MCM-10-03	10	11.6	12.4	15	0.8	4.6	10.025	3.13/2.87
MCM-12-02	12	13.6	14.4	17	0.8	3.6	12.025	2.34/1.45
MCM-12-03	12	13.6	14.4	17	0.8	4.6	12.025	3.13/2.87
MCM-12-04	12	13.6	14.4	17	0.8	5.6	12.025	4.40/4.00
MCM-14-03	14	15.6	16.4	19	0.8	4.6	14.025	3.13/2.87
MCM-16-02	16	17.6	18.4	21	0.8	3.6	16.025	2.34/1.45
MCM-16-03	16	17.6	18.4	21	0.8	4.6	16.025	3.13/2.87
MCM-18-03	18	20	21	23	1.0	5.0	18.025	3.13/2.87
MCM-20-03	20	22	23	25	1.0	5.0	20.025	3.13/2.87
MCM-25-03	25	27	28	30	1.0	5.0	25.025	3.13/2.87

For recommended housing bore and shaft sizes see the following page

iglide® Clip - MM

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

inch


mm



igus®

iglide® Plain Bearings  
Clip - MM

iglide® Clip - MM

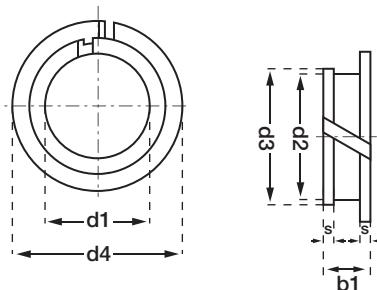Telephone 1-800-521-2747  
1-401-438-7270  
  
FaxInternet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Part Number	Recommended Housing Bore		Recommended Shaft Size	
	Max.	Min.	Max.	Min.
MCM-03-02	4.380	4.200	3.000	2.975
MCM-03-03	4.380	4.200	3.000	2.975
MCM-04-02	5.380	5.200	4.000	3.975
MCM-04-03	5.380	5.200	4.000	3.975
MCM-05-02	6.420	6.200	5.000	4.975
MCM-05-03	6.420	6.200	5.000	4.975
MCM-06-02	7.420	7.200	6.000	5.975
MCM-06-03	7.420	7.200	6.000	5.975
MCM-06-04	7.420	7.200	6.000	5.975
MCM-07-03	9.220	9.000	7.000	6.975
MCM-08-02	9.820	9.600	8.000	7.975
MCM-08-03	9.820	9.600	8.000	7.975
MCM-09-02	10.870	10.600	9.000	8.975
MCM-10-02	11.870	11.600	10.000	9.975
MCM-10-03	11.870	11.600	10.000	9.975
MCM-12-02	13.870	13.600	12.000	11.975
MCM-12-03	13.870	13.600	12.000	11.975
MCM-12-04	13.870	13.600	12.000	11.975
MCM-14-03	15.870	15.600	14.000	13.975
MCM-16-02	17.870	17.600	16.000	15.975
MCM-16-03	17.870	17.600	16.000	15.975
MCM-18-03	20.330	20.000	18.000	17.975
MCM-20-03	22.330	22.000	20.000	19.975
MCM-25-03	27.330	27.000	25.000	24.975

**igus®**



**iglide® Clip2**



### Product Range

- Inner diameters:  
Inch sizes from 3/16 - 1 in.  
Metric sizes from 4 - 25 mm


The iglide® Clip2 bearing is a thin walled bearing in the iglide® M250 material with beveled edge for extremely simple installations. The diagonal slit helps to compensate for poor housing bore tolerance as well as temperature and humidity changes. These self lubricating plain bearings are defined by their impact strength, vibration dampening, and wear resistant properties. They excel in applications in which vibration dampening is necessary, for example, in fitness and packaging machines.

### Material Table

#### Part Number Structure

##### Part Number Structure

**M Y I - 03 - 03**

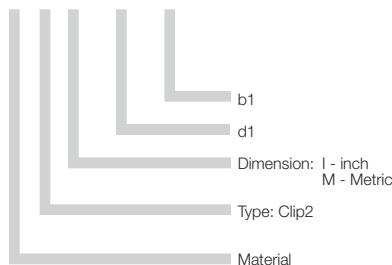

#### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	157	393
Oscillating	118	275
Linear	492	984

#### Special Properties



- Split version of the iglide® M250 bearing
- Easy assembly by hand
- Compensation for heat expansion
- Suitable for ambient temperatures with high humidity
- Lightweight
- Very economical
- Inch and metric sizes available from stock

#### General Properties

General Properties	Unit	iglide® M250	Testing Method
Density	g/cm³	1.14	
Color		charcoal	
Max. moisture absorption at 73°F / 50% r.h.	% weight	1.4	DIN 53495
Max. moisture absorption	% weight	7.6	
Coefficient of friction, dynamic against steel	μ	0.1 - 0.3	
p x v value, max. (dry)	psi x fpm	3,400	

#### Mechanical Properties

Modulus of elasticity	psi	391,600	DIN 53457
Tensile strength at 68°F	psi	16,240	DIN 53452
Compressive strength	psi	7,540	
Permissible static surface pressure (68°F)	psi	2,901	
Shore D-hardness		79	DIN 53505

#### Physical and Thermal Properties

Max. long-term application temperature	°F	176	
Max. application temperature, short-term	°F	338	
Min. application temperature	°F	-40	
Thermal conductivity	W/m x K	0.24	ASTM C 177
Coefficient of thermal expansion	K⁻¹ x 10⁻⁵	10	DIN 53752

#### Electrical Properties

Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹¹	DIN 53482




Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system



### Compressive Strength

The permissible static load of iglide Clip bearings at room temperature is 2610 psi. Due to the possibility of high tolerances in the housing bore, the clip bearing has a high compressive strength even for punched holes. For bearing surfaces that are very small, the vibration-dampening properties and the resistance to edge loads are especially important.

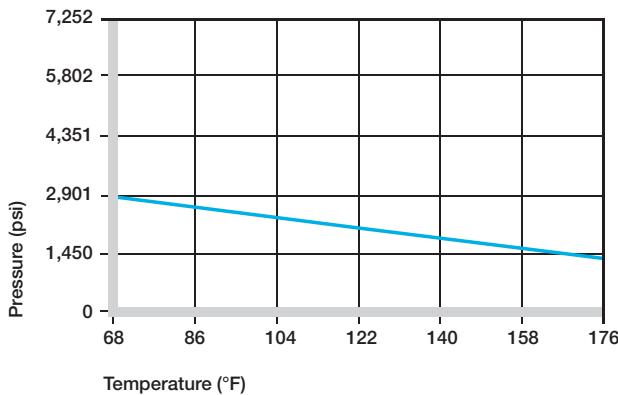

Permissible static surface pressure as a result of the operating temperature for clip bearings made of iglide® M250

### Surface Speeds

Clip bearings are extremely wear-resistant in slow rotating, oscillating, and axial movements. The maximum surface speeds for the different movements are the same as for the iglide® M250 material (See adjacent table).

With lubrication during installation or continuous lubrication, the permissible speeds can be increased.

	Continuous fpm	Short Term fpm
Rotating	157	393
Oscillating	118	275
Linear	492	984

Maximum running speeds

### Operating Temperatures

For operating temperatures up to 176°F, iglide® clip bearings display high wear resistance.

Even in the cold, the plain bearings remain elastic and wear-resistant.

iglide® M250	Application Temperature
Minimum	- 40°F
Max. Long-term	+ 176°F
Max. Short-term	+ 338°F

Temperature limits for iglide® M250

### Installation

For installation, the plain bearings are pressed together on the side with the large flange. The angled slit makes the bearing spiral-shaped so that it can be placed easily into the metal plate.

The slit also compensates for expansions of the circumference. In this way, a tight clearance is possible with the clip bearings. The recommended clearance allows a nominal size shaft to turn easily. The Clip bearing can also rotate within the housing bore.

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
 CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)







**igus®**

## iglide® Plain Bearings Clip2 - Inch



iglide® Clip2 - Inch

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

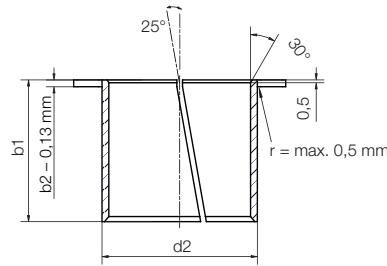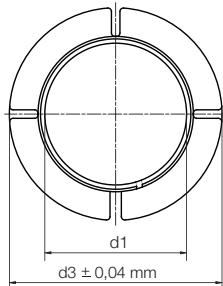

Part Number	d1	d2	d3	b1	b2	W	a1=a2	Recommended Housing Bore Max. Min.	Recommended Shaft Size Max. Min.
MYI-03-03	3/16	0.2339	5/16	3/16	0.0252	25°	0.0394	0.2351 0.2339	0.1875 0.1865
MYI-04-04	1/4	0.2965	13/32	1/4	0.0252	25°	0.0394	0.2979 0.2965	0.2500 0.2490
MYI-05-05	5/16	0.3744	1/2	5/16	0.0299	25°	0.0394	0.3758 0.3744	0.3125 0.3115
MYI-06-06	3/8	0.4370	19/32	3/8	0.0299	25°	0.0394	0.4387 0.4370	0.3750 0.3740
MYI-07-07	7/16	0.4996	21/32	7/16	0.0299	25°	0.0394	0.5013 0.4996	0.4375 0.4365
MYI-08-06	1/2	0.5618	3/4	3/8	0.0299	25°	0.0591	0.5635 0.5618	0.5000 0.4990
MYI-08-08	1/2	0.5618	3/4	1/2	0.0299	25°	0.0591	0.5635 0.5618	0.5000 0.4990
MYI-10-07	5/8	0.6870	15/16	7/16	0.0299	25°	0.0591	0.6887 0.6870	0.6250 0.6240
MYI-10-10	5/8	0.6870	15/16	5/8	0.0299	25°	0.0591	0.6887 0.6870	0.6250 0.6240
MYI-10-18	5/8	0.6870	15/16	1 1/8	0.0299	25°	0.0591	0.6887 0.6870	0.6250 0.6240
MYI-12-12	3/4	0.8118	1 1/8	3/4	0.0299	25°	0.0591	0.8139 0.8118	0.7500 0.7490
MYI-12-18	3/4	0.8118	1 1/8	1 1/8	0.0299	25°	0.0591	0.8139 0.8118	0.7500 0.7490
MYI-14-7.5	7/8	0.9370	1 5/16	15/32	0.0299	25°	0.0591	0.9391 0.9370	0.8750 0.8740
MYI-14-14	7/8	0.9370	1 5/16	7/8	0.0299	25°	0.0591	0.9391 0.9370	0.8750 0.8740
MYI-16-10	1	1.0933	1 1/2	5/8	0.0449	25°	0.0591	1.0954 1.0933	1.0000 0.9985
MYI-16-14	1	1.0933	1 1/2	7/8	0.0449	25°	0.0591	1.0954 1.0933	1.0000 0.9985
MYI-16-16	1	1.0933	1 1/2	1	0.0449	25°	0.0591	1.0954 1.0933	1.0000 0.9985

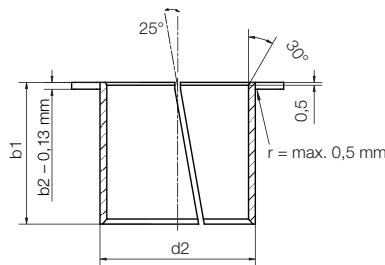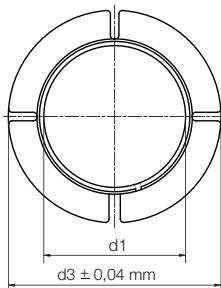

Part Number	d1	d2	d3	b1	b2	W	a1=a2	Recommended Housing Bore Max.	Recommended Shaft Size Max.
								Min.	Min.
MYM-04-04	4	5.2	7.0	4.0	0.6	25°	1.000	5.230	5.200
MYM-05-05	5	6.2	8.0	5.0	0.6	25°	1.000	6.236	6.200
MYM-06-06	6	7.2	9.5	6.0	0.6	25°	1.000	7.236	7.200
MYM-08-08	8	9.6	12.0	8.0	0.8	25°	1.000	9.636	9.600
MYM-10-10	10	11.6	15.0	10.0	0.8	25°	1.000	11.643	11.600
MYM-12-06	12	13.6	18.0	6.0	0.8	25°	1.000	13.643	13.600
MYM-12-12	12	13.6	18.0	12.0	0.8	25°	1.000	13.643	13.600
MYM-14-14	14	15.6	21.0	14.0	0.8	25°	1.000	15.643	15.600
MYM-16-16	16	17.6	24.0	16.0	0.8	25°	1.000	17.643	17.600
MYM-20-20	20	21.6	30.0	20.0	0.8	25°	1.000	21.652	21.600
MYM-25-25	25	27.4	37.5	25.0	1.2	25°	1.000	27.452	27.400
								25.000	24.962

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.

inch  
 mm



**igus®**

## iglide® Plain Bearings Clip2 - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® Clip2

igus®



iglide®  
Pre-tensioned




### Product Range

- Standard Styles:  
Sleeve, Flange
- Inner diameters:  
Inch sizes from 3/8 - 1 in.  
Metric sizes from 8 - 20 mm

### Part Number Structure

#### Part Number Structure

**J V S I - 06 08 - 06**

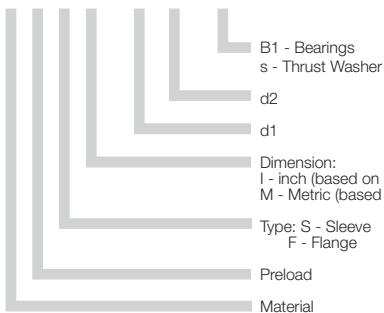

### Permissible Surface Speeds

	Continuous fpm	Short Term fpm
Rotating	295	590
Oscillating	216	413
Linear	1574	1969

### Advantages



- Clearance-free preloaded bearing even without load
- Made from iglide® J



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

iglide® pre-tensioned bearings are free from clearance in unloaded state because of the pretension at the ends,. The material iglide® J is designed for the lowest coefficient of friction while running dry for its low stick slip tendency.

### Material Table

General Properties	Unit	iglide® J	Testing Method
Density	g/cm <sup>3</sup>	1.49	
Color		yellow	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.3	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.18	
p x v value, max. (dry)	psi x fpm	9700	

### Mechanical Properties

Modulus of elasticity	psi	348,000	DIN 53457
Tensile strength at 68°F	psi	10,585	DIN 53452
Compressive strength	psi	8,700	
Permissible static surface pressure (68°F)	psi	5,075	
Shore D-hardness		74	DIN 53505

### Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. application temperature, short-term	°F	248	
Min. application temperature	°F	-58	
Thermal conductivity	W/m x K	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K <sup>-1</sup> x 10 <sup>-5</sup>	10	DIN 53752

### Electrical Properties


Specific volume resistance	Ωcm	> 10 <sup>13</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	DIN 53482



## Compressive Strength

With a maximum permissible surface pressure of 5075 psi, iglide® J material is not suited for extreme loads. The graph shows elastic deformation of iglide® J for radial loads. At the maximum permissible load of 5075 psi, the deformation is less than 2.5%.

- Compressive Strength, Page 1.3

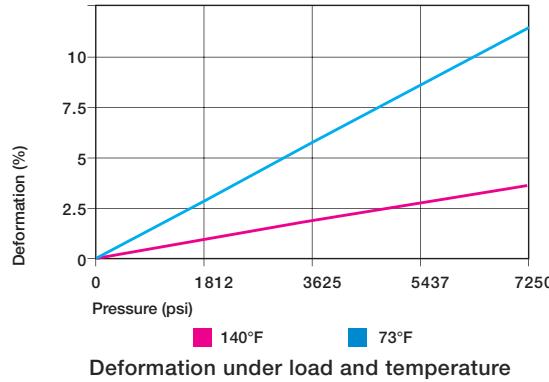

## Permissible Surface Speeds

The low coefficient of friction and the extremely low stick-slip tendency of iglide® JV bearings are especially important at very low speeds. However, iglide® J material can also be used for high speeds of over 197 fpm. In both cases, the static friction is very low and stick-slip does not occur.

The maximum values given in the table at the right can only be achieved at the lowest pressure loads. At the given speeds, friction can cause a temperature increase to maximum permissible levels. In practice, though, this temperature level is rarely reached, due to varying application conditions.

- Surface Speed, Page 1.5
- p x v value, Page 1.6

Continuous      Short Term  
fpm                fpm


Rotating	295	590
Oscillating	216	413
Linear	1574	1969

### Maximum surface speeds

## Temperatures

iglide® J material can be used between -58°F and 194°F; the short-term maximum permissible temperature is 248°F. The graph shows that the compressive strength of iglide® J material decreases with increasing temperatures. Also, the wear increases significantly above 176°F.


- Application Temperatures, Page 1.7

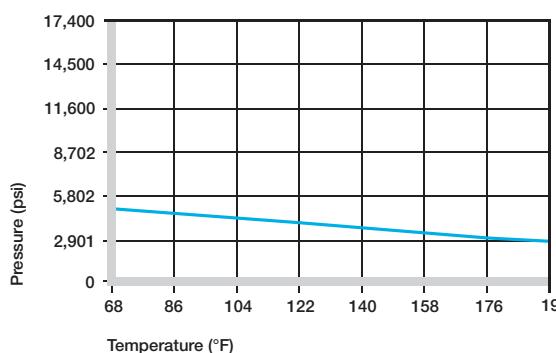

Recommended maximum permissible static surface pressure of iglide® J as a result of the temperature

iglide® J	Application Temperature
Minimum	-58 °F
Max., long-term	+194 °F
Max., short-term	+248 °F

### Temperature limits for iglide® J

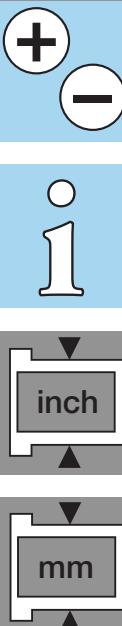





**igus®**

## iglide® Plain Bearings JV - Sleeve, Inch

iglide® JV  
Sleeve, Flange - Inch

Telephone 1-800-521-2747  
Fax 1-401-438-7270



Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

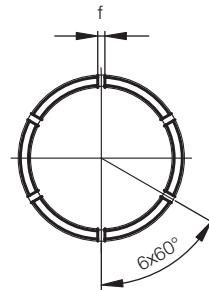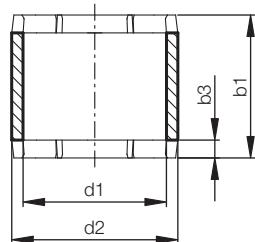

### Dimensions (inch)



Part Number	d1	d2	b	b3	d1 Tolerance	
					Max.	Min.
JVSI-0608-06	3/8	1/2	3/8	0.079	0.3773	0.3750
JVSI-0810-08	1/2	5/8	1/2	0.079	0.5040	0.5013
JVSI-1012-10	5/8	3/4	5/8	0.098	0.6297	0.6270
JVSI-1214-12	3/4	7/8	3/4	0.098	0.7541	0.7505
JVSI-1618-16	1	1 1/8	1	0.098	1.0041	1.0007

## iglide® Plain Bearings JV - Flange, Inch

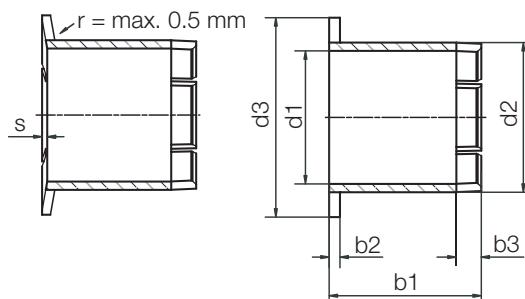

### Dimensions (inch)



Part Number	d1	d2	d3	b1	b2	b3	d1 Tolerance	
							Max.	Min.
JVFI-0608-06	3/8	1/2	0.625	3/8	0.062	0.079	0.3773	0.3750
JVFI-0810-08	1/2	5/8	0.875	1/2	0.062	0.079	0.5040	0.5013
JVFI-1012-10	5/8	3/4	1.000	5/8	0.062	0.098	0.6297	0.6270
JVFI-1214-12	3/4	7/8	1.125	3/4	0.062	0.098	0.7541	0.7505
JVFI-1618-16	1	1 1/8	1.375	1	0.062	0.098	1.0041	1.0007

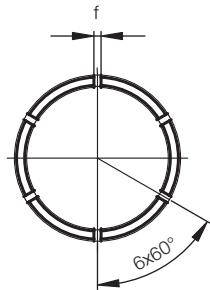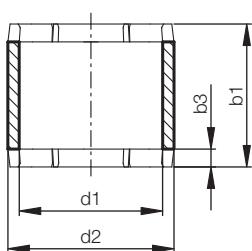

### Dimensions (mm)

Part No.	d1	d2	b1	b3 h13	f	d1-Tolerance (E10)	
						Max.	Min.
JVSM-0810-08	8	10	8	2.0	1	8.083	8.025
JVSM-1012-10	10	12	10	2.0	1	10.083	10.025
JVSM-1214-12	12	14	12	2.0	1	12.102	12.032
JVSM-1416-14	14	16	14	2.0	1	14.102	14.032
JVSM-1517-15	15	17	15	2.5	1	15.102	15.032
JVSM-1820-18	18	20	18	2.5	1	18.102	18.032
JVSM-2023-20	20	23	20	2.5	1	20.140	20.040

### iglide® Plain Bearings JV - Flange, MM

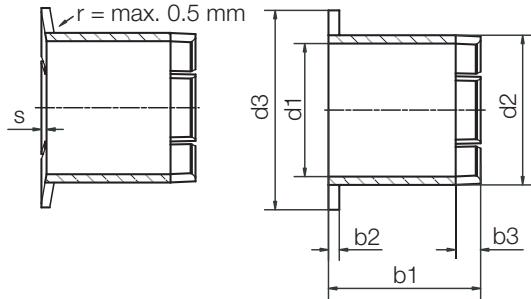

### Dimensions (mm)

Part No.	d1	d2	d3	b1 h13	b2	b3	s	d1-Tolerance (E10)	
								Max.	Min.
JVFM-0810-10	8	10	15	10	1	2.0	0.44	8.083	8.025
JVFM-1012-10	10	12	18	10	1	2.0	0.53	10.083	10.025
JVFM-1214-12	12	14	20	12	1	2.0	0.53	12.102	12.032
JVFM-1416-12	14	16	22	12	1	2.0	0.53	14.102	14.032
JVFM-1517-15	15	17	23	15	1	2.5	0.53	15.102	15.032
JVFM-1820-18	18	20	26	18	1	2.5	0.53	18.102	18.032
JVFM-2023-20	20	23	30	20	1.5	2.5	0.62	20.140	20.040

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch  
mm

inch  
mm



**igus®**

## iglide® Plain Bearings JV - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

iglide® JV

Telephone 1-800-521-2747  
Fax 1-401-438-7270

igus®



# iglide® Piston Rings



# iglide® Plain Bearings Piston Rings - Technical Data

## Product Range

- Standard Styles:  
Metric sizes from 10 - 70 mm


## Other material Options

iglide® J: universal  
(standard piston ring material)  
iglide® A180: FDA conform  
iglide® J4: cost-effective  
iglide® J350: temperature requirements  
up to +194 °F  
iglide® T500: chemicals, temperatures  
Choose your material and diameter from  
the igus® bearing

## Part Number Structure

### Part Number Structure

#### J PR M- 10 12 - 054

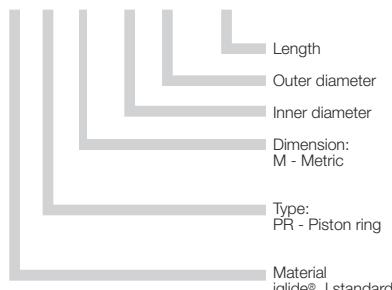

## Advantages

- Easy installation
- Economic
- More wear resistant than PTFE strips
- High load capacity
- Wide dimensional range
- Available in a wide range of materials

## Usage Guidelines




- When piston rings with excellent wear properties are required
- When simple assembly is important
- When high edge loads occur
- When tailor-made solutions based on iglide® materials are required




- When piston rings should also act as a seal
- When different diameters should be covered by one part

## Standard method

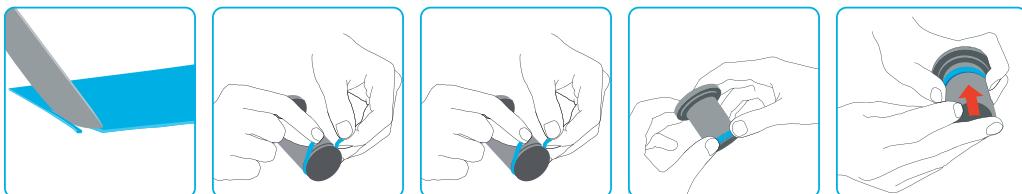

## Piston ring method

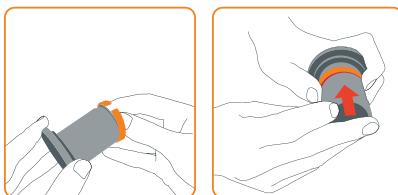

## Material Table

General Properties	Unit	iglide® J	Testing Method
Density	g/cm³	1.49	
Color		yellow	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.3	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.18	
p x v value, max. (dry)	psi x fpm	9700	

## Mechanical Properties

Modulus of elasticity	psi	348,000	DIN 53457
Tensile strength at 68°F	psi	10,585	DIN 53452
Compressive strength	psi	8,700	
Permissible static surface pressure (68°F)	psi	5,075	
Shore D-hardness		74	DIN 53505

## Physical and Thermal Properties

Max. application temperature, long-term	°F	194	
Max. application temperature, short-term	°F	248	
Min. application temperature	°F	-58	
Thermal conductivity	W/m x K	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K⁻¹ x 10⁻⁵	10	DIN 53752



## Electrical Properties

Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹²	DIN 53482



Part Number	Inner diameter d1	Outer diameter d2	Piston ring Width b1; (h13)	Gap width	Gap Tolerance ± mm	Split angle (°)
JPRM-1012-054	10	12	5.4	2.5	0.5	20
JPRM-1214-054	12	14	5.4	2.5	0.5	20
JPRM-1416-054	14	16	5.4	2.5	0.5	20
JPRM-1416-08	14	16	8	2.5	0.5	20
JPRM-1618-054	16	18	5.4	2.5	0.5	20
JPRM-2023-054	20	23	5.4	2.5	0.5	20
JPRM-2528-054	25	28	5.4	2.5	0.5	20
JPRM-2833-054	28	33	5.4	2.5	0.5	20
JPRM-3034-054	30	34	5.4	2.5	0.5	20
JPRM-3539-054	35	39	5.4	2.5	0.5	20
JPRM-4044-054	40	44	5.4	2.5	0.5	20
JPRM-4550-054	44	50	5.4	2.5	0.5	20
JPRM-5055-054	50	55	5.4	2.5	0.5	20
JPRM-5863-095	58	63	9.5	2.5	0.5	20
JPRM-6065-054	60	65	5.4	2.5	0.5	20
JPRM-7075-054	70	75	5.4	2.5	0.5	20
JPRM-8085-058	80	85	5.8	2.5	0.5	20

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

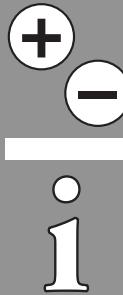




## iglide® Plain Bearings Type - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® Type

**igus®**

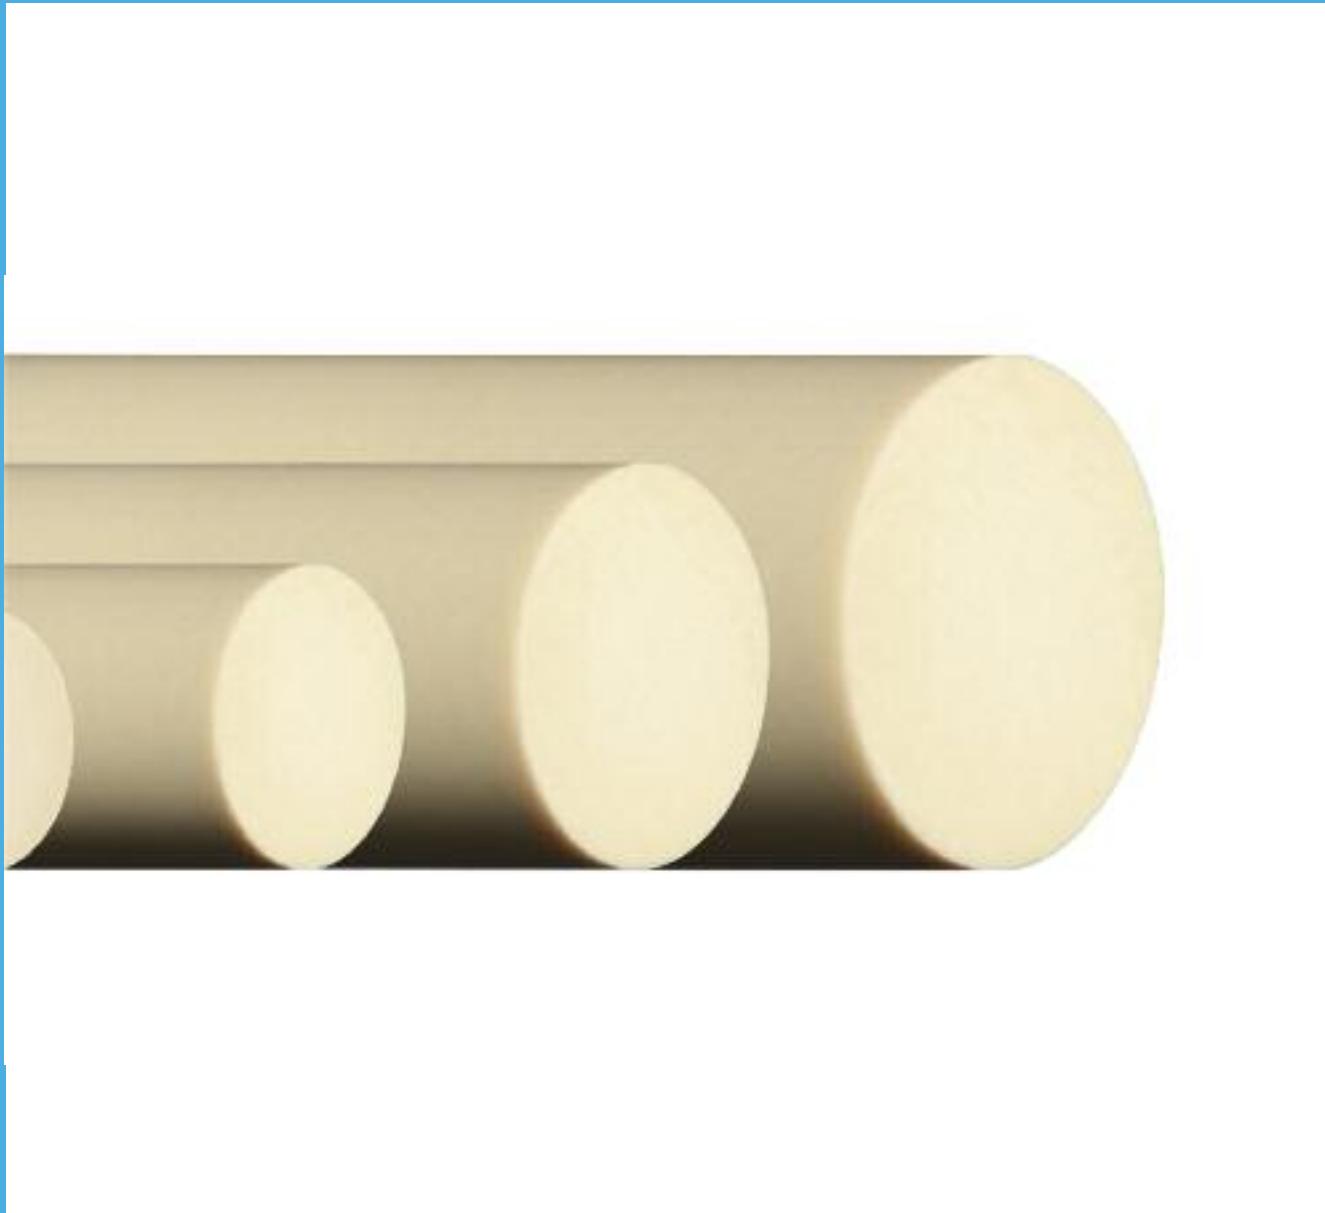

**iglide® Bar Stock**



## iglide® Bearings Bar Stock - Technical Data


### Product Range

- Available in 6 materials
  - iglide® J
  - iglide® J350
  - iglide® A180
  - iglide® A350
  - iglide® J4
  - iglide® R
  - iglide® P210
- Available in Outer Diameters from 10mm to 100mm depending on materials selection

### Part Number Structure

#### Part Number Structure

**S J - 30 - 500**

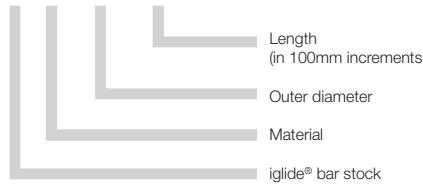

### Material Table iglide® J, J350, A180 and A350

General Properties	Unit	iglide® Materials			
		J	J350	A180	A350
Color		yellow	yellow	white	light blue
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	0.3	0.2	0.6
Max. moisture absorption	% weight	1.3	1.6	1.3	1.9
Mechanical Properties					
Modulus of elasticity	psi	348,000	290,100	333,585	290,100
Tensile strength at 68°F	psi	10,585	7,977	12,765	15,950
Permissible static surface pressure (68°F)	psi	5,075	8,702	4,050	11,310
Shore D-hardness		74	80	76	76
Physical and Thermal Properties					
Max. long-term application temperature	°F	194	356	194	356
Max. short-term application temperature	°F	248	428	230	410
Min. application temperature	°F	-58	-148	-58	-148

### Advantages



- Machining samples for testing prior to ordering a new tool
- For applications where machining tolerances must be held
- For smaller orders that do not warrant a new tool

### Material Table iglide® J4, R and P210

General Properties	Unit	iglide® Materials		
		J4	R	P210
Color		gray	red	yellow
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	0.2	0.3
Max. moisture absorption	% weight	1.3	1.1	0.5
Mechanical Properties				
Modulus of elasticity	psi	340,750	290,000	319,083
Tensile strength at 68°F	psi	10,150	10,150	9,425
Permissible static surface pressure (68°F)	psi	5,075	3,335	7,250
Shore D-hardness		74	77	75
Physical and Thermal Properties				
Max. long-term application temperature	°F	194	194	212
Max. short-term application temperature	°F	248	230	320
Min. application temperature	°F	-58	-58	-40



- iglide® materials as round material from stock
- Special components and special sizes available in shortened delivery times
- Fast and cost-effective
- Predictable service life for plain bearing applications based on real-life test data
- Barstock outside diameters have a tolerance of +2mm to -0mm

### Dimensions (mm)

Part No.	Size	Material
SJ-10-XXX	10	iglide® J
SJ-20-XXX	20	iglide® J
SJ-30-XXX	30	iglide® J
SJ-40-XXX	40	iglide® J
SJ-50-XXX	50	iglide® J
SJ-60-XXX	60	iglide® J
SJ-80-XXX	80	iglide® J
SJ-100-XXX	100	iglide® J

Part No.	Size	Material
SA350-30-XXX	30	iglide® A350
SA350-40-XXX	40	iglide® A350
SA350-50-XXX	50	iglide® A350
SA350-60-XXX	60	iglide® A350

Part No.	Size	Material
SJ4-30-XXX	30	iglide® J4

Part No.	Size	Material
SR-30-XXX	30	iglide® R



Part No.	Size	Material
SP210-30-XXX	30	iglide® P210
SP210-40-XXX	40	iglide® P210
SP210-50-XXX	50	iglide® P210
SP210-60-XXX	60	iglide® P210


Part No.	Size	Material
SJ350-30-XXX	30	iglide® J350
SJ350-40-XXX	40	iglide® J350
SJ350-50-XXX	50	iglide® J350
SJ350-60-XXX	60	iglide® J350

Part No.	Size	Material
SA180-10-XXX	10	iglide® A180
SA180-20-XXX	20	iglide® A180
SA180-30-XXX	30	iglide® A180
SA180-40-XXX	40	iglide® A180
SA180-50-XXX	50	iglide® A180
SA180-60-XXX	60	iglide® A180
SA180-80-XXX	80	iglide® A180
SA180-100-XXX	100	iglide® A180

iglide® Bar Stock

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

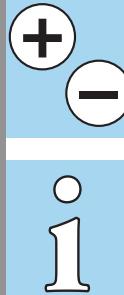



**igus®**


**iglide® Bearings  
Bar Stock - Notes**

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® Bar Stock

igus®

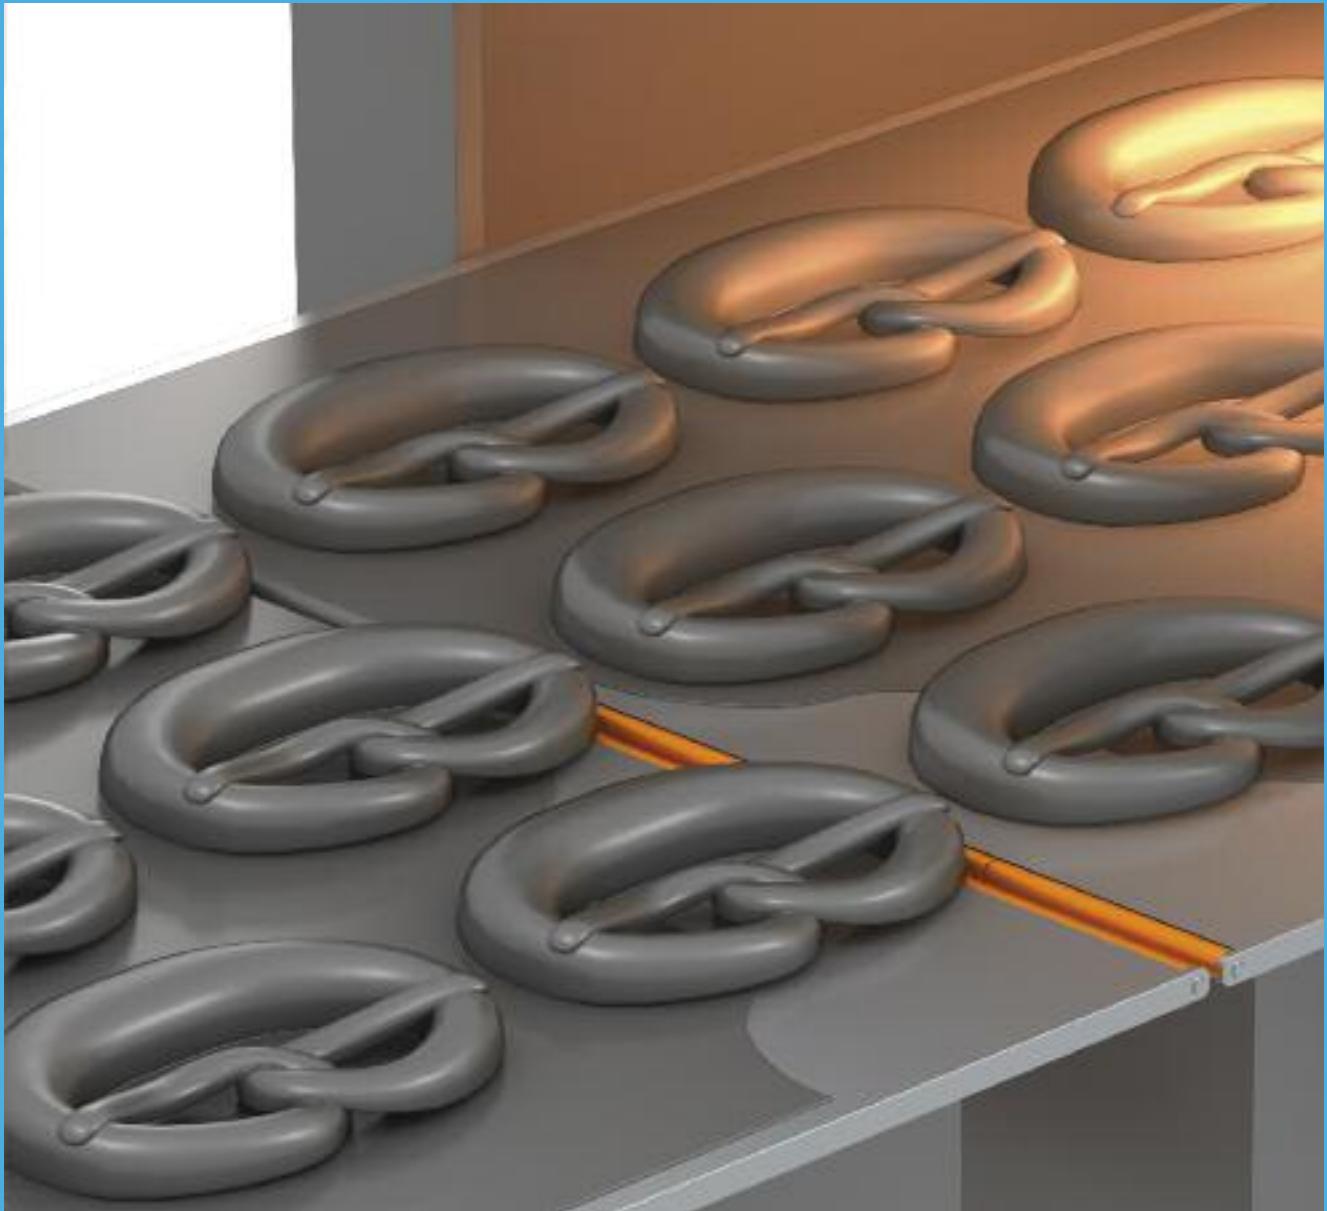

iglide® Rollers

## iglide® Plain Bearings Rollers - Technical Data



### Product Range

- Inner diameters:
- Metric sizes from (3 - 8 mm)

### Part Number Structure

#### Part Number Structure

**A180 RL M - 03 09 - 50**

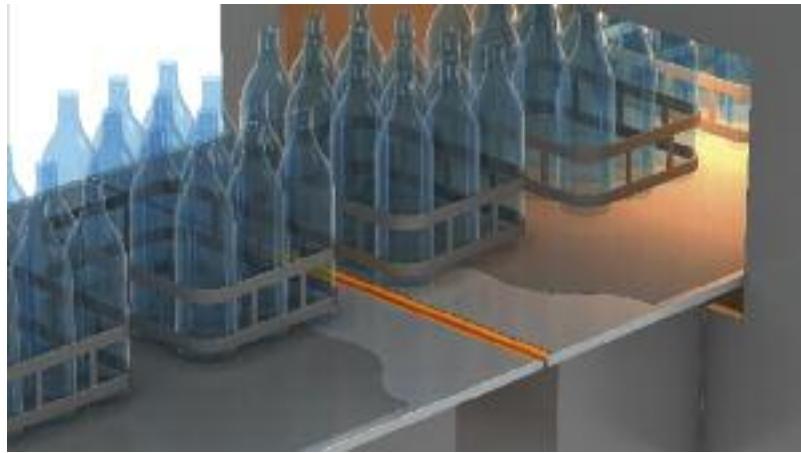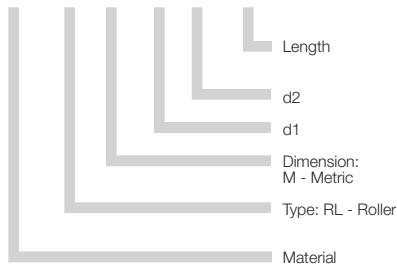

### Material Table iglide® P210, A180 and A350

General Properties	Unit	iglide® Materials			Testing Method
		P210	A180	A350	
Density	g/cm³	1.40	1.46	1.42	
Color		yellow	white	blue	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	0.2	0.6	DIN 53495
Max. moisture absorption	% weight	0.5	1.3	1.9	

#### Mechanical Properties


Permissible static surface pressure (68°F)	psi	10.880	4,061	8,702	
Shore D-hardness		75	76	76	DIN 53505

#### Physical and Thermal Properties

Max. application temperature, long term	°F	212	194	356	
Max. application temperature, short-term	°F	320	230	410	
Min. application temperature	°F	-40	-58	-148	

#### Electrical Properties

Surface resistance	Ω	> 10¹¹	> 10¹¹	> 10¹¹	DIN 53482
--------------------	---	--------	--------	--------	-----------

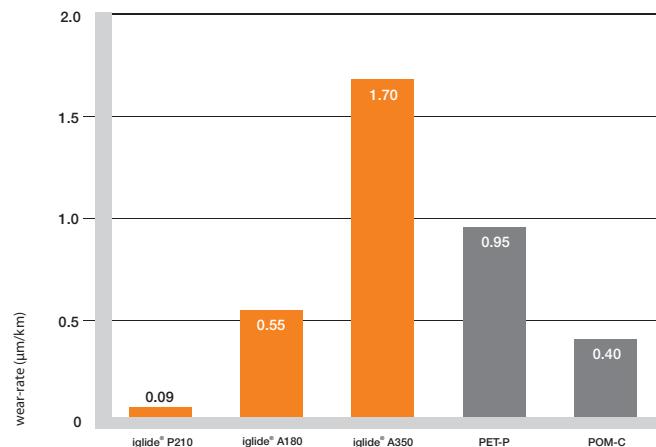

Service life test of rollers on silver steel shaft 1.2210, 145 psi, 59 fpm

iglide® P210 Rollers



Part Number	d1 +0.1	d2 ±0.1	b1 -0.3
P210RLM-0309-50	3.1	9	50
P210RLM-0614-70	6.1	14	70
P210RLM-0818-70	8.1	18	70

iglide® A180 Rollers



Part Number	d1 +0.1	d2 ±0.1	b1 -0.3
A180RLM-0309-50	3.1	9	50
A180RLM-0614-70	6.1	14	70
A180RLM-0818-70	8.1	18	70

iglide® A350 Rollers




Part Number	d1 +0.1	d2 ±0.1	b1 -0.3
A350RLM-0309-50	3.1	9	50
A350RLM-0614-70	6.1	14	70
A350RLM-0818-70	8.1	18	70

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





## iglide® Plain Bearings Rollers - Notes

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

iglide® Rollers

igus®



iglide® Flange



### Product Range

- Available in 4 materials  
Standard material: G300
- Inner diameters:  
Metric sizes from 10 - 35 mm

### Other material Options


- iglide® G300: standard
- iglide® A180: FDA conform
- iglide® J: universal
- iglide® T500: chemicals,  
temperatures



### Part Number Structure

#### Part Number Structure

#### G FL - 03

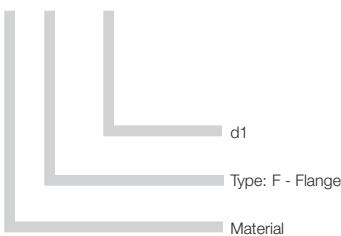

### Advantages



- Maintenance-free
- Easy installation
- Very good wear resistance
- Very high temperature resistance
- Resistant to dirt, dust, and lint
- Corrosion-resistant
- Vibration-dampening
- Used for rotating and linear movements
- Very lightweight
- Can also be used in bore holes with larger tolerances



Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system

With this design it is possible to use iglide® high performance plain bearings in locations where recommended housing bore tolerances are not possible.

Through the design, high loads are possible when there is a minimal precision requirement of the housing. iglide® maintenance-free flange bearings are made of iglide® G300, but can also be manufactured by special order from the different iglide® materials. In this way, all advantages of the iglide® high performance plastics can be utilized.

### Material Data

General Properties	Unit	iglide® G300	iglide® A180	iglide® J	iglide® T500
Density	g/cm³	1.45	1.46	1.49	1.44
Color		dark gray	white	yellow	black
Max. moisture absorption at 73°F / 50% r.h.	% weight	0.7	0.2	0.3	0.1
Max. moisture absorption	% weight	4.0	1.3	1.3	0.5
Coefficient of friction, dynamic against steel	μ	0.08-0.15	0.05-0.23	0.06-0.18	0.09-0.27
p x v-value, max. (dry)	psi x fpm	12,000	8,800	9700	37,700

### Mechanical Properties

Modulus of elasticity	psi	1,131,000	333,585	348,000	1,174,500
Tensile strength at 68°F	psi	30,450	12,765	10,585	24,650
Compressive strength	psi	11,310	11,310	8,700	14,500
Max. static surface pressure (68°F)	psi	11,600	4,050	5,075	21,750
Shore D-hardness		81	76	74	85

### Physical and Thermal Properties

Max. long-term application temperature	°F	266	194	194	482
Max. short-term application temperature	°F	428	230	248	599
Min. application temperature	°F	-40	-58	-58	-148
Thermal conductivity	(W/m x K)	0.24	0.25	0.25	0.6
Coefficient of thermal expansion (at 73°F)	(K⁻¹ x 10⁻⁵)	9	11	10	5

### Electrical Properties


Specific volume resistance	Ωcm	> 10¹³	> 10¹²	> 10¹³	> 10⁵
Surface resistance	Ω	> 10¹¹	> 10¹¹	> 10¹²	> 10³



### Installation

Depending on the requirements, different mounting types can be considered. For low radial loads, it is sufficient to mount iglide® flange bearings on one surface simply with two bolts. For higher radial loads, it is recommended to support the iglide® flange bearing in a bore on the reinforced side facing the direction of the load. For this bore hole, large tolerances are permitted, since it only serves as additional support for the iglide flange bearing. In order to achieve higher radial loads in the bearings, the iglide® flange bearing can be pressfit into a recommended housing bore. The additional bolts ensure the fit of the bearing in the housing.

For the installation of the iglide® maintenance-free flange bearing, no special materials or devices are necessary.

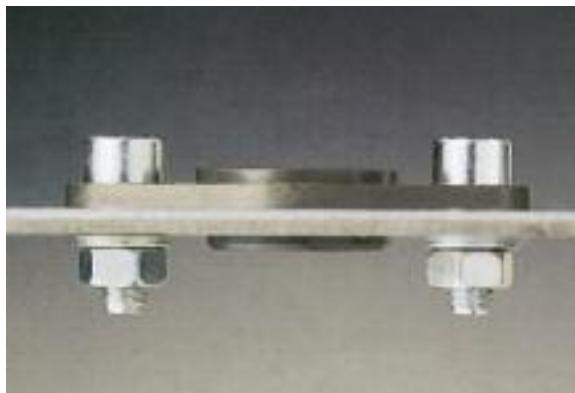

iglide® Flange Bearing



The installation of the iglide® flange bearing, simple and secure

### Temperatures

Application temperatures affect the properties of plain bearings greatly. In the case of the standard iglide® G300 for the flange bearings, the short-term maximum temperature is 428°F, allowing for the use of iglide® G300 in heat treat applications when the bearing is not subjected to additional loading. In the extreme the iglide® T500 can see short-term temperatures of 599°F.

With increasing temperatures, the compressive strength of iglide® bearings decreases. However, at the maximum long-term temperature the compressive strength for each bearing material is still very high. See each material section located in the front of the catalog for more detailed temperature-wear and temperature-strength comparisons.


► Application Temperatures, 1.7

#### Temperature range for other materials


	Minimum	Max. Short-term	Max. Long-term
G300	-40°F	+428°F	+266°F
A180	-40°F	+230°F	+194°F
JFL	-58°F	+248°F	+194°F
TFL	-148°F	+599°F	+482°F

iglide® Flange

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1





igus®



# iglide® Bearings

## Flange. MM

iglide® Flange

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

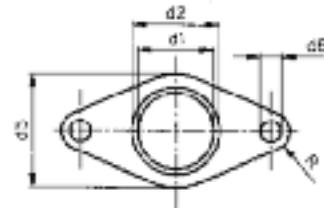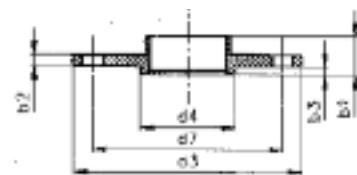

## Dimensions (mm)

iglide® G300	d1 <sup>1)</sup>	d2 <sup>2)</sup>	d3	d4	d5	d6	d7	b1	b2	b3	R
(± 0.2)											
GFL-10	10	12	30	14	15	4.5	22	6	2	1	4
GFL-12	12	14	36	16	18	4.5	26	6	2	1	4.5
GFL-14	14	16	42	18	21	5.5	30	6	2	1	5
GFL-16	16	18	48	20	24	5.5	34	6	2	1	5.5
GFL-18	18	20	54	22	27	6.5	39	6	2	1	7
GFL-20	20	23	60	26	30	6.5	44	10	3	2	7
GFL-25	25	28	75	30	35	6.5	55	10	3	2	8.5
GFL-30	30	34	90	36	40	8.5	66	10	3	2	10
GFL-35	35	39	95	41	55	8.5	77	10	3	2	12

## iglide® A180

iglide® A180	d1 <sup>1)</sup>	d2 <sup>2)</sup>	d3	d4	d5	d6	d7	b1	b2	b3	R
(± 0.2)											
A180FL-10	10	12	30	14	15	4.5	22	6	2	1	4
A180FL-12	12	14	36	16	18	4.5	26	6	2	1	4.5
A180FL-16	16	18	48	20	24	5.5	34	6	2	1	5.5
A180FL-20	20	23	60	26	30	6.5	44	10	3	2	7
A180FL-25	25	28	75	30	35	6.5	55	10	3	2	8.5
A180FL-30	30	34	90	36	40	8.5	66	10	3	2	10
A180FL-35	35	39	95	41	55	8.5	77	10	3	2	12

## iglide® J

iglide® J	d1 <sup>1)</sup>	d2 <sup>2)</sup>	d3	d4	d5	d6	d7	b1	b2	b3	R
(± 0.2)											
JFL-10	10	12	30	14	15	4.5	22	6	2	1	4
JFL-12	12	14	36	16	18	4.5	26	6	2	1	4.5
JFL-16	16	18	48	20	24	5.5	34	6	2	1	5.5
JFL-20	20	23	60	26	30	6.5	44	10	3	2	7
JFL-25	25	28	75	30	35	6.5	55	10	3	2	8.5
JFL-30	30	34	90	36	40	8.5	66	10	3	2	10
JFL-35	35	39	95	41	55	8.5	77	10	3	2	12


## iglide® T500

iglide® T500	d1 <sup>1)</sup>	d2 <sup>2)</sup>	d3	d4	d5	d6	d7	b1	b2	b3	R
(± 0.2)											
TFL-10	10	12	30	14	15	4.5	22	6	2	1	4
TFL-12	12	14	36	16	18	4.5	26	6	2	1	4.5
TFL-16	16	18	48	20	24	5.5	34	6	2	1	5.5
TFL-20	20	23	60	26	30	6.5	44	10	3	2	7
TFL-25	25	28	75	30	35	6.5	55	10	3	2	8.5
TFL-30	30	34	90	36	40	8.5	66	10	3	2	10
TFL-35	35	39	95	41	55	8.5	77	10	3	2	12

1) Tolerance based on E10 (pin gauge measurement)

2) Press-fit in housing bore with H7 tolerance

igus®

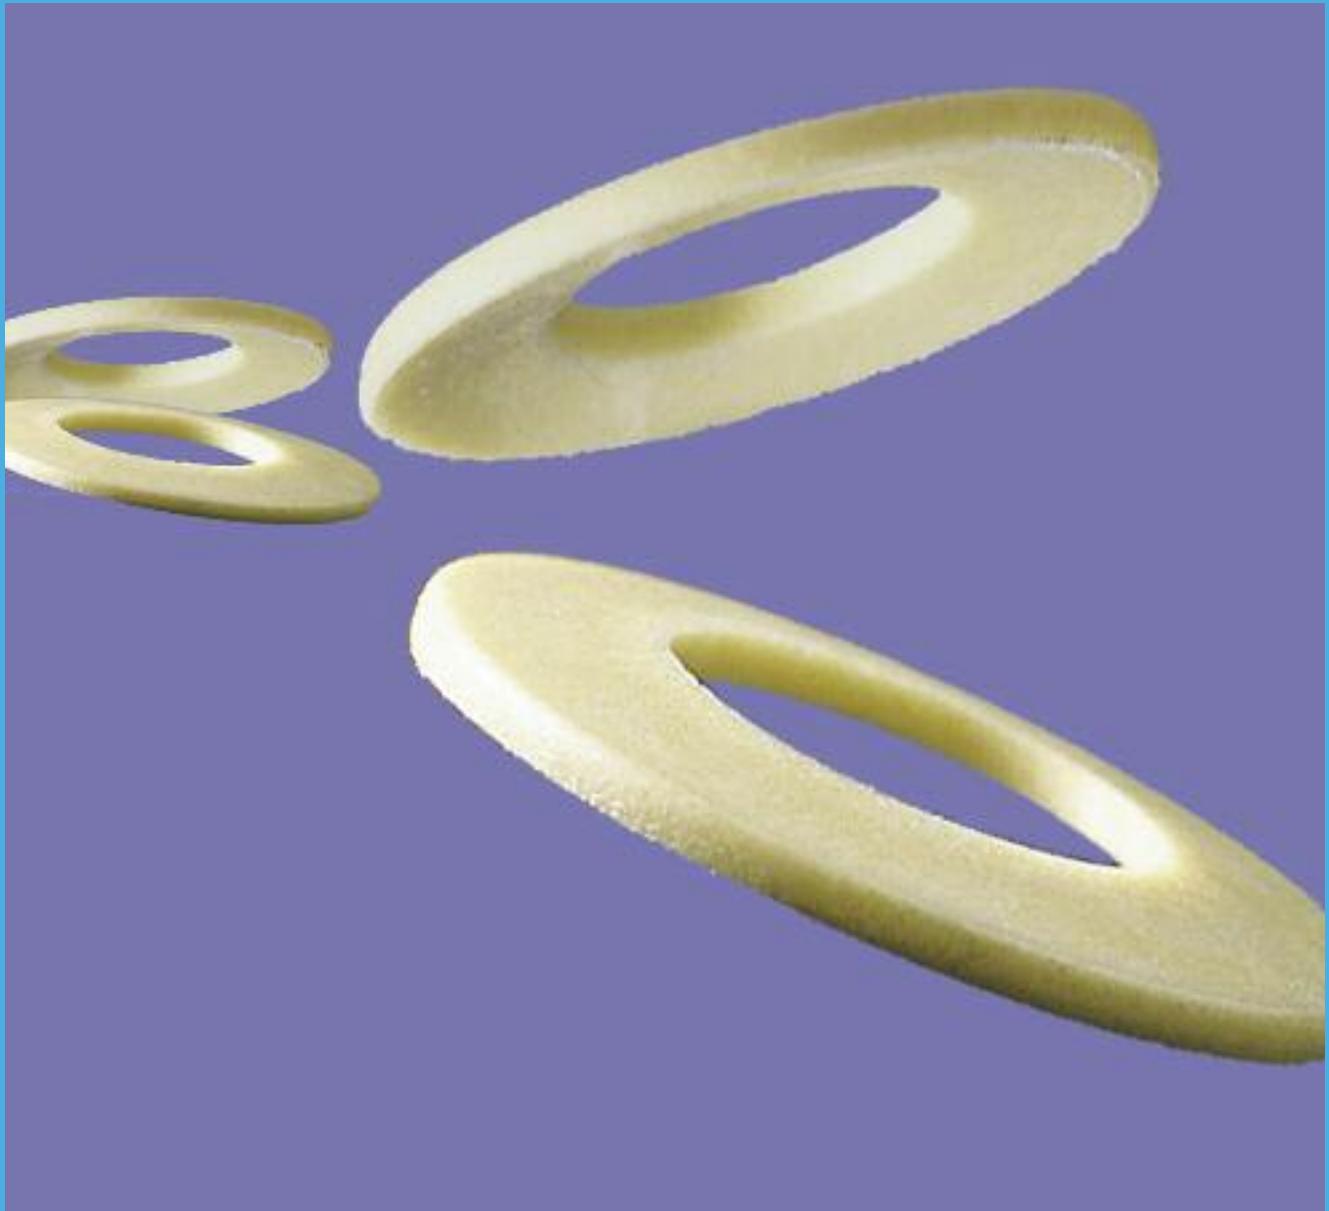

iglide® Polysorb


## Product Range

- Inner diameters:  
Metric sizes from 5.2 - 20.4 mm

## Part Number Structure

### Part Number Structure

**J T E M - 06**

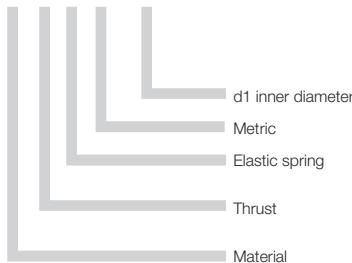

Spring washers are discs that can be axially loaded, which are concave in the axial direction on the plate surface. Polysorb disc springs require less space than other spring types. They are especially suitable for designs that demand a small spring deflection.

## Material Table

General Properties	Unit	iglide® J	Testing Method
Density	g/cm³	1.49	
Color		yellow	
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	DIN 53495
Max. moisture absorption	% weight	1.3	
Coefficient of friction, dynamic against steel	μ	0.06 - 0.18	
p x v value, max. (dry)	psi x fpm	9700	

## Mechanical Properties

Modulus of elasticity	psi	348,000	DIN 53457
Tensile strength at 68°F	psi	10,585	DIN 53452
Compressive strength	psi	8,700	
Permissible static surface pressure (68°F)	psi	5,075	
Shore D-hardness		74	DIN 53505

## Physical and Thermal Properties

Max. long-term application temperature	°F	194	
Max. application temperature, short-term	°F	248	
Min. application temperature	°F	-58	
Thermal conductivity	W/m x K	0.25	ASTM C 177
Coefficient of thermal expansion (at 73°F)	K⁻¹ x 10⁻⁵	10	DIN 53752

## Electrical Properties

Specific volume resistance	Ωcm	> 10¹³	DIN IEC 93
Surface resistance	Ω	> 10¹²	DIN 53482

## Advantages



- application requires, flat spring characteristics, which are only possible in metal at a considerable expense (slotted design)
- compensation of axial clearances and manufacturing tolerances
- vibration dampening
- noise-dampening
- electrical and thermal insulation
- no lubrication necessary
- lightweight
- low profile dimensions
- anti-magnetic




- when constant spring forces are necessary over wide temperature ranges
- when high spring forces are desired



Polysorb Disc Springs in a fatigue test

Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system



## Chemical Resistance

Polysorb disc springs are acid-resistant against diluted lyes and very weak acids, as well as against fuels and all types of lubricants. The small moisture absorption permits the use in wet or moist environments.

Medium	Resistance
Alcohol	+
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Weak acids	0 to -
Strong acids	-
Weak alkaline	+
Strong alkaline	+ to 0


Chemical resistance of Polysorb

## Moisture Absorption


Polysorb disc springs absorb moisture. In the process, their mechanical properties change. However, in the worst application case - a long lasting use in water - Polysorb disc springs still have a maximum spring force of 2.24 lbs.

## Force and Temperature

Force and temperature are two factors that influence the spring force and the amount of time the spring force will hold. See the graphs below for detailed information.

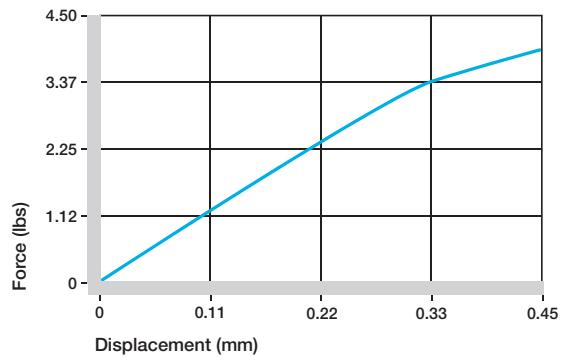


Experimental test results between the force ratio  $F/F_{1,0}$  and the spring length ratio  $S/h_0$  ( $S_{1,0} = h_0$ )

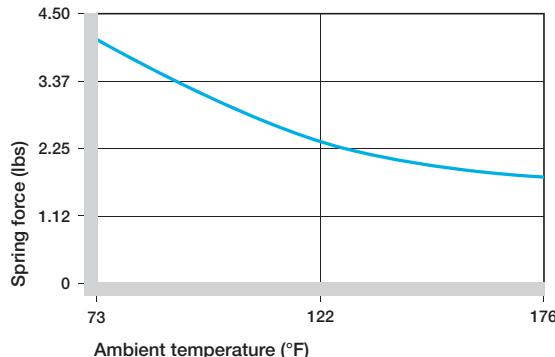


Effect of ambient temperature on the spring force

iglide® Polysorb

PDF: [www.igus.com/iglide-pdfs](http://www.igus.com/iglide-pdfs)  
CAD: [www.igus.com/iglide-CAD](http://www.igus.com/iglide-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

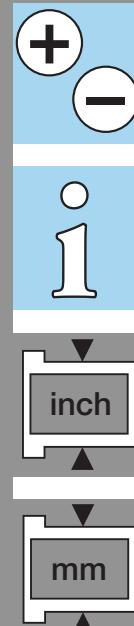




**igus®**

## iglide® Plain Bearings Polysorb JTEM - MM

iglide® Polysorb  
JTEM - MM

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/iglide-quickspec>

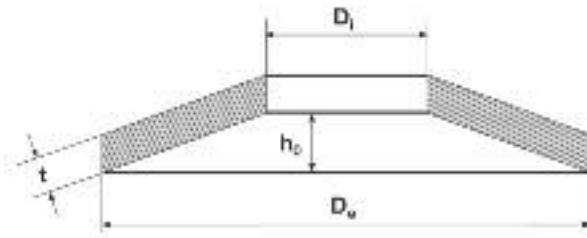

Dimensions based on DIN 2093


### Part Number

	$D_i$ (mm)	$D_e$ (mm)	$t$ (mm)	$h_0$ (mm)	Standard values: spring lengths and forces							
					$S_{0.25}$ (mm)	$F_{0.25}$ (lbs)	$S_{0.5}$ (mm)	$F_{0.5}$ (lbs)	$S_{0.75}$ (mm)	$F_{0.75}$ (lbs)	$F_{1.0}$ (lbs)	$M$ (g)
JTEM-05	5.2	10.0	0.5	0.25	0.06	.22	0.13	.54	0.19	.81	1.12	0.04
JTEM-06	6.2	12.5	0.7	0.30	0.08	.67	0.15	1.15	0.23	1.80	2.70	0.11
JTEM-08	8.2	16.0	0.9	0.35	0.09	.90	0.18	1.80	0.28	2.47	2.70	0.20
JTEM-10	10.2	20.0	1.1	0.45	0.11	1.12	0.22	2.25	0.33	3.37	4.05	0.33
JTEM-12	12.2	25.0	1.5	0.55	0.14	2.02	0.28	4.05	0.42	6.07	7.87	0.85
JTEM-16	16.3	31.5	1.75	0.70	0.18	3.37	0.35	7.19	0.53	11.46	15.74	1.44
JTEM-20	20.4	40.0	2.25	0.90	0.23	7.87	0.45	15.74	0.68	24.73	31.47	3.10

The standard values for the spring lengths and forces represent rounded average values

- $F$  = Force
- $S$  = Spring Length
- $D_e$  = Outside diameter (mm)
- $D_i$  = Inside diameter (mm)
- $t$  = Thickness of one plate
- $h_0$  = Maximum spring (mm)
- $S_{0.25}$  = 25% of the maximum spring length (mm)
- $F_{0.25}$  = Spring force at 25% spring (N)
- $S_{0.5}$  = 50% of the maximum spring length (mm)
- $F_{0.5}$  = Spring force at 50% spring (N)
- $S_{0.75}$  = 75% of the maximum spring length (mm)
- $F_{0.75}$  = Spring force at 75% spring (N)
- $F_{1.0}$  = Spring force 100% spring (N)
- $M$  = Weight of a single plate (g)

**igus®**

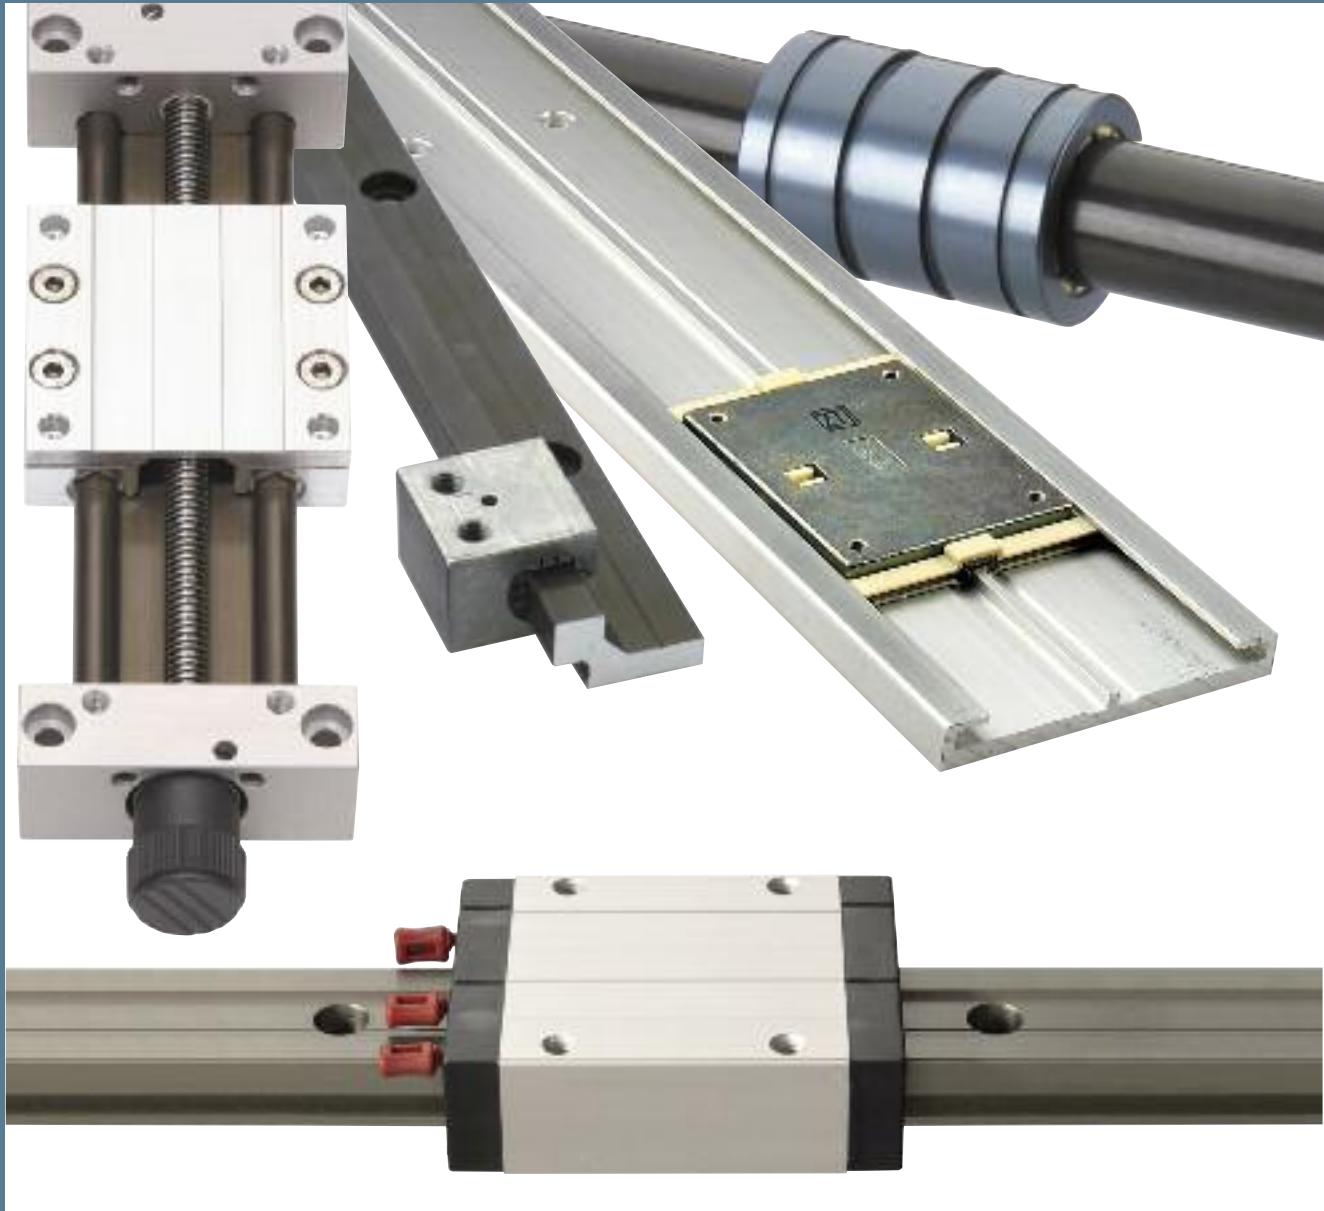

# DryLin® Design Guide

## DryLin® N Low Profile Guides

# DryLin® Overview




## DryLin® W Flexible Guiding System




### The DryLin® Story

We perform over 2,500 tests per year on hundreds of bearing materials specifically formulated for maintenance-free operation, without lubrication. As a result of this testing we have determined that our iglide® J, J200 and T500 are ideal materials for most linear bearing applications due to their excellent wear properties and low coefficients of friction. Unlike older bearing technology, DryLin® Linear Plain Bearings are engineered to run dry, without the need for messy lubricants or costly maintenance and downtime; expensive and cumbersome grease lines may be eliminated from the design entirely. Dirt, dust, and other abrasives will not be drawn into the bearing surface, making DryLin® ideal for aggressive environments, as well as for high moisture, wash-down, and even underwater applications.

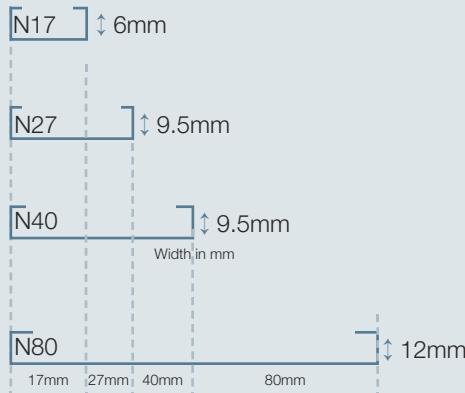

### DryLin® N Low Profile Guide Rails

The DryLin® N series offers extremely low profiles in several widths, and is therefore ideal in tight space constraints. Like all DryLin® products the carriages glide smoothly on anodized aluminum rails without the need for messy lubricants. They are also available in preloaded versions for reducing running clearance. DryLin® N is a particularly low-coat alternative to miniature ball bearing systems, and is more precise and economical when compared to many custom-machined or simple plastic parts.

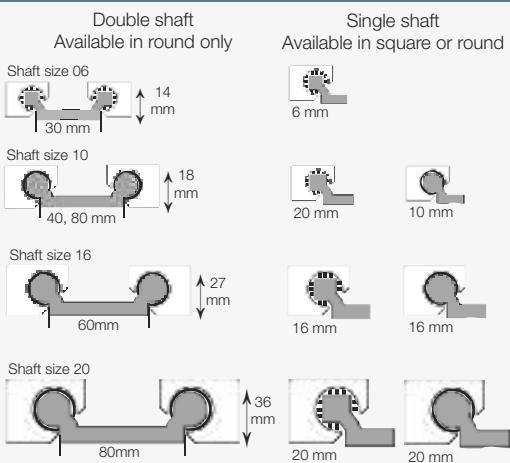

Not actual size

### DryLin® W Flexible Linear Guide System

DryLin® W was developed to promote design flexibility and quick assembly in both single and double rail configurations. DryLin® W is also offered as a pre-mounted, bolt-on system - eliminating the need for timely shaft alignment and carriage assembly. All DryLin® W systems are available with our enhanced J200 liners, which reduces friction and optimizes bearing life.

- The single rail system, which can incorporate a floating square linear bearing, compensates efficiently for extreme shaft misalignments.
- The double rail system totally eliminates the need for shaft alignment, offering a single, bolt-on solution.
- Available in 316 Stainless Steel


## DryLin® T Linear Guide System




## DryLin® R Linear Bearings/Shafing



## DryLin® Slide Tables

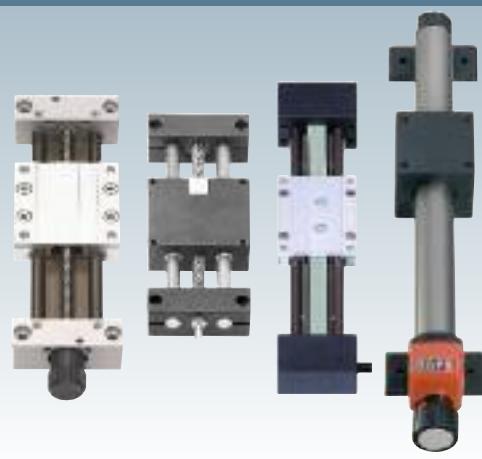

TK-04 Miniature

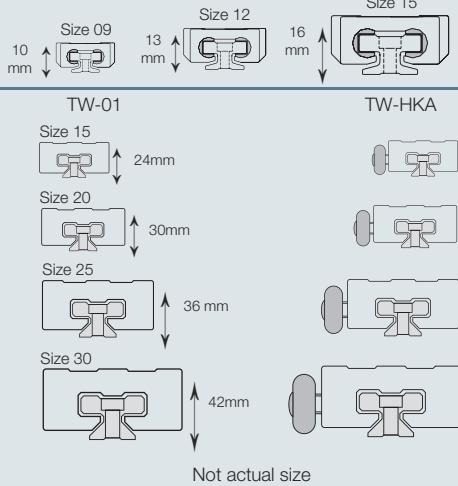

## DryLin® T Profile Guide Rails

DryLin® T guide rails are dimensionally interchangeable with recirculating ball guides, but offer cost-effective, maintenance-free operation. Series 01 offers adjustable clearance, and the mini 04 series is ideal for use in tight design constraints. Both use iglide® J glide pads and hard-anodized aluminum rails for optimal friction and wear resistance.

- Permits adjustments to the play of guidance systems (Series 01)
- Very resistant to dirt
- Very low coefficient of friction and wear

Liners




Adapters & Liners




Solid plastic



Pillow Blocks



Shafting Options




Not actual size


## DryLin® R Shaft Guide

DryLin® R is dimensionally interchangeable with other linear bearings, but offers clean, cost-effective results, suitable for many shaft materials. The liner offers excellent clearance, and makes DryLin® R suitable for use in extremely wet and dirty environments – they are also easily replaceable. DryLin® S shafting is the optimal shafting for the iglide® J material – increasing lifetime up to 50% vs. steel shafting.


- Hard anodized aluminum shafts used with DryLin® linear bearings are ideal for applications in which weight reduction and/or high service life is required.
- DryLin® with stainless steel shafts provide excellent chemical resistance and is an ideal solution for applications in the food and packaging industry



SLW - Rigid and Low Profile  
Based on DryLin® W double rail system



HTS - Tough and Adaptable  
Available in 3 sizes and several shafting types and screw materials



ZLW - Linear Actuator  
Compact and Lightweight

Not actual size

## DryLin® Slide Tables

### SLW/HTS

DryLin® Slide Tables are maintenance-free and offered in both belt and screw drives for simple bolt-on assembly. Offering design flexibility and corrosion-resistance, they are also ideal as a low cost solutions for reduced production and assembly time.

### ZLW

High speed belt-driven tables for velocities up to 15 fps (5m/s)

### SET Easy Tube

Simple, but and effective and solid design: that's the new DryLin® SET Easy Tube. A complete system from few components for simple linear adjustments.

# DryLin® Selection Guide



## DryLin® N Low Profile Guides

- Low profile for tight design constraints
- Low cost
- No lubrication needed
- Preloaded systems available for reduced clearance
- Extremely lightweight



Storage Solutions for a Tape Library



## DryLin® W Flexible Guiding System

- Modular design offers flexible design configurations
- Low cost
- 316 stainless systems available
- Double rail eliminates the need for shaft alignment
- Easy to assemble



Flatbed Ink-Jet Printer



## DryLin® T Linear Guide System

- Low cost alternative to ball bearing profile systems
- Dimensionally interchangeable with ball bearing system
- No lubrication or maintenance required
- Adjustable clearance standard on some series
- Lightweight
- Corrosion-resistant



Mailroom Machinery




## DryLin® R Linear Bearings/Shafing

- Low cost alternative to recirculating ball bearings
- Dimensionally interchangeable with ball bearings and PTFE-lined systems
- Replaceable liners
- Corrosion-resistant
- Works on many shaft materials, even aluminum and 300-series stainless steel



Machining Center

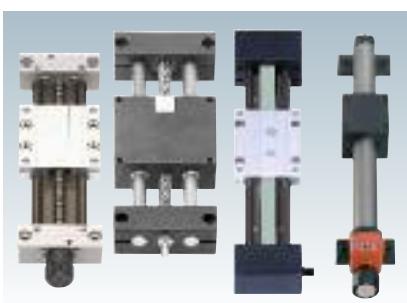

## DryLin Slide Tables

- Bolt-on systems reduce design and assembly time
- Available in screw and belt-actuated designs
- Corrosion-resistant materials available
- Cost-effective compared to other ball bearing stages



High Dirt Resistance

Maximum Static Load	Maximum Surface Speed Linear	Maximum Application Temperature	Rail/Shft Material	Online Calculator	Section
225 lbs	49.2 ft/s (15 m/s)	-40°F to 194°F (-40°C to +90°C)	anodized aluminum		26
<b>Mounted System</b> 2,877 lbs <b>Single Bearing</b> 719 lbs	49.2 ft/s (15 m/s)	-40°F to 194°F (-40°C to +90°C)	hard anodized aluminum, anodized aluminum 316 stainless steel		27
3,140 lbs	49.2 ft/s (15 m/s)	-40°F to 194°F (-40°C to +90°C)	hard anodized aluminum		28
>11,240 lbs	49.2 ft/s (15 m/s)	<b>iglide® J</b> -40°F to 194°F (-40°C to +90°C)  <b>iglide® T500</b> 148° to 482°F (-100° to 250°C)	hard anodized aluminum, anodized aluminum, case hardened steel, chrome plated steel, stainless steel,		29
<b>Screw driven</b> 2,200 lbs  <b>Belt driven</b> 65 lbs (300 N)	<b>Screw Driven</b> 3.9 fpm (x m/s)  <b>Belt Driven</b> 16.4 fpm (5 m/s)	-40°F to 194°F (-40°C to +90°C)  HTC High Temp 350°F	<b>Screw Driven</b> Hard anodized aluminum, steel, stainless steel, chrome-plated <b>Belt Driven</b> Hard anodized aluminum		30

## DryLin®: Sliding instead of Rolling



DryLin® is a range of maintenance-free, lubrication-free linear slide bearings consisting of four main product lines. Principal features, in addition to zero maintenance, are strength and resistance to external influences such as corrosion, moisture, chemicals, heat and impact.

### Features


- Predictable, long life
- Self lubricating and oil-free
- Maintenance-free
- Dirt and dust resistant
- Replaceable liners
- Supports high static loads
- Needs no messy grease lines
- Lightweight
- Runs on soft and hard shafts
- Constant coefficient of friction
- Short strokes and high accelerations
- Withstands shocks and vibrations
- Dimensionally interchangeable
- Corrosion-free

### Benefits


- = Confidence in design and operation
- = Eliminate down time and messy lubricants
- = Save money
- = Ideal for harsh environments
- = Lower costs
- = Eliminate shaft damage
- = Cleaner, simpler design
- = Less transportation costs and fatigue
- = More options, including cost-effective shafts
- = Smooth movements over design lifetime
- = No scoring or replacement of shafting
- = Reduces stress on other components
- = No redesign/drop-in replacements available
- = Ideal for high moisture/wash down/chemicals

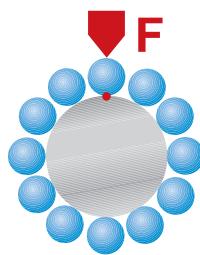

Ball bearing system

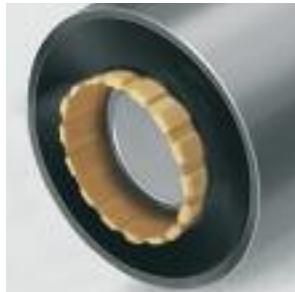

igus® DryLin® linear bearings

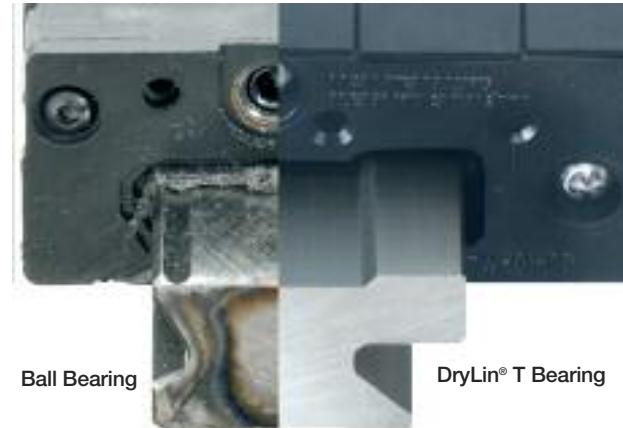

Ball Bearing                      DryLin® T Bearing  
Resistant to dirt, dust and moisture

### Lower surface pressure


DryLin® linear bearings work through the use of sliding elements, in contrast to the design of recirculating ball bearing systems. This results in a larger contact surface and to a much lower pressure. The advantages are:

- No scoring or galling of shaft
- Compatible with non-hardened shafts



### Dry running, without lubrication

DryLin® does not require costly maintenance or additional components such as grease lines to function. Designed for dry running, DryLin® linear bearing systems run without grease or oil; this permits operation even applications with dirt or washdowns- the bearing liners are designed to act as wipers by removing debris from the system.

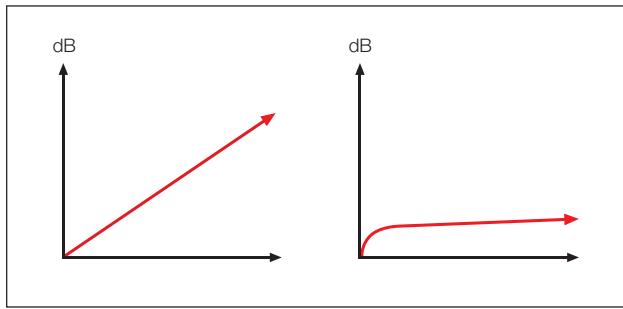

Comparative noise generation

### Works well with short strokes

Compared with recirculating ball bushings, DryLin® bearings' operating characteristics do not depend on the length of travel. Even applications with extremely short strokes are no problem for DryLin® linear bearings.

### Quiet operation

The smooth operation is also attributable to the difference between rolling and sliding (see graph at the left): No mechanical rolling against hard surfaces, no collisions between balls resulting in loud running noises. Sliding motion is extremely quiet, only a low "swishing" noise is heard. Many customers prefer the feel of DryLin® for manual operations


## Suitable Materials for the DryLin® Series

	DryLin® T	DryLin® N	DryLin® W	DryLin® R
iglide® J	●	●	●	●
iglide® J200 <sup>1)</sup>	—	—	●	●
iglide® T500 <sup>2)</sup>	—	—	—	●

● suitable — not available

<sup>1)</sup> Use only with hard anodized aluminum<sup>2)</sup> Use only with hardened shafts, preferably stainless steel or chromed shafts

## DryLin® – Coefficients of friction

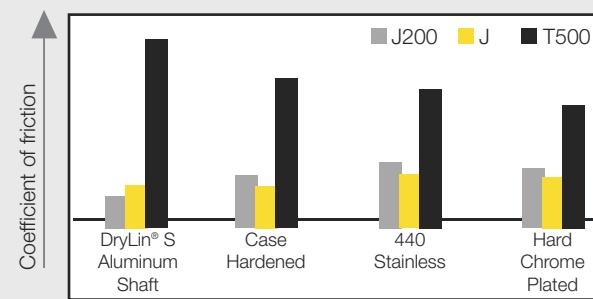


## The coefficient of friction - Not just simple plastics

All DryLin® materials are characterized by excellent coefficient of friction values in dry operation. DryLin® linear guide systems can reach coefficients of friction as low as 0.12 without any additional lubricants. Depending on the load, the kind of application and the environmental conditions, this value might be 2 to 3 times higher.



J200 on DryLin® S hard-anodized shafting

## iglide® J – various shaft materials

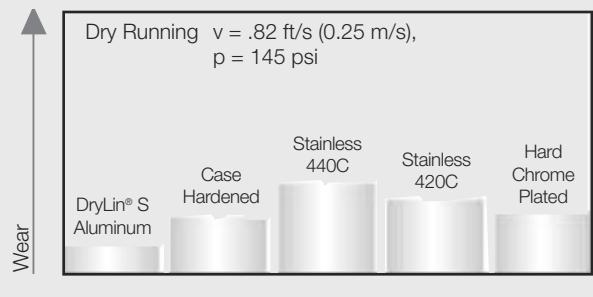


## The iglide® J material

Comprehensive laboratory tests showed that iglide® J is by far the most suitable polymer material for most linear motion applications. Special characteristics of iglide® J:

- Lowest coefficient of friction on all materials overall
- Very low abrasion values during dry operation
- Excellent wear resistance
- Maintenance free dry operation
- Vibration dampening
- Very low moisture absorption
- Recommended for all shaft materials

## iglide® T500 – various shaft materials

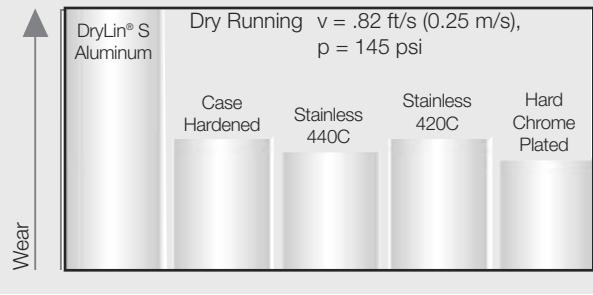

## The iglide® T500 material

iglide® T500 is defined by its combination of high temperature resistance with compressive strength, along with high resistance to chemicals. iglide® T500 achieves the best wear results with hardened stainless steel and case-hardened chrome plated steel shafts. Special characteristics:

- Temperature resistant from -148°F to +482°F in continuous operation
- Universal resistance to chemicals
- High compressive strength
- Very low moisture absorption
- Great wear resistance through the entire temperature range




Online  
Lifetime  
Calculation

[www.igus.com](http://www.igus.com)



## Wear Behavior

The wear behavior of DryLin® R linear plain bearings is a result of the shaft material. iglide® J works well on many different materials. The surface load, in addition to the shaft material and roughness, has an effect on the wear. With decreasing surface load, the wear also decreases.

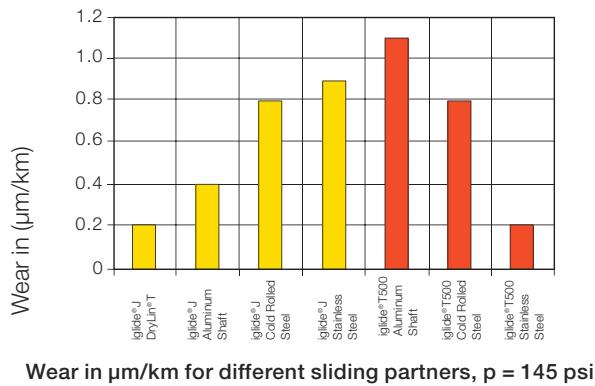

See our Online Expert System and ...



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

## Operating Temperatures

### iglide® J Material

Sliding elements made of iglide® J can be used in the temperature range between -40°F and 194°F. Because of the excellent heat conductivity of aluminum as a shaft and housing material, a large increase in bearing temperature only occurs in high-frequency short-stroke applications with a high load.

### Temperature limits for iglide® J

iglide® J	Application Temperature
Minimum	-40 °F
Max., long-term	+194 °F
Max., short-term	+248 °F

### iglide® T500 Material

T500 liners were developed specifically for high temperature and chemical applications, and run particularly well on stainless-steel shafting.



iglide® T500 material for heavy-duty operation at high temperatures in foundries

### Temperature limits for iglide® T500

iglide® T500	Application Temperature
Minimum	- 148 °F
Max., long-term	+ 482 °F
Max., short-term	+ 599 °F

## Loading Capacity


### Static Load Capacity

Since there is no point-to-point contact with DryLin®, as there is with ball bearing systems, the static load capabilities of DryLin are extremely high. At the right find the maximum static load for the largest bearing in each series:

Series	Max Static Load
DryLin R	20,000 lbs
DryLin T	3,140 lbs
DryLin W	719 lbs
DryLin N	220 lbs

### Dynamic Load Capacity

The dynamic load capacity is related to the continuous application speed as shown in the graph, this is due to the P•V value of the iglide® J material. The lower the surface speed, the higher the permissible dynamic load. Our available Online Expert System quickly and easily checks the functionality of a particular DryLin® system for your application, and is available at [www.igus.com](http://www.igus.com). It will give warning if the load capacity of a certain bearing is exceeded.

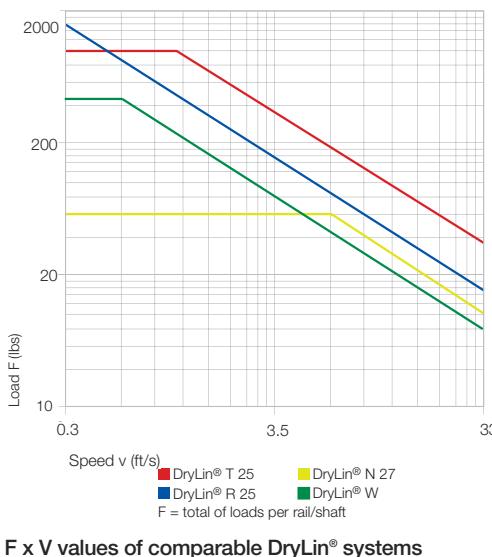


## Permissible Speeds

With low loads DryLin® has been tested at speeds up to 49 fps (15 m/s). The maximum permissible speed is related to the bearing load - the lower the load the higher the permissible speed. Since DryLin® does not rely on complicated rolling elements, but instead on specially engineered, low wear, low friction glide strips, extremely high speeds and accelerations are now possible. This means that DryLin® is ideal for applications where cycle and accelerations must be increased.

More significant than the maximum speed is the average speed-per-cycle time. Therefore, in order to calculate the suitability of a particular DryLin® system, the average surface speed should be determined. In applications with intermittent cycles, the highest average surface speed is significant; this is an average taken over a 10-30 minute time period

The use of DryLin® S hard anodized aluminum as a shaft material decreases the operating temperature in the bearing system due to its thermal conductivity and micro-finish. It is recommended for most applications with short-strokes or high cycles when using the iglide® J/J200 material liners. It is the material we have designed for use with all of our profile guides as well.

## Eccentric Forces

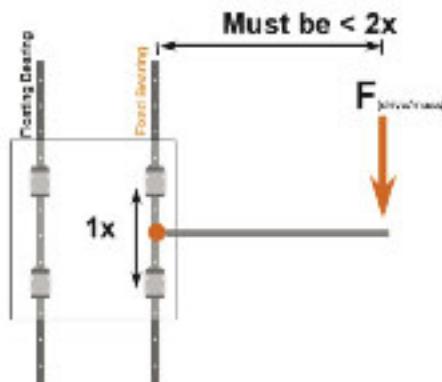

### The 2:1 Rule

When using linear plain bearings it is important to ensure that the acting forces follow the 2:1 Rule (see drawing). If either the load or the drive force (F) is greater than twice the bearing length (1X), then a binding or interrupted motion may occur.

If the location of the drive force or load cannot be changed, simply increase the distance between the bearings, or create a counterbalance to move the center-of-gravity back within the 2 to 1 ratio.



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

2:1 Rule = permissible distances of the applied forces

## Chemical Resistance

iglide® J is resistant to weak acids, diluted lyes and to fuels and all types of lubricants. Even the frequent chemical washdowns of machines in the food industry are not a problem for DryLin® linear plain bearings.

T500 liners were developed specifically for chemical resistance and high temperature applications. T500 liners run particularly well when combined with stainless steel shafts, which are also recommended for chemical resistance.

Medium	iglide® J Resistance	iglide® T500
Alcohol	Resistant	Resistant
Chlorinated hydrocarbons	Resistant	Resistant
Ester	Not Resistant	Resistant
Greases, oils	Resistant	Resistant
Ketones	Conditionally Resistant	Resistant
Fuels	Resistant	Resistant
Weak acids	Conditionally Resistant	Resistant
Strong acids	Not Resistant	Conditionally Resistant
Weak lyes	Resistant	Resistant
Strong lyes	Resistant	Resistant
Sea water	Resistant	Resistant

Chemical resistance of iglide® J and iglide® T500

## Corrosion Behavior

The low moisture absorption of iglide® J and T500 allows design in underwater areas. With the use of stainless steel shafts or anodized aluminum, a corrosion resistant guide results. Anodized aluminum is resistant to chemically neutral materials in the PH range 5 to 8. For special applications it is recommended to test coated aluminum sample parts to examine results prior to their use.





Golden manus® winner for Inspection equipment for offshore drilling riserplant with iglide® G300 and DryLin® N

## Clean Room Suitability and ESD Compatibility

All DryLin® guide systems are qualified for cleanroom applications. The differentiation between the various cleanroom classes is only dependent on load and speed of the application. The combination of iglide® J and hard anodized aluminum is classified as level 1 in the ESD compatibility according to SEMI E78-0998 (Highest rank).

The following DryLin® guide systems were examined: N40, W10, T25 and T30. See ► page 45.11 for detailed results.



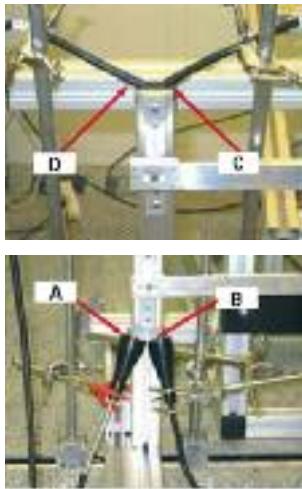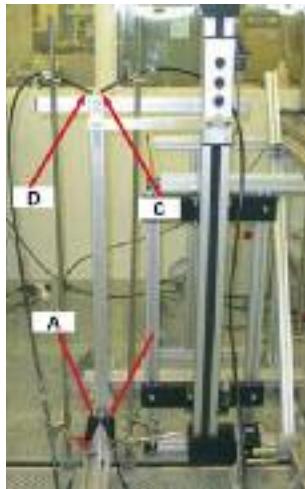

Photographs of the measuring points MP1 to MP4 of the linear bearing DryLin® NK02-40-02 used for the airborne particle emission measurements

All DryLin®-Guides are clearly qualified for clean room applications. The differentiation between the various clean room classes is only dependent on load and speed of the application. The combination of iglide® J and hard anodized aluminum is classified as level 1 in the ESD compatibility according to SEMI E78-0998 (Highest rank).

The following DryLin®-Guides have been examined:  
N40, W10, T25 and T30. Detailed results can be found below:

### Linear guide DryLin® TK01-30-01

"For the linear guiding system DryLin® TK01-30-01 by igus®, it is possible, on the calculations of the likelihood of violation of the threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm and 5 µm with a motion speed of  $v = 0.1 \text{ m/s}$ , to clearly derive a suitability for clean rooms classified as ISO-Class 3 according to DIN EN ISO 14644-1".

### Linear guide DryLin® NK02-40-02

"For the linear guiding system DryLin® NK02-40-02 by igus®, it is possible, on the calculations of the likelihood of violation of the threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm and 5 µm with a motion speed of  $v = 1 \text{ m/s}$ , to clearly derive a suitability for clean rooms classified as ISO-Class 6 according to DIN EN ISO 14644-1".

The measurement results of the ESD compatibility according to SEMI E78-0998 show that the linear guiding system DryLin® NK02-40-02 can be classified "level 1" (highest rank). See Fraunhofer IPA Report No.: IG 0308-295 73.

### Linear guide DryLin® TK01-25-02



"For the linear guiding system DryLin® TK01-25-02 by igus®, it is possible, on the calculations of the likelihood of violation of the threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm and 5 µm with a motion speed of  $v = 1 \text{ m/s}$ , to clearly derive a suitability for clean rooms classified as ISO-Class 5 according to DIN EN ISO 14644-1".

The measurement results of the ESD compatibility according to SEMI E78-0998 show that the linear guiding system DryLin® TK01-25-02 can be classified "level 1" (highest rank).



### Linear guide DryLin® WK-10-40-15-01

"For the linear guiding system DryLin® WK-10-40-15-01 by igus®, it is possible, on the calculations of the likelihood of violation of the threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm and 5 µm with a motion speed of  $v = 1 \text{ m/s}$ , to clearly derive a suitability for clean rooms classified as ISO-Class 6 according to DIN EN ISO 14644-1".

The measurement results of the ESD compatibility according to SEMI E78-0998 show that the linear guiding system DryLin® WK-10-40-15-01 can be classified "level 1" (highest rank). See Fraunhofer IPA Report No.: IG 0308-295 74.

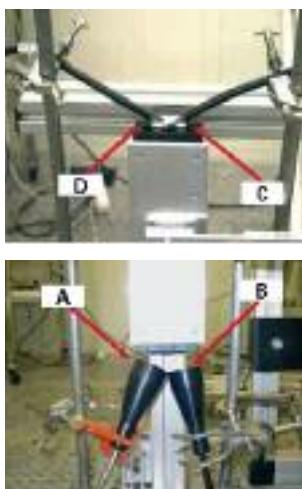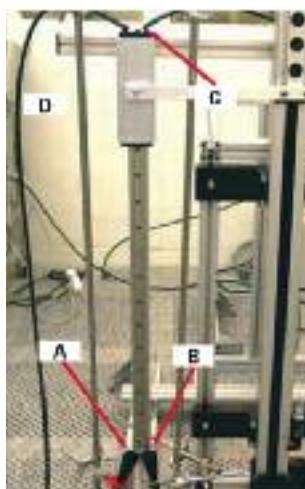

Photographs of the measuring points MP1 to MP4 of the linear bearing DryLin® TK01-25-02 used for the airborne particle emission measurements

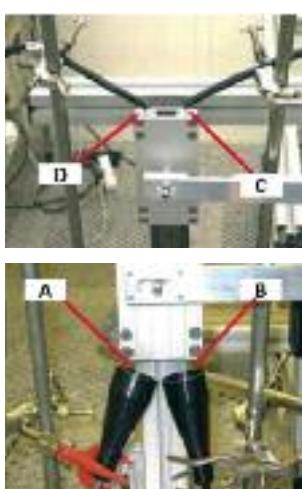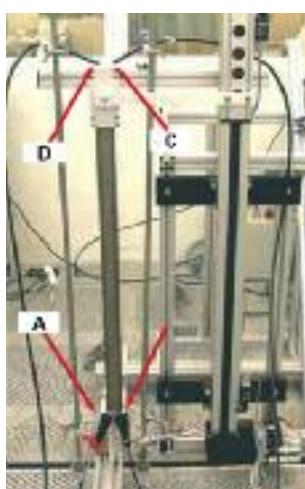

Photographs of the measuring points MP1 to MP4 of the linear bearing DryLin® WK-10-40-15-01 used for the airborne particle emission measurements

## Fixed and Floating Bearing Mounting Instructions

When using systems with 2 parallel rails, one side must be designated as the "fixed" rail, and the opposite side as the "floating" rail.

### Why use floating bearings?

- promotes smooth gliding performance and maximizes bearing life
- prevents binding caused by parallelism and angle errors
- decreases necessary drive force and wear by minimizing friction-forces
- Enhances the precision of the system over the bearings' lifetime.
- Reduce assembly time and cost



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

### Fixed Bearings

The "fixed" bearing rail should be positioned closest to the drive force. This rail will determine the precision of the system; no system should contain more than two "fixed" bearings.

### Floating/Self-Aligning Bearings

The "floating" rail should be the rail located furthest from the drive force. It is to act only as a guide, and will compensate for any misalignments or angle errors in the system ensuring proper functionality.

### Mounting Surfaces

The mounting surfaces for rails and bearings should have a very flat surface (e.g milled surface) in order to enhance performance. Variations in these surfaces may be compensated for by using floating bearings.

## DryLin® N - Floating Systems


Maximum float = .02" (.5 mm)



Standard Version



Horizontal Float "LLZ"




Vertical Float "LLY"

## DryLin® W - Floating Systems


Maximum float = .08" (2 mm)



Standard Version



Horizontal Float "LLZ"



Vertical Float "LLY"



DryLin® W can also  
alleviate edge pressure  
Ideal for non-flat, even  
surfaces

## DryLin® T - Floating Systems


Maximum float = .04" (1 mm)



Standard Version



Horizontal Float "LLZ"

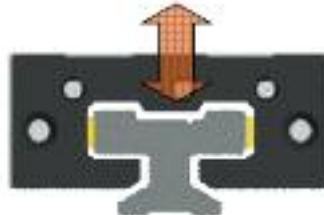

Vertical Float "LLY"

# DryLin® Linear Plain Bearings: Floating Bearing/Self-Alignment - DryLin® T, DryLin® R



DryLin®

## DryLin® R

DryLin® R linear plain bearings in the 03 Design Series are self-aligning and offer great advantages in applications with parallel shafts. They are able to compensate for alignment and parallelism errors and should be used on the shaft located furthest from the drive mechanism.

The design provides a raised spherical area on the outer diameter of the aluminum adapter for self-alignment. Load capacity is the same as the fixed version.

Even in unfavorable edge-load conditions, the load is supported by the entire projected surface

In order to compensate for parallelism errors between two shafts, the outer diameter is designed to be smaller than the


housing bore diameter by 0.2 - 0.3 mm (depending on the size). With the use of mounted O-rings, these bearings have an elastic bearing seat.

### Compensation for angle errors


Series RJUI/RJUM/OJUI/OJUM-03	$\pm 0.5^\circ$
Series RJUM-06-LL/OJUM-06-LL	$\pm 3.5^\circ$

### Compensation of parallelism errors

Series RJUI/RJUM/OJUI/OJUM-03	$\pm 0.1 \text{ mm (.004")}$
Series RJUM-06-LL/OJUM-06-LL	$\pm 3 \text{ mm (.12")}$

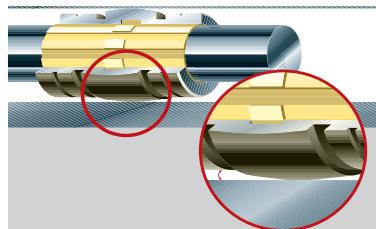

The spherical DryLin® adapters can compensate for alignment errors. A hard-anodization protects the aluminum adapter from wear.

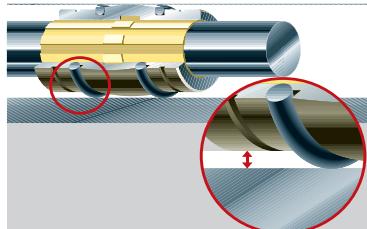


With built in clearances and the use of O-rings, the self-aligning DryLin® R bearings of the 03 Design Series can compensate for parallelism errors.




The self-aligning DryLin® R bearings of the 06 LL design series can compensate parallelism errors up to  $\pm .12"$  (3mm).


## DryLin® T Shown As Example Only

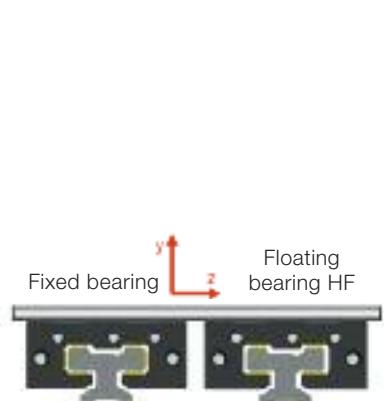

Installation variation horizontal with floating bearing in the Z-direction

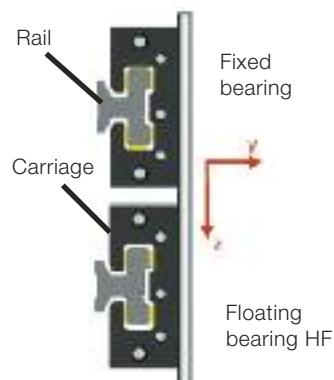

Installation variation lateral with floating bearing in the Z-direction

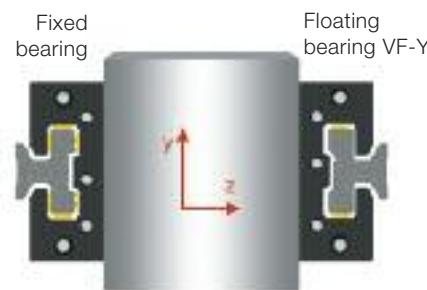

Horizontal mounting version with floating bearing in the Y-direction and lateral mounting carriage

10

DryLin® Linear  
Plain Bearings

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

## DryLin® Linear Plain Bearings

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



Testing and sorting machines



Storage solutions for a tape library



Feeding systems for a blister machine



Flatbed ink-jet printers



Packaging machines



Machining centers for the furniture industry



Machining Center



Packaging technology



Positioning of milling heads



Height-adjustment for an encoding machine



DryLin® N



DryLin® W



DryLin® T



DryLin® R



DryLin® HTS


**igus®**



# DryLin® N Low Profile Linear Guide System

# DryLin® N Selection Guide

## Available Carriages

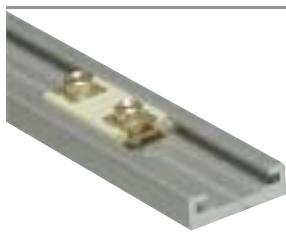

### DryLin® N17

- Good for tight design constraints
- Low cost
- Excellent for low loads
- Excellent corrosion resistance




Standard



Preload



Double Carriage

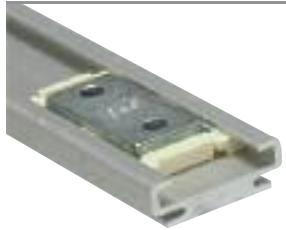

### DryLin® N27

- Through hole for flexible mounting
- Threaded boss for easy attachment
- Extremely low friction/low wear
- Replaceable glide pads
- Low weight
- Flexible size
- Excellent for low to medium loads
- High temperature version available



Standard/holes



Standard/thread



Preload




Overmolded



iglide® J carriage  
Double length  
with thread



Zinc carriage  
Double length  
with holes

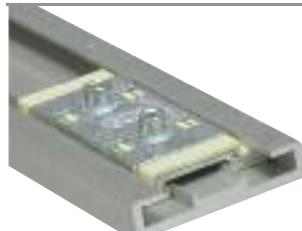

### DryLin® N40

- Flexible size
- Replaceable glide pads
- Excellent for medium to high loads
- Wide base for stable design



Standard/holes




Standard/thread



Overmold/holes




Overmold/thread

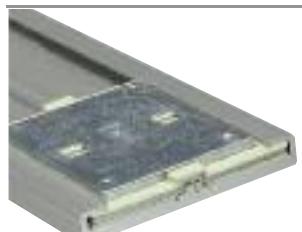


### DryLin® N80

- Use one rail instead of two narrow rails
- High accelerations possible
- Replaceable glide pads
- Extremely low friction/low wear
- Good for higher loads



Standard/thread



Overmold/thread



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

Dimensional Drawing	Maximum Load	Maximum Speed	Rail Material	Carriage Material
	11 lbs (50 N)	49 fps (15 m/s)	Anodized Aluminum	Brass / Plastic
	110 - 168 lbs (490 - 750 N) Depending on the carriage	49 fps (15 m/s)	Anodized Aluminum	Chromated Zinc / Plastic or Brass / Plastic
	157 lbs (700 N)	49 fps (15 m/s)	Anodized Aluminum	Chromated Zinc / Plastic
	220 lbs (1000 N)	49 fps (15 m/s)	Anodized Aluminum	Chromated Zinc / Plastic Aluminum available



## Technical Data

### Sliding elements:

Maintenance-free polymer

### Material:

iglide® J\*

### Max. surface speed:

49 fps (15 m/s)

### Temperature range:

-40°F to +194°F

(-40 °C to +90 °C)

### High temp NW02-27HT

up to 266°F

\* Other materials upon request

### DryLin® N Height

N17	.24 in (6.0 mm)
N27	.37 in (9.5 mm)
N40	.37 in (9.5 mm)
N80	.47 in (12.0 mm)

## Special Features



Cleanroom certified - IPA Fraunhofer




ESD compatible (electrostatic discharge)



Free of toxins - RoHS 2002/95/EC

## DryLin® N Low Profile Linear Guide Systems

The DryLin® N series offers extremely low profiles in several widths, and is ideal in tight space constraints. Like all DryLin® products the carriages are designed to glide smoothly on anodized aluminum rails without the need for messy lubricants. DryLin® N is a particularly low-cost alternative to miniature ball bearing systems, and is more precise and economical when compared to many custom-machined or simple plastic parts.

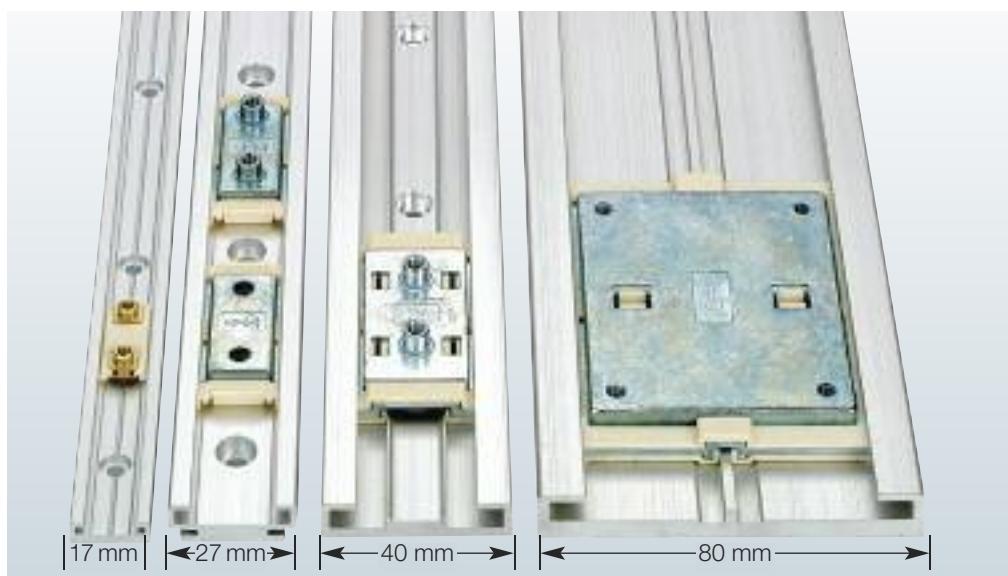

## Advantages of DryLin® N

- Small mounting height and width
- Maintenance-free and self-lubricating
- Corrosion-resistant
- Low wear and low coefficient of friction
- Lightweight
- Very high speed and acceleration possible
- Replaceable polymer sliding elements



- ① 6063-T6 or 6060-T66 anodized rails
- ② iglide® J plastic bearing liner
- ③ Chromated zinc carriages



DryLin® N80 in a belt-driven linear actuator for high-speed handling up to 12 m/s




DryLin® N80, black anodized used for adjusting spotlights



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

# DryLin® N Low Profile Linear Guide Systems

## Part No. for single carriages:

Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Max Static Load
NW-02-17	Plastic/Brass/iglide J/Yellow	Threaded brass boss	Standard	11 lbs (50N)
NW-02-17 P	Plastic/Brass/iglide J/Yellow	Threaded brass boss	Preloaded	11 lbs (50N)
NW-22-17-40	Plastic/Brass/iglide J/Yellow	Threaded brass boss	Overmolded, double-length version	11 lbs (50N)
NW-01-27	Chromated Zinc/iglide/Yellow	Through holes	Standard, clip-on plastic	112 lbs (500N)
NW-01-27 P	Zinc/iglide J/Yellow	Through holes	Preloaded .22 lbs (1N)	112 lbs (500N)
NW-01-27HT			High temp 266°F	
NW-11-27	Zinc/iglide J/Yellow	Through holes	Overmolded plastic, with through holes	112 lbs (500N)
NW-11-27-SS	Stainless Steel/iglide J/Yellow	Through holes	Overmolded plastic, with through holes	168 lbs (750N)
NW-02-27	Zinc/iglide J/Yellow	Threaded bosses	Standard, clip-on plastic	112 lbs (500N)
NW-02-27 P	Zinc/iglide J/Yellow	Threaded bosses	Preloaded .22 lbs (1N)	112 lbs (500N)
NW-02-27HT			High temp 266°F	
NW-12-27	Zinc/iglide J/Yellow	Threaded bosses	Overmolded plastic, with through holes	112 lbs (500N)
NW-11-27-80	Zinc/iglide J200/Grey	Through holes	Overmolded, double-length version	167 lbs (740N)
NW-21-27-60P	Plastic/iglide J/Yellow	Brass through holes	50% longer, preloaded	112 lbs (500N)
NW-22-27-60P	Plastic/iglide J/Yellow	Brass threaded boss	50% longer, preloaded	112 lbs (500N)
NW-01-40	Chromated Zinc/iglide J/Yellow	Through holes	Standard, clip-on plastic	157 lbs (700N)
NW-02-40	Chromated Zinc/iglide J/Yellow	Threaded bosses	Standard, clip-on plastic	157 lbs (700N)
NW-12-40	Chromated Zinc/iglide J/Yellow	Threaded bosses	Overmolded plastic	157 lbs (700N)
NW-02-80	Chromated Zinc/iglide J/Yellow	Threaded, no bosses	Standard, clip-on plastic	225 lbs (1000N)
NW-12-80	Chromated Zinc/iglide J/Yellow	Threaded, no bosses	Overmolded	225 lbs (1000N)
NW-02-80AL	Aluminum/iglide J/Yellow	Threaded, no bosses	Standard, clip-on plastic	250 lbs (1111N)



## Part No. for single rails:

Rail	Material	Description	Maximum Length
NS-01-17	6063-T6 or 6060-T66 anodized aluminum	M3 Mounting holes	6.5 ft
NS-01-17S	6063-T6 or 6060-T66 anodized aluminum	No holes	6.5 ft
NS-01-27	6063-T6 or 6060-T66 anodized aluminum	M4 Mounting holes	12 ft (4000 mm special order)
NS-01-27S	6063-T6 or 6060-T66 anodized aluminum	No holes	12 ft (4000 mm special order)
NS-01-40	6063-T6 or 6060-T66 anodized aluminum	M4 Mounting holes	12 ft (4000 mm special order)
NS-01-40S	6063-T6 or 6060-T66 anodized aluminum	No holes	12 ft (4000 mm special order)
NS-01-80	6063-T6 or 6060-T66 anodized aluminum	M4 Mounting holes	12 ft (4000 mm special order)
NS-01-80S	6063-T6 or 6060-T66 anodized aluminum	No holes	12 ft (4000 mm special order)

DryLin® N  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)


10

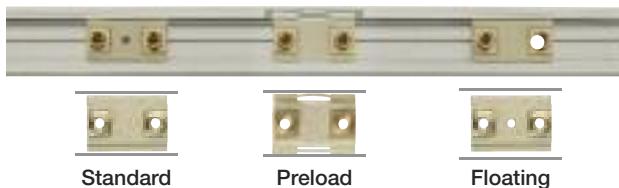

DryLin® NW-17 = 17 mm Rail width

## NW 17


The smallest size of the DryLin® N range is designed to fit in the tightest space constraints. In addition, this range is free from lubrication and can run at high speeds.

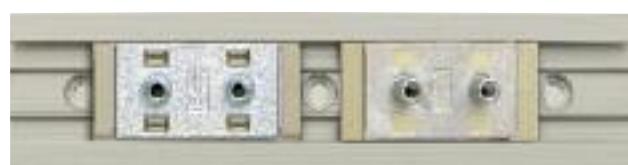Standard 02  
with threadOvermolded  
with thread

DryLin® NW-40 = 40 mm Rail width

## NW 40

Compared with smaller series, NW 40 is able to withstand significantly higher loads. Like all other DryLin® N series, the lubrication free design is capable of running at high linear speeds.

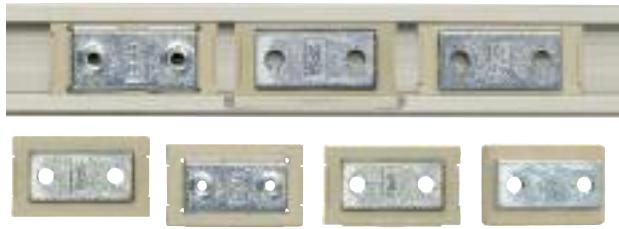

DryLin® NW-27 = 27 mm Rail width

## NW 27

The NW 27 series is available in multiple carriage lengths and materials, and has great performance-to-cost benefits.


### Overmolded

This version is practically identical to the standard slide NW-01/02-27. Overmolded with iglide® J, however, it is easier to assemble for high volume production.

- Quick assembly
- Easier handling

### High Temp


NW-01-27HT/NW-02-27HT available for up to 266°F



DryLin® NW-80 = 80 mm rail width

## NW 80

The largest of the DryLin® N series permits low installation heights while offering high load-bearing capacity. The lubrication free design is capable of running at high linear speeds.

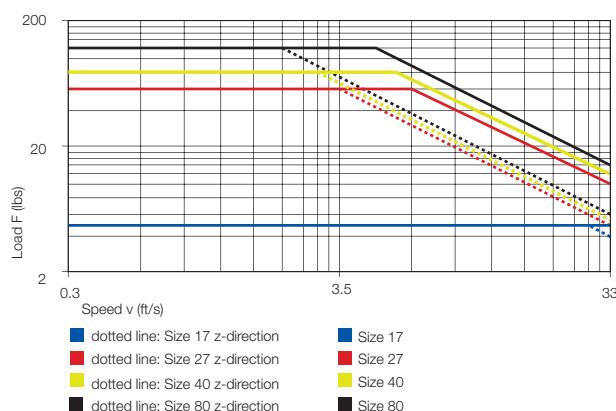

F = total of the loads on one rail

Fv-Diagram, maximum permissible dynamic loads of DryLin® N


## Maximum loads (per carriage)

NW-02-17 = 11 lbs


NW-01/02-27 = 110 lbs

NW-02-40 = 154 lbs

NW-02-80 = 220 lbs



## Eccentric Forces

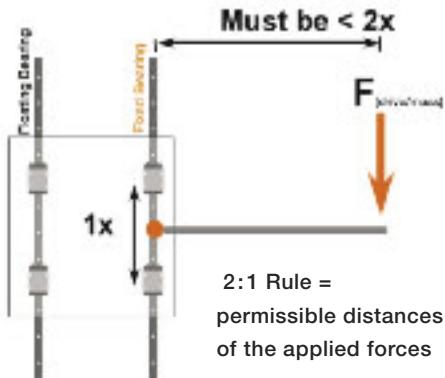

Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

DryLin® N  
Linear Guide Systems

## The 2:1 Rule

When using linear plain bearings it is important to ensure that the acting forces follow the 2:1 Rule (see drawing). If either the load or the drive force ( $F$ ) is greater than twice the bearing length ( $1x$ ), then binding or interrupted motion may occur.

If the location of the drive force or load cannot be changed, simply increase the distance between the bearings, or create a counterbalance to move the center-of-gravity back within the 2 to 1 ratio.

## Fixed and Floating Bearing Mounting Instructions

When using systems with 2 parallel rails, one side must be designated as the "fixed" rail, and the opposite side the "floating" rail.

### Why use floating bearings?

- promotes smooth gliding performance and maximizes bearing life
- prevents binding caused by parallelism and angle errors
- decreases necessary drive force and wear by minimizing friction-forces
- Enhances the precision of the system over the bearings' lifetime.
- Reduce assembly time and cost

### Fixed Bearings


The "fixed" bearing rail should be positioned closest to the drive force. This rail will determine the precision of the system; no system should contain more than two "fixed" bearings.

### Floating/Self-Aligning Bearings

The "floating" rail should be the rail located furthest from the drive force. It acts only as a guide, and compensates for any misalignments or angle errors in the system, ensuring proper functionality.

### Mounting Surfaces

The mounting surfaces for rails and bearings should have a very flat surface (e.g milled surface) in order to enhance performance. Variations in these surfaces may be compensated for by using floating bearings.

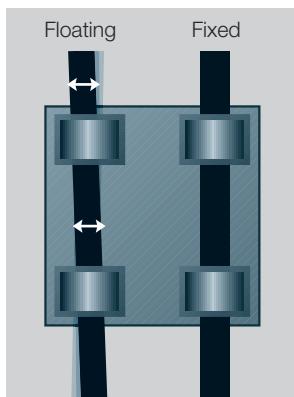


Automatic compensation of  
parallelism errors

## DryLin® N - Floating Systems

Maximum float =  $\pm .02"$  (.5 mm)



Standard Version



Horizontal Float "LLZ"



Part No.  
Fixed Bearing -  
CARRIAGE ONLY

NW-02-17
NW-02-27 / NW-02-27
NW-02-40
NW-02-80

Part No.  
Horizontal Floating -  
CARRIAGE ONLY

NW-02-17 LLZ
NW-01-27 LLZ
NW-02-27 LLZ
NW-02-40 LLZ
NW-02-80 LLZ



Vertical Float "LLY"

Part No.  
Vertical Floating -  
CARRIAGE ONLY

NW-02-17 LLY
NW-01-27 LLY
NW-02-27 LLY
NW-02-40 LLY
NW-02-80 LLY




Vertical Float "LLYZ"

Part No.  
Horizontal/Vertical Floating -  
CARRIAGE ONLY

NW-02-17 LLYZ
NW-01-27 LLYZ
NW-02-27 LLYZ
NW-02-40 LLYZ
NW-02-80 LLYZ

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10




**igus®**

## DryLin® N Low Profile Linear Guide Systems - NK-02-17

DryLin® N  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



NW-02-17  
Standard



NW-22-17-40  
Double Length



NW-02-17P  
Preloaded



Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Weight	Max Static Load
NW-02-17	Plastic/Brass/Iglide J/Yellow	Threaded brass boss	Standard	.06 oz (1.7g)	11 lbs (50N)
NW-02-17P	Plastic/Brass/Iglide J/Yellow	Threaded brass boss	Preloaded .23 lbs (1N)	.06 oz (1.7g)	11 lbs (50N)
NW-22-17-40	Plastic/Brass/Iglide J/Yellow	Threaded brass boss	Overmolded, double-length version	.09 oz (2.6g)	11 lbs (50N)
-LLZ	for floating in Z-direction, best for horizontal applications for rail alignment				
-LLY	for floating in Y-direction, best for vertical applications or when flatness of the mounting surface is of concern				
-LLYZ	for floating in both directions				

Floating carriages (see page 21.6 about fixed and floating)



Rail	Material	Description	Weight	Hole Pattern	Max Length
NS-01-17	Anodized AL	M3 Mounting holes	0.1 lbs/ft (150 g/m)	Bore pattern symmetrical C% = C6	6.5 ft
NS-01-17S	Anodized AL	No holes	0.1 lbs/ft (150 g/m)	NA	12 ft

No cut charges for standard C5/C6, overall length tolerances, minimum of 100 mm.

### NW-02-17(P)

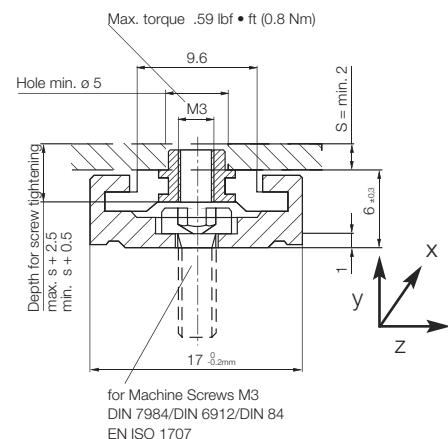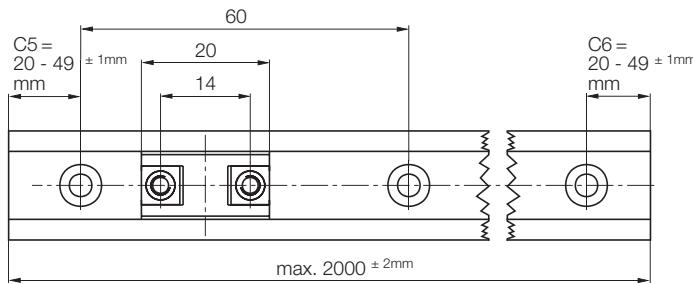

### NW-22-17-40

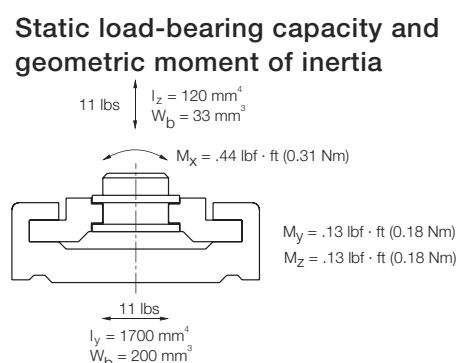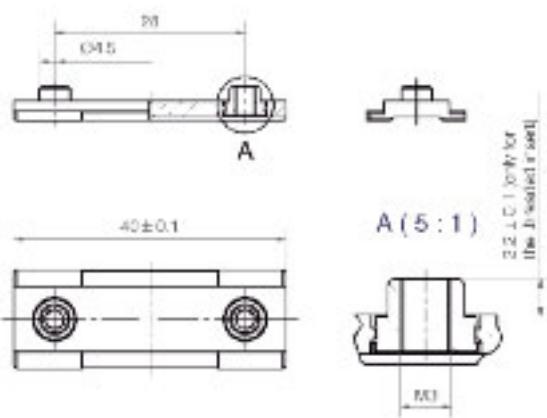

### Structure of the Part No.

NK -02 -17 P -2 -500

Complete system

Thread

Size

"P" for preloaded

Number of carriages

Length of rail (mm)


CAD files online:  
[www.igus.com](http://www.igus.com)

# DryLin® N Low Profile Linear Guide Systems

## NK-01-27 / NK-02-27


**igus®**

**NW-01-27(P)/NW-11-01**  
Carriages with through hole

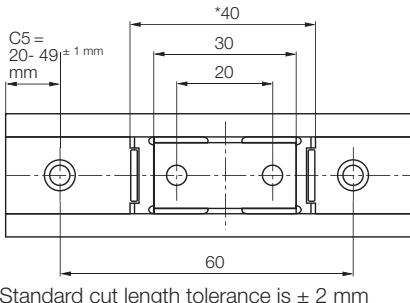

Standard cut length tolerance is  $\pm 2$  mm

**NW-02-27(P)/NW-12-01**  
Carriages with threaded boss

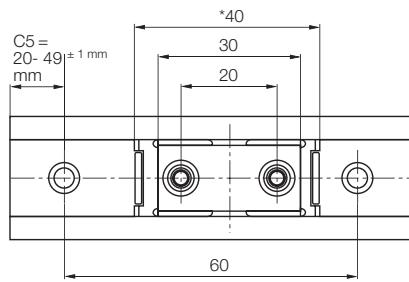

Standard cut length tolerance is  $\pm 2$  mm

Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Weight	Max Static Load
<b>Standard</b>					
<b>NW-01-27</b>	Chromated Zinc/iglide J/Yellow	Through holes	Standard, clip-on plastic	.38 oz (10.8g)	112 lbs (500N)
<b>NW-02-27</b>	Chromated Zinc/iglide J/Yellow	Threaded bosses	Standard, clip-on plastic	.44 oz (12.5g)	112 lbs (500N)
<b>Overmolded</b>					
<b>NW-11-27</b>	Chromated Zinc/iglide J/Yellow	Through holes	Overmolded plastic	.38 oz (10.8g)	112 lbs (500N)
<b>NW-12-27</b>	Chromated Zinc/iglide J/Yellow	Threaded bosses	Overmolded plastic	.44 oz (12.5g)	112 lbs (500N)
<b>Preloaded</b>					
<b>NW-01-27P</b>	Chromated Zinc/iglide J/Yellow	Through holes	Preloaded .22 lbs (1N), clip-on	.38 oz (10.8g)	112 lbs (500N)
<b>NW-02-27P</b>	Chromated Zinc/iglide J/Yellow	Threaded bosses	Preloaded .22 lbs (1N), clip-on	.44 oz (12.5g)	112 lbs (500N)
<b>High Temp</b>					
<b>NW-01-27HT</b>	Chromated Zinc/high temp	Through holes	High temp up to 266°F	.38 oz (10.8g)	112 lbs (500N)
<b>NW-02-27HT</b>	Chromated Zinc/high temp	Threaded bosses	High temp up to 266°F	.44 oz (12.5g)	112 lbs (500N)
-LLZ	for floating in Z-direction, best for horizontal applications for rail alignment				
-LLY	for floating in Y-direction, best for vertical applications or when flatness of the mounting surface is of concern				
-LLYZ	for floating in both directions				


Floating carriages (see page 21.6 about fixed and floating)

Rail	Material	Description	Weight	Hole Pattern	Max Length
<b>NS-01-27</b>	Anodized AL	M4 Mounting holes	0.2 lbs/ft (290 g/m)	Bore pattern symmetrical C5=C6	3658 mm
<b>NS-01-27S</b>	Anodized AL	No holes	0.2 lbs/ft (290 g/m)	NA	3658 mm


No cut charges for standard C5/C6, overall length tolerances, and minimum 100 mm

\* Length of overmolded carriages version NW-11-27 and NW-12-27:  $34 \pm 0.7$  mm



### NK-01-27(P)

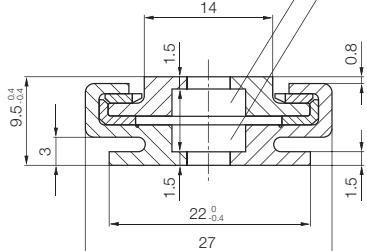


### NK-02-27(P)

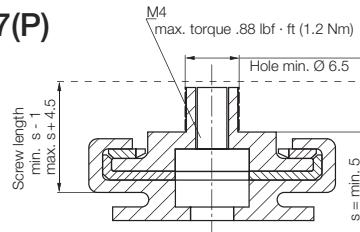

Static load-bearing capacity and geometric moment of inertia

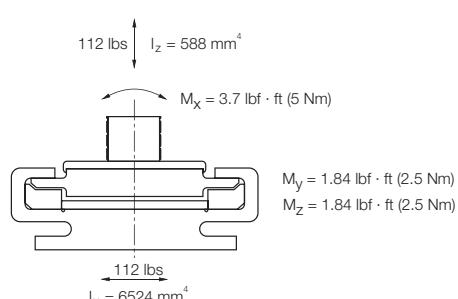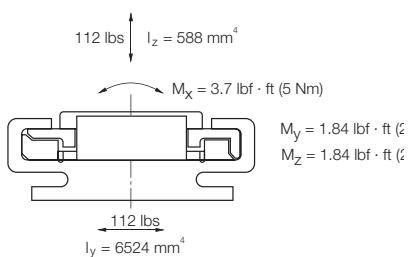

CAD files online: [www.igus.com](http://www.igus.com)



**igus®**

## DryLin® N Low Profile Linear Guide Systems NW-11-27-80 Double Length Version

DryLin® N  
Linear Guide Systems


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Weight	Max Static Load
NW-11-27-80	Chromated Zinc/iglide J200/Grey	Through holes	Overmolded, double length version	.80 oz (25g)	168 lbs (750N)


Rail	Material	Description	Weight	Hole Pattern	Max Length
NS-01-27	6063-T6 Anodized AL	M4 Mounting holes	0.2 lbs/ft (290 g/m)	Bore pattern symmetrical C5=C6	12 ft
NS-01-27S	6063-T6 Anodized AL	No holes	0.2 lbs/ft (290 g/m)	NA	12 ft

No cut charges for standard C5/C6, overall length tolerances, and minimum 100 mm

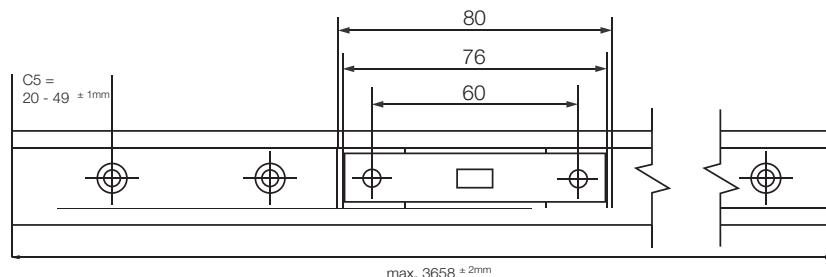


NK-04-27

For machine "low head" screws M4  
DIN 7984 / DIN 6912  
DIN 84 / EN ISO 1707

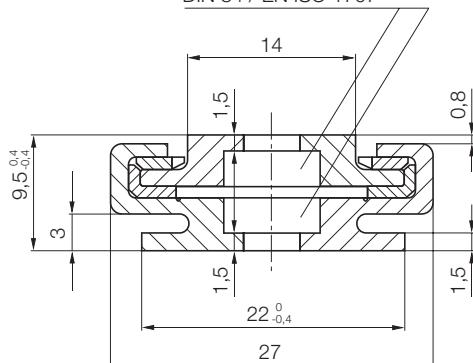

Static load-bearing capacity and geometric moment of inertia

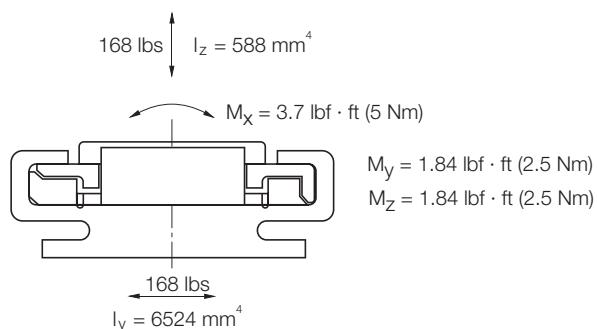

CAD files online:  
[www.igus.com](http://www.igus.com)

# DryLin® N Low Profile Linear Guide Systems, Preloaded 50% longer than standard

**igus®**



NW-21-27-60-P




NW-22-27-60-P

Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Weight	Max Static Load
<b>NW-21-27-60P</b>	Plastic/iglide J/Yellow	Brass through holes	Preloaded	.29 oz (9g)	112 lbs (500N)
<b>NW-22-27-60P</b>	Plastic/iglide J/Yellow	Brass threaded boss	Preloaded	.39 oz (12g)	112 lbs (500N)



Rail	Material	Description	Weight	Hole Pattern	Max Length
<b>NS-01-27</b>	6063-T6 Anodized AL	M4 Mounting holes	0.2 lbs/ft (290 g/m)	Bore pattern symmetrical C%=C6	12 ft
<b>NS-01-27S</b>	6063-T6 Anodized AL	No holes	0.2 lbs/ft (290 g/m)	NA	12 ft

No cut charges for standard C5/C6, overall length tolerances, and minimum 100 mm

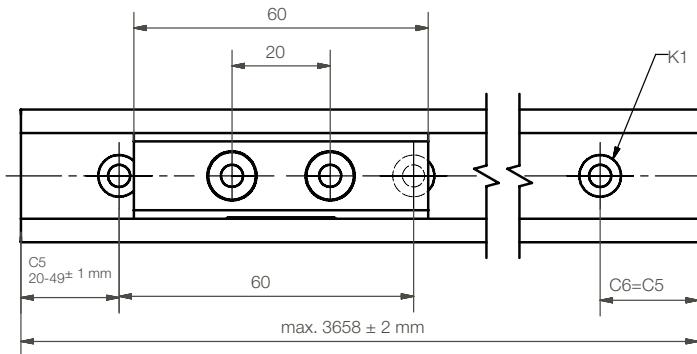

NW-21-27-60-P

NW-22-27-60-P

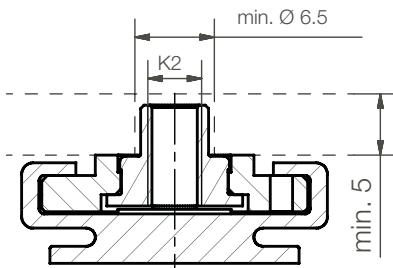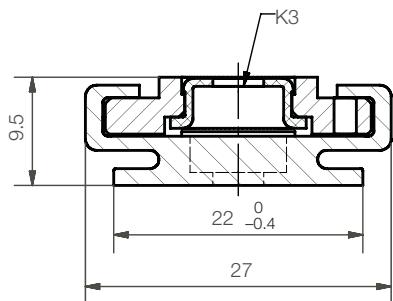


112 lbs  
 $I_z = 588 \text{ mm}^4$


$M_x = 3.7 \text{ lbf} \cdot \text{ft (5 Nm)}$

112 lbs  
 $I_z = 588 \text{ mm}^4$

$M_x = 3.7 \text{ lbf} \cdot \text{ft (5 Nm)}$

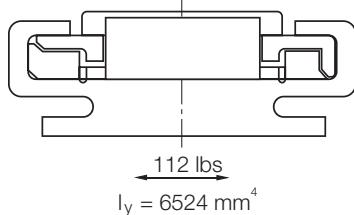

$M_y = 1.84 \text{ lbf} \cdot \text{ft (2.5 Nm)}$   
 $M_z = 1.84 \text{ lbf} \cdot \text{ft (2.5 Nm)}$

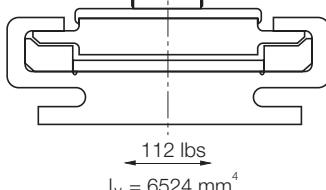


$M_y = 1.84 \text{ lbf} \cdot \text{ft (2.5 Nm)}$   
 $M_z = 1.84 \text{ lbf} \cdot \text{ft (2.5 Nm)}$

**DryLin® N  
Linear Guide Systems**

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® N Low Profile Linear Guide Systems NW-01/02-40

DryLin® N  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



NW-02-40





NW-01-40

Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Weight	Max Static Load
NW-01-40	Chromated Zinc/iglide J/Yellow	Through holes	Standard, clip-on plastic	1.06 oz (30g)	157 lbs (700N)
NW-02-40	Chromated Zinc/iglide J/Yellow	Threaded bosses	Standard, clip-on plastic	1.06 oz (30g)	157 lbs (700N)
NW-12-40	Chromated Zinc/iglide J/Yellow	Threaded bosses	Overmolded plastic	1.06 oz (30g)	157 lbs (700N)
-LLZ	for floating in Z-direction, best for horizontal applications for rail alignment				
-LLY	for floating in Y-direction, best for vertical applications or when flatness of the mounting surface is of concern				
-LLYZ	for floating in both directions				

Rail	Material	Description	Weight	Hole Pattern	Max Length
NS-01-40	6063-T6 Anodized AL	M4 Mounting holes	0.3 lbs/ft (450 g/m)	Bore pattern symmetrical C5=C6	12 ft
NS-01-40S	6063-T6 Anodized AL	No holes	0.3 lbs/ft (450 g/m)	NA	12 ft



No cut charges for standard C5/C6, overall length tolerances, and minimum 100 mm

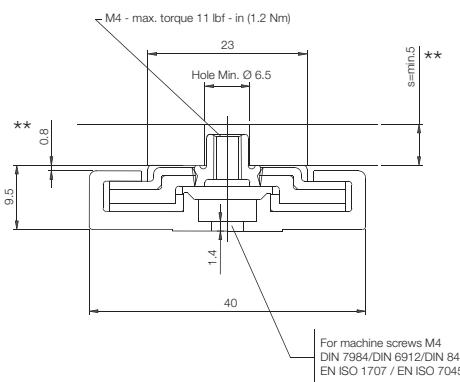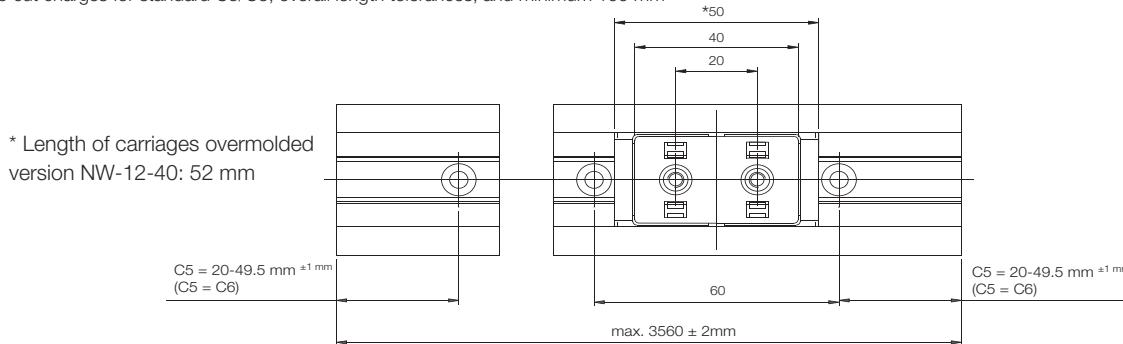

\*\* For NW-02-40 only


\*\*

**Static load-bearing capacity and geometric moment of inertia**

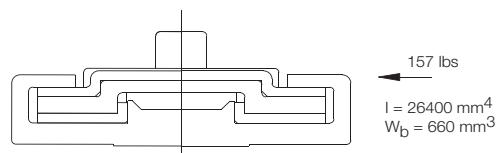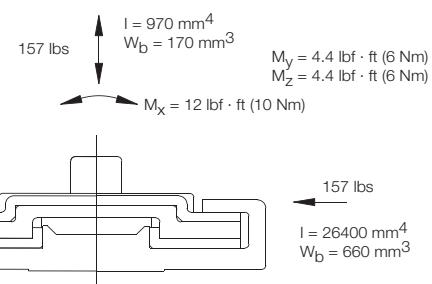

### DryLin® NK – Complete system

Structure of the Part No. – Standard version

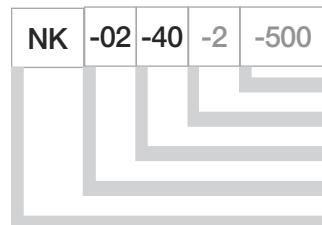


Length of rail (mm)

Number of carriages

Size

Thread

Complete system





Carriages	Carriage/Bearing Material/Color	Mounting Style	Description	Weight	Max Static Load
NW-02-80	Chromated Zinc/iglide J/Yellow	Threaded no bosses	Standard, clip-on plastic	3.53 oz (100g)	225 lbs (1000N)
NW-12-80	Chromated Zinc/iglide J200/Grey	Threaded no bosses	Overmolded	3.53 oz (100g)	225 lbs (1000N)
NW-02-80AL	Aluminum/iglide J/Yellow	Threaded no bosses	Aluminum, clip-on plastic	2.56 oz (72g)	250 lbs (1111N)
Rail	Material	Description	Weight	Hole Pattern	Max Length
NS-01-80	6063-T6 Anodized AL	M4 Mounting holes	0.3 lbs/ft (450 g/m)	Bore pattern symmetrical C5=C6	12 ft
NS-01-80S	6063-T6 Anodized AL	No holes	0.3 lbs/ft (450 g/m)	NA	12 ft


No cut charges for standard C5/C6, overall length tolerances, and minimum 100 mm

\* carriage length for overmolded NW-12-80 = 83 mm

\*\* size 45 on request

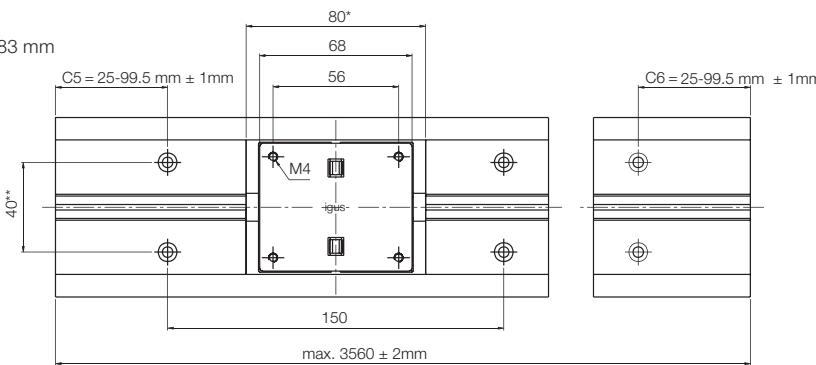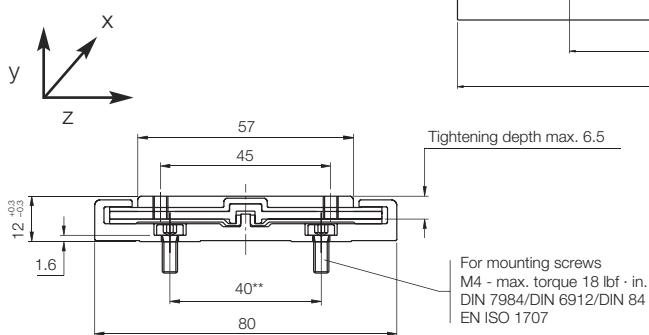


### Static load-bearing capacity and geometric moment of inertia

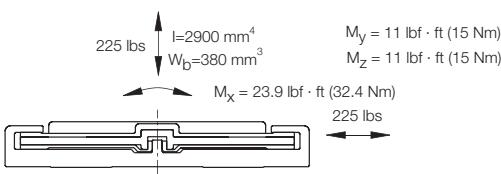

### Structure of the Part No. – Standard version

NK -02 -40 -2 -500 -LLZ

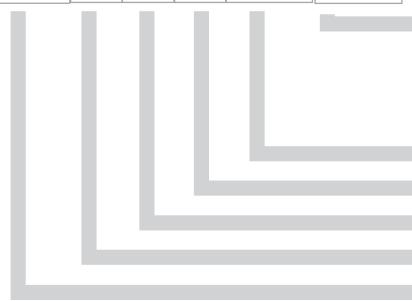

Carriage option  
Standard - Leave blank  
Floating z-direction - LLZ  
Floating y-direction - LLY  
Floating y- and z-direction - LLYZ

Length of rail (mm)  
Number of carriages  
Size  
Thread  
Complete system




Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

CAD files online: [www.igus.com](http://www.igus.com)

DryLin® N  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



igus®


## DryLin® N Low Profile Linear Guide Systems - End Caps

### DryLin® N end caps



DryLin® N end caps are available for every size rail

- Easy assembly
- Cost-effective
- Dismantling possible
- High retention force

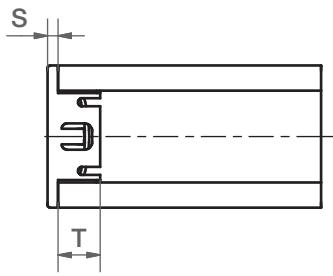


#### Dimensions (mm)

Part number	S	T	For rail
NSKB-17	1.5	7	NS-01-17
NSKB-27	2	8	NS-01-27
NSKB-80	2	17	NS-01-80
NSK-40	1.5	8	NS-01-40




Easy assembly by hand. Disassemble by  
using a screwdriver

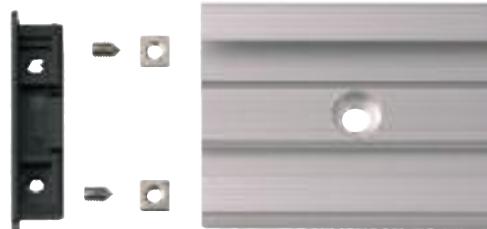


End caps for rail size 40, bolted




**igus®**

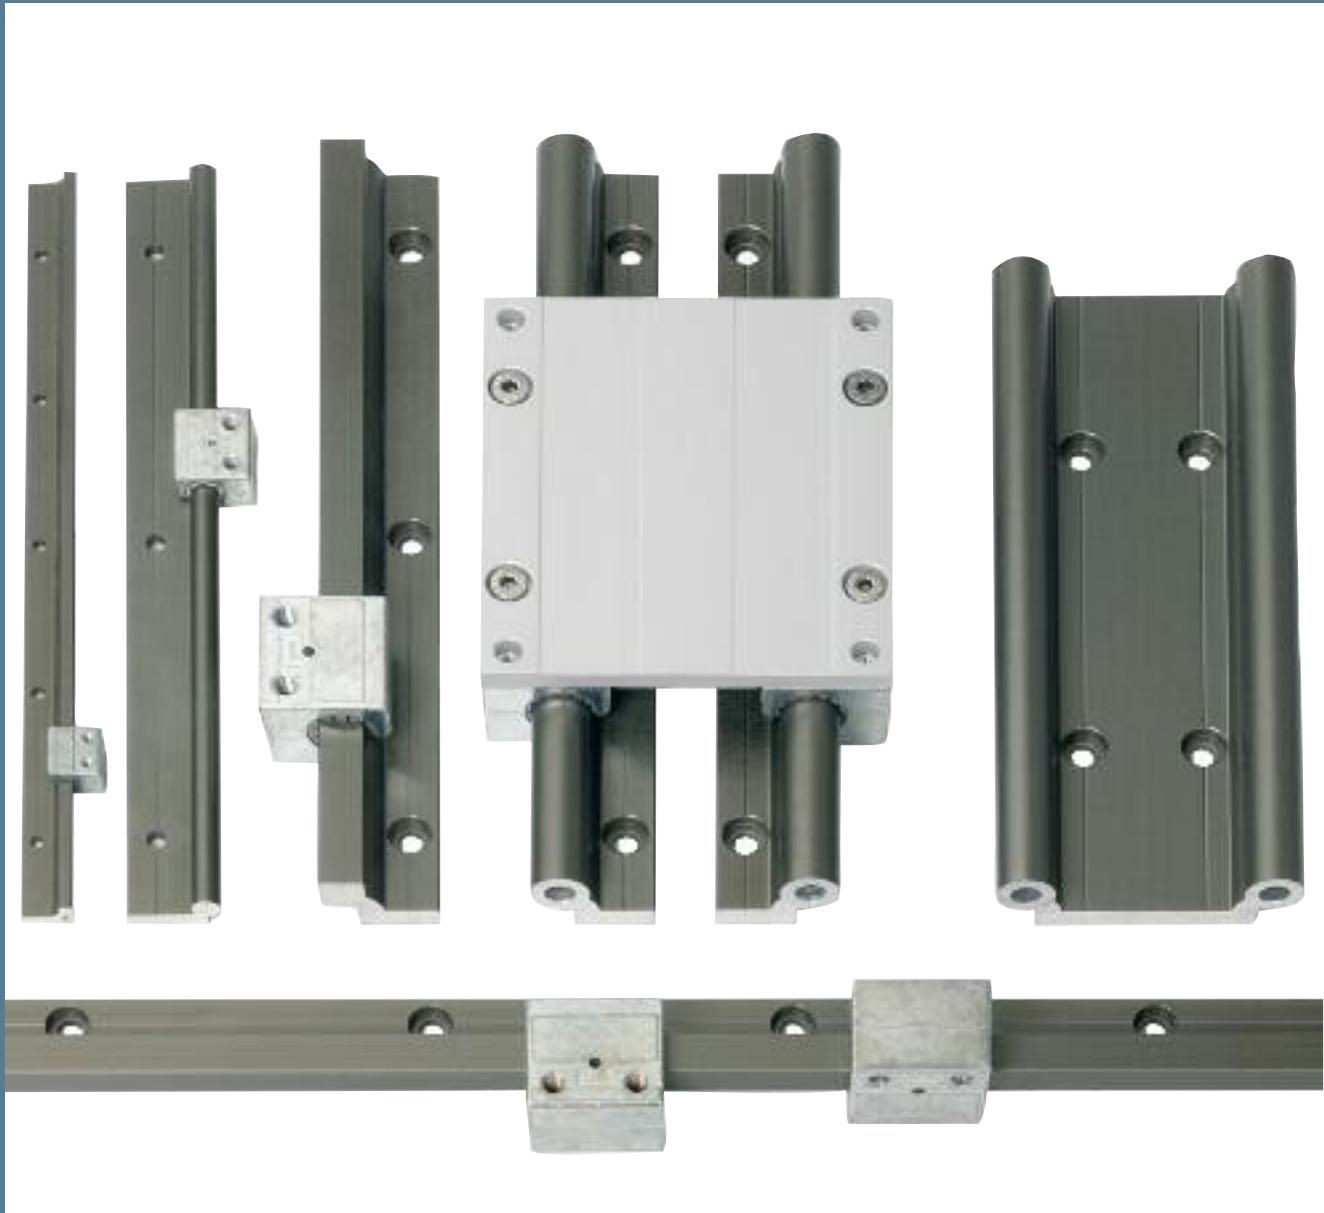

# DryLin® W Linear Guide Systems

# DryLin® W Selection Guide

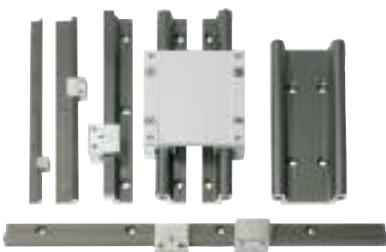	Temperature	Maximum Load
	<b>DryLin® W06</b> <ul style="list-style-type: none"><li>• 06 mm bearing</li><li>• Small size for design constraints</li><li>• Flexible</li><li>• J200 liner for reduced friction</li><li>• Great for manual and motor driven applications</li><li>• Square design for optimal floating option</li></ul>	-40°F to +194°F (-40°C to +90°C) 94 lbs
	<b>DryLin® W10</b> <ul style="list-style-type: none"><li>• 10 mm bearing</li><li>• Available in the most configurations</li><li>• Round standard with iglide® J material</li><li>• Square standard with iglide® J200 material</li><li>• Use square style as floating bearings</li><li>• Round style is excellent in aggressive environments</li></ul>	-40°F to +194°F (-40°C to +90°C) -148°F to 482°F (stainless) Single Carriage 270 lbs Mounted System 1079 lbs
	<b>DryLin® W16</b> <ul style="list-style-type: none"><li>• 16 mm bearing</li><li>• All use the enhanced iglide® J200 liner</li><li>• Available square rail for optimal floating feature</li><li>• Also available in round profile</li><li>• Durable size</li></ul>	-40°F to +194°F (-40°C to +90°C) Single Carriage 462 lbs Mounted System 1848 lbs
	<b>DryLin® W20</b> <ul style="list-style-type: none"><li>• 20 mm bearing</li><li>• Robust size</li><li>• All use the iglide® J200 liner for reduced friction and wear</li><li>• Available in both round and square profiles</li></ul>	-40°F to +194°F (-40°C to +90°C) -148°F to 482°F (stainless) Single Carriage 719 lbs Mounted System 2876 lbs

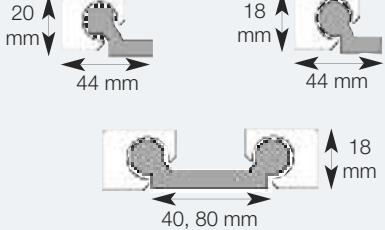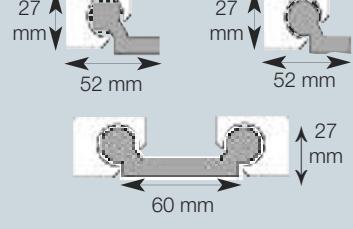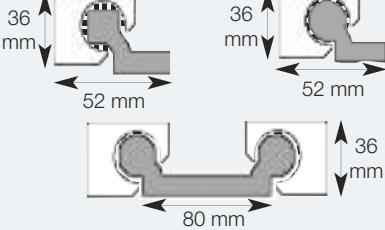Maximum Speed	Maximum Rail Length	Size Range	Rail Material	Carriage Material
49 fps (15 m/s)	9.84 ft	 27.5 mm      30 mm      14 mm	Hard-Anodized Aluminum	Chromated Zinc / iglide® J200
49 fps (15 m/s)	12 ft (4m upon request)	 44 mm      44 mm      40, 80 mm      20 mm      18 mm	Hard-Anodized Aluminum	Chromated Zinc / iglide® J / J200 Anodized aluminum and 316 stainless steel optional
49 fps (15 m/s)	12 ft (4m upon request)	 52 mm      52 mm      60 mm      27 mm	Hard-Anodized Aluminum	Chromated Zinc / iglide® J200 Anodized aluminum optional and 316 stainless steel optional
49 fps (15 m/s)	13.1 ft (4m upon request)	 52 mm      52 mm      80 mm      36 mm	Hard-Anodized Aluminum	Chromated Zinc / iglide® J200 Anodized aluminum and 316 stainless steel optional



**igus®**

## Technical Data

### Sliding elements:

- Maintenance-free
- iglide® J / J200
- iglide® T500 (SS only)

### Max. surface speed:

49 f/s (15 m/s)

### Temperature range:

-40°F to +194°F  
(-40°C to +90°C)

### Rail:

- Hard anodized aluminum
- Optional 316 stainless

### Carriages:

- Chromated Zinc
- Anodized aluminum
- Optional 316 Stainless



ESD



RoHS  
2002/95/EC



DryLin® W used for a stop dog in the glass industry



DryLin® W in permanent use in a conveyor belt



DryLin® W for guiding the igus® EnergyChain® in an inkjet printer


DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

## DryLin® W Linear Guide System

DryLin® W was developed to promote both design flexibility and quick assembly in both single and double rail configurations. DryLin® W is also available in several mounted assemblies eliminating the need for both shaft alignment and bearing assembly. All DryLin® W systems are available with our enhanced J200 liners, which reduce friction and optimize bearing life.

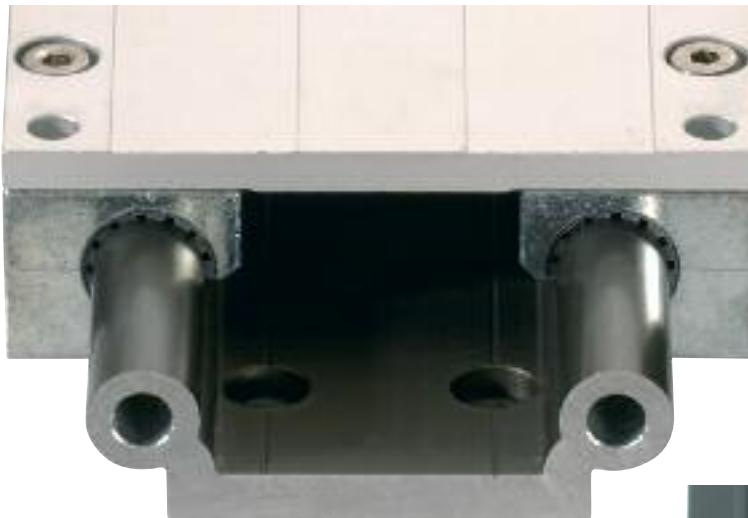

### DryLin® W - The original flexible guiding systems

DryLin® W uses iglide® J200 liners similar to DryLin® R but is also offered as cost-effective, harnessed systems.

- The single rail system, which may incorporate a floating square bearing, efficiently compensates for extreme shaft misalignments.
- The double rail system eliminates the need for shaft alignment, offering a single bolt-on solution.



Also available as  
pre-assembled driven systems




**SLW**  
Page  
50.10



**ZLW**  
Page  
50.34



Turn-To-Fit carriages allow you to adjust the clearance for your application



## DryLin® W Single Rail – Square

Due to their geometry the square rails offer enhanced lifetime as the bearing surface area is larger than the round bearings. They also allow better compensation for shaft misalignments and angle errors, and compensate for poor tolerances, mounting surfaces. Rails are hard-anodized aluminum, bearings are zinc (optional hard-anodized aluminum), and the bearing materials are iglide® J200 and iglide® J, depending on the series.

## DryLin® W Single Rail – Round

The round series offers the most options, such as WJUME bearings with adjustable clearance, WJRM rolling hybrid bearings, as well as manually-locking hand clamps. This series is particularly well suited for dirty, dusty application.

## DryLin® W Double Rail

This series reduces assembly time by eliminating shaft alignment. They also offer high torque support and torsional rigidity. This series also offers the most options, such as WJUME bearings with adjustable clearance, WJRM rolling hybrid bearings, as well as manually-locking hand clamps.

## DryLin® W Complete Carriage

Pre-assembled bearing carriages are available to reduce assembly time and purchasing costs.

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

mm

## DryLin® W Stainless Steel

For the ultimate corrosion-resistant linear guide series our plastic linear bearings are coupled with 316-Series stainless.

## DryLin® Specialists

WJUME - Adjustable, allows radial clearance adjustment by the use of a simple allen key.  
WJRM - Rolling hybrid with reduced friction for hand powered and very low cycle applications.



**igus®**

## DryLin® W Linear Guide Systems

### DryLin® W - Sliding elements iglide® J and iglide® J200

DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



iglide® J (Standard in 10mm round only)




iglide® J200 Square



iglide® J200 Round

#### iglide® J200 – various shaft materials

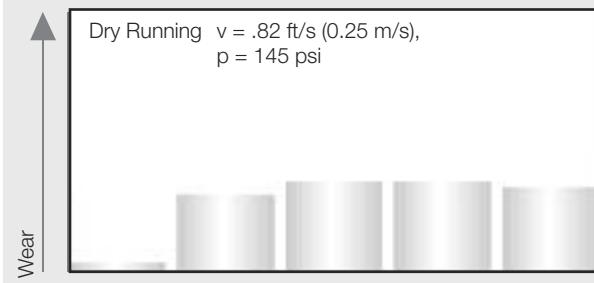

#### The iglide® J200 material


iglide® J200 material is especially developed for hard anodized aluminum surfaces. Comprehensive laboratory tests showed that iglide® J200 is by far the most suitable polymer material for linear motion applications on aluminum rails. iglide® J200 is 3 times as abrasion resistant on anodized aluminum than hardened steel. Special Characteristics of iglide® J200:

- Extreme durability using anodized aluminum
- Low abrasion using anodized aluminum
- Excellent wear resistance using anodized aluminum
- Maintenance free


Iglide® J200 is standard on all DryLin® W products using hard anodized aluminum rail.

### DryLin® W Mounting Instructions

For Parts WJ-

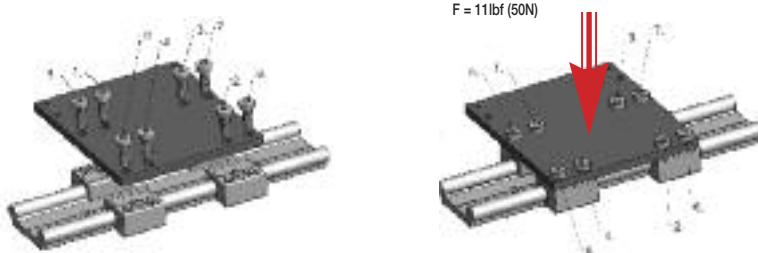

For Parts WK-

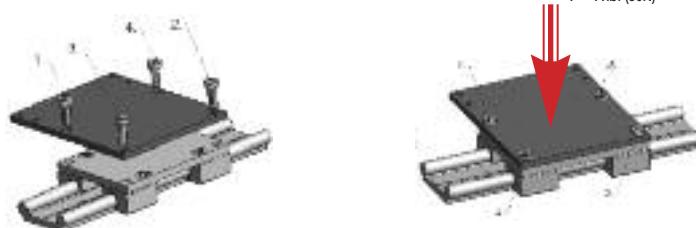

A thrust force of at least 11lbs (50N) applied to the center of the assembly is recommended during the mounting process.

#### Fastener/Torque

W-06: M4 = 13.27 lbf · in (1.5 Nm)  
W-10: M6 = 53 lbf · in (6 Nm)  
W-16: M8 = 133 lbf · in (15 Nm)  
W-20: M8 = 133 lbf · in (15 Nm)

# DryLin® W Linear Guide Systems

## Technical Information

**igus®**





Type	Carriage Length (in.) mm	Carriage Width (in.) mm	Coy (lbs) N	Coz (lbs) N	Mox (lbf · ft) Nm	Moy (lbf · ft) Nm	Moz (lbf · ft) Nm
WW-06-30-06	(2.36) 60	(2.13) 54	(377) 1680	(377) 1680	(18) 25	(25) 34	(25) 34
WW-06-30-08	(3.15) 80	(2.13) 54	(377) 1680	(377) 1680	(18) 25	(37) 51	(37) 51
WW-06-30-10	(3.94) 100	(2.13) 54	(377) 1680	(377) 1680	(18) 25	(50) 68	(50) 68
WW-10-40-10	(3.94) 100	(2.87) 73	(1079) 4800	(1079) 4800	(70) 96	(125) 170	(125) 170
WW-10-40-15	(5.91) 150	(2.87) 73	(1079) 4800	(1079) 4800	(70) 96	(213) 290	(213) 290
WW-10-40-20	(7.87) 200	(2.87) 73	(1079) 4800	(1079) 4800	(70) 96	(302) 410	(302) 410
WW-10-80-10	(3.94) 100	(4.21) 107	(1079) 4800	(1079) 4800	(131) 178	(125) 170	(125) 170
WW-10-80-15	(5.91) 150	(4.21) 107	(1079) 4800	(1079) 4800	(131) 178	(213) 290	(213) 290
WW-10-80-20	(7.87) 200	(4.21) 107	(1079) 4800	(1079) 4800	(131) 178	(302) 410	(302) 410
WW-16-60-10	(3.94) 100	(4.09) 104	(1888) 8400	(1888) 8400	(177) 240	(199) 270	(199) 270
WW-16-60-15	(5.91) 150	(4.90) 104	(1888) 8400	(1888) 8400	(177) 240	(354) 480	(354) 480
WW-16-60-20	(7.87) 200	(4.09) 104	(1888) 8400	(1888) 8400	(177) 240	(509) 690	(509) 690
WW-20-80-15	(5.91) 150	(5.20) 134	(2877) 12800	(2877) 12800	(387) 525	(434) 670	(434) 670
WW-20-80-20	(7.87) 200	(5.20) 134	(2877) 12800	(2877) 12800	(387) 525	(730) 990	(730) 990
WW-20-80-25	(9.84) 250	(5.20) 134	(2877) 12800	(2877) 12800	(387) 525	(922) 1250	(922) 1250

Load capacities for complete carriage plates

### DryLin® W – Rail Systems

	Size 6 (mm)	Size 10 (mm)	Size 16 (mm)	Size 20 (mm)
Single Rail – Round		●	●	●
Single Rail – Square	●	●	●	●
Double Rail	●	●	●	●
Linear Guide System	●	●	●	●

1 Square double profile  
2 Width double rails (mm)

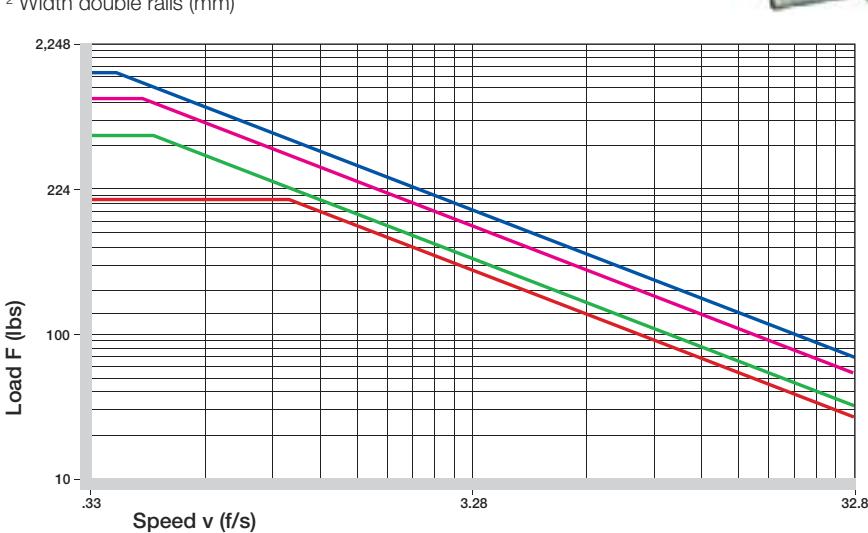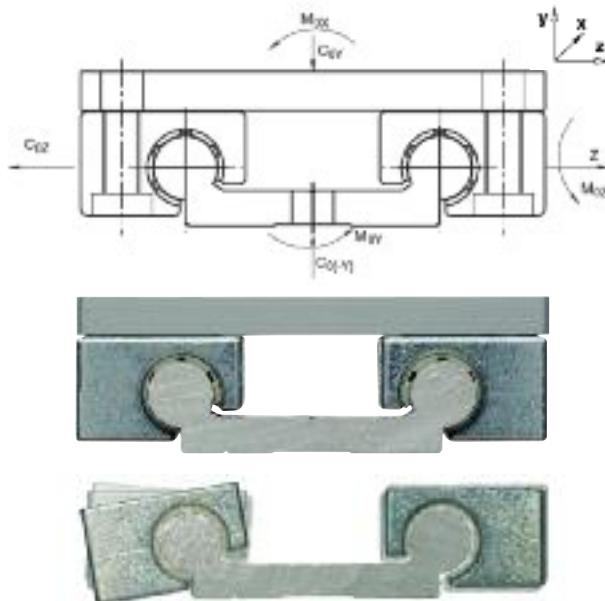

F x V Diagram, maximum permissible dynamic loads (4 bearing system)

DryLin® W Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

mm



igus®

## DryLin® W Linear Guide Systems - Design Notes

DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



Floating bearings for all directions compensate misalignments and parallelism errors

### System Assembling: Rails

Fixed



Floating

Fixed



Floating

Fixed



Floating

Floating bearings facilitate assembly – only necessary for individual rails.

Assembly is easy with the DryLin® WQ square profile. Floating bearings for all directions ( $\pm 1$  mm) compensate for misalignments and parallelism errors between rails. This includes jamming, otherwise only prevented by time-consuming parallel alignment of the system.

Although DryLin® W is a profile rail system, it is able to compensate angular rotation errors about the x-axis. An angular adjustment of  $\pm 7^\circ$  is possible. This effectively eliminates the problems known to occur when fitting to sheet metal.

### Available floating bearing blocks

$\pm .008$  in (0.2 mm)



$\pm .04$  in (1.0 mm)



$\pm .04$  in (1.0 mm)



$+/- 7^\circ$



Rotating – Angular

When using systems with 2 parallel rails, one side must be designated as the “fixed” rail, and the opposite side as the “floating” rail.

#### Why use floating bearings?

- promotes smooth gliding performance and maximizes bearing life
- prevents binding caused by parallelism and angle errors
- decreases necessary drive force and wear by minimizing friction-forces
- Enhances the precision of the system over the bearings’ lifetime.
- Reduce assembly time and cost

#### Fixed Bearings

The “fixed” bearing rail should be positioned closest to the drive force. This rail will determine the precision of the system; no system should contain more than two “fixed” bearings.

#### Floating/Self-Aligning Bearings

The “floating” rail should be the rail located furthest from the drive force. It is to act only as a guide, and will compensate for any misalignments or angle errors in the system ensuring proper functionality.


#### Mounting Surfaces

The mounting surfaces for rails and bearings should have a very flat surface (e.g milled surface) in order to enhance performance. Variations in these surfaces may be compensated for by using floating bearings.


#### Eccentric Forces — The 2:1 Rule

When using linear plain bearings it is important to ensure that the acting forces follow the 2:1 Rule (see drawing). If either the load or the drive force ( $F$ ) is greater than twice the bearing length ( $1X$ ), then a binding or interrupted motion may occur.

If the location of the drive force or load cannot be changed, simply increase the distance between the bearings, or create a counter-balance to move the center-of-gravity back within the 2 to 1 ratio.

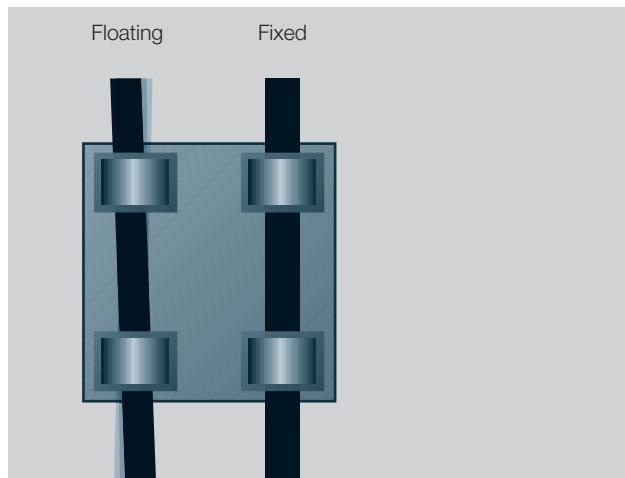

Automatic compensation of parallelism errors

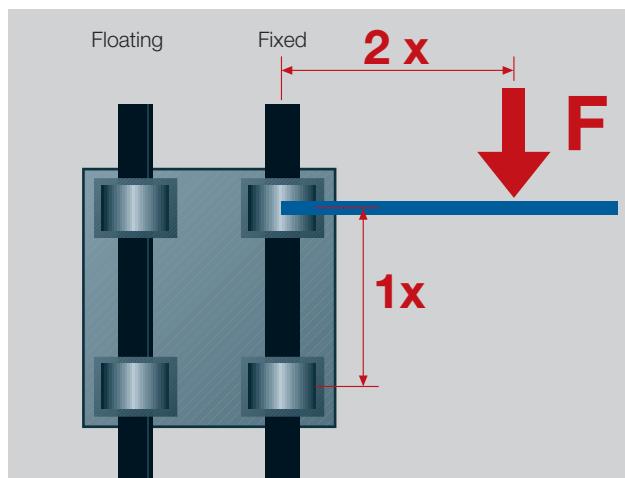

The 2:1 Rule




**igus®**




## DryLin® W Linear Guide Systems Single Rail and Bearing Block - Square

DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

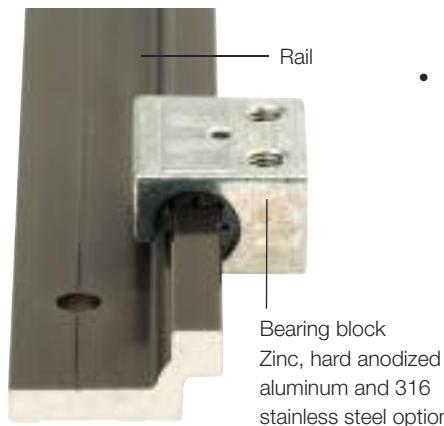

- No cut charges for standard C5/C6 and overall length tolerances

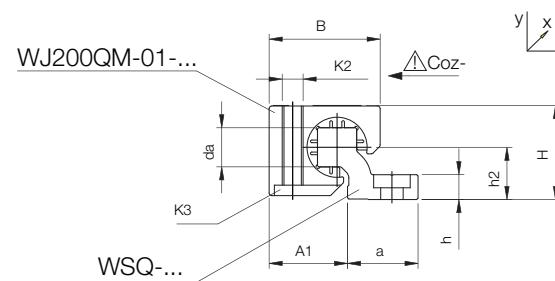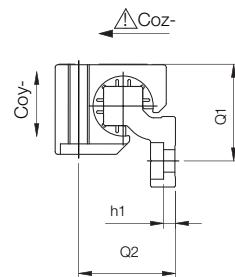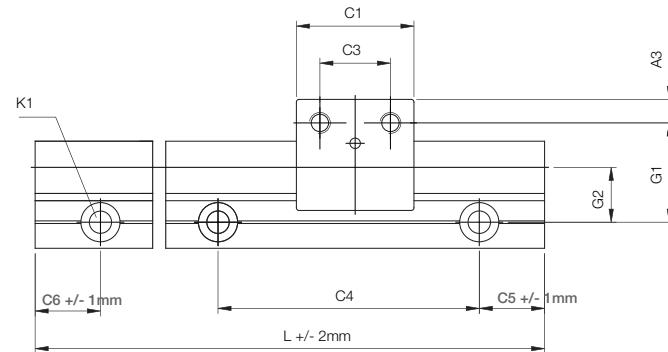

### DryLin® W guide rails – Square

Part No.	Weight (kg/m)	H $\pm 0.07$ (mm)	da -0.1 (mm)	L Max. (mm)	a -0.3 (mm)	h	h1 (mm)	h2 (mm)	G1 (mm)	G2 (mm)	A1 (mm)	Q1 (mm)	Q2 (mm)
WSQ-06	0.23	14	5	3000	14	4	4*	7.5	18	10.5	13.5	17	15
WSQ-10	0.54	20	7.5	4000	25	5.5	5.5*	11	27	17	18.5	26	21
WSQ-16	0.94	27	11.5	4000	27	7.5	3.5	14	33	19	25	32	28
WSQ-20	1.41	36	15	4000	27	9.5	4.5	20	38	21	30	37	37

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for screw DIN 912	Iy (mm <sup>4</sup> )	Iz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
WSQ-06	60	20	49.5	20	49.5	M4*	2200	640	220	100
WSQ-10	120	20	79.5	20	79.5	M6*	16100	3300	950	350
WSQ-16	120	20	79.5	20	79.5	M8	33000	10800	1700	910
WSQ-20	120	20	79.5	20	79.5	M8	56500	34000	2600	2100




Standard bore pattern symmetrical: C5 = C6; please order C5 ≠ C6 with drawing

\* Through hole

# DryLin® W Linear Guide Systems

## Single Rail and Bearing Block - Square

**igus®**

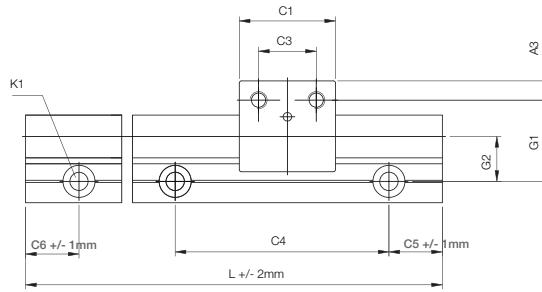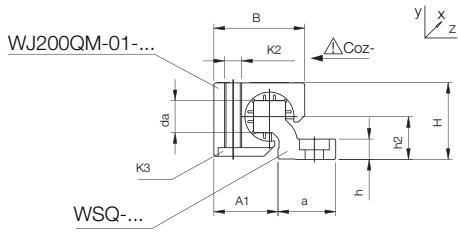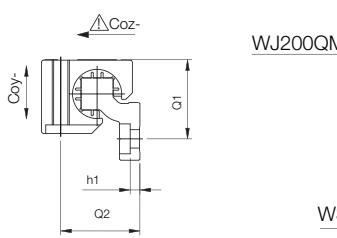

Part No.	Floating bearing play	Weight (g)	B (mm)	C1 (mm)	C3 (mm)	A3 (mm)	K2 (mm)	K3 (mm)	Static load capacity
									Coy lbf (N) Coz+ lbf (N) Coz- lbf (N)

### Zinc Block

WJ200QM-01-06	–	16	18	19	10	4.5	M4	M3	94 (420) 94 (420) 31 (140)
WJ200QM-01-10	–	41	26	29	16	6.5	M6	M5	270 (1200) 270 (1200) 56 (250)
WJ200QM-01-16	–	100	34.5	36	18	9	M8	M6	472 (2100) 472 (2100) 89 (400)
WJ200QM-01-20	–	190	42.5	45	27	9	M8	M6	719 (3200) 719 (3200) 112 (500)

### Floating Z-Direction

WJ200QM0106LLZ	$\pm 0.5$	16	18	19	10	4.5	M4	M3	94 (420) 94 (420) 31 (140)
WJ200QM0110LLZ	$\pm 0.7$	41	26	29	16	6.5	M6	M5	270 (1200) 270 (1200) 56 (250)
WJ200QM0116LLZ	$\pm 1.0$	100	34.5	36	18	9	M8	M6	472 (2100) 472 (2100) 89 (400)
WJ200QM0120LLZ	$\pm 1.0$	190	42.5	45	27	9	M8	M6	719 (3200) 719 (3200) 112 (500)

### Floating Y-Direction

WJ200QM0106LLY	$\pm 0.5$	16	18	19	10	4.5	M4	M3	94 (420) 94 (420) 31 (140)
WJ200QM0110LLY	$\pm 0.7$	41	26	29	16	6.5	M6	M5	270 (1200) 270 (1200) 56 (250)
WJ200QM0116LLY	$\pm 1.0$	100	34.5	36	18	9	M8	M6	472 (2100) 472 (2100) 89 (400)
WJ200QM0120LLY	$\pm 1.0$	190	42.5	45	27	9	M8	M6	719 (3200) 719 (3200) 112 (500)

### Aluminum Block

WJ200QM0106AL	–	7	18	19	10	4.5	M4	M3	94 (420) 94 (420) 31 (140)
WJ200QM0110AL	–	20	26	29	16	6.5	M6	M5	270 (1200) 270 (1200) 56 (250)
WJ200QM0116AL	–	47	34.5	36	18	9	M8	M6	472 (2100) 472 (2100) 89 (400)
WJ200QM0120AL	–	94	42.5	45	27	9	M8	M6	719 (3200) 719 (3200) 112 (500)

### Floating Z-Direction

WJ200QM0106ALZ	$\pm 0.5$	16	18	19	10	4.5	M4	M3	94 (420) 94 (420) 31 (140)
WJ200QM0110ALZ	$\pm 0.7$	41	26	29	16	6.5	M6	M5	270 (1200) 270 (1200) 56 (250)
WJ200QM0116ALZ	$\pm 1.0$	100	34.5	36	18	9	M8	M6	472 (2100) 472 (2100) 89 (400)
WJ200QM0120ALZ	$\pm 1.0$	190	42.5	45	27	9	M8	M6	719 (3200) 719 (3200) 112 (500)

### Floating Y-Direction

WJ200QM0106ALY	$\pm 0.5$	16	18	19	10	4.5	M4	M3	94 (420) 94 (420) 31 (140)
WJ200QM0110ALY	$\pm 0.7$	41	26	29	16	6.5	M6	M5	270 (1200) 270 (1200) 56 (250)
WJ200QM0116ALY	$\pm 1.0$	100	34.5	36	18	9	M8	M6	472 (2100) 472 (2100) 89 (400)
WJ200QM0120ALY	$\pm 1.0$	190	42.5	45	27	9	M8	M6	719 (3200) 719 (3200) 112 (500)

DryLin® W Linear Guide Systems  
Single Rail and Bearing Block - Square

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

mm





**igus®**

## DryLin® W Linear Guide Systems Single Rail and Bearing Block - Round



DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

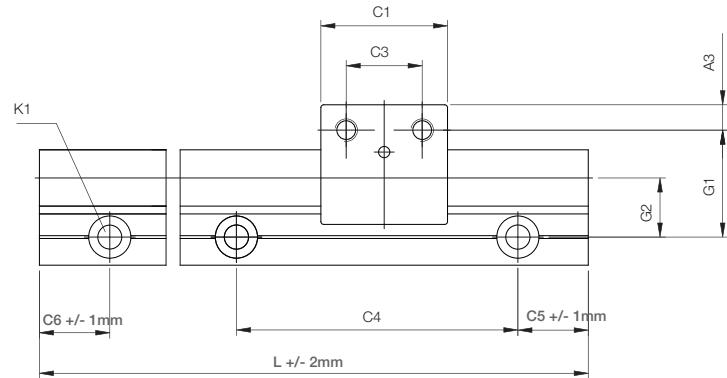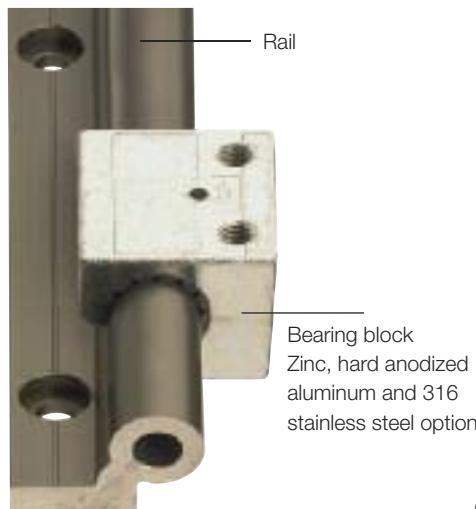

This bearing block orientation is not possible for WS-10.  
Use square WSQ-10

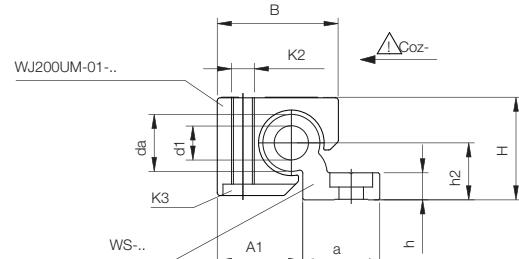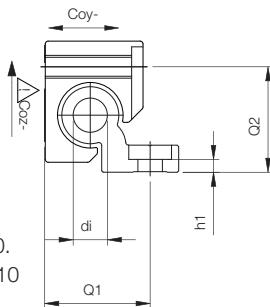

### DryLin® W guide rails – Round

Part No.	Weight (kg/m)	H $\pm 0.07$ (mm)	da -0.1 (mm)	di (mm)	L Max. (mm)	a -0.3 (mm)	h (mm)	h1 (mm)	h2 (mm)	G1 (mm)	G2 (mm)	A1 (mm)	Q1 (mm)	Q2 (mm)
WS-10	0.62	18	10	–	4000	27	5.5	5.5**	9	27	17	16.5	–	–
WS-16	0.98	27	16	8.0	4000	27	7.5	3.5	14	33	19	25	32	28
WS-20	1.32	36	20	10.2	4000	27	9.5	4.5	20	38	21	30	37	37

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for screw DIN 912	ly (mm <sup>4</sup> )	lz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
WS-10	120	20	79.5	20	79.5	M6**	19000	2850	1000	310
WS-16	120	20	79.5	20	79.5	M8	36000	12900	1800	940
WS-20	120	20	79.5	20	79.5	M8	57100	35000	2700	1900



Standard bore pattern symmetrical: C5 = C6; please order C5 ≠ C6 with drawing

\*\* Through hole

# DryLin® W Linear Guide Systems

## Single Rail and Bearing Block - Round

**igus®**

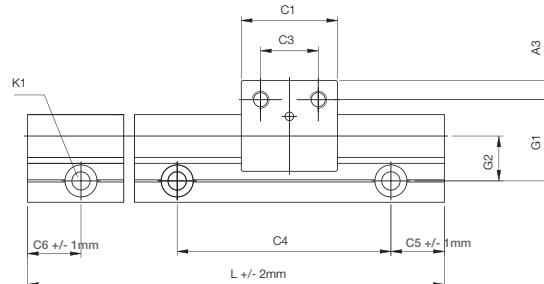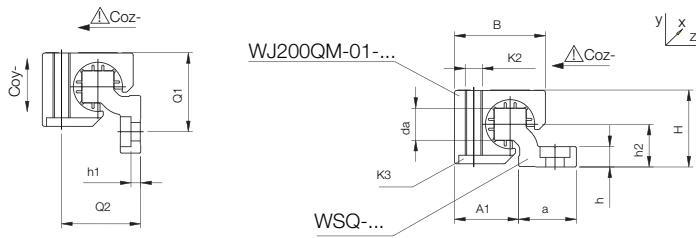

Part No.	Floating bearing play	Weight (g)	B (mm)	C1 (mm)	C3 (mm)	A3 (mm)	K2 (mm)	K3 (mm)	Static load capacity		
									Coy lbf (N)	Coz+ lbf (N)	Coz- lbf (N)
<b>Zinc Block</b>											
WJ200UM-01-10	–	41	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM-01-16	–	100	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM-01-20	–	190	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)
<b>Floating (extra clearance)</b>											
WJ200UM0110LL	±0.2	41	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM0116LL	±0.2	100	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM0120LL	±0.2	190	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)
<b>Aluminum Block</b>											
WJ200UM0110AL	–	20	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM0116AL	–	47	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM0120AL	–	94	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)
<b>Floating</b>											
WJ200UM0110ALL	±0.2	41	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM0116ALL	±0.2	100	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM0120ALL	±0.2	190	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)

### DryLin® W Linear Guides with “Turn-to-Fit”



- Manual adjustable clearance by “Turn-To-Fit” function (allen key included in delivery)
- Adjusting screw: max. torque 0.1 Nm
- 100% lubrication-free
- Compact dimensions
- 8 different rail profiles available

Part No.	Weight (g)	B (mm)	C1 (mm)	C3 (mm)	A3 (mm)	K2 (mm)	H (mm)	SW Required Allen Key		G1 (mm)
								(mm)	(mm)	
WJUME-01-10	43	26	29	16	6.5	M6	18	1.5	27	
WJ200UME-01-16	110	34.5	36	18	9	M8	27	2.5	33	
WJ200UME-01-20	222	42.5	45	27	9	M8	36	2.5	38	







**igus®**

## DryLin® W Linear Guide Systems Double Rail and Bearing Block - Square

DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

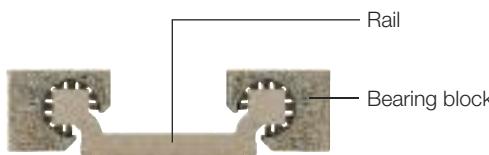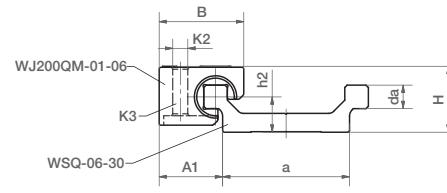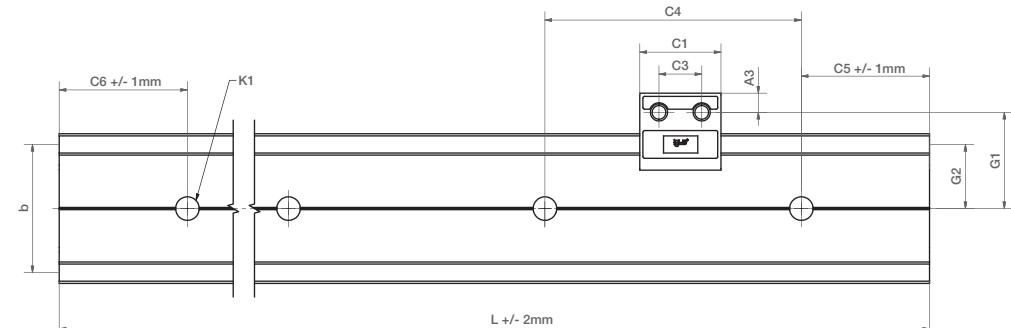


### DryLin® W Guide Rails - Square

Part No.	Weight (kg/m)	H ± 0.07 (mm)	da -0.1 (mm)	di	L Max. (mm)	a -0.3 (mm)	b (mm)	h (mm)	h2 (mm)	G1 (mm)	G2 (mm)	a1 (mm)
WSQ-06-30	0.45	14	5	-	3000	27	30	4	7.5	22.5	15	13.5
WSQ-10-40	0.92	20	7.5		4000	36	40	5.5	11	30	20	18.5
WSQ-10-80	1.41	20	7.5		4000	70	74	5.5	11	27	17	25.0

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for screw DIN 912	ly (mm <sup>4</sup> )	lz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
WSQ-06-30	60	20	49.5	20	49.5	M5	19,000	1,250	1,100	200
WSQ-10-40	120	20	79.5	20	79.5	M6	71,600	5,580	3,000	610
WSQ-10-80	120	20	79.5	20	79.5	M6	335,000	7,070	8,300	700

WSQ-10-80 has two parallel bores, all other sizes have one as shown in photo



## Guide Carriage, Fitted - Square

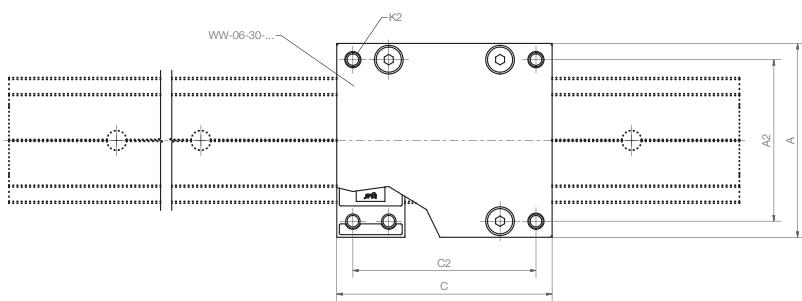

## DryLin® W Carriages, fitted

Part No.	Weight (kg)	A Width (mm)	C Length (mm)	A2 (mm)	C2 (mm)	K2 (mm)	H2 $\pm 0.17$ (mm)	Static load capacity												
								Coy lbs (N)	Coz lbs (N)	Mox lbs (Nm)	Moy lbf-ft (Nm)	Moz lbf-ft (Nm)								
<b>For Guide Rail WSQ-06-30</b>																				
<b>Zinc Block</b>																				
WW-06-30-06	0.10	54	60	45	51	M4	18	377 (1680)	188 (840)	18 (25)	25 (34)	25 (34)								
WW-06-30-08	0.11	54	80	45	71	M4	18	377 (1680)	188 (840)	18 (25)	37 (51)	37 (51)								
WW-06-30-10	0.12	54	100	45	91	M4	18	377 (1680)	188 (840)	18 (25)	50 (68)	50 (68)								
<b>Aluminum Block</b>																				
WW-06-30-06AL	0.07	54	60	45	51	M4	18	377 (1680)	188 (840)	18 (25)	25 (34)	25 (34)								
WW-06-30-08AL	0.08	54	80	45	71	M4	18	377 (1680)	188 (840)	18 (25)	37 (51)	37 (51)								
WW-06-30-10AL	0.09	54	100	45	91	M4	18	377 (1680)	188 (840)	18 (25)	50 (68)	50 (68)								

## DryLin® W Mono-Slide Guide Carriage

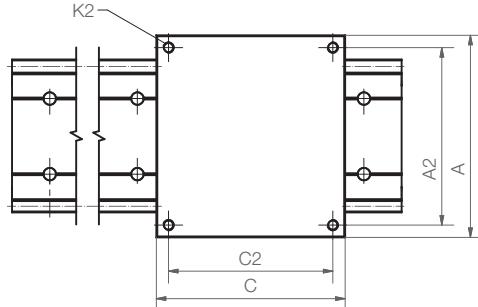

Part No.	Weight (kg)	A Width (mm)	C Length (mm)	A2 (mm)	C2 (mm)	K2 (mm)	H2 $\pm 0.17$ (mm)	Static load capacity				
								Coy lbs (N)	Coz lbs (N)	Mox lbs (Nm)	Moy lbf-ft (Nm)	Moz lbf-ft (Nm)
WWC-10-40-10	0.21	73	100	60	87	M6	22	1079 (4800)	539 (2400)	71 (96)	125 (170)	125 (170)
WWC-10-40-15	0.32	73	150	60	137	M6	22	1079 (4800)	539 (2400)	71 (96)	214 (290)	214 (290)
WWC-10-40-20	0.42	73	200	60	187	M6	22	1079 (4800)	539 (2400)	71 (96)	302 (410)	302 (410)
WWC-10-80-10	0.28	107	100	94	87	M6	22	1079 (4800)	539 (2400)	131 (178)	125 (170)	125 (170)
WWC-10-80-15	0.42	107	150	94	137	M6	22	1079 (4800)	539 (2400)	131 (178)	214 (290)	214 (290)
WWC-10-80-20	0.56	107	200	94	187	M6	22	1079 (4800)	539 (2400)	131 (178)	302 (410)	302 (410)






**igus®**

## DryLin® W Linear Guide Systems Double Rail and Bearing Block - Round

DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

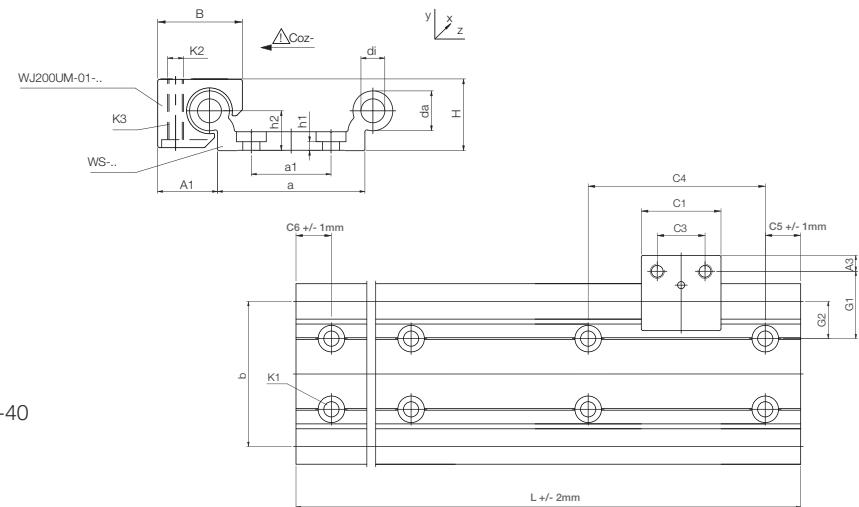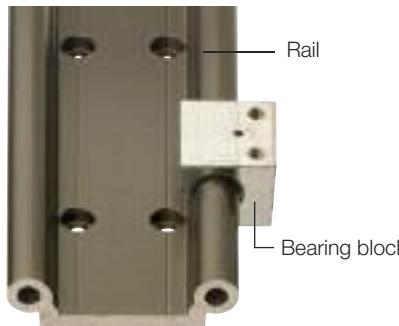

### DryLin® W Guide Rails

Part No.	Weight (kg/m)	H ± 0.07 (mm)	da -0.1 (mm)	di	L Max. (mm)	a -0.3 (mm)	b (mm)	h (mm)	h1 (mm)	h2 (mm)	G1 (mm)	G2 (mm)	a1* (mm)	Q1 (mm)	Q2 (mm)
WS-10-40	1.00	18	10	-	4000	40	40	5.5	5.5**	9	30	20	-	-	-
WS-10-80	1.50	18	10	-	4000	74	74	5.5	5.5**	9	27	17	40	-	-
WS-16-60	1.96	27	16	8.0	4000	54	58	7.5	3.5	14	43	29	-	42	28
WS-20-80	3.30	36	20	10.2	4000	74	82	9.5	4.5	20	38	21	40	37	37

\* WS-10-40 and WS-16-60 have a single row of mounting holes down the center line

\*\* WS-10-80 and WS-20-80 have two parallel rows of mounting holes

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for screw DIN 912	ly (mm <sup>4</sup> )	Iz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
WS-10-40	120	20	79.5	20	79.5	M6***	91000	5100	3600	590
WS-10-80	120	20	79.5	20	79.5	M6***	388000	6100	9200	650
WS-16-60	120	20	79.5	20	79.5	M8	367600	26100	9900	1900
WS-20-80	120	20	79.5	20	79.5	M8	1080000	78700	21000	4000

Standard bore pattern symmetrical: C5 = C6; please order C5 ≠ C6 with drawing. \*\*\* Through bore

### DryLin® W Bearing Block

Part No.	Weight (g)	B (mm)	C1 (mm)	C3 (mm)	A3 (mm)	K2 (mm)	K3 (mm)	Static load capacity		
								Coy (N)	Coz+ (N)	Coz- (N)
<b>Zinc Block</b>										
WJ200UM-01-10	41	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM-01-16	100	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM-01-20	190	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)
<b>Aluminum Block</b>										
WJ200UM0110AL	41	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM0116AL	100	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM0120AL	190	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)
<b>Stainless Block</b>										
WJ200UM0110AL	41	26	29	16	6.5	M6	M5	270 (1200)	270 (1200)	56 (250)
WJ200UM0116AL	100	34.5	36	18	9	M8	M6	472 (2100)	472 (2100)	89 (400)
WJ200UM0120AL	190	42.5	45	27	9	M8	M6	719 (3200)	719 (3200)	112 (500)



# DryLin® W Linear Guide Systems

## Guide Carriage, Fitted - Round

**igus®**



\*DryLin® W manual clamp (optional)  
Use suffix HKA to the end of the part number when ordering  
Example: WW-16-60-15HKA

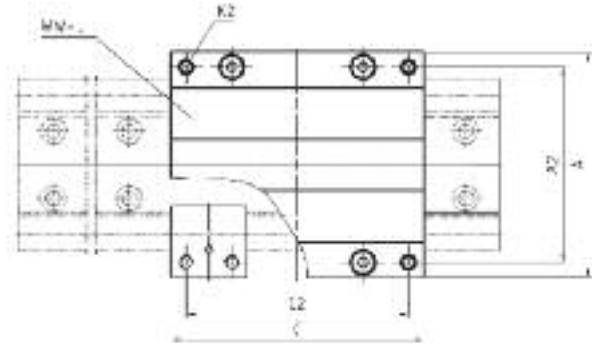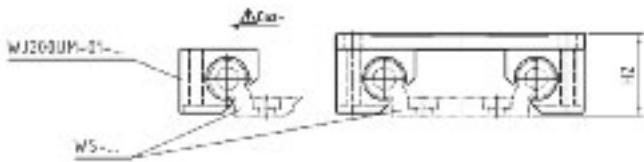

Also available as version with adjustable clearance in installation sizes 10, 16 and 20:  
Order example, WWE-10-40-15

### DryLin® W Carriages, fitted

Part No.	Weight (kg)	A Width (mm)	C Length (mm)	A2 (mm)	C2 (mm)	K2 (mm)	H2 $\pm 0.17$ (mm)	Static load capacity				
								Coy lbs (N)	Coz lbs (N)	Mox lbs (Nm)	Moy lbf-ft (Nm)	Moz lbf-ft (Nm)

(See Page 47.7 for more information)

#### For Guide Rail WS-10-40

##### Zinc Block

WW-10-40-10	0.29	73	100	60	87	M6	24	1079 (4800)	539 (2400)	70 (96)	125 (170)	125 (170)
WW-10-40-15	0.34	73	150	60	137	M6	24	1079 (4800)	539 (2400)	70 (96)	213 (290)	213 (290)
WW-10-40-20	0.40	73	200	60	187	M6	24	1079 (4800)	539 (2400)	70 (96)	302 (410)	302 (410)

##### Aluminum Block

WW-10-40-10AL	0.29	73	100	60	87	M6	24	1079 (4800)	539 (2400)	70 (96)	125 (170)	125 (170)
WW-10-40-15AL	0.34	73	150	60	137	M6	24	1079 (4800)	539 (2400)	70 (96)	213 (290)	213 (290)
WW-10-40-20AL	0.40	73	200	60	187	M6	24	1079 (4800)	539 (2400)	70 (96)	302 (410)	302 (410)

#### For Guide Rail WS-10-80

##### Zinc Block

WW-10-80-10	0.34	107	100	94	87	M6	24	1079 (4800)	539 (2400)	131 (178)	125 (170)	125 (170)
WW-10-80-15	0.42	107	150	94	137	M6	24	1079 (4800)	539 (2400)	131 (178)	213 (290)	213 (290)
WW-10-80-20	0.50	107	200	94	187	M6	24	1079 (4800)	539 (2400)	131 (178)	302 (410)	302 (410)

##### Aluminum Block

WW-10-80-10AL	0.34	107	100	94	87	M6	24	1079 (4800)	539 (2400)	131 (178)	125 (170)	125 (170)
WW-10-80-15AL	0.42	107	150	94	137	M6	24	1079 (4800)	539 (2400)	131 (178)	213 (290)	213 (290)
WW-10-80-20AL	0.50	107	200	94	187	M6	24	1079 (4800)	539 (2400)	131 (178)	302 (410)	302 (410)

#### For Guide Rail WS-16-60

##### Zinc Block

WW-16-60-10	0.71	104	100	86	82	M8	35	1888 (8400)	944 (4200)	177 (240)	199 (270)	199 (270)
WW-16-60-15	0.84	104	150	86	132	M8	35	1888 (8400)	944 (4200)	177 (240)	354 (480)	354 (480)
WW-16-60-20	0.97	104	200	86	182	M8	35	1888 (8400)	944 (4200)	177 (240)	508 (690)	508 (690)

##### Aluminum Block

WW-16-60-10AL	0.71	104	100	86	82	M8	35	1888 (8400)	944 (4200)	177 (240)	199 (270)	199 (270)
WW-16-60-15AL	0.84	104	150	86	132	M8	35	1888 (8400)	944 (4200)	177 (240)	354 (480)	354 (480)
WW-16-60-20AL	0.97	104	200	86	182	M8	35	1888 (8400)	944 (4200)	177 (240)	508 (690)	508 (690)

#### For Guide Rail WS-20-80

##### Zinc Block

WW-20-80-15	1.20	134	150	116	132	M8	44	2878 (12800)	1439 (6400)	387 (525)	494 (670)	494 (670)
WW-20-80-20	1.30	134	200	116	182	M8	44	2878 (12800)	1439 (6400)	387 (525)	730 (990)	730 (990)
WW-20-80-25	1.50	134	250	116	232	M8	44	2878 (12800)	1439 (6400)	387 (525)	922 (1250)	922 (1250)


##### Aluminum Block

WW-20-80-15AL	1.20	134	150	116	132	M8	44	2878 (12800)	1439 (6400)	387 (525)	494 (670)	494 (670)
WW-20-80-20AL	1.30	134	200	116	182	M8	44	2878 (12800)	1439 (6400)	387 (525)	730 (990)	730 (990)
WW-20-80-25AL	1.50	134	250	116	232	M8	44	2878 (12800)	1439 (6400)	387 (525)	922 (1250)	922 (1250)






## DryLin® W – manual clamp

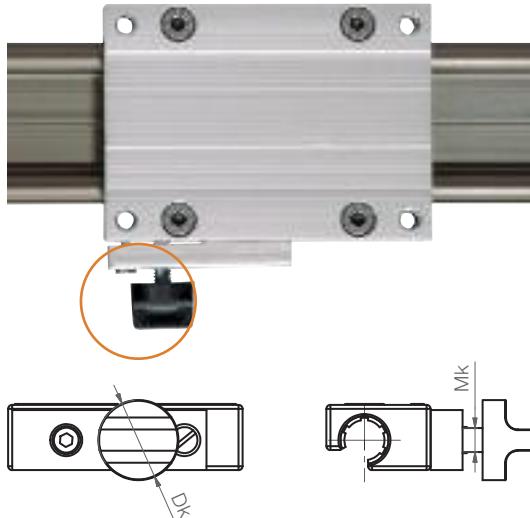

## Special properties

- Cost-efficient option
- Universal applications
- Clamping force based on tightening torque
- Clamping by locking friction

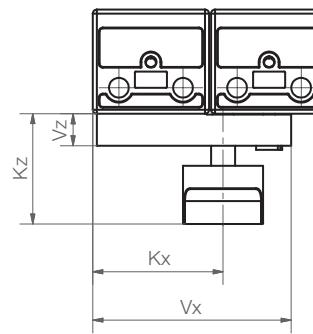

## DryLin® W Manual Clamp

Part number	Mk (mm)	Vx (mm)	Kx (mm)	Vz (mm)	Kz (mm)	Dk (mm)	Min. holding strength** (N)	Min. tightening torque (Nm)
WHKA-10*	M6	50	33	8	28	20	30	0.8
WHKA-16*	M8	72	32	10	31	26	60	1.5
WHKA-20*	M8	90	29	10	31	26	70	1.5


\*DryLin® W manual clamp is also available as a complete carriage us suffix HKA when ordering. Example: WW-10-40-10HKA

► Complete carriage WW page X.XX

\*\* Condition: dry rail surface


**Please Note:** The creep behavior of the clamped plastic results in reduced clamping force over time (up to 70%). Therefore safety-related parts should use an alternative method.

### DryLin® W – manual clamp

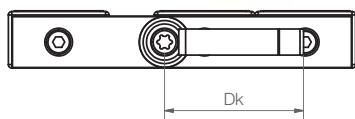

#### Special properties

- Available as single part or assembled on guide carriage
- Clamping force based on tightening torque
- Clamping by locking friction

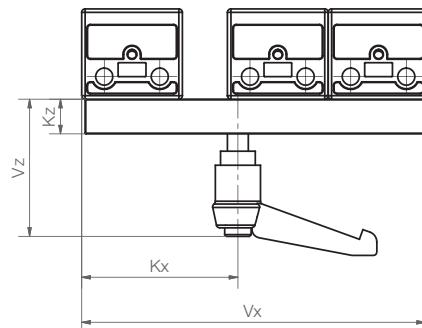

### DryLin® W Manual Clamp

Part number	Mk (mm)	Vx (mm)	Kx (mm)	Vz (mm)	Kz (mm)	Dk (mm)	Min. holding strength** (N)	Min. tightening torque (Nm)
WHKD-10*	M6	99	45	40	10	40	70 N	2.5 Nm
WHKD-20*	M8	149	87	–	15	–	90 N	3.5 Nm

\*DryLin® W manual clamp is also available as a complete carriage us suffix HKA when ordering. Example: WW-10-40-10HKD

► Complete carriage WW page X.XX

\*\* Condition: dry rail surface

**Please Note:** The creep behavior of the clamped plastic results in reduced clamping force over time (up to 70%). Therefore safety-related parts should use an alternative method.

### DryLin® W – digital measuring device

#### Special properties

- **Installation:** right (R) or left (L) of guide carriage
- **Measuring principle:** magnetic with magnetic tape (10 x 1.4 mm)
- **Resolution:** 0.1 mm
- **Accuracy:**  $\pm 0.1 + 0.01 \times \text{measured length (m)} \text{ mm}$
- **Service life:** 5 years powered 100% of the time
- **Operation temperature:**  $+32^{\circ}\text{F} \text{ to } +140^{\circ}\text{F}$
- **Display:** LCD
- **Repeat accuracy:**  $\pm 1 \text{ Digit}$
- **Absolute and incremental measuring method**



#### Clean room suitability and ESD-compatibility

Wireless measuring device with direct, digital indication of position  
Part No.: WKM-10 / WKM-20



You can find detailed results on  
► Page 25.12




An additional DryLin® W solution is a combined rolling and sliding carriage. Because of the defined load direction the required drive force is reduced by a maintenance free roller bearing. This system represents an ideal solution for many hand powered applications. Ideal for machine tool guards, furniture and camera/film applications.

- Roller made of plastic
- Liner made of iglide® J
- Low drive force needed, friction: 0.04-0.05μ
- Cost-effective vs. other roller systems
- Can be combined with 7 linear profile rails

### Compatible Guide Rails


WS-10	Page 47.12
WS-10-40	Page 47.16
WS-10-80	Page 47.16
WS-16	Page 47.12
WS-16-60	Page 47.16
WS-20	Page 47.12
WS-20-80	Page 47.16

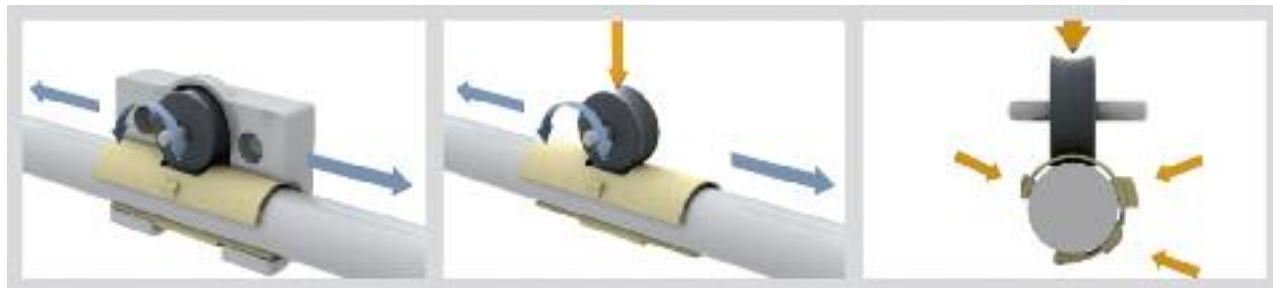

### Load Data and Dimensions

Part number	Static. load capacity Co [N]	Dynamic. load capacity Cz+ at total running distance (km)			F · v max. (N · m/s)
		10	100	200	
		[N]	[N]	[N]	
WJRM-01-10	250	250	90	50	50
WJRM-01-16	400	400	140	70	80
WJRM-01-20	550	550	200	100	80

Part number	Friction in +z direction	Weight (g)	B	B2	C1	C3	G1	A3	A1	K2	K3 (N)	Q1	Q2
WJRM-01-10	< 0.1	46	26	2.5	35	22	27	6.5	16.5	M6	M5	-	-
WJRM-01-16	< 0.1	131	34.5	5	48	30	33	9	25	M8	M6	32	28
WJRM-01-20	< 0.1	232	42.5	6	52	34	38	9	30	M8	M6	37	37

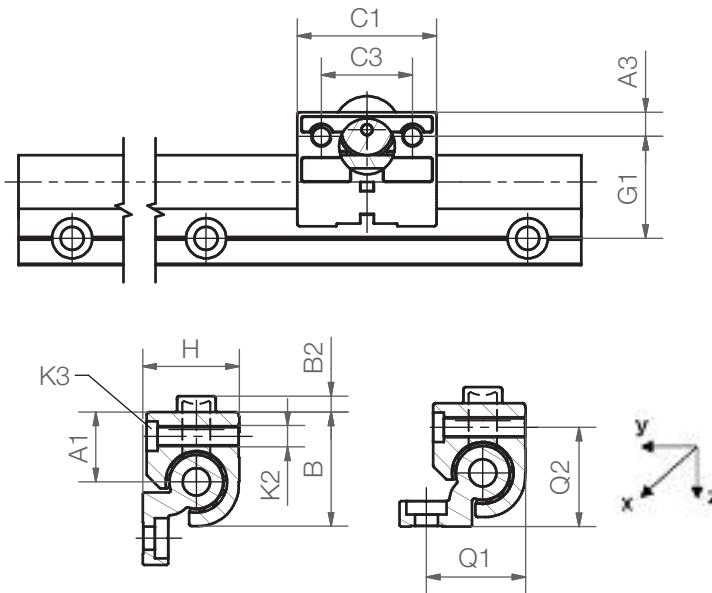

This installation position is not possible  
for combination of WJRM-01-10 with rail  
WS-10/WS-10-40/WS-10-80

#### Load Data and Dimensions

Part No.	Friction in +z direction	Weight (g)	B	B2	C1	C3	G1	A3	A1	K2	K3	Q1	Q2
			(mm)										
WJRM-01-10	<0.1	46	26	2.5	35	22	27	6.5	16.5	M6	M5	-	-
WJRM-01-16	<0.1	131	34.5	5	48	30	33	9	25	M8	M6	32	28
WJRM-01-20	<0.1	232	42.5	6	52	34	38	9	30	M8	M6	37	37

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

mm





igus®

## DryLin® W Linear Guide Systems, 316 Stainless Steel

DryLin® W Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

- Oil-free
- Low friction
- Lightweight

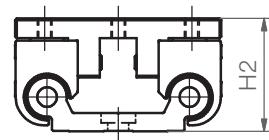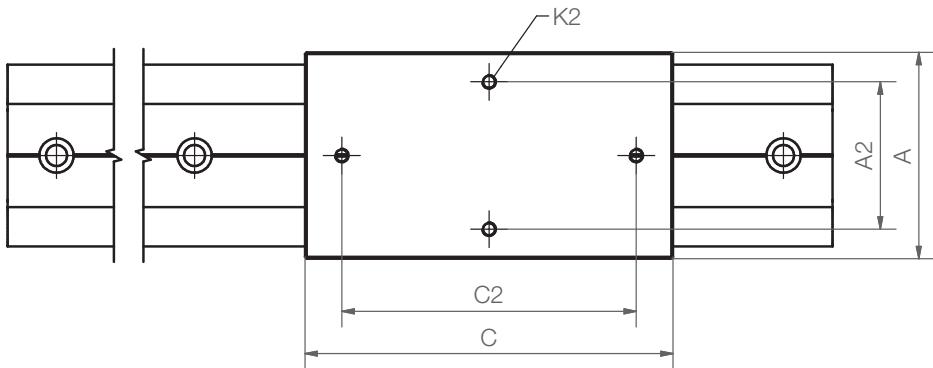




### Load Data and Dimensions

Part No.	Weight (kg)	A Width (mm)	C Length (mm)	A2 (mm)	C2 (mm)	K2 (mm)	H2 $\pm 0.17$ (mm)	Static load capacity				
								Coy lbs (N)	Coz lbs (N)	Mox lbs (Nm)	Moy lbf-ft (Nm)	Moz lbf-ft (Nm)
WWH-16-60-15	.96	84	150	60	120	M6	46	360 (1600)	360 (1600)	33 (45)	28 (38)	57 (77)

fitting rail: WS-16-60

# DryLin® W Linear Guide Systems, 316 Stainless Steel

**igus®**

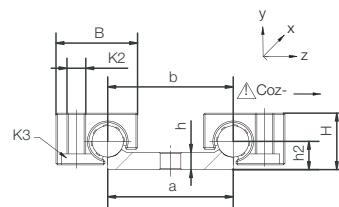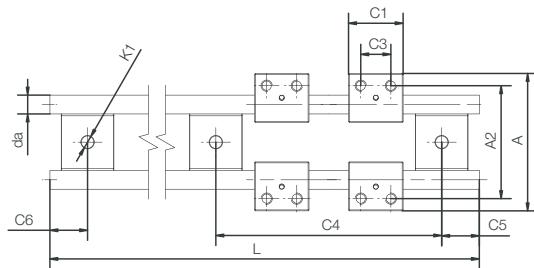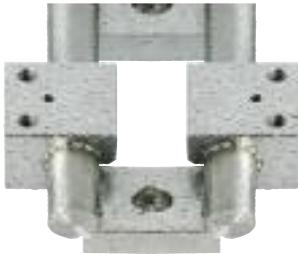

## DryLin® W Guide Rail, Double, ø 10 mm

Part No.	Suitable bearing (Part No.)	Weight (kg/m)	da h9 (mm)	L Max. (mm)	a -0.3 (mm)	b (mm)	h (mm)	h2 (mm)
WS-10-40-ES (FG)	WJUM-01-10-ES (FG)	1.58	10	3000	40	40	5.5	9

(FG) - cast 316

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for screw DIN 912
WS-10-40-ES (FG)	120	20	79.5	20	79.5	M6




(FG) - cast 316

## DryLin® W Bearing Blocks

Part No.	Weight (g)	H ± 0.07 (mm)	B (mm)	C1 (mm)	C3 (mm)	A (mm)	A2 (mm)	K2 (mm)	K3 Countersunk screw	Static load capacity		
										Coy lbs (N)	Coz+ lbs (N)	Coz- lbs (N)
WJUM-01-10-ES (FG)*	57	18	26	29	16	73	60	M6	M5	854 (3800)	854 (3800)	213 (950)

(FG) - cast 316

\* TUMO-01-10 liners are optional extra, page 47.26, for high temperatures

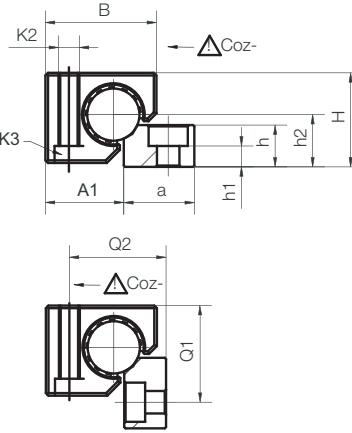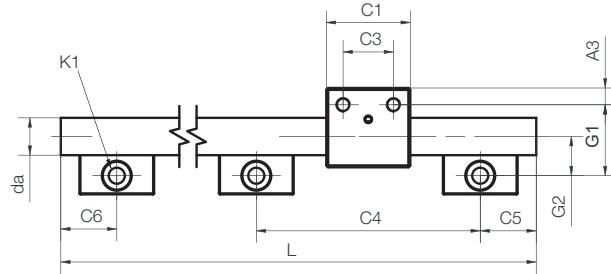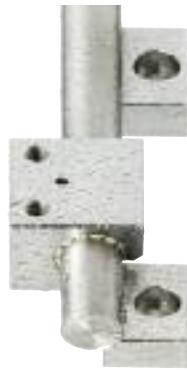

## DryLin® W-Guide rail, single, ø 20 mm

Part No.	Suitable bearing (Part No.)	Weight (kg/m)	da h9 (mm)	L Max. (mm)	a -0.3 (mm)	h (mm)	h2 (mm)	G2 (mm)
WS-20-ES (FG)	WJUM-01-20-ES (FG)	3.37	20	3000	27	16	20	21

(FG) - cast 316

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for screw DIN 912	h1 (mm)	ly (mm <sup>4</sup> )	lz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
WS-20-ES (FG)	120	20	79.5	20	79,5	M8	8	7854	7854	785	785

(FG) - cast 316

## DryLin® W housing bearings


Part No.	WT (g)	H ± 0.07 (mm)	B (mm)	C1 (mm)	C3 (mm)	G1 (mm)	A3 (mm)	A1 (mm)	K2 (mm)	Countersunk- head screw		Q1 (mm)	Q2 (mm)	Static load capacity		
														Coy lbs (N)	Coz+ lbs (N)	Coz- lbs (N)
WJUM-01-20-ES (FG)*	280	36	42.5	45	27	38	9	30	M8	M6	37	37	2473 (11000)	2473 (11000)	427 (1900)	

\* TUMO-01-20 liners are optional for high temperatures up to 482°F

(FG) - cast 316

DryLin® W Linear  
Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm



**igus®**


## DryLin® W Linear Guide Systems

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

DryLin® W Linear  
Guide Systems

**igus®**

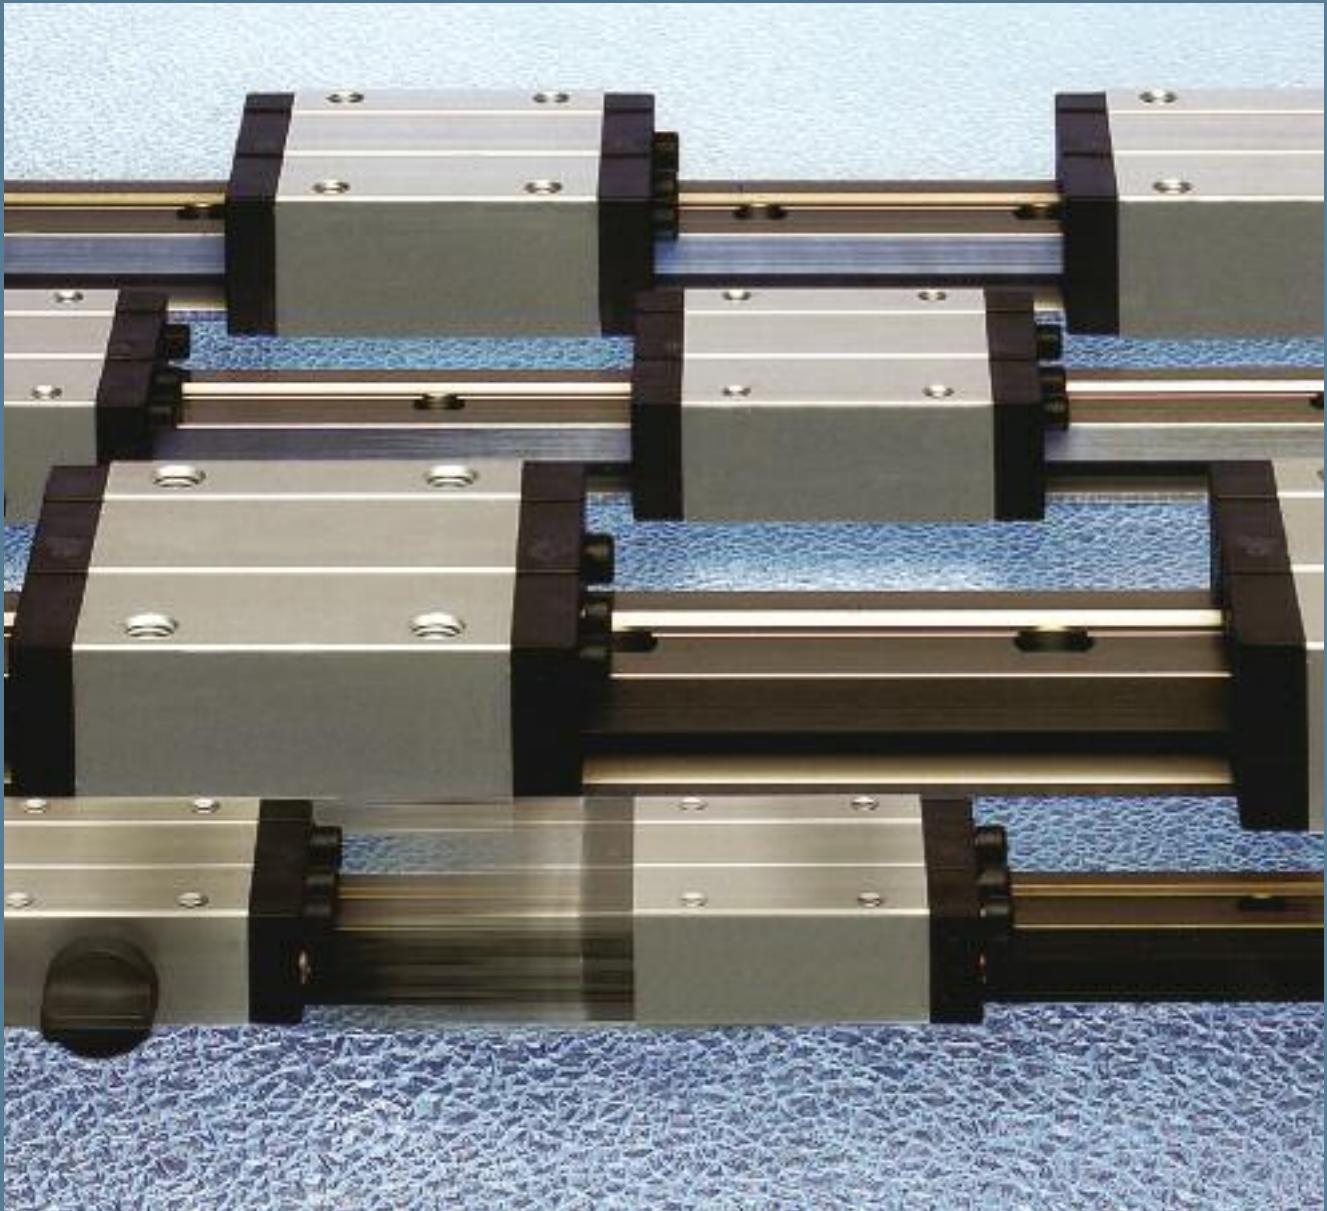

**DryLin® T Linear Guide System**  
Maintenance-Free, Adjustable,  
and Quiet

# DryLin® T Selection Guide



## Series TW-01-XX Adjustable clearance

- Pre-set from factory for optimal standard clearance
- Clearance can be reduced for higher precision requirements
- Clearance can be increased to compensate for poor mounting surface tolerances



## Series TWA-01-XX Automatic

- Clearance automatically adjusts
- Maintains better precision over lifetime vs. TW-01 version



## Series TW-HKA Manual Hand Clamp

- Allows a simple hand-clamp function for light-duty applications
- Not recommended for vertical applications



## Series TW-02-XX Heavy Duty

- Better for aggressive and heavy industrial environments due to metal end caps
- Ideal for applications containing weld splatter, dirt, wood chips, etc.
- Same loading as Series TW-01



## Miniature

- Lightweight
- Ideal for tight design constraints
- Cost-effective








## Series TWBM Heavy-Duty Clamps


- Offer higher clamping force than TW-HKA
- Holding forces up to 112 lbs

## Temperature

## Maximum Load

-40°F to +194°F (-40°C to +90°C)	From 900 lbs (4000 N) to 3140 lbs (14,000 N)
-40°F to +194°F (-40°C to +90°C)	From 900 lbs (4000 N) to 3140 lbs (14,000 N)
-40°F to +194°F (-40°C to +90°C)	From 900 lbs (4000 N) to 3140 lbs (14,000 N)
-40°F to +194°F (-40°C to +90°C)	From 900 lbs (4000 N) to 3140 lbs (14,000 N)
-40°F to +194°F (-40°C to +90°C)	From 108 lbs (480 N) to 315 lbs (1,400 N)
-40°F to +194°F (-40°C to +90°C)	NA

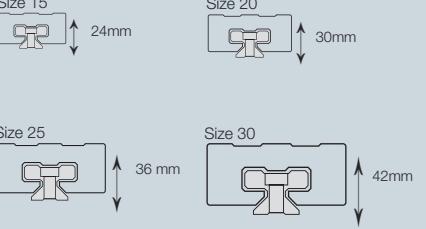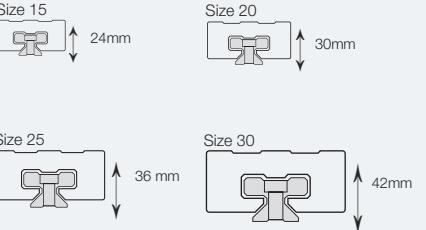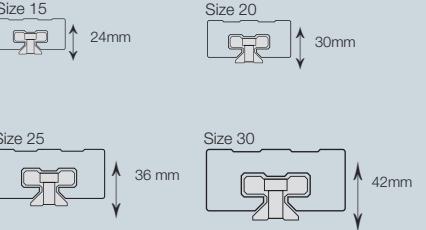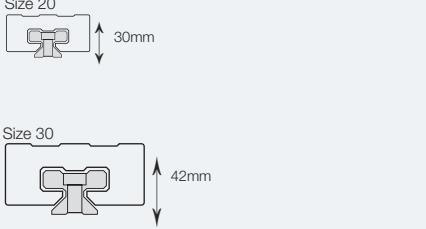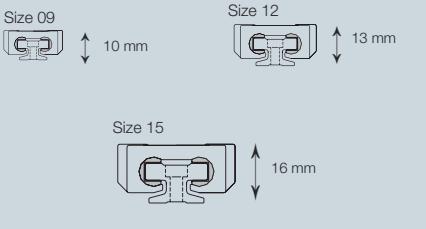Maximum Speed	Maximum Rail Length	Size Range	Rail Material	Carriage Material
49 fps (15 m/s)	12 ft (4m upon request)		Hard-Anodized Aluminum	Plastic liners Aluminum carriages Stainless steel fasteners
49 fps (15 m/s)	12 ft (4m upon request)		Hard-Anodized Aluminum	Plastic liners Aluminum carriages Stainless steel fasteners
49 fps (15 m/s)	12 ft (4m upon request)		Hard-Anodized Aluminum	Plastic liners Aluminum carriages Stainless steel fasteners
49 fps (15 m/s)	12 ft (4m upon request)		Hard-Anodized Aluminum	Plastic liners Anodized Aluminum
49 fps (15 m/s)	6.56 ft (2000 mm)		Hard-Anodized Aluminum	Plastic liners Chromated zinc carriage
NA	NA		Hard-Anodized Aluminum	Anodized Aluminum



**igus®**

## DryLin® T Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

### Technical Data

#### Sliding elements:

Self-lubricating polymer

#### Material:

iglide® J\*

#### Max. surface speed:

49 fpm (15 m/s)

#### Temperature range:

-40° F to +194° F

(-40 °C to +90 °C)

\* Other materials upon request

### Special Features



Cleanroom certified -  
IPA Fraunhofer




ESD compatible  
(electrostatic  
discharge)



Free of toxins -  
RoHS 2002/95/EC



DryLin® linear guide system  
in a treatment machine

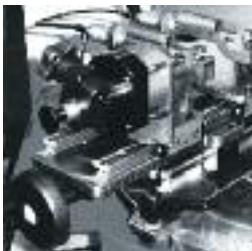


Valve machining produces  
an extreme environment



DryLin® T linear guide  
system in pneumatic  
doors of tool changers

## DryLin® T Linear Guide Systems

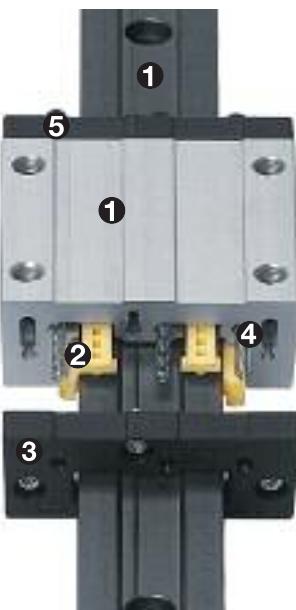

- ❶ The rail is hard anodized, the aluminum carriage housing is clear anodized, or chromated zinc (mini series)
- ❷ 6 sliding iglide® J elements act as guide bearings
- ❸ Clearance can be adjusted manually or automatically (depending on series)
- ❹ All steel parts are galvanized or stainless steel
- ❺ The end plate is solid plastic with an optional aluminum - HD carriage option


### Technical Data

#### Guide Rails

Material	Aluminum, extruded
Substance	6063-T6 or 6060-T66 (Al Mg Si 0.5)
Coating	Hard-anodized aluminum, .002" (50 µm)
Hardness	500 HV

#### Sliding Carriages

Base Structure	Aluminum, extruded section (TK01/TKA/TKC1), Zinc (TK04)
Material	6060-T66 (Al Mg Si 0.5)
Coating	Clear Anodized
Sliding Elements	iglide® J, maintenance-free, plain bearing material
Bolts	Stainless steel
Springs	Stainless steel
Cover	Plastic or aluminum (HD version)
Max. Surface Speed	49 ft/s (15 m/s)
Temperature Range	-40°F to 194°F (-40°C to +90°C)



## Features


- With low inertia rates, high accelerations and speeds up to 49 fps (15 m/s) are possible
- Oil and maintenance-free
- Ideal for use in lab, food-processing, and packaging machinery
- Excellent corrosion resistance
- Dimensionally interchangeable with common linear ball bearings
- Excellent in dirty environments without the need of wipers or seals




DryLin® T in a demanding packaging machine application

## DryLin® T - Load / Speed Capacity

DryLin® T Linear Guide Systems can hold high static loads because of large surface areas. The maximum load in the y-direction is higher than in the z-direction, since the bearing surface is doubled in the y-direction. With a low rate of inertia, high accelerations and short term extreme speeds up to 49 ft/s (15 m/s) are possible.

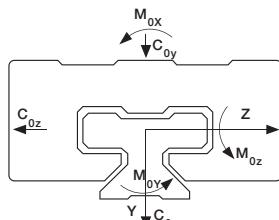


Designation of load directions

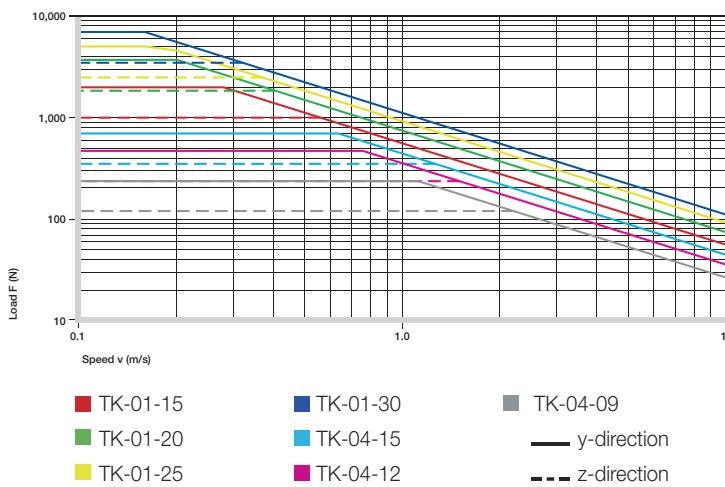

Type	$C_{0Y}$ lbs (kN)	$C_{0(Y)}$ lbs (kN)	$C_{0Z}$ lbs (kN)	$M_{0X}$ ft lbs (Nm)	$M_{0Y}$ ft lbs (Nm)	$M_{0Z}$ ft lbs (Nm)						
01-15	900	4	900	4	450	2	24	32	18	25	18	25
01-20	1665	7.4	1665	7.4	833	3.7	62	85	32	45	32	45
01-25	2250	10	2250	10	1125	5	92	125	48	65	48	65
01-30	3140	14	3140	14	1570	7	148	200	74	100	74	100
04-09	108	.48	108	.48	54	.24	2.5	3.4	1.3	1.8	1.3	1.8
04-12	215	.96	215	.96	108	.48	6.8	9.2	3.2	4.4	3.2	4.4
04-15	315	1.4	315	1.4	157	0.7	12.5	17	6.0	8	6.0	8

Table 20.1: DryLin® T permissible static load capacity

## Eccentric Forces

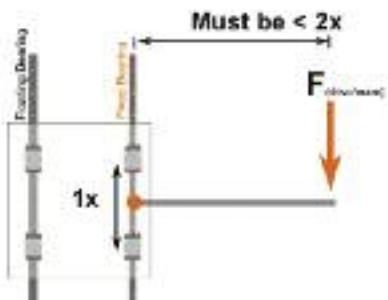

2:1 Rule = permissible distances of the applied forces

### The 2:1 Rule

When using linear plain bearings it is important to ensure that the acting forces follow the 2:1 Rule (see drawing). If either the load or the drive force (F) is greater than twice the bearing length (1x), then a binding or interrupted motion may occur.

If the location of the drive force or load cannot be changed, simply increase the distance between the bearings, or create a counterbalance to move the center-of-gravity back within the 2 to 1 ratio.



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)



**igus®**

## DryLin® T Linear Guide Systems - Fixed and Floating Systems


DryLin® T Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

### DryLin® T - Floating Systems


Maximum float = .04" (1 mm)

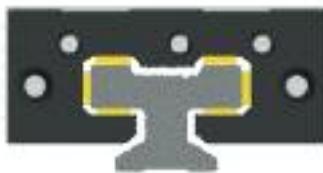

Standard Version

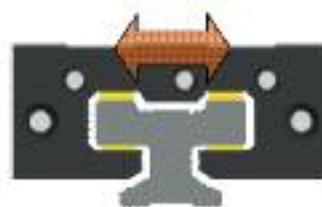

Horizontal Float "LLZ"

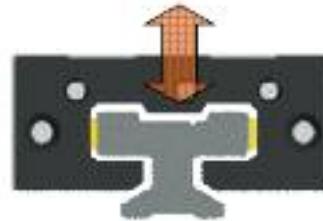

Vertical Float "LLY"

Part-No. Standard
TW-01-15
TW-01-20
TW-01-25
TW-01-30

Part-No. Floating Horizontal
TW-01-15HF
TW-01-20HF
TW-01-25HF
TW-01-30HF


Part No. Floating Vertical
TW-01-15VF
TW-01-20VF
TW-01-25VF
TW-01-30VF

### DryLin® T - Fixed and Floating Bearing Mounting Instructions


When using systems with 2 parallel rails, one side must be designated as the "fixed" rail, and the opposite side the "floating" rail.

#### Why use floating bearings?

- promotes smooth gliding performance and maximizes bearing life
- prevents binding caused by parallelism and angle errors
- decreases necessary drive force and wear by minimizing friction-forces
- Enhances the precision of the system over the bearings' lifetime.
- Reduce assembly time and cost

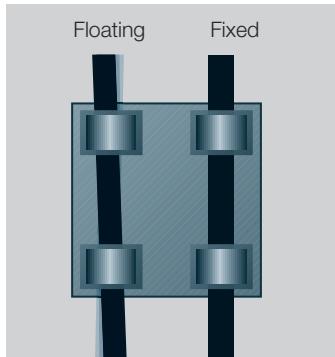

Automatic compensation of parallelism errors

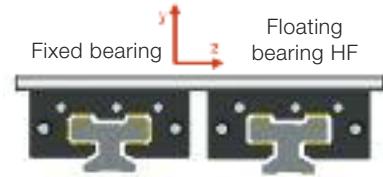

Installation variation horizontal with floating bearing in the Z-direction

#### Fixed Bearings


The "fixed" bearing rail should be positioned closest to the drive force. This rail will determine the precision of the system; no system should contain more than two "fixed" bearings.

#### Floating/Self-Aligning Bearings


The "floating" rail should be the rail located furthest from the drive force. It is to act only as a guide, and will compensate for any misalignments or angle errors in the system ensuring proper functionality.

#### Mounting Surfaces

The mounting surfaces for rails and bearings should have a very flat surface (e.g milled surface) in order to enhance performance. Variations in these surfaces may be compensated for by using floating bearings.

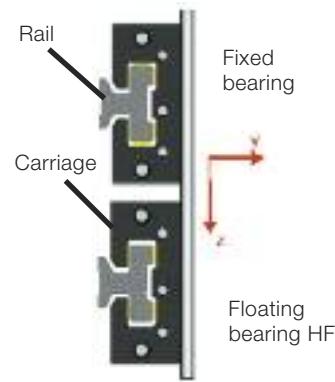

Installation variation lateral with floating bearing in the Z-direction

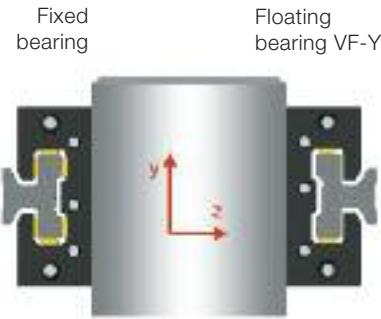

Horizontal mounting version with floating bearing in the Y-direction and lateral mounting carriage



# Cleanroom Suitability and ESD Compatibility of DryLin® Linear Guide Systems by igus® GmbH

All DryLin® guide systems are clearly qualified for clean room applications. The differentiation between the various clean room classes is only dependent on load and speed of the application. The combination of iglide® J and hard anodized aluminum is classified as level 1 in the ESD compatibility according to SEMI E78-0998 (Highest rank).

The following DryLin® guide systems by igus® were examined: N40, W10, T25 and T30.

See below for detailed results.

Linear guide system DryLin® TK-10-30-01:

"For the linear guide system DryLin® TK-10-30-01 by igus®, it is possible, on the calculations of the likelihood of violation of threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm, and 5 µm with motion speed of v = 0.1 m/s, to clearly derive suitability for clean rooms classified as ISO Class 3 according to DIN EN ISO 14644-1."

Linear guide system DryLin® NK-02-40-02:

"For the linear guide system DryLin® NK-02-40-02 by igus®, it is possible, on the calculations of the likelihood of violation of threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm, and 5 µm with motion speed of v = 1 m/s, to clearly derive suitability for clean rooms classified as ISO Class 6 according to DIN EN ISO 14644-1."



The measurement results of the ESD compatibility according to SEMI E78-0998 show that the linear guide system DryLin® NK-02-40-02 can be classified as "level 1" (Highest rank). See Fraunhofer IPA Report No.: IG 0308-295 73.

Linear guide system DryLin® TK-01-25-02:

"For the linear guide system DryLin® TK-01-25-02 by igus®, it is possible, on the calculations of the likelihood of violation of threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm, and 5 µm with motion speed of v = 1 m/s, to clearly derive suitability for clean rooms classified as ISO Class 5 according to DIN EN ISO 14644-1."

The measurement results of the ESD compatibility according to SEMI E78-0998 show that the linear guide system DryLin® TK-01-25-02 can be classified as "level 1" (Highest rank).

Linear guide system DryLin® WK-10-40-15-01:

"For the linear guide system DryLin® WK-10-40-15-01 by igus®, it is possible, on the calculations of the likelihood of violation of threshold values of the detection sizes 0.2 µm, 0.3 µm, 0.5 µm, and 5 µm with motion speed of v = 1 m/s, to clearly derive suitability for clean rooms classified as ISO Class 6 according to DIN EN ISO 14644-1."


The measurement results of the ESD compatibility according to SEMI E78-0998 show that the linear guide system DryLin® WK-10-40-15-01 can be classified as "level 1" (Highest rank).

See Fraunhofer IPA Report No.: IG 0308-295 74.

DryLin® T Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10  
1




**igus®**

## DryLin® T Linear Guide Systems - Adjustable Clearance

DryLin® T Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

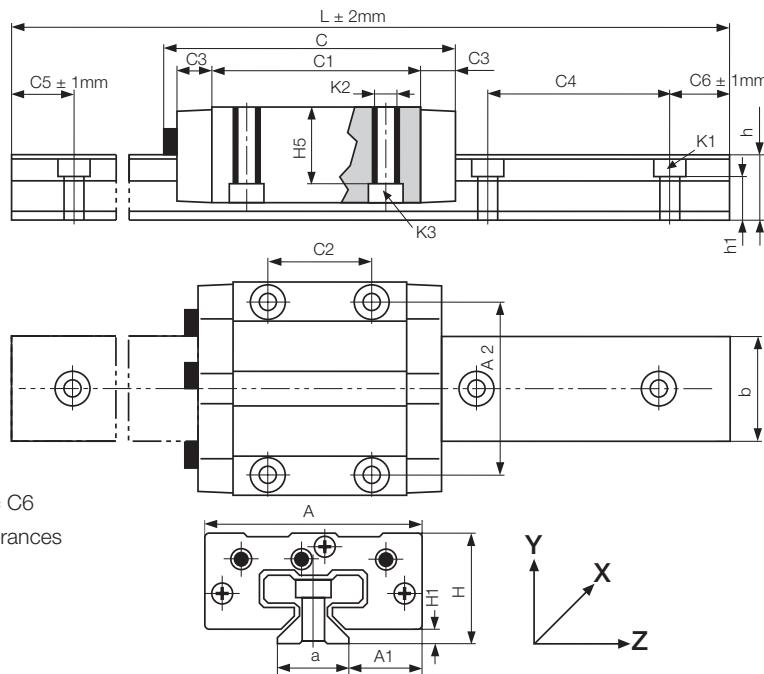

### DryLin® T guide rails

Part No.	Weight	L max. (kg/m)	a -0.2 (mm)	C4	C5 min. (mm)	C5 max. (mm)	C6 min. (mm)	C6 max. (mm)	h	h1	K1 for Screw DIN 912	b	Iy (mm <sup>4</sup> )	Iz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
TS-01-15	0.6	3650	15	60	20	49	20	49	15.5	10.0	M 4	22	6440	4290	585	488
TS-01-20	1.0	3650	20	60	20	49	20	49	19.0	12.3	M 5	31	22570	11520	1456	1067
TS-01-25	1.3	3650	23	60	20	49	20	49	21.5	13.8	M 6	34	34700	19300	2041	1608
TS-01-30	1.9	3650	28	80	20	59	20	59	26.0	15.8	M 8	40	70040	40780	3502	2832

Order example: TS-01-15, 2000 for a guide rail TS-01-15 of 2 m length

For rails without mounting holes, please use part number suffix "S"

\*4000 mm length available upon request


### DryLin® T carriages

Part No.	Weight	H ±0.35	A	C	A1 ±0.35	A2	C1	C2	C3	H1 ±0.35	H5	K2 Thread	Max. Screw Torque (Nm)	K3 for Screw DIN 912
	(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
TW-01-15	0.11	24	47	68	16.0	38	50	30	9	4.0	16.0	M 5	1.5	M 4
TW-01-20	0.19	30	63	81	21.5	53	61	40	10	5.0	19.8	M 6	2.5	M 5
TW-01-25	0.29	36	70	90	23.5	57	68	45	11	5.0	24.8	M 8	6.0	M 6
TW-01-30	0.50	42	90	103	31.0	72	79	52	12	6.5	27.0	M 10	15.0	M 8

Order examples: TW-01-20 for a guide carriage

TW-01-20, LLy for a guide carriage with floating bearing in y-direction, 1mm additional clearance

TW-01-20, LLz for a guide carriage with floating bearing in z-direction, 1mm additional clearance

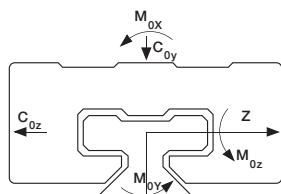


Designation of load directions

Type	C <sub>0Y</sub> lbs (kN)	C <sub>0(-Y)</sub> lbs (kN)	C <sub>0Z</sub> lbs (kN)	M <sub>0X</sub> ft lbs (Nm)	M <sub>0Y</sub> ft lbs (Nm)	M <sub>0Z</sub> ft lbs (Nm)
01-15	900 4	900 4	450 2	24 32	18 25	18 25
01-20	1665 7.4	1665 7.4	833 3.7	62 85	32 45	32 45
01-25	2250 10	2250 10	1125 5	92 125	48 65	48 65
01-30	3140 14	3140 14	1570 7	148 200	74 100	74 100

# DryLin® T Linear Guide Systems - Automatic

**igus®**

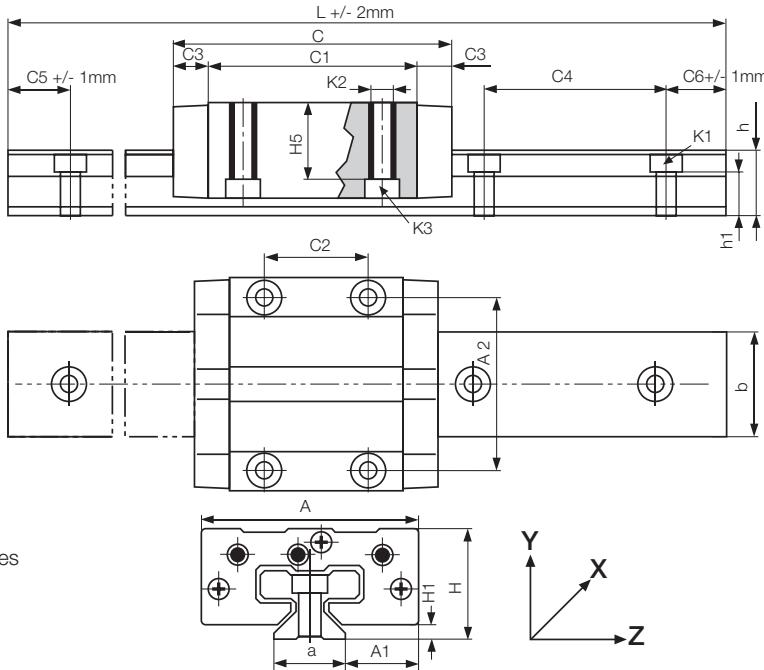

- Automatic clearance adjustment
- Maintenance-free, dry operation
- Corrosion resistant
- Hard anodized aluminum rails (6063-T6)
- Clear anodized aluminum carriage
- Standard bore pattern symmetrical for rail, C5 = C6
- No charge for rails cut to standard C5 + C6 tolerances
- Clearance adjusts when applied load is removed

## DryLin® T guide rails

Part No.	Weight (kg/m)	L max. (mm)	a -0.2 (mm)	C4 (mm)	C5 min. (mm)	C5 max. (mm)	C6 min. (mm)	C6 max. (mm)	h	h1	K1 for Screw DIN 912	b (mm)	Iy (mm <sup>4</sup> )	Iz (mm <sup>4</sup> )	Wby (mm <sup>3</sup> )	Wbz (mm <sup>3</sup> )
TS-01-15	0.6	3650	15	60	20	49.5	20	49.5	15.5	10.0	M 4	22	6440	4290	585	488
TS-01-20	1.0	3650	20	60	20	49.5	20	49.5	19.0	12.3	M 5	31	22570	11520	1456	1067
TS-01-25	1.3	3650	23	60	20	49.5	20	49.5	21.5	13.8	M 6	34	34700	19300	2041	1608
TS-01-30	1.9	3650	28	80	20	59.5	20	59.5	26.0	15.8	M 8	40	70040	40780	3502	2832

Order example: TS-01-15, 2000 for a guide rail TS-01-15 of 2 m length

For rails without mounting holes, please use part number suffix "S"

\*4000 mm length available upon request


## DryLin® T carriages with automatic clearance adjustment

Part No.	Weight (kg)	H $\pm 0.35$ (mm)	A (mm)	C (mm)	A1 $\pm 0.35$ (mm)	A2 (mm)	C1 (mm)	C2 (mm)	C3 (mm)	H1 $\pm 0.35$ (mm)	H5 (mm)	K2- Thread	Max. Screw Torque (Nm)	K3 for Screw DIN 912
TWA-01-15	0.11	24	47	68	16.0	38	50	30	9	4.0	16.0	M 5	1.11	M 4
TWA-01-20	0.19	30	63	81	21.5	53	61	40	10	5.0	19.8	M 6	1.84	M 5
TWA-01-25	0.29	36	70	90	23.5	57	68	45	11	5.0	24.8	M 8	4.43	M 6
TWA-01-30	0.50	42	90	103	31.0	72	79	52	12	6.5	27.0	M 10	11.06	M 8

Order examples: TWA-01-20 for a guide carriage

TWA-01-20, LLy for a guide carriage with floating bearing in y-direction, 1mm additional clearance

TWA-01-20, LLz for a guide carriage with floating bearing in z-direction, 1mm additional clearance

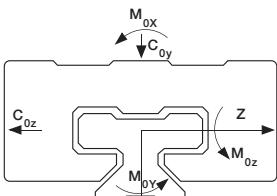

Designation of load directions

Type	$C_{0Y}$ lbs (kN)	$C_{0(-Y)}$ lbs (kN)	$C_{0Z}$ lbs (kN)	$M_{0X}$ ft lbs (Nm)	$M_{0Y}$ ft lbs (Nm)	$M_{0Z}$ ft lbs (Nm)
01-15	900 4	900 4	450 2	24 32	18 25	18 25
01-20	1665 7.4	1665 7.4	833 3.7	62 85	32 45	32 45
01-25	2250 10	2250 10	1125 5	92 125	48 65	48 65
01-30	3140 14	3140 14	1570 7	148 200	74 100	74 100



**igus®**

## DryLin® T Linear Guide Systems - Manual Clamping




DryLin® T Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

- With manual clamp for simple locking functions.  
Plastic may creep over time resulting in decreased clamping forces (up to 70%).
- Adjustable clearance
- Maintenance-free, dry operation
- Corrosion resistant
- Standard bore pattern symmetrical for rail, C5 = C6
- No charge for rails cut to standard C5/C6 tolerances
- Not suitable for vertical applications

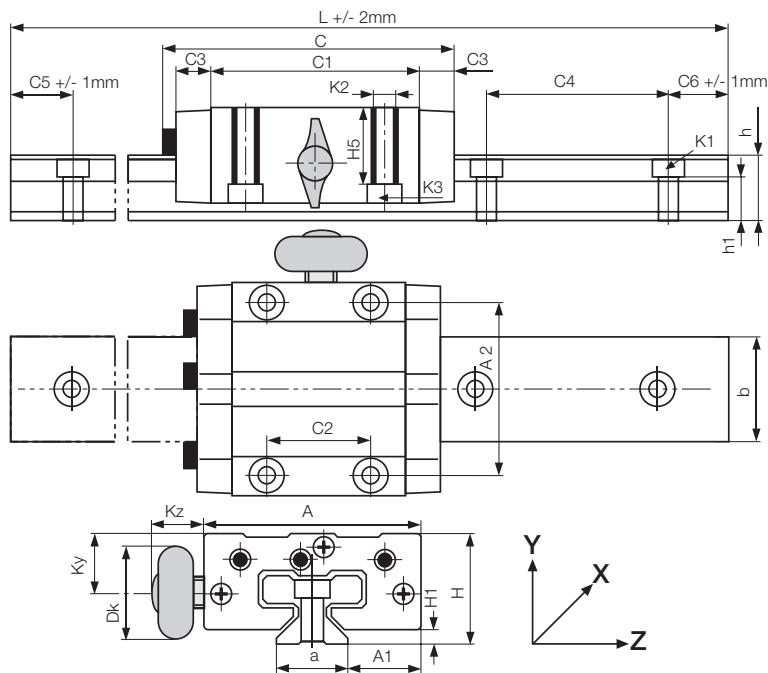

### DryLin® T guide rails

Part No.	Weight	L max.	a	C4	C5 min.	C5 max.	C6 min.	C6 max.	h	h1	K1 for Screw DIN 912	b	Iy	Iz	Wby	Wbz
	(kg/m)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)				(mm)	(mm <sup>4</sup> )	(mm <sup>4</sup> )	(mm <sup>3</sup> )	(mm <sup>3</sup> )
TS-01-15	0.6	3650	15	60	20	49.5	20	49.5	15.5	10.0	M 4	22	6440	4290	585	488
TS-01-20	1.0	3650	20	60	20	49.5	20	49.5	19.0	12.3	M 5	31	22570	11520	1456	1067
TS-01-25	1.3	3650	23	60	20	49.5	20	49.5	21.5	13.8	M 6	34	34700	19300	2041	1608
TS-01-30	1.9	3650	28	80	20	59.5	20	59.5	26.0	15.8	M 8	40	70040	40780	3502	2832

Order example: TS-01-15, 2000 for a guide rail TS-01-15 of 2m length


### DryLin® T carriages

Part No.	Weight	H ±0.35	A	C	A1 ±0.35	A2	C1	C2	C3	H1 ±0.35	H5	K2 Thread	Max. Screw Torque (Nm)	K3 for Screw DIN 912
	(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
TW-HKA-01-15	0.11	24	47	74	16.0	38	50	30	9	4.0	16.0	M 5	1.5	M 4
TW-HKA-01-20	0.19	30	63	87	21.5	53	61	40	10	5.0	19.8	M 6	2.5	M 5
TW-HKA-01-25	0.29	36	70	96	23.5	57	68	45	11	5.0	24.8	M 8	6.0	M 6
TW-HKA-01-30	0.50	42	90	109	31.0	72	79	52	12	6.5	27.0	M 10	15.0	M 8

### DryLin® T - Carriages with manual clamping

Part No.	Size	Kz	Ky	Dk	Thread of the Clamp
TW-HKA-01-15	15	19.0	11.5	20.0	M6
TW-HKA-01-20	20	18.0	15.0	28.0	M8
TW-HKA-01-25	25	17.0	19.0	28.0	M8
TW-HKA-01-30	30	20.0	21.5	28.0	M8

TW-HKA-01-21VF, LLy for a guide carriage with manual clamping and floating bearing in y-direction. Floating offers 1mm extra clearance

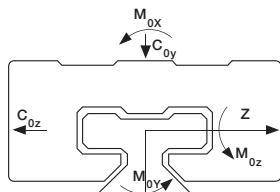

Type	C <sub>0Y</sub> lbs (kN)	C <sub>0(-Y)</sub> lbs (kN)	C <sub>0Z</sub> lbs (kN)	M <sub>0X</sub> ft lbs (Nm)	M <sub>0Y</sub> ft lbs (Nm)	M <sub>0Z</sub> ft lbs (Nm)
01-15	900 4	900 4	450 2	24 32	18 25	18 25
01-20	1665 7.4	1665 7.4	833 3.7	62 85	32 45	32 45
01-25	2250 10	2250 10	1125 5	92 125	48 65	48 65
01-30	3140 14	3140 14	1570 7	148 200	74 100	74 100

Designation of load directions

# DryLin® T Linear Guide Systems


## Clamping Elements and Manual Clamp

**igus®**



### Special properties

- Compact clamping of high loads, for all sizes (15-30) holding strength 112 lbs
- Simple assembly

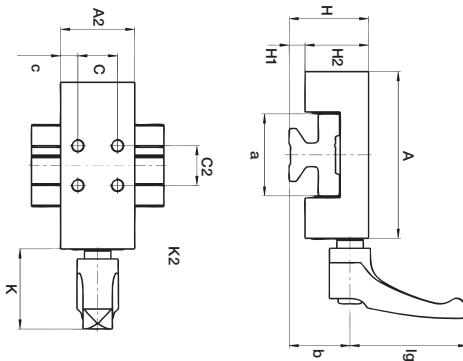

### DryLin® T carriages with manual clamping




Part No.	A	a	A2	H	H1	H2	K2	C	C2	c	lg	b
TWBM-11-15	47	22	15	24	4	20	M4	15	15	4	44	18.9
TWBM-11-20	63	31	28	30	6	24	M5	15	15	6.5	44	23
TWBM-11-25	70	34	35	36	5	31	M6	20	20	7.5	63.6	26.2
TWBM-11-30	90	40	38	42	6.5	35.5	M6	20	20	9	78	32.4

### DryLin® T manual clamp



### Special properties

- Clamping of high loads, holding strength 112 lbf per clamp
- Brass clamp elements
- Same hole pattern as TW-01-25
- Removable handle

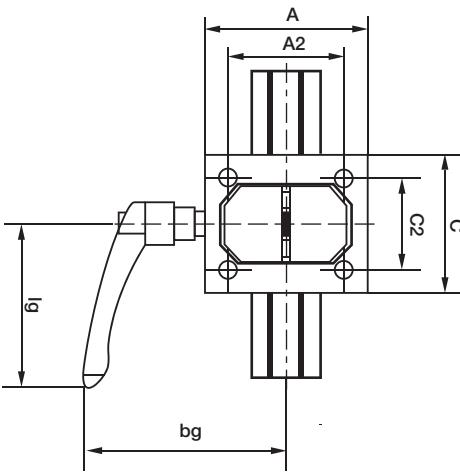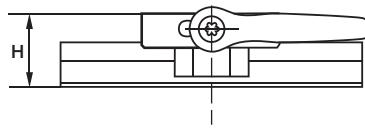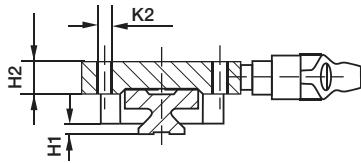

### DryLin® T manual clamping


Part No.	A	A2	H	H1	H2	K2	C	C2	lg	bg
	[mm]									
TWBM-01-25*	80	57	36	5	16	M8	68	45	80	99

\*Only for guide rails TS-01-25

### DryLin® T guide rail for TWBM

Part No.	Weight [kg/m]	L [mm]	a [-0.2 [mm]]	C4		C5		C6		h [mm]	h1 [mm]	K1 for Screw DIN 912	b [mm]	ly [mm <sup>4</sup> ]	lz [mm <sup>4</sup> ]	Wby [mm <sup>3</sup> ]	Wbz [mm <sup>3</sup> ]
				max. [mm]	min. [mm]	max. [mm]	min. [mm]	max. [mm]	min. [mm]								
TS-01-15	0.6	4,000	15	60	20	49	20	49	15.5	10.0	M4	22	6,440	4,290	585	488	
TS-01-20	1.0	4,000	20	60	20	49	20	49	19.0	12.3	M5	31	22,570	11,520	1,456	1,067	
TS-01-25	1.3	4,000	23	60	20	49	20	49	21.5	13.8	M6	34	34,700	19,300	2,041	1,608	
TS-01-30	1.9	4,000	28	80	20	49	20	49	26.0	15.8	M8	40	70,040	40,780	3,502	2,832	

For rails without mounting holes, please use part number suffix "S"



**igus®**

## DryLin® T Linear Guide Systems Heavy Duty


DryLin® T Linear  
Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



- Linear guide carriage for extreme conditions (dirt, glue resins, wood chips, mud, etc.)
- iglide® J polymer sliding pads are mechanically fixed by metal end plates
- Dimensions equivalent to the TW-01 design and standard recirculating ball bearings.
- Non-adjustable version
- Same loading as -01 Series but with better shock resistance
- No charge for rails cut to standard C5/C6 tolerances

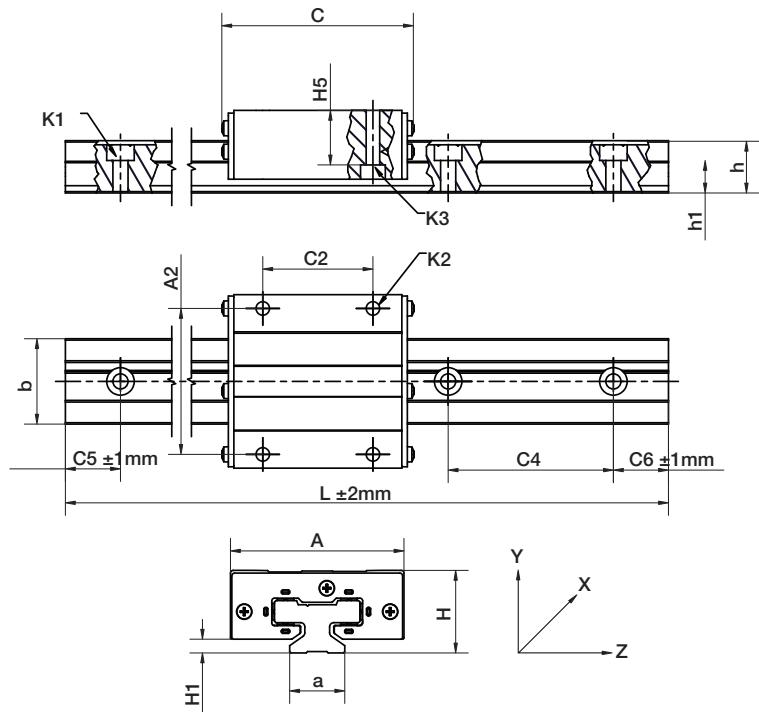

### DryLin® T guide rails

Part No.	Weight	L max.	a -0.2	C4	C5 min. max.	C6 min. max.	h	h1	K1 for Screw DIN 912	b	Iy	Iz	Wby	Wbz
	[kg/m]	[mm]	[mm]	[mm]	[mm] [mm]	[mm] [mm]				[mm]	[mm <sup>3</sup> ]	[mm <sup>3</sup> ]	[mm <sup>3</sup> ]	[mm <sup>3</sup> ]
TS-01-20	1.0	3650	20	60	20 49	20 49	19.0	12.3	M 5	31	22,570	11,520	1,456	1,067
TS-01-25	1.3	3650	23	60	20 49	20 49	21.5	13.8	M 6	34	34,700	19,300	2,041	1,608
TS-01-30	1.9	3650	28	80	20 59	20 59	26.0	15.8	M 8	40	70,040	40,780	3,502	2,832

Order example: TS-01-20, 2000 for a guide rail TS-01-20 of 2 m length. For rails without mounting holes, please use part number suffix "S"


### DryLin® T heavy duty carriages

Part No.	Weight	H $\pm 0.35$	H5	A	C	A2	C2	H1 $\pm 0.35$	K2	K3
	(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
TW-02-20	0.19	30	19.8	63	70	53	40	5.0	M6	M5
TW-02-25	0.29	36	24.8	70	77	57	45	5.0	M8	M6
TW-02-30	0.50	42	27.0	90	92	72	52	6.5	M10	M8

Order examples: TW-02-20 for a guide carriage

TW-02-20, LLy for a guide carriage with floating bearing in y-direction, 1mm additional clearance

TW-02-20, LLz for a guide carriage with floating bearing in z-direction, 1mm additional clearance

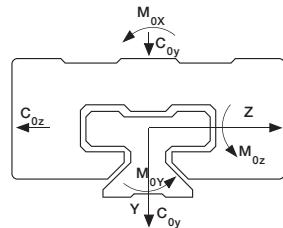

Type	C <sub>0Y</sub> lbs (kN)	C <sub>0(-Y)</sub> lbs (kN)	C <sub>0Z</sub> lbs (kN)	M <sub>0X</sub> ft lbs (Nm)	M <sub>0Y</sub> ft lbs (Nm)	M <sub>0Z</sub> ft lbs (Nm)
02-20	1665 7.4	1665 7.4	833 3.7	62 85	32 45	32 45
02-25	2250 10	2250 10	1125 5	92 125	48 65	48 65
02-30	3140 14	3140 14	1570 7	148 200	74 100	74 100


Designation of load directions

# DryLin® T Linear Guide Systems - Miniature

**igus®**



- Maintenance-free, dry operation
- 3 sizes
- Cast zinc chromated carriage
- iglide® J polymer sliding pads
- Hard anodized aluminum rails
- Small mounting height and width
- Resistant to corrosion
- Standard bore pattern symmetrical C5 = C6
- No charge for rails cut to standard C5/C6 tolerances

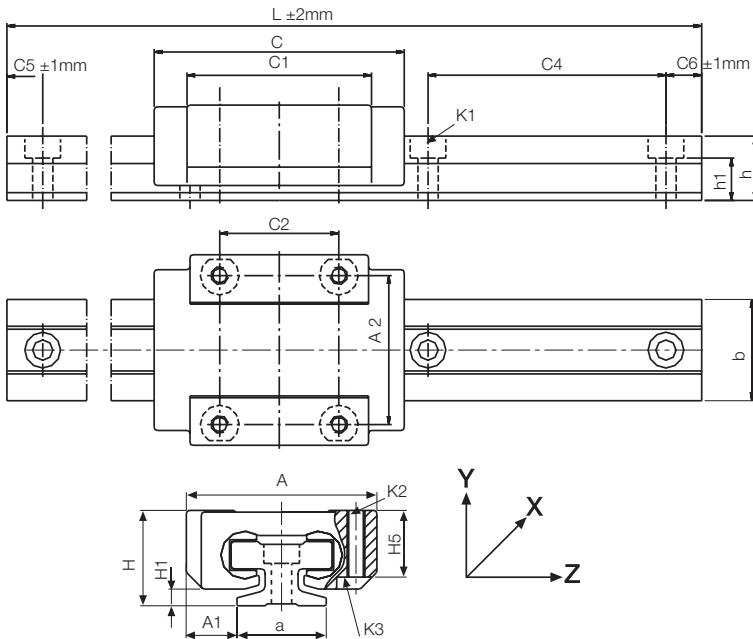


## DryLin® T miniature rails

Part No.	Weight [kg/m]	L max. [mm]	a -0.2 [mm]	C4 [mm]	C5 min. [mm]	C6 max. [mm]	h [mm]	h1 [mm]	K1 for Screw DIN 912	b [mm]	ly [mm³]	lz [mm³]	Wby [mm³]	Wbz [mm³]
TS-04-09	0.11	2000	9	20	5	14.5	5	14.5	M 2	9.6	252	169	52	49
TS-04-12	0.19	2000	12	25	5	19.5	5	19.5	M 3	13	856	574	132	120
TS-04-15	0.33	3000	15	40	10	29.5	10	29.5	M 3	17	2420	1410	285	239

## DryLin® T miniature carriages

Part No.	Weight (g)	H ±0.2 (mm)	A ±0.2 (mm)	C ±0.3 (mm)	A1 ±0.35 (mm)	A2 (mm)	C1 (mm)	C2 (mm)	H1 ±0.35 (mm)	H5 (mm)	K2 Thread	Max. Screw Torque (Nm)	K3 for Screw DIN 912
TW-04-09	17	10	20	29	5.5	15	18	13	1.7	7.2	M 2	25	(M 2)
TW-04-12	34	13	27	34	7.5	20	22	15	2.2	9.5	M 3	50	M2 (M 3)
TW-04-15	61	16	32	42	8.5	25	31	20	2.8	11	M 3	50	M2 (M 3)

Available from stock

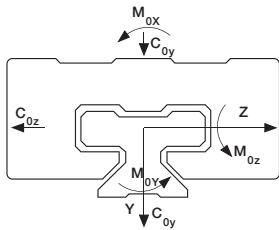

Type	C <sub>0Y</sub> lbs (kN)	C <sub>0(-Y)</sub> lbs (kN)	C <sub>0Z</sub> lbs (kN)	M <sub>0X</sub> ft lbs (Nm)	M <sub>0Y</sub> ft lbs (Nm)	M <sub>0Z</sub> ft lbs (Nm)
04-09	108 .48	108 .48	54 .24	2.5 3.4	1.3 1.8	1.3 1.8
04-12	215 .96	215 .96	108 .48	6.8 9.2	3.2 4.4	3.2 4.4
04-15	315 1.4	315 1.4	157 0.7	12.5 17	6.0 8	6.0 8

Designation of load directions

DryLin® T Linear  
Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)


10



## Adjusting the clearance: DryLin® T

DryLin® T is delivered ready for installation. Clearance of the carriage is adjusted at the factory. The preadjustment is determined by the acting forces on each individual system. If necessary, clearance of the DryLin® T linear guide system can be readjusted. This should always take place when there is no load on the carriage.

- 1** After removing the protective cover, loosen the locknuts Width across flats:
  - SW 5 for TW-01-15 and TW-01-20
  - SW 7 for TW-01-25 and TW-01-30
- 2** Adjust the bearing clearance for the 3 guide points with an Allen key – Allen key size:
  - 1.5 mm for TW-01-15 and TW-01-20
  - 2.0 mm for TW-01-25 and TW-01-30
- 3** Check the clearance of the carriage after adjusting the 3 levels. If it is sufficient, tighten the locknuts and put on the cover.
- 4** There is a danger that excessive reduction of the clearances can seize the sliding pads and that the clearance cannot be reset simply by loosening the adjustment screws. The sliding pads are then released by pressing the reset button on the opposite side. Press hard against the readjusting spring. You must have already loosened the respective adjustment screws. Use the correct size pin for this purpose:
  - 2.5 mm for TW-01-20 and TW-01-15
  - 3.0 mm for TW-01-25 and TW-01-30

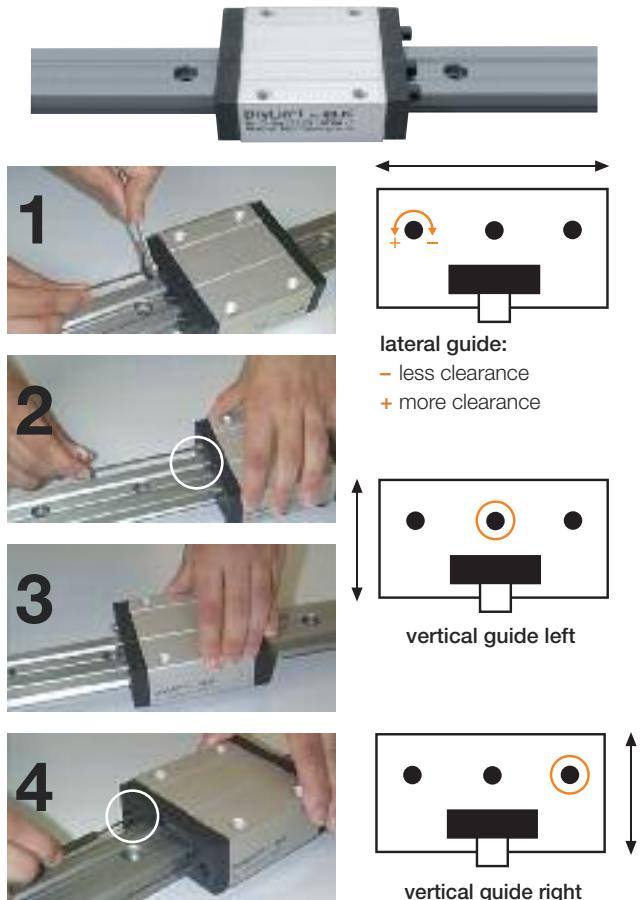


Video instructions available at [www.igus.com](http://www.igus.com)

## Adjusting the clearance: DryLin® T Automatic

The DryLin® T Automatic series offers you an automatic adjustment of the clearance. A readjustment can take place automatically in steps of 0.1 mm. Springs tighten the regulating wedge immediately as soon as the clearance is bigger than 0.1 mm and the system is unloaded.

- 1** The system will be delivered with 3 keys and are necessary for mounting the carriage onto the rail. In case these keys are removed they need to be refitted into the openings and turned clockwise 90°.
- 2** After the carriage is on the rail, remove the keys by turning them counterclockwise 90° and pull out. The clearance will then be adjusted automatically.
- 3** You can remove the carriage at any time. In order to do so, simply plug the keys back into the carriage (see step 1).

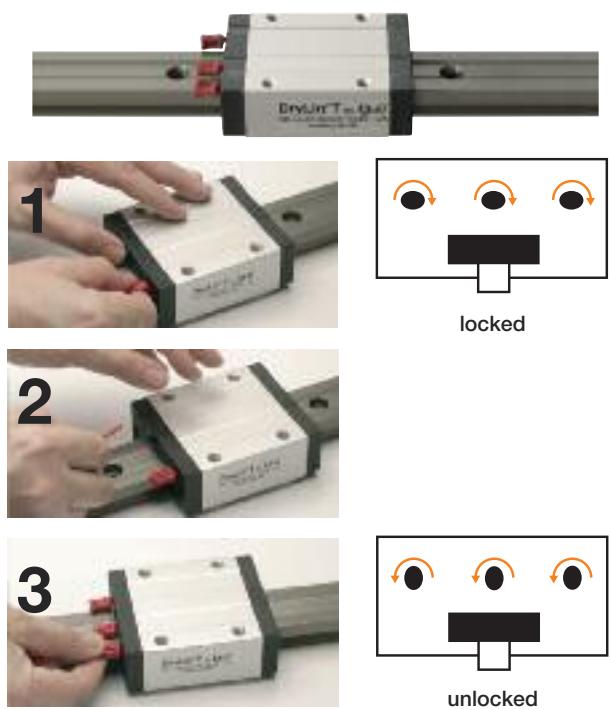

# DryLin® T Linear Guide Systems

## System Design

**igus®**

### Example of DryLin® T Calculation

For the exact calculation of the Linear Guide System it is essential to find out whether the position of the forces is within the allowable limits, and if the gliding element where the highest forces occur is not overloaded. The calculation of the necessary driving force and the maximum speed allowed is important. Each mounting version requires a different formula for calculation. Factors concerning shocks and acceleration forces are not included in the calculation, therefore the maximum load and allowable load must be monitored.

#### Variables in the Calculation:


F <sub>a</sub>	: Drive Force (lbs)
F <sub>s</sub>	: Applied Mass Force (lbs)
F <sub>y</sub> , F <sub>z</sub>	: Bearing Load (lbs) in y or z direction (mm)
s <sub>x</sub> , s <sub>y</sub> , s <sub>z</sub>	: Distance of the mass force in y or z direction (mm)
a <sub>y</sub> , a <sub>z</sub>	: Distance of the drive force in y or z direction (mm)
w <sub>x</sub>	: Distance between carriages on a rail (mm)
L <sub>X</sub>	: Constant from table (mm)
Z <sub>m</sub>	: Constant from table (mm)
Y <sub>0</sub>	: Constant from table (mm)
b	: Distance between guide rails (mm)
μ	: Coefficient of Friction, $\mu = 0$ for static Loads $\mu = 0.2$ for dynamic loads
Z <sub>W</sub>	: number of carriages per rail

#### Coefficients:

K <sub>1</sub>	1 Rail	1 Rail	2 Rails
	1 Carriage	2 Carriages	3-4 Carriages
K <sub>2</sub>	(ay+Y <sub>0</sub> )/L <sub>x</sub>	(ay+Y <sub>0</sub> )/W <sub>x</sub>	(ay+Y <sub>0</sub> )/W <sub>x</sub>
K <sub>3</sub>	(sy+Y <sub>0</sub> )/L <sub>x</sub>	(sy+Y <sub>0</sub> )/W <sub>x</sub>	(sy+Y <sub>0</sub> )/W <sub>x</sub>
K <sub>4</sub>	az/L <sub>x</sub>	az/W <sub>x</sub>	az/W <sub>x</sub>
K <sub>5</sub>	s <sub>x</sub> /L <sub>x</sub>	s <sub>x</sub> /W <sub>x</sub>	s <sub>x</sub> /W <sub>x</sub>
K <sub>6</sub>	s <sub>y</sub> /L <sub>x</sub>	s <sub>y</sub> /W <sub>x</sub>	s <sub>y</sub> /W <sub>x</sub>
K <sub>7</sub>	(sy+Y <sub>0</sub> )/Z <sub>m</sub>	(sy+Y <sub>0</sub> )/Z <sub>m</sub>	(sy+Y <sub>0</sub> )/b
	s <sub>z</sub> /Z <sub>m</sub>	s <sub>z</sub> /Z <sub>m</sub>	(s <sub>z</sub> /b)-0.5

#### The Constant Values:

Part #	L <sub>X</sub> (mm)	Z <sub>m</sub> (mm)	Y <sub>0</sub> (mm)
TW-01-15	29	16	11.5
TW-01-20	35	23	15.0
TW-01-25	41	25	19.0
TW-01-30	49	29	21.5

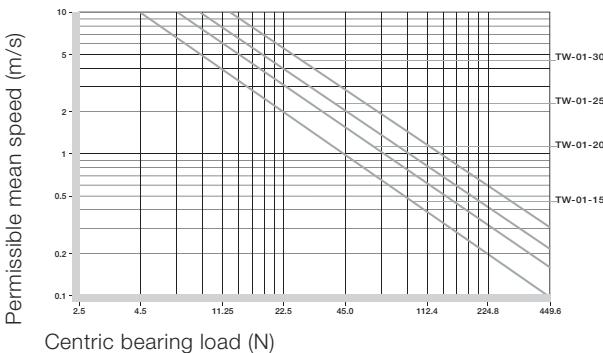

Centric bearing load (N)

Diagram for determining the maximum permissible speed for the calculated bearing load

Part No.	F <sub>y</sub> max. lbs	F <sub>z</sub> max. (N)
TW-01-15	450	2000
TW-01-20	830	3700
TW-01-25	1125	5000
TW-01-30	1575	7000

Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

#### Maximum permissible load



DryLin® T linear guide systems are used in these enveloping machines to guide a suction opener for envelopes. The guide system must have low clearance, be maintenance-free and not require any lubrication.

**Recommended Procedure:****1st Step**

Select the mounting version:

- horizontal



1 rail and 1 carriage

1 rail and 2 carriages

2 rails and 4 carriages

**2nd Step**

Check to see whether the maximum distances of the applied forces are within the permissible values (see Maximum permissible distances.)

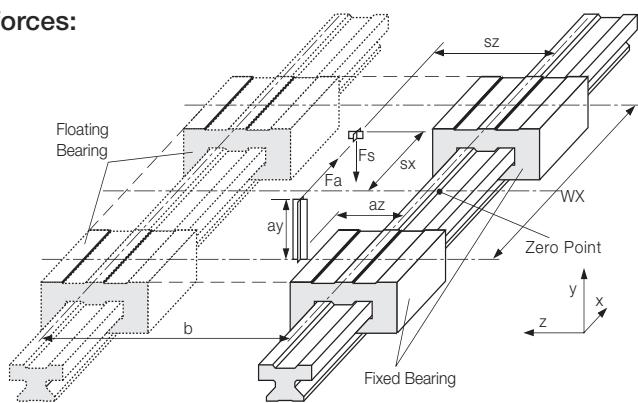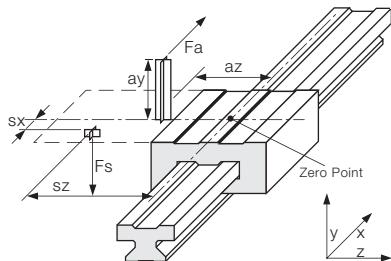**Maximum permissible distances between acting forces:****Variation: 1 Rail, 1 Carriage**

sy + sz	<	2 Lx - Yo
ay + az	<	2 Lx - Yo
sy	<	5 Zm
sz	<	5 Zm

**Variation: 1 Rail, 2 Carriages****Variation: 2 Rails, 4 Carriages**

sy + sz	<	2 wx - Yo
ay + az	<	2 wx - Yo

**3rd Step:**

Calculate the necessary drive force

**3.1 Center of gravity in x and z direction inside the carriage(s)**

$$Fa_1 = \frac{\mu}{1-2\mu K_3} \cdot Fs$$

**3.2 Center of gravity in z direction outside of the carriage(s)**

$$Fa_2 = \frac{2\mu K_7}{1-2\mu K_3} \cdot Fs$$

**3.3 Center of gravity in x direction outside of the carriage(s)**

$$Fa_3 = \frac{2\mu K_4}{1-2\mu K_3-2\mu K_1} \cdot Fs$$

If the position of the center of gravity is not specified:  $Fa = \text{MAX}(Fa_1, Fa_2, Fa_3)$ **4th Step:**

Calculate the maximum bearing load

**4.1 Maximum bearing load in the y direction**

$$Fy_{\text{max}} = \frac{2Fs}{Zw} \left( \frac{2K_4}{Zw} + 0,5 \right) \cdot \left( K_7 + 0,5 \right) + \frac{2Fa K_1}{Zw^2}$$

**4.2 Maximum bearing load in the z direction**

$$Fz_{\text{max}} = \frac{4Fa K_3}{Zw^2}$$

**5th Step:**Check calculated load for both y and z with table on page 26.15 - Maximum permissible load for  $Fy_{\text{max}}$  &  $Fz_{\text{max}}$ . This table illustrates the maximum permissible load on a single gliding element from the DryLin® T carriage. Evaluating the maximum load on a single gliding element establishes a safety factor for the linear system.

► Page 26.15

**6th Step:**

Determine the maximum permissible speed for the calculated load from Step No. 4

► Page 26.15



## Recommended Procedure:

### 1st Step

Select the mounting version:

- side-mounting

1 rail and 1 carriage

1 rail and 2 carriages


2 rails and 4 carriages

Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

### 2nd Step


Check to see whether the maximum distances of the applied forces are within the permissible values (see Maximum permissible distances.)

### Maximum permissible distances between acting forces:

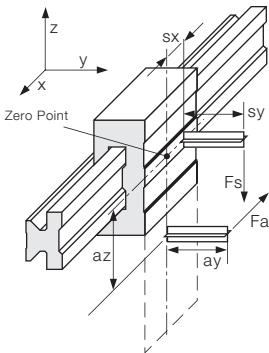

Variation: 1 Rail, 1 Carriage

sy + sz	<	2 Lx - Y0
ay + az	<	2 Lx - Y0
sy	<	5 Zm
sz	<	5 Zm

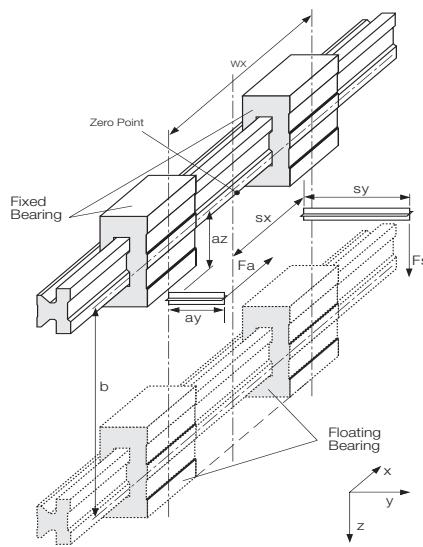

Variation: 1 Rail, 2 Carriages

Variation: 2 Rails, 4 Carriages

sy + sz	<	2 wx - Y0
ay + az	<	2 wx - Y0

### 3rd Step:

Calculate the necessary drive force

First, two calculations must be made:

$$Fa_1 = \frac{(1+2K_6)\mu}{1-2\mu K_1} \cdot Fs$$

$$Fa_2 = \frac{(2K_4+2K_6)\mu}{1-2\mu K_1-2\mu K_3} \cdot Fs$$

The drive force Fa corresponds to the calculated maximum value  $Fa = \text{MAX}(Fa_1, Fa_2)$

### 4th Step:

Calculate the maximum bearing load

#### 4.1 Maximum bearing load in the y direction

$$Fy_{\max} = \frac{Fs K_6}{Zw} + \frac{2Fa K_1}{Zw^2}$$

#### 4.2 Maximum bearing load in the z direction

$$Fz_{\max} = \frac{2Fs}{Zw} \left( \frac{2K_4}{Zw} + 0.5 \right) + \frac{4Fa K_3}{Zw^2}$$

### 5th Step:

Check calculated load for both y and z with table on page 26.15 - Maximum permissible load for Fy max & Fz max. This table illustrates the maximum permissible load on a single gliding element from the DryLin® T carriage. Evaluating the maximum load on a single gliding element establishes a safety factor for the linear system.

► Page 26.15

### 6th Step:

Determine the maximum permissible speed for the calculated load from Step No. 4

► Page 26.15

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

**Recommended Procedure:****1st Step**

Select the mounting version:

 vertical


1 rail and 1 carriage

1 rail and 2 carriages


2 rails and 4 carriages

**2nd Step**

Check to see whether the maximum distances of the applied forces are within the permissible values (see Maximum permissible distances.)

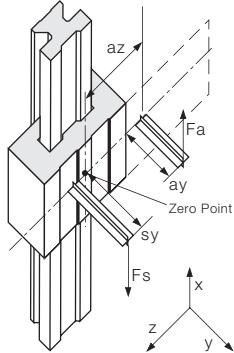**Maximum permissible distances between acting forces:****Variation: 1 Rail, 1 Carriage**

sy + sz	<	2 Lx - Yo
ay + az	<	2 Lx - Yo
sy	<	5 Zm
sz	<	5 Zm

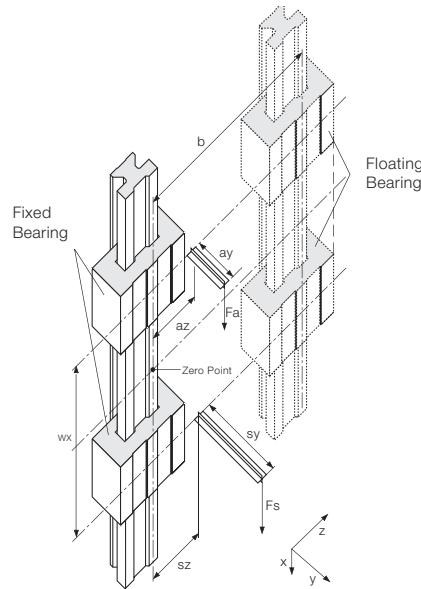**Variation: 1 Rail, 2 Carriages  
Variation: 2 Rails, 4 Carriages**

sy + sz	<	2 wx - Yo
ay + az	<	2 wx - Yo

**3rd Step:**

Calculate the necessary drive force

First, four calculations must be made:

$$Fa_1 = \frac{2\mu (sz+sy+Yo)-wx}{2\mu (az+ay+Yo)-wx} \cdot Fs$$

$$Fa_3 = \frac{2\mu (sz-sy-Yo)-wx}{2\mu (az-ay-Yo)-wx} \cdot Fs$$

$$Fa_2 = \frac{2\mu (-sz+sy+Yo)-wx}{2\mu (-az+ay+Yo)-wx} \cdot Fs$$

$$Fa_4 = \frac{2\mu (sz+sy+Yo)+wx}{2\mu (az+ay+Yo)+wx} \cdot Fs$$

The drive force Fa corresponds to the calculated maximum value  $Fa = MAX (Fa_1, Fa_2, Fa_3, Fa_4)$ **4th Step:**

Calculate the maximum bearing load

**4.1 Maximum bearing load in the y direction**

$$Fy_{max} = \left| Fa \frac{ay+Yo}{wx} - Fs K_2 \right| \cdot \frac{2}{Zw^2}$$

**4.2 Maximum bearing load in the z direction**

$$Fz_{max} = \left| Fa \frac{az}{wx} - Fs K_5 \right| \cdot \frac{4}{Zw^2}$$

**5th Step:**

Check calculated load for both y and z with table on page 26.15 - Maximum permissible load for Fy max &amp; Fz max. This table illustrates the maximum permissible load on a single gliding element from the DryLin® T carriage. Evaluating the maximum load on a single gliding element establishes a safety factor for the linear system.

►Page 26.15

**6th Step:**


Determine the maximum permissible speed for the calculated load from Step No. 4

►Page 26.15



DryLin® T Linear  
Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

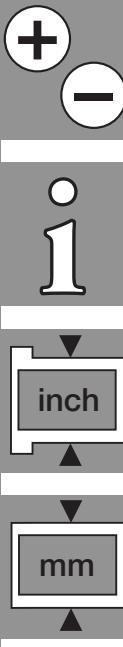



**igus®**


## DryLin® T Linear Guide Systems

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

DryLin® T Linear  
Guide Systems

**igus®**

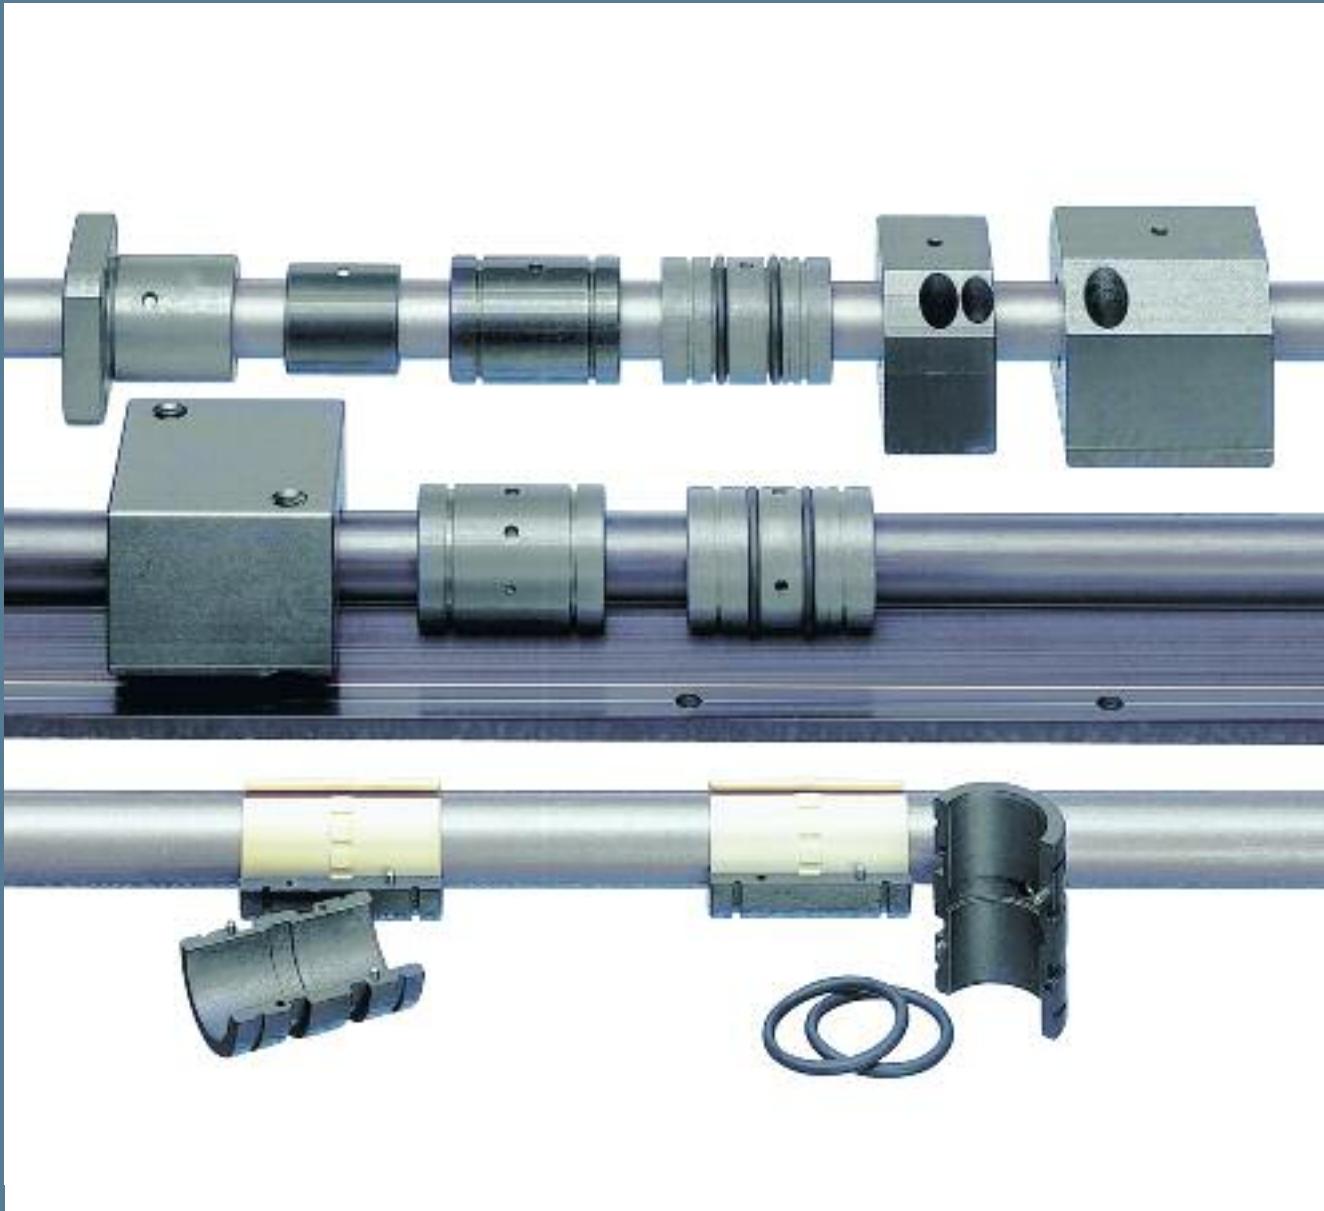

## DryLin® R Linear Plain Bearings for Round Shafts



## Product Range

- Inner diameters:  
Inch sizes from 1/4 - 2 in.  
Metric sizes from 6 - 60 mm
- up to 30 bearing types for every diameter

## Special Features

	Cleanroom certified - IPA Fraunhofer
	ESD compatible (electrostatic discharge)
	Free of toxins - RoHS 2002/95/EC

## Technical Data

**Liners:** Maintenance-free

### Materials:

- iglide® J
- iglide® J200
- iglide® T500

### Max. speed:

up to 49 ft/min  
(15 m/s)

### Shaft materials:

- Anodized aluminum
- Case-hardened steel
- Stainless steel
- Cold-rolled steel
- Hard chrome-plated
- Carbon fiber

## Temperatures

### iglide® J:

-40°F to +194°F

### iglide® J200:

-40°F to +194°F

### iglide® T500:

-148°F to +482°F

Also available as driven systems



**HTS**  
**Page**  
**50.17**

# DryLin® R Linear Plain Bearing

DryLin® R linear plain bearings, made from solid polymers, are dimensionally equivalent to standard ball bearings. They are made entirely of wear resistant iglide® materials offering technical benefits as well as a clear price advantage.




## DryLin® R: Linear Plain Bearings

DryLin® R is dimensionally interchangeable with linear ball bearings, but offers cleaner, more cost-effective results even in harsh environments. The standard RJUI/RJUM bearing consists of an iglide® J liner slip-fit into an aluminum housing. The unique grooved design of the J liner minimizes clearance, is suitable for use in extremely wet and dirty environments, and is easily replaceable. Dimensionally interchangeable all-polymer parts RJI/RJM are also available for cost-savings, weight reduction, and other technical advantages. Both parts are secured with retaining clips, as are ball bearings. DryLin R guides may also be used with the high temperature, chemically resistant T500 (TUI/TUM) liners for extreme applications.

## Advantages of DryLin® R

- Self-lubricating
- Maintenance-free
- Can be used in extreme dirt conditions
- Can be used underwater or in washdown conditions
- Replaceable liner
- Dimensionally interchangeable with standard recirculating ball bearings
- Vibration dampening
- No seals or wipers needed
- Compensation for shaft misalignment (03 series)

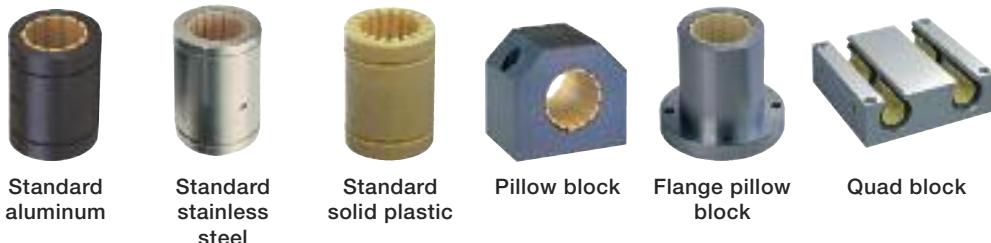

DryLin® R can be used in extreme dirt conditions

# DryLin® R Linear Plain Bearing Material Table

**igus®**



General Properties	Unit	iglide® J	iglide® T500 (Available in some sizes)	iglide® J200 (Available in some sizes)	Testing Method
Density	g/cm <sup>3</sup>	1.49	1.44	1.72	
Color		Yellow	Black	Dark grey	
Max. moisture absorption at 73°F/50% r.F.	% weight	0.3	0.1	0.2	DIN 53495
Max. moisture absorption at 73°F	% weight	1.3	0.5	0.7	
Coefficient of sliding friction, dynamic against steel	μ	0.06 - 0.18	0.09 - 0.27	0.11 - 0.17	
P x V value, max. (dry)	psi x fpm	9,700	37,700	8,600	

## Mechanical Properties

Modulus of elasticity	PSI	398,090	1,174,806	406,105	DIN 53457
Tensile strength at 68°F	PSI	10,587	24,656	8,412	DIN 53452
Compressive strength	PSI	8,702	14,504	n.d.	
Permissible static surface pressure (68°F)	PSI	5,076	21,755	3,335	
Shore D hardness		74	85	70	DIN 53505


## Physical and Thermal Properties

Max. long term application temperature	°F	194	482	194	
Max. short term application temperature	°F	248	599	248	
Min. application temperature	°F	-58	-148	-58	
Thermal conductivity	W/m x K	0.25	0.6	0.24	ASTM C 177
Coefficient of thermal expansion (at 68°C)	K <sup>-1</sup> x 10 <sup>-5</sup>	10	5	8	DIN 53752

## Electrical Properties

Specific volume resistance	Ωcm	> 10 <sup>13</sup>	< 10 <sup>5</sup>	> 10 <sup>8</sup>	DIN IEC 93
Surface resistance	Ω	> 10 <sup>12</sup>	< 10 <sup>3</sup>	> 10 <sup>8</sup>	DIN 53482

### Material Data for iglide® J (standard linear material)

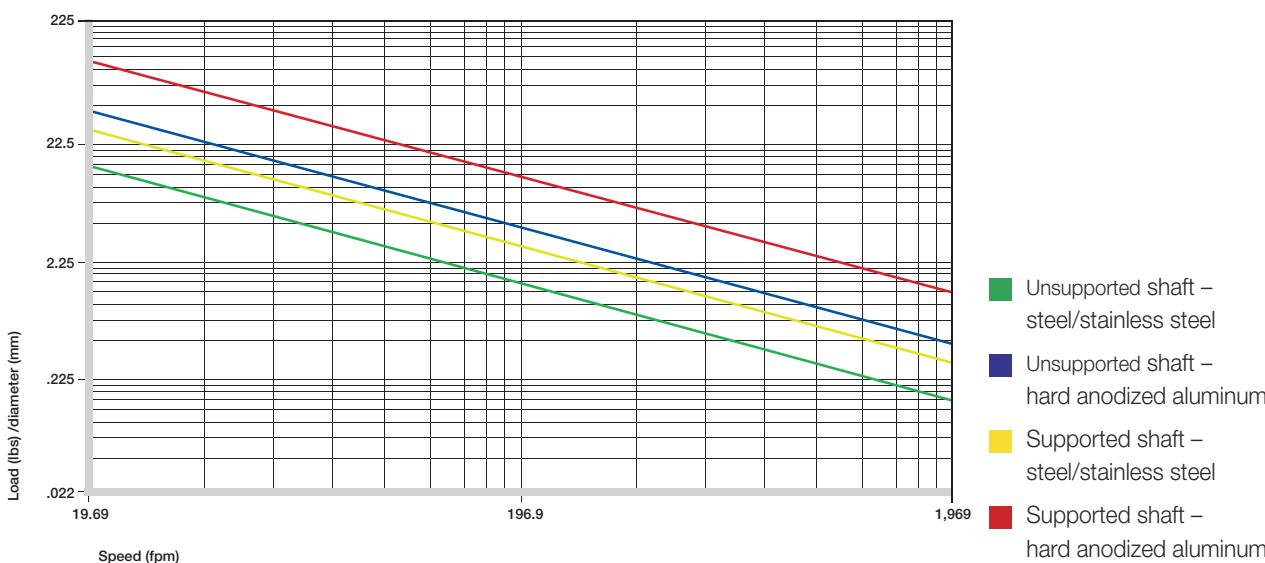

DryLin® R – Comparison of the permissible dynamic loads at equivalent diameters

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm









### The iglide® J material

iglide® J material gliding on different surface materials achieved the best results in our tests. Comprehensive laboratory tests showed that iglide® J is by far the most suitable polymer material for linear motion applications. Special Characteristics of iglide® J:

- Lowest coefficient of friction on all materials
- Very low abrasion values during dry operation
- Excellent wear resistance
- Maintenance free dry operation
- Vibration dampening
- Very low moisture absorption
- Recommended for all shaft materials

### iglide® J against various shaft materials

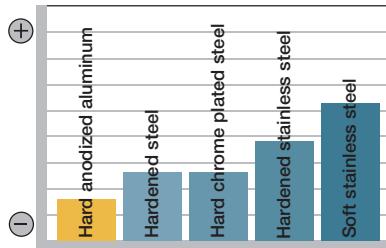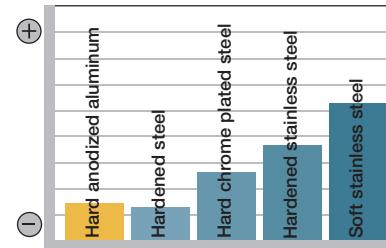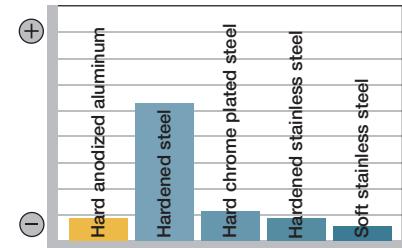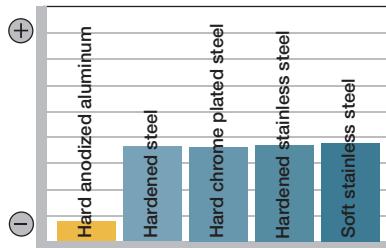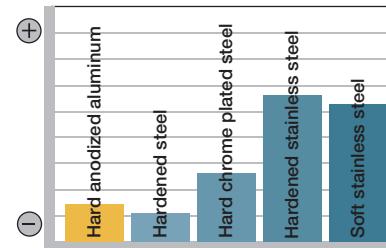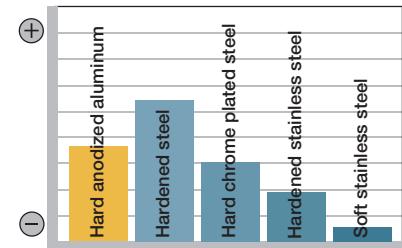**Wear****Coefficient of friction****Corrosion****Weight****Costs****Chemical resistance**

DryLin® high-temperature bearings made of iglide® T500 are used to support the sealing bar in this packaging machine. The TUM liners run without lubrication at temperatures of around 266°F, allowing a class leading output of 90 cycles/min.

### DryLin® S: Hard-Anodized Shafting

Although DryLin® R works well with various steel shafts, DryLin® S hard-anodized aluminum shafting was specifically developed as the optimal sliding surface for DryLin® R when using our standard iglide® J/J200 liner material. This combination achieves the lowest frictional properties, and reduces wear by up to 50% versus steel shafting — not to mention being very lightweight and extremely cost-effective.

### The iglide® T500 material

iglide® T500 is defined by its combination of high temperature resistance with compressive strength, along with high resistance to chemicals. iglide® T500 achieves the best wear results with stainless steel and chrome plated steel shafts. Special characteristics:

- Temperature resistant from -148°F to +482°F in continuous operation
- Universal resistance to chemicals
- High compressive strength
- Very low moisture absorption
- Great wear resistance through the entire temperature range




## The Expert System 2.0

The Online Expert System ([www.igus.com](http://www.igus.com)) enables the user to quickly and confidently determine the suitability of one or all DryLin systems in a particular application, and is able to calculate the following:

- Bearing lifetime in miles or kilometers
- The necessary drive force
- The maximum permissible continuous speed
- Bearing wear and the theoretical clearance

The system is able to determine proper functionality, and provides warning signals in order for the user to optimize the design. Information with regards to drive force, center-of-gravity, and required lifetime are also given.

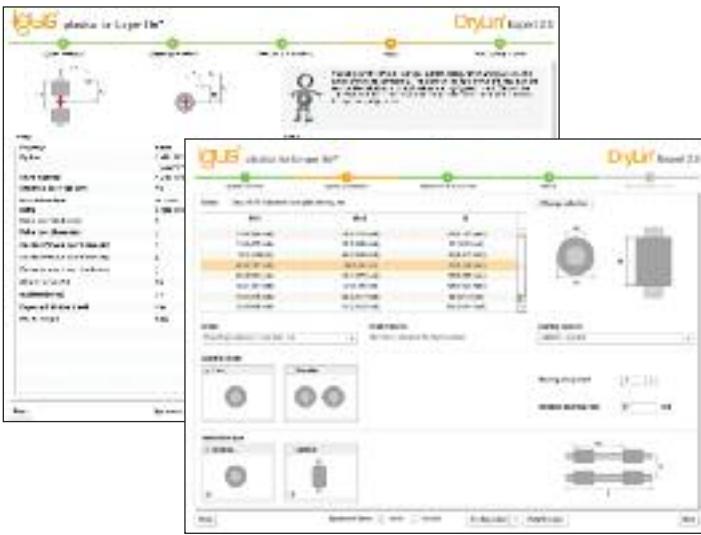

## Dirt, Dust, Fibers

The patented design of the bearing surface using individual slide pads connected by thin film sections, provides performance benefits for dirty environments. For most ball bearing systems, the use of wiper or seals is recommended to prevent dirt accumulation. No other system has the design benefits for use in dust, fibers, and coarse dirt as DryLin®.



DryLin® R provides reliability in applications where contaminants are prevalent



DryLin® R linear bearings in a safety door



DryLin® R bearings in a retrieval robot with speeds up to 1574 fpm

## Split Linear Bearings

Applications that operate on the edge of technical feasibility or in extremely harsh environments may require frequent replacement of the linear bearings. In many cases, service life can be multiplied many times by DryLin®. However, in extreme applications replacement of the bearings may be necessary even with DryLin®.

With this product line of split DryLin® bearings, installation times can be reduced to a minimum.



The DryLin® liner can be pushed easily onto the shaft



Then the adapter is fitted over the liner



Installation is simple and reduces downtime and maintenance costs

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)


10

inch

mm



## Eccentric Forces

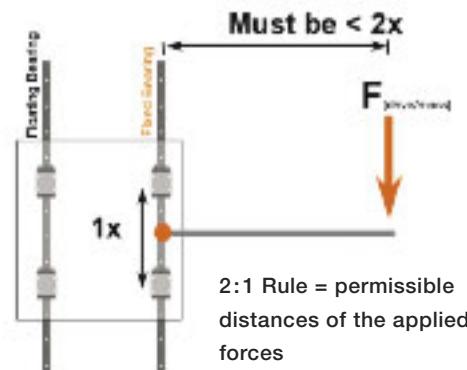

### The 2:1 Rule

When using linear plain bearings it is important to ensure that the acting forces follow the 2:1 Rule (see drawing). If either the load or the drive force (F) is greater than twice the bearing length (1X), then a binding or interrupted motion may occur.

If the location of the drive force or load cannot be changed, simply increase the distance between the bearings, or create a counterbalance to move the center-of-gravity back within the 2 to 1 ratio.



Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

## Fixed and Floating Bearing Mounting Instructions

When using systems with 2 parallel rails, one side must be designated as the "fixed" rail, and the opposite side as the "floating" rail.

### Why use floating bearings?

- Promotes smooth gliding performance and maximizes bearing life
- Prevents binding caused by parallelism and angle errors
- Decreases necessary drive force and wear by minimizing friction-forces
- Enhances the precision of the system over the bearings' lifetime.
- Reduce assembly time and cost

### Fixed Bearings

The "fixed" bearing rail should be positioned closest to the drive force. This rail will determine the precision of the system; no system should contain more than two "fixed" bearings.

### Floating/Self-Aligning Bearings

The "floating" rail should be the rail located furthest from the drive force. It is to act only as a guide, and will compensate for any misalignments or angle errors in the system ensuring proper functionality.

### Mounting Surfaces

The mounting surfaces for rails and bearings should have a very flat surface (e.g milled surface) in order to enhance performance. Variations in these surfaces may be compensated for by using floating bearings.

## DryLin® R - Mounting Instructions

DryLin® R linear plain bearings in the 03 Design Series are self-aligning and offer great advantages in applications with parallel shafts. They are able to compensate for alignment and parallelism errors and should be used on the shaft located furthest from the drive mechanism.

The design provides a raised spherical area on the outer diameter of the aluminum adapter for self-alignment. Load capacity is the same as the fixed version.


Even in unfavorable edge-load conditions, the load is supported by the entire projected surface

In order to compensate for parallelism errors between two shafts, the outer diameter is designed to be smaller than the


housing bore diameter by 0.2 - 0.3 mm (depending on the size). With the use of mounted O-rings, these bearings have an elastic bearing seat.

### Compensation for angle errors

Series RJUI/RJUM/OJUI/OJUM-03	$\pm 0.5^\circ$
Series RJUM-06-LL/OJUM-06-LL	$\pm 3.5^\circ$

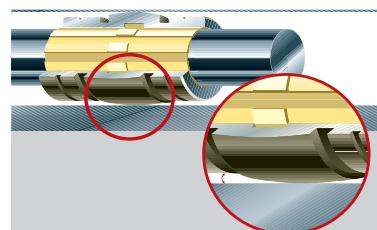

The spherical DryLin® adapters can compensate for alignment errors. A hard-anodization protects the aluminum adapter from wear.

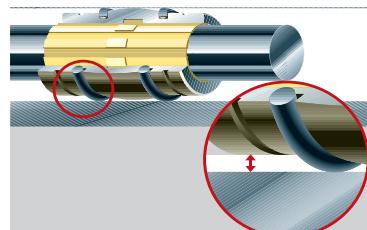

With built in clearances and the use of O-rings, the self-aligning DryLin® R bearings of the 03 Design Series can compensate for parallelism errors.



The self-aligning DryLin® R bearings of the 06 LL design series can compensate parallelism errors up to  $\pm .12"$  (3mm).



DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



This application, a rotary transfer machine, seals champagne bottles with corks, aluminum caps and wire braid. The fact that the DryLin® guide systems are lubricant free is important in the food processing and packaging industries, additional benefits include resistance to chemicals and cleaning.



This application from the food industry transfers breads and pastries from one conveyor to the next. Lubrication is totally prohibited due to food contact. Another reason for using the DryLin® R linear plain bearings is the resistance to corrosive cleaning agents. Additional benefits include the reduced design space required by the iglide® J bearings and the excellent corrosion resistance.

# DryLin® R - Liner, inch

## JUI-01, Standard

## JUI-20, Low Clearance


## TUI-01, High Temp

**igus®**



### Special Properties

- Very low coefficient of friction while running dry
- Very high wear resistance
- Maintenance-free
- Vibration dampening
- Very low moisture absorption
- High chemical resistance
- Suitable for rotating, oscillating and linear movements

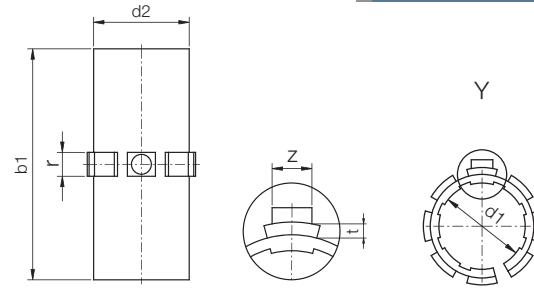

Part No.	Nominal Size	Tolerance*	d2	b1	r -0.004 -0.008	t -0.004	z -0.020
----------	--------------	------------	----	----	-----------------------	-------------	-------------

### Standard Clearance

JUI-01-06	3/8	.0016-.0024	0.4684	0.846	.1250	.0311	.0866
JUI-01-08	1/2	.0016-.0024	0.5934	1.220	.1250	.0391	.1024
JUI-01-10	5/8	.0016-.0024	0.7184	1.460	.1406	.0391	.1181
JUI-01-12	3/4	.0016-.0024	0.8747	1.575	.1875	.0391	.1339
JUI-01-16	1	.0016-.0024	1.1247	2.205	.1875	.0391	.1496
JUI-01-20	1 1/4	.0020-.0032	1.4058	2.573	.1875	.0391	.1496
JUI-01-24	1 1/2	.0020-.0032	1.6558	2.953	.2500	.0625	.1811
JUI-01-32	2	.0024-.0040	2.1871	3.937	.2813	.0625	.2280



JUI-01-XX

Material: iglide® J

Temp. range: -40°F to +194°F

**Best Shaft Material:** DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless Maximum static psi = 5,075

### Low Clearance

JUI-20-06	3/8	.0008-.0012	0.4684	0.846	.1250	.0311	.0866
JUI-20-08	1/2	.0008-.0012	0.5934	1.220	.1250	.0391	.1024
JUI-20-10	5/8	.0008-.0012	0.7184	1.460	.1406	.0391	.1181
JUI-20-12	3/4	.0008-.0012	0.8747	1.575	.1875	.0391	.1339
JUI-20-16	1	.0008-.0012	1.1247	2.205	.1875	.0391	.1496
JUI-20-20	1 1/4	.0010-.0016	1.4058	2.573	.1875	.0391	.1496
JUI-20-24	1 1/2	.0010-.0016	1.6558	2.953	.2500	.0625	.1811
JUI-20-32	2	.0012-.0020	2.1871	3.937	.2813	.0625	.2280



JUI-20-XX

Material: iglide® J

Temp. range: -40°F to +194°F

**Best Shaft Material:** DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless Maximum static psi = 5,075

### High Temperature

TUI-01-08	1/2	.0016-.0024	0.5934	1.220	.1250	.0391	.1024
TUI-01-12	3/4	.0016-.0024	0.8747	1.545	.1875	.0391	.1339
TUI-01-16	1	.0016-.0024	1.1247	2.205	.1875	.0391	.1496
TUI-01-20	1 1/4	.0020-.0032	1.4058	2.573	.1875	.0391	.1496
TUI-01-24	1 1/2	.0020-.0032	1.6558	2.953	.2500	.0625	.1811



TUI-01-XX

\*2-piece design

Material: iglide® T500

Temp. range: -148°F to +482°F


**Best Shaft Material:** Hardened stainless and hard chrome plated steel. Maximum static psi = 21,755

\* according to igus® testing method ► Page 49.57

### Housing Bore for Liner JUI-01/JUI-20/TUI-01

#### Dimensions (inch)

Part No.	Nominal	di	B	r	t	f	z	
	Size	Max.	Min.	*h10	+0.002	+0.004	+0.02	+0.008
JUI-01-06	3/8	.4680	.4684	.875	.1250	.031	.039	.102
JUI-01-08	1/2	.5940	.5934	1.250	.1250	.0391	.059	.122
JUI-01-10	5/8	.7190	.7184	1.500	.1406	.0391	.067	.142
JUI-01-12	3/4	.8755	.8747	1.625	.1875	.0391	.079	.142
JUI-01-16	1	1.1255	1.1247	2.250	.1875	.0391	.079	.161
JUI-01-20	1 1/4	1.4068	1.4058	2.625	.1875	.0391	.079	.161
JUI-01-24	1 1/2	1.6568	1.6558	3.000	.2500	.051	.098	.200
JUI-01-32	2	2.1881	2.1871	4.000	.2813	.051	.098	.240

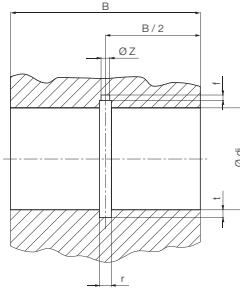

#### JUI-01/JUI-20/TUI-01

Liners are used in:

► RJUI-01

Page 49.12

► RJUI-03

Page 49.13

► TJUI-01

Page 49.14

► TJUI-03

Page 49.15

Online Lifetime Calculation [www.igus.com](http://www.igus.com)

10

inch

mm

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



**igus®**

DryLin® R  
Linear Guide Systems


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

## DryLin® R - Open Liner, inch JUIO-0, Standard JUIO-20, Low Clearance


### Special Properties

- Open design for supported shafts
- Very low coefficient of friction while running dry
- Very high wear resistance
- Maintenance-free
- Vibration dampening
- Very low moisture absorption
- High chemical resistance
- Suitable for rotating, oscillating and linear movements
- High temperature T500 liners available for up to 482°F

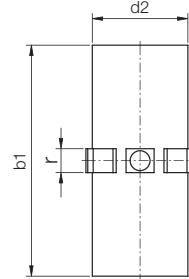

JUIO-01 Liners are used in:

- OJUI-01, Page 49.16
- OJUI-03, Page 49.17

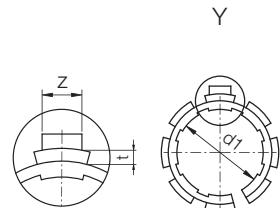

Part No.	Nominal Size	Tolerance	d2	b1	W	r -0.004 -0.008	t -0.004	z -0.020
----------	--------------	-----------	----	----	---	-----------------------	-------------	-------------

### Standard Clearance

JUIO-01-06	3/8	.0016-.0024	0.4684	0.846	0.250	.1250	.0311	.0866
JUIO-01-08	1/2	.0016-.0024	0.5934	1.220	0.394	.1250	.0391	.1024
JUIO-01-10	5/8	.0016-.0024	0.7184	1.460	0.433	.1406	.0391	.1181
JUIO-01-12	3/4	.0016-.0024	0.8747	1.575	0.492	.1875	.0391	.1339
JUIO-01-16	1	.0016-.0024	1.1247	2.205	0.630	.1875	.0391	.1496
JUIO-01-20	1 1/4	.0020-.0032	1.4058	2.573	0.709	.1875	.0391	.1496
JUIO-01-24	1 1/2	.0020-.0032	1.6558	2.953	0.866	.2500	.0625	.1811
JUIO-01-32	2	.0024-.0040	2.1871	4.937	1.181	.2813	.0625	.2280



Material: iglide® J  
Temp. range: -40°F to +194°F  
Best Shaft Material: DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless  
Maximum static psi = 5,075



### Low Clearance

JUIO-20-06	3/8	.0008-.0012	0.4684	0.846	0.250	.1250	.0311	.0866
JUIO-20-08	1/2	.0008-.0012	0.5934	1.220	0.394	.1250	.0391	.1024
JUIO-20-10	5/8	.0008-.0012	0.7184	1.460	0.433	.1406	.0391	.1181
JUIO-20-12	3/4	.0008-.0012	0.8747	1.575	0.492	.1875	.0391	.1339
JUIO-20-16	1	.0008-.0012	1.1247	2.205	0.630	.1875	.0391	.1496
JUIO-20-20	1 1/4	.0010-.0016	1.4058	2.573	0.709	.1875	.0391	.1496
JUIO-20-24	1 1/2	.0010-.0016	1.6558	2.953	0.866	.2500	.0625	.1811
JUIO-20-32	2	.0012-.0020	2.1871	4.937	1.181	.2813	.0625	.2280



Material: iglide® J  
Temp. range: -40°F to +194°F  
Best Shaft Material: DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless  
Maximum static psi = 5,075

\* according to igus® testing method ► Page 49.57

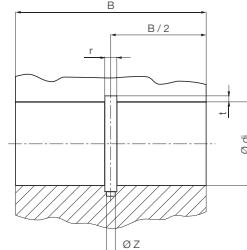

### Housing Bore, Dimensions (Inch)



Part No. Standard	Part No. Low Clearance	Shaft Size Ø	di (inch)		B (inch) *h10 +0.002	r (inch) +0.004	t (inch) +0.004	f (inch) +0.02	z (inch) +0.008	W (inch) +0.008
			Min.	Max.						
JUIO-01-06	JUIO-20-06	3/8	.4680	.4684	.875	.1250	.031	.039	.102	.250
JUIO-01-08	JUIO-20-08	1/2	.5940	.5934	1.250	.1250	.031	.059	.122	.394
JUIO-01-10	JUIO-20-10	5/8	.7190	.7184	1.500	.1406	.039	.067	.142	.433
JUIO-01-12	JUIO-20-12	3/4	.8755	.8747	1.625	.1875	.039	.079	.142	.492
JUIO-01-16	JUIO-20-16	1	1.1255	1.1247	2.250	.1875	.039	.079	.161	.630
JUIO-01-20	JUIO-20-20	1 1/4	1.4068	1.4058	2.625	.1875	.039	.079	.161	.709
JUIO-01-24	JUIO-20-24	1 1/2	1.6568	1.6558	3.000	.2500	.062	.089	.200	.866
JUIO-01-32	JUIO-20-32	2	2.1881	2.1871	4.000	.2813	.062	.098	.240	1.181

\*See ISO tolerance information on Page 49.57



## Special Properties

- Plain bearing made from iglide® J
- Dimensionally interchangeable with linear ball bearings
- Secured by retaining clips (not included in delivery)
- Designed as a press-fit part
- Temperature range: -40°F to +194°F
- Best with DryLin® AWI shafting, case-hardened steel, 300 series stainless and others (call for assistance)

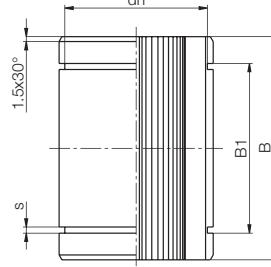

## Dimensions (inch)

Part No.	d1	d2	B	B1	S	dn
RJI-01-06	.375	.6250	.8750	.6890	.0410	.5870
RJI-01-08	.500	.8750	1.2500	1.0120	.0520	.8200
RJI-01-10	.625	1.1250	1.5000	1.0950	.0620	1.0600
RJI-01-12	.750	1.2500	1.6200	1.2500	.0620	1.1770
RJI-01-16	1.000	1.5625	2.2500	1.8640	.0740	1.4710
RJI-01-20	1.250	2.0000	2.6250	1.9840	.0740	1.8890
RJI-01-24	1.500	2.3750	3.0000	2.3900	.0950	2.2410
RJI-01-32	2.000	3.0000	4.0000	3.1630	.1110	2.8390

## Load Data

Part No.	Nominal Size	Tolerance for d1	pmax	pmax	Weight (oz.)
			Dynamic Load (lbs) p = 363 psi	Static Load (lbs) p = 2538 psi	
RJI-01-06	.375	.0010 - .0024	67	417	.10
RJI-01-08	.500	.0013 - .0030	80	555	.31
RJI-01-10	.625	.0013 - .0030	141	992	.61
RJI-01-12	.750	.0016 - .0036	204	1428	.78
RJI-01-16	1.000	.0016 - .0036	294	2062	1.5
RJI-01-20	1.250	.0020 - .0044	595	4163	2.86
RJI-01-24	1.500	.0020 - .0044	816	5710	4.48
RJI-01-32	2.000	.0024 - .0053	1452	10152	8.78

\* according to igus® testing method ► Page 49.57

Housing Bore  
Recommendations

Nominal ID Size	Min.	Max.
3/8	0.6250	0.6257
1/2	0.8750	0.8758
5/8	1.1250	1.1258
3/4	1.2500	1.2510
1	1.5620	1.5630
1-1/4	2.0000	2.0010
1-1/2	2.3750	2.3760
2	3.0000	3.0010

RJI is a press-fit part. It will be  
oversized prior to installationonline lifetime  
calculation  
[www.igus.com](http://www.igus.com)DryLin® R  
Linear Guide SystemsPDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch


mm



## DryLin® R Straight Linear Plain Bearing - Inch

## Special Properties

- Anodized aluminum adapter (Stainless available upon request)
- Dimensionally interchangeable with linear ball bearings
- Equipped with liner made of iglide® J Temperature range -40°F to +194°F JUI-01 (standard), JUI-20 (low clearance)
- T500 liner optional for chemicals/high temps (up to 482°F for steel housing, 356°F for aluminum)
- Suitable shafting for iglide® J: DryLin® AWI aluminum, case-hardened, 300 series stainless Best shafting for T500: hard-chrome and hard-stainless steel

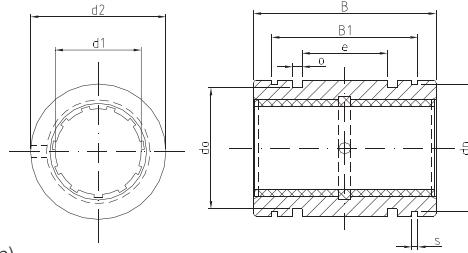

## RJUI-01, Standard Clearance

## Dimensions (inch)

Part No.	Nominal Size	Tolerance**	d2 ISO h7	B ISO h10	B1 ISO H10	s	dn	e	o +.004	do
RJUI-01-04*	1/4	.0016 -.0032	.5000	.7500	.518	.0410	.4670	.125	.0800	.3990
RJUI-01-06	3/8	.0016 -.0032	.6250	.8700	.644	.0410	.5870	.243	.0610	.5660
RJUI-01-08	1/2	.0016 -.0032	.8750	1.2500	.979	.0520	.8200	.281	.1250	.7120
RJUI-01-10	5/8	.0016 -.0032	1.1250	1.5000	1.124	.0620	1.0600	.312	.1250	.9620
RJUI-01-12	3/4	.0016 -.0032	1.2500	1.6200	1.186	.0620	1.1770	.312	.1250	1.0870
RJUI-01-16	1	.0016 -.0032	1.5625	2.2500	1.773	.0740	1.4710	.500	.1250	1.3990
RJUI-01-20	1-1/4	.0020 -.0041	2.0000	2.6200	2.023	.0740	1.8890	.625	.1250	1.8370
RJUI-01-24	1-1/2	.0020 -.0041	2.3750	3.0000	2.440	.0950	2.2410	.750	.1620	2.1520
RJUI-01-32	2	.0024 -.0051	3.0000	4.0000	3.222	.1110	2.8390	1.000	.1890	2.7750

## RJUI-21, Low Clearance

## Dimensions (inch)

Part No.	Nominal Size	Tolerance**	d2 ISO h7	B ISO h10	B1 ISO H10	s	dn	e	o +.004	do
RJUI-21-06	3/8	.0008 -.0016	.6250	.8700	.644	.0410	.5870	.243	.0610	.5660
RJUI-21-08	1/2	.0008 -.0016	.8750	1.2500	.979	.0520	.8200	.281	.1250	.7120
RJUI-21-10	5/8	.0008 -.0016	1.1250	1.5000	1.124	.0620	1.0600	.312	.1250	.9620
RJUI-21-12	3/4	.0008 -.0016	1.2500	1.6200	1.186	.0620	1.1770	.312	.1250	1.0870
RJUI-21-16	1	.0008 -.0016	1.5625	2.2500	1.773	.0740	1.4710	.500	.1250	1.3990
RJUI-21-20	1-1/4	.0010 -.0021	2.0000	2.6200	2.023	.0740	1.8890	.625	.1250	1.8370
RJUI-21-24	1-1/2	.0010 -.0021	2.3750	3.0000	2.440	.0950	2.2410	.750	.1620	2.1520
RJUI-21-32	2	.0012 -.0026	3.0000	4.0000	3.222	.1110	2.8390	1.000	.1890	2.7750

## Housing Bore Recommendations

Nominal ID Size	Min.	Max.
1/4	0.5000	0.5007
3/8	0.6250	0.6257
1/2	0.8750	0.8758
5/8	1.1250	1.1258
3/4	1.2500	1.2510
1	1.5625	1.5635
1-1/4	2.0000	2.0010
1-1/2	2.3750	2.3760
2	3.0000	3.0010

## Load Data

Part No.	pmax Dynamic Load (lbs) p = 725 psi	pmax Static Load (lbs) p = 5075 psi
RJUI-01-04*	135	946
RJUI-01-06 / RJUI-21-06	118	828
RJUI-01-08 / RJUI-21-08	225	1575
RJUI-01-10 / RJUI-21-10	338	2365
RJUI-01-12 / RJUI-21-12	439	3077
RJUI-01-16 / RJUI-21-16	811	5678
RJUI-01-20 / RJUI-21-20	1184	8287
RJUI-01-24 / RJUI-21-24	1622	11358
RJUI-01-32 / RJUI-21-32	2885	20198

\* Nominal widths under 3/8 inch are delivered with pressfit sleeve bearings

\*\* according to igus® testing method ► Page 49.57


# DryLin® R Self-Aligning Linear Plain Bearing, inch

**igus®**



## Special Properties

- Hard anodized aluminum (Stainless available upon request)
- Compensates +/- 0.5° angle error
- Approximately 0.007" smaller OD for parallelism errors
- iglide® J Temperature range -40°F to +194°F  
JUI-01 (standard), JUI-20 (low clearance)
- T500 liner optional for chemicals/high temps, 356°F for aluminum
- Suitable shafting for iglide® J: DryLin® AWI aluminum, case-hardened, 300 series stainless  
Best shafting for T500: hard-chrome and hard-stainless steel
- Includes o-rings (o-ring grease recommended for install)
- Secure by retaining clips (not included)

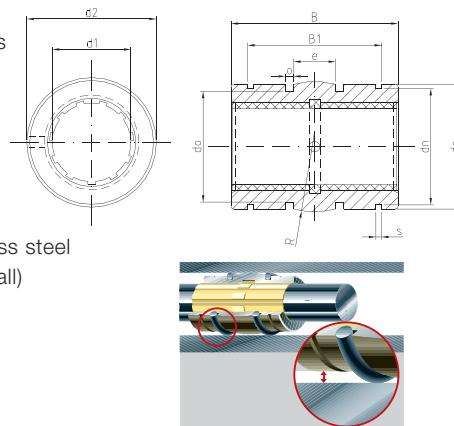

## RJUI-03, Standard Clearance

### Dimensions (inch)

Part No.	Nominal Size	Tolerance**	d2 ISO h8	B ISO h10	B1 ISO H10	s	ds	dn ISO h10	do	o -0.004	e
RJUI-03-04*	1/4	.0016-.0032	.4921	.7460	.5270	.0410	.4803	.4660	.3990	.0800	.1250
RJUI-03-06	3/8	.0016-.0032	.6173	.8713	.6520	.0410	.6055	.5870	.5240	.0610	.2430
RJUI-03-08	1/2	.0016-.0032	.8673	1.2461	.9870	.0520	.8556	.8200	.7120	.1250	.2815
RJUI-03-10	5/8	.0016-.0032	1.1173	1.4961	1.1360	.0620	1.1055	1.0600	.9620	.1250	.3125
RJUI-03-12	3/4	.0016-.0032	1.2421	1.6173	1.1980	.0620	1.2300	1.1770	1.0870	.1250	.3125
RJUI-03-16	1	.0016-.0032	1.5547	2.2421	1.7890	.0740	1.5271	1.4710	1.3990	.1250	.5000
RJUI-03-20	1-1/4	.0020-.0041	1.9881	2.6173	2.0390	.0740	1.9606	1.8890	1.8370	.1250	.6250
RJUI-03-24	1-1/2	.0020-.0041	2.3634	2.9921	2.4630	.0950	2.3358	2.2410	2.1520	.1620	.7500
RJUI-03-32	2	.0024-.0051	2.9881	3.9921	3.2490	.1110	2.9606	2.8390	2.7750	.1890	1.0000

## RJUI-23, Low Clearance

### Dimensions (inch)

Part No.	Nominal Size	Tolerance**	d2 ISO h8	B ISO h10	B1 ISO H10	s	ds	dn ISO h10	do	o -0.004	e
RJUI-23-06	3/8	.0008-.0016	.6173	.8713	.6520	.0410	.6055	.5870	.5240	.0610	.2430
RJUI-23-08	1/2	.0008-.0016	.8673	1.2461	.9870	.0520	.8556	.8200	.7120	.1250	.2815
RJUI-23-10	5/8	.0008-.0016	1.1173	1.4961	1.1360	.0620	1.1055	1.0600	.9620	.1250	.3125
RJUI-23-12	3/4	.0008-.0016	1.2421	1.6173	1.1980	.0620	1.2300	1.1770	1.0870	.1250	.3125
RJUI-23-16	1	.0008-.0016	1.5547	2.2421	1.7890	.0740	1.5271	1.4710	1.3990	.1250	.5000
RJUI-23-20	1-1/4	.0010-.0021	1.9881	2.6173	2.0390	.0740	1.9606	1.8890	1.8370	.1250	.6250
RJUI-23-24	1-1/2	.0010-.0021	2.3634	2.9921	2.4630	.0950	2.3358	2.2410	2.1520	.1620	.7500
RJUI-23-32	2	.0012-.0026	2.9881	3.9921	3.2490	.1110	2.9606	2.8390	2.7750	.1890	1.0000

### Housing Bore Recommendations

Nominal ID Size	Min.	Max.
1/4	0.5000	0.5007
3/8	0.6250	0.6257
1/2	0.8750	0.8758
5/8	1.1250	1.1258
3/4	1.2500	1.2510
1	1.5625	1.5635
1-1/4	2.0000	2.0010
1-1/2	2.3750	2.3760
2	3.0000	3.0010

### Load Data

Part No.	pmax Dynamic Load (lbs) p = 725 psi	pmax Static Load (lbs) p = 5075 psi
RJUI-03-04*	135	946
RJUI-03-06 / RJUI-23-06	118	828
RJUI-03-08 / RJUI-23-08	225	1575
RJUI-03-10 / RJUI-23-10	338	2365
RJUI-03-12 / RJUI-23-12	439	3077
RJUI-03-16 / RJUI-23-16	811	5678
RJUI-03-20 / RJUI-23-20	1184	8287
RJUI-03-24 / RJUI-23-24	1622	11358
RJUI-03-32 / RJUI-23-32	2885	20198

\* Nominal widths under 3/8 inch are delivered with pressfit sleeve bearings

\*\* according to igus® testing method ► Page 49.57

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



**igus®**

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270




Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



## DryLin® R Straight, Split Linear Bearings, inch

### Special Properties

- Anodized aluminum adapter
- Dimensionally interchangeable with linear ball bearings
- Equipped with liner made of iglide® J  
Temperature range -40°F to +194°F  
JUI-01 (standard), JUI-20 (low clearance)
- T500 liner optional for chemicals/high temps  
(up to 482°F for steel housing, 356°F for aluminum)
- Suitable shafting for iglide® J: DryLin® AWI aluminum, case-hardened, 300 series stainless  
Best shafting for T500: hard-chrome and hard-stainless steel



### TJUI-01, Standard Clearance

#### Dimensions (inch)

Part No.	Nominal Size	Tolerance*	d2 ISO f7	B ISO h10	B1 ISO H10	s	dn	e	o +0.008	do
TJUI-01-08	1/2	.0016 -.0036	.8750	1.2500	.979	.0520	.8200	.281	.1250	.7120
TJUI-01-10	5/8	.0016 -.0036	1.1250	1.5000	1.124	.0620	1.0600	.312	.1250	.9620
TJUI-01-12	3/4	.0016 -.0036	1.2500	1.6250	1.186	.0620	1.1770	.312	.1250	1.0870
TJUI-01-16	1	.0016 -.0036	1.5625	2.2500	1.773	.0740	1.4710	.500	.1250	1.3990
TJUI-01-20	1-1/4	.0020 -.0039	2.0000	2.6250	2.023	.0740	1.8890	.625	.1250	1.8370
TJUI-01-24	1-1/2	.0020 -.0047	2.3750	3.0000	2.440	.0950	2.2410	.650	.1620	2.1520
TJUI-01-32	2	.0024 -.0057	3.0000	4.0000	3.222	.1110	2.8390	1.000	.1890	2.7750

### TJUI-21, Low Clearance

#### Dimensions (inch)

Part No.	Nominal Size	Tolerance*	d2 ISO f7	B ISO h10	B1 ISO H10	s	dn	e	o +0.008	do
TJUI-21-08	1/2	.0008 -.0018	.8750	1.2500	.979	.0520	.8200	.281	.1250	.7120
TJUI-21-10	5/8	.0008 -.0018	1.1250	1.5000	1.124	.0620	1.0600	.312	.1250	.9620
TJUI-21-12	3/4	.0008 -.0018	1.2500	1.6250	1.186	.0620	1.1770	.312	.1250	1.0870
TJUI-21-16	1	.0008 -.0018	1.5625	2.2500	1.773	.0740	1.4710	.500	.1250	1.3990
TJUI-21-20	1-1/4	.0010 -.0020	2.0000	2.6250	2.023	.0740	1.8890	.625	.1250	1.8370
TJUI-21-24	1-1/2	.0010 -.0024	2.3750	3.0000	2.440	.0950	2.2410	.650	.1620	2.1520
TJUI-21-32	2	.0012 -.0029	3.0000	4.0000	3.222	.1110	2.8390	1.000	.1890	2.7750

#### Housing Bore Recommendations

Nominal ID Size	Min.	Max.
1/4	0.5000	0.5007
3/8	0.6250	0.6257
1/2	0.8750	0.8758
5/8	1.1250	1.1258
3/4	1.2500	1.2510
1	1.5625	1.5635
1-1/4	2.0000	2.0010
1-1/2	2.3750	2.3760
2	3.0000	3.0010

#### Load Data

Part No.	Dynamic Load (lbs) p = 725 psi	Static Load (lbs) p = 5075 psi
TJUI-01-08 / TJUI-03-08	225	1575
TJUI-01-10 / TJUI-03-10	338	2365
TJUI-01-12 / TJUI-03-12	439	3077
TJUI-01-16 / TJUI-03-16	811	5678
TJUI-01-20 / TJUI-03-20	1184	8287
TJUI-01-24 / TJUI-03-24	1622	11358
TJUI-01-32 / TJUI-03-32	2885	20198

Material: iglide® J

Temp. range: -40°F to +194°F

Best Shaft Material: DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless

\* according to igus® testing method ► Page 49.57




# DryLin® R Self-Aligning, Split Linear Plain Bearing, inch

**igus®**



## Special Properties

- Anodized aluminum adapter
- Dimensionally interchangeable with linear ball bearings
- iglide® J Temperature range -40°F to +194°F
- T500 liner optional for chemicals/high temps (up to 482°F for steel housing, 356°F for aluminum)
- Suitable shafting for iglide® J: DryLin® AWI aluminum, case-hardened, 300 series stainless
- Best shafting for T500: hard-chrome and hard-stainless steel
- Includes o-rings (o-ring grease recommended for install)

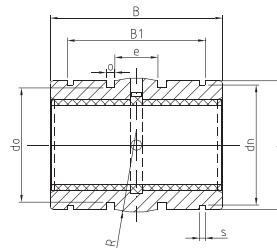

## TJUI-03, Standard Clearance

### Dimensions (inch)

Part No.	ø Shaft	Tolerance*	d2 ISO f7	B ISO h10	B1 ISO H10	s	ds	do	ø +0.008	e
TJUI-03-08	1/2	.0016 -.0036	.8750	1.2420	.987	.0520	.8563	.7120	.1250	.2815
TJUI-03-10	5/8	.0016 -.0036	1.1250	1.4920	1.136	.0620	1.1039	.9620	.1250	.3125
TJUI-03-12	3/4	.0016 -.0036	1.2500	1.6170	1.198	.0620	1.2276	1.0870	.1250	.3125
TJUI-03-16	1	.0016 -.0036	1.5625	2.2382	1.789	.0740	1.5350	1.3990	.1250	.5000
TJUI-03-20	1-1/4	.0020 -.0039	2.0000	2.6134	2.039	.0740	1.9654	1.8370	.1250	.6250
TJUI-03-24	1-1/2	.0020 -.0047	2.3750	2.9843	2.463	.0950	2.3370	2.1520	.1620	.7500
TJUI-03-32	2	.0024 -.0057	3.0000	3.9803	3.249	.1110	2.9531	2.7750	.1890	1.0000

## TJUI-23, Low Clearance

### Dimensions (inch)

Part No.	ø Shaft	Tolerance*	d2 ISO f7	B ISO h10	B1 ISO H10	s	ds	do	ø +0.008	e
TJUI-23-08	1/2	.0008 -.0018	.8750	1.2420	.987	.0520	.8563	.7120	.1250	.2815
TJUI-23-10	5/8	.0008 -.0018	1.1250	1.4920	1.136	.0620	1.1039	.9620	.1250	.3125
TJUI-23-12	3/4	.0008 -.0018	1.2500	1.6170	1.198	.0620	1.2276	1.0870	.1250	.3125
TJUI-23-16	1	.0008 -.0018	1.5625	2.2382	1.789	.0740	1.5350	1.3990	.1250	.5000
TJUI-23-20	1-1/4	.0010 -.0020	2.0000	2.6134	2.039	.0740	1.9654	1.8370	.1250	.6250
TJUI-23-24	1-1/2	.0010 -.0024	2.3750	2.9843	2.463	.0950	2.3370	2.1520	.1620	.7500
TJUI-23-32	2	.0012 -.0029	3.0000	3.9803	3.249	.1110	2.9531	2.7750	.1890	1.0000

\* according to igus® testing method ► Page 49.57

### Housing Bore Recommendations

Nominal ID Size	Min.	Max.
1/4	0.5000	0.5007
3/8	0.6250	0.6257
1/2	0.8750	0.8758
5/8	1.1250	1.1258
3/4	1.2500	1.2510
1	1.5625	1.5635
1-1/4	2.0000	2.0010
1-1/2	2.3750	2.3760
2	3.0000	3.0010

### Benefits

- Drastically reduce machine downtime
- Replace bearings without removing shafts
- Unique, cost-effective solution versus ball bearings



PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



**igus®**

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



## DryLin® R Straight, Open Linear Bearing, inch

### Special Properties

- Anodized aluminum adapter
- Dimensionally interchangeable with linear ball bearings
- Equipped with liner made of iglide® J  
Temperature range -40°F to +194°F  
JUIO-01 (standard), JUI-20 (low clearance)
- T500 liner optional for chemicals/high temps  
(up to 482°F for steel housing, 356°F for aluminum)
- Suitable shafting for iglide® J: DryLin® AWI aluminum,  
case-hardened, 300 series stainless  
Best shafting for T500: hard-chrome and hard-stainless steel

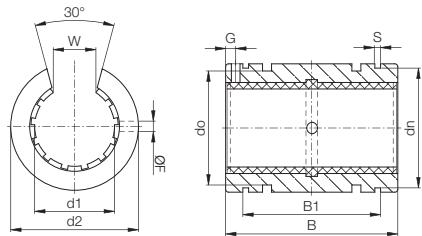

### OJUI-01, Standard Clearance

#### Dimensions (inch)

Part No..	Ø Shaft	Tolerance*	d2	B	W	s	dn	B1	F	G	do
			ISO h7	ISO h10	±0.012		ISO h10	ISO H10	+0.004	+0.004	
OJUI-01-08	1/2	.0016 -.0032	.8750	1.2500	.3940	.0520	.8200	.979	.1360	.6250	.684
OJUI-01-10	5/8	.0016 -.0032	1.1250	1.5000	.4330	.0620	1.0600	1.124	.1360	.1250	.934
OJUI-01-12	3/4	.0016 -.0032	1.2500	1.6250	.4920	.0620	1.1770	1.186	.1360	.1250	1.059
OJUI-01-16	1	.0016 -.0032	1.5625	2.2500	.6300	.0740	1.4710	1.773	.1360	.1250	1.372
OJUI-01-20	1-1/4	.0020 -.0041	2.0000	2.6250	.7090	.0740	1.8890	2.023	.2010	.1875	1.809
OJUI-01-24	1-1/2	.0020 -.0041	2.3750	3.0000	.8660	.0950	2.2410	2.440	.2010	.1875	2.113
OJUI-01-32	2	.0024 -.0051	3.0000	4.0000	1.1810	.1110	2.8390	3.222	.2650	.3125	2.738

### OJUI-21, Low Clearance

#### Dimensions (inch)

Part No..	Ø Shaft	Tolerance*	d2	B	W	s	dn	B1	F	G	do
			ISO h7	ISO h10	±0.012		ISO h10	ISO H10	+0.004	+0.004	
OJUI-21-08	1/2	.0008 -.0016	.8750	1.2500	.3940	.0520	.8200	.979	.1360	.6250	.684
OJUI-21-10	5/8	.0008 -.0016	1.1250	1.5000	.4330	.0620	1.0600	1.124	.1360	.1250	.934
OJUI-21-12	3/4	.0008 -.0016	1.2500	1.6250	.4920	.0620	1.1770	1.186	.1360	.1250	1.059
OJUI-21-16	1	.0008 -.0016	1.5625	2.2500	.6300	.0740	1.4710	1.773	.1360	.1250	1.372
OJUI-21-20	1-1/4	.0010 -.0021	2.0000	2.6250	.7090	.0740	1.8890	2.023	.2010	.1875	1.809
OJUI-21-24	1-1/2	.0010 -.0021	2.3750	3.0000	.8660	.0950	2.2410	2.440	.2010	.1875	2.113
OJUI-21-32	2	.0012 -.0026	3.0000	4.0000	1.1810	.1110	2.8390	3.222	.2650	.3125	2.738


\* according to igus® testing method ► Page 49.57

#### Housing Bore Recommendations

Nominal ID Size	Min.	Max.
1/4	0.5000	0.5007
3/8	0.6250	0.6257
1/2	0.8750	0.8758
5/8	1.1250	1.1258
3/4	1.2500	1.2510
1	1.5625	1.5635
1-1/4	2.0000	2.0010
1-1/2	2.3750	2.3760
2	3.0000	3.0010

#### Load Data

Part No.	pmax. Dynamic Load P = 725 psi			pmax. Static Load P = 5075 psi		
	0°	90°	180°	0°	90°	180°
OJUI-01-08 / OJUI-21-08	226	154	80	1585	1078	555
OJUI-01-10 / OJUI-21-10	340	231	118	2378	1617	832
OJUI-01-12 / OJUI-21-12	408	277	143	2854	1942	998
OJUI-01-16 / OJUI-21-16	590	400	206	4123	2804	1443
OJUI-01-20 / OJUI-21-20	1189	809	416	8323	5659	2912
OJUI-01-24 / OJUI-21-24	1631	1109	571	11418	7765	3996
OJUI-01-32 / OJUI-21-32	2900	1972	1015	20300	13804	7104

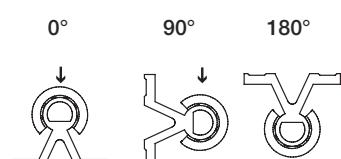


# DryLin® R Self-Aligning, Open Linear Plain Bearing, inch

**igus®**



## Special Properties

- Hard anodized aluminum adapter
- Dimensionally interchangeable with linear ball bearings
- Equipped with liner made of iglide® J  
Temperature range -40°F to +194°F  
JUJO-01 (standard), JUJO-20 (low clearance)
- T500 liner optional for chemicals/high temps  
(up to 482°F for steel housing, 356°F for aluminum)
- Suitable shafting for iglide® J: DryLin® AWI aluminum,  
case-hardened, 300 series stainless  
Best shafting for T500: hard-chrome and hard-stainless steel

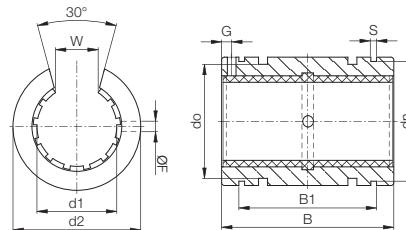

## OJUI-03, Standard Clearance

### Dimensions (inch)


Part No.	Ø Shaft	Tolerance*	d2 ISO h8	ds ISO h10	F +0.004	G +0.004	do	B1 ISO H10	s ISO H10	dn ISO h10	B ISO h10	W +0.012
OJUI-03-08	1/2	.0016 -.0032	.8673	.8556	.1360	.6250	.6846	.987	.0520	.8200	1.2461	.3940
OJUI-03-10	5/8	.0016 -.0032	1.1173	1.1055	.1360	.1250	.9346	1.136	.0620	1.0600	1.4961	.4330
OJUI-03-12	3/4	.0016 -.0032	1.2421	1.2300	.1360	.1250	1.0590	1.198	.0620	1.1770	1.6173	.4920
OJUI-03-16	1	.0016 -.0032	1.5547	1.5271	.1360	.1250	1.3720	1.789	.0740	1.4710	2.2421	.6300
OJUI-03-20	1-1/4	.0020 -.0041	1.9881	1.9606	.2010	.1875	1.8094	2.039	.0740	1.8890	2.6173	.7090
OJUI-03-24	1-1/2	.0020 -.0041	2.3634	2.3358	.2010	.1875	2.1130	2.463	.0950	2.2410	2.9921	.8660
OJUI-03-32	2	.0024 -.0051	2.988	2.9606	.2650	.3125	2.7378	3.249	.1110	2.8390	3.9921	1.1810

## OJUI-23, Low Clearance

### Dimensions (inch)

Part No.	Ø Shaft	Tolerance*	d2 ISO h8	ds ISO h10	F +0.004	G +0.004	do	B1 ISO H10	s ISO H10	dn ISO h10	B ISO h10	W +0.012
OJUI-23-08	1/2	.0008 -.0016	.8673	.8556	.1360	.6250	.6846	.987	.0520	.8200	1.2461	.3940
OJUI-23-10	5/8	.0008 -.0016	1.1173	1.1055	.1360	.1250	.9346	1.136	.0620	1.0600	1.4961	.4330
OJUI-23-12	3/4	.0008 -.0016	1.2421	1.2300	.1360	.1250	1.0590	1.198	.0620	1.1770	1.6173	.4920
OJUI-23-16	1	.0008 -.0016	1.5547	1.5271	.1360	.1250	1.3720	1.789	.0740	1.4710	2.2421	.6300
OJUI-23-20	1-1/4	.0010 -.0021	1.9881	1.9606	.2010	.1875	1.8094	2.039	.0740	1.8890	2.6173	.7090
OJUI-23-24	1-1/2	.0010 -.0021	2.3634	2.3358	.2010	.1875	2.1130	2.463	.0950	2.2410	2.9921	.8660
OJUI-23-32	2	.0012 -.0026	2.988	2.9606	.2650	.3125	2.7378	3.249	.1110	2.8390	3.9921	1.1810

\* according to igus® testing method ► Page 49.57

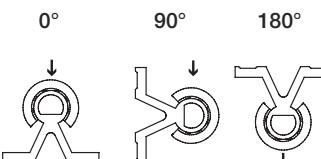

## Housing Bore Recommendations

## Load Data

Nominal ID Size	Part No.		pmax. Dynamic Load P = 725 psi			pmax. Static Load P = 5075 psi			
	Min.	Max.	0°	90°	180°	0°	90°	180°	
1/4	0.5000	0.5007							
3/8	0.6250	0.6257							
1/2	0.8750	0.8758	OJUI-03-08 / OJUI-23-08	226	154	80	1585	1078	555
5/8	1.1250	1.1258	OJUI-03-10 / OJUI-23-10	340	231	118	2378	1617	832
3/4	1.2500	1.2510	OJUI-03-12 / OJUI-23-12	408	277	143	2854	1942	998
1	1.5625	1.5635	OJUI-03-16 / OJUI-23-16	590	400	206	4123	2804	1443
1-1/4	2.0000	2.0010	OJUI-03-20 / OJUI-23-20	1189	809	416	8323	5659	2912
1-1/2	2.3750	2.3760	OJUI-03-24 / OJUI-23-24	1631	1109	571	11418	7765	3996
2	3.0000	3.0010	OJUI-03-32 / OJUI-23-32	2900	1972	1015	20300	13804	7104





# DryLin® R Straight Bearing, Closed Pillow Block, inch



## Special Properties

- Closed, anodized aluminum housing
- Liner JUI-01 made of iglide® J is contained according to standard tolerances
- Can be fitted with iglide® T500 liner material for temperatures up to 356°F
- Low clearance liners optional
- Dimensionally interchangeable with ball bearings

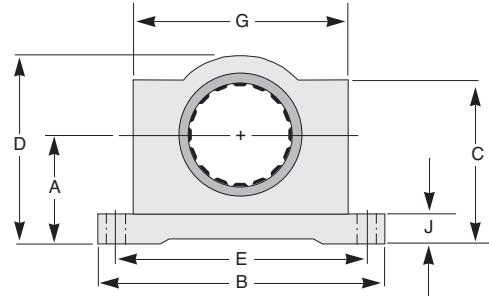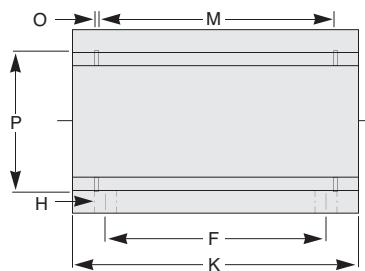

## RJUI-XX, Bearing

### Dimensions (inch)

Part No.	Nom. Size	A ±.001	B	C	D ±.010	E ±.010	F	G	H BOLT	HOLE	J	K	M	O	P
RJUI-[ ]-04	1/4	0.437	1.625	0.750	0.813	1.312	0.750	1.000	#6	5/32	0.188	1.188	0.750	0.039	0.532
RJUI-[ ]-06	3/8	0.500	1.750	0.875	0.938	1.437	0.875	1.125	#6	5/32	0.188	1.313	0.875	0.039	0.665
RJUI-[ ]-08	1/2	0.687	2.000	1.125	1.250	1.688	1.000	1.375	#6	5/32	0.250	1.688	1.250	0.046	0.931
RJUI-[ ]-10	5/8	0.875	2.500	1.438	1.625	2.125	1.125	1.750	#8	3/16	0.281	1.938	1.500	0.056	1.197
RJUI-[ ]-12	3/4	0.937	2.750	1.563	1.750	2.375	1.250	1.875	#8	3/16	0.313	2.063	1.625	0.056	1.330
RJUI-[ ]-16	1	1.187	3.250	1.938	2.188	2.875	1.750	2.375	#10	7/32	0.375	2.813	2.250	0.068	1.671
RJUI-[ ]-20	1-1/4	1.500	4.000	2.500	2.813	3.500	2.000	3.000	#10	7/32	0.438	3.625	2.625	0.068	2.122
RJUI-[ ]-24	1-1/2	1.750	4.750	2.875	3.250	4.125	2.500	3.500	1/4	9/32	0.500	4.000	3.000	0.086	2.519
RJUI-[ ]-32	2	2.125	6.000	3.625	4.063	5.250	3.250	4.500	3/8	13/32	0.625	5.000	4.000	0.103	3.182

Supplement the part number with one of the following choices.

Example: RJUI-[ ]-04 for a self aligning version

For Straight bearing use [11] (see page 49.12)

For Self-Aligning bearing use [13] (see page 49.13)

For Low Clearance Straight use [31] (see page 49.12)

For Low Clearance Self-Aligning use [33] (see page 49.13)



Online lifetime calculation  
[www.igus.com](http://www.igus.com)

### Load Data

#### Part No.

Part No.	Dynamic Load (lbs)		Static Load (lbs)	
	P = 725 psi	P = 5075 psi	P = 725 psi	P = 5075 psi
RJUI-[XX]-04	135	946		
RJUI-[XX]-06	118	828		
RJUI-[XX]-08	225	1575		
RJUI-[XX]-10	338	2365		
RJUI-[XX]-12	439	3077		
RJUI-[XX]-16	811	5678		
RJUI-[XX]-20	1184	8287		
RJUI-[XX]-24	1622	11358		
RJUI-[XX]-32	2885	20198		



# DryLin® R Straight Bearing, Open Pillow Block, inch

**igus®**



## Special Properties

- Open, anodized aluminum housing
- Liner JUI-01 made of iglide® J is contained according to standard tolerances
- Can be fitted with iglide® T500 liner material for temperatures up to 356°F
- Low clearance liners optional
- Dimensionally interchangeable with ball bearings

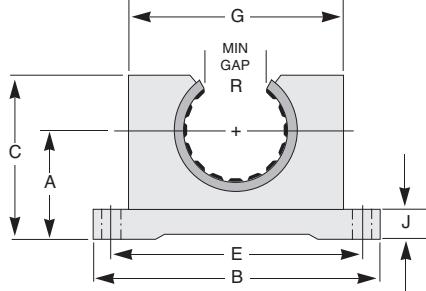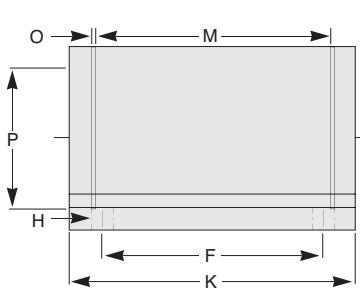

## OJUI-XX, Bearing

### Dimensions (inch)

Part No.	Nom. Size	A $\pm .001$	B	C	E $\pm .010$	F $\pm .010$	G	H BOLT HOLE	J	K	M	O	P	R
OJUI-[ ]-08	1/2	0.687	2.000	1.125	1.688	1.000	1.375	#6 5/32	0.250	1.688	1.250	0.046	0.931	0.313
OJUI-[ ]-10	5/8	0.875	2.500	1.438	2.125	1.125	1.750	#8 3/16	0.281	1.938	1.500	0.056	1.197	0.375
OJUI-[ ]-12	3/4	0.937	2.750	1.563	2.375	1.250	1.875	#8 3/16	0.313	2.063	1.625	0.056	1.330	0.438
OJUI-[ ]-16	1	1.187	3.250	1.938	2.875	1.750	2.375	#10 7/32	0.375	2.813	2.250	0.068	1.671	0.563
OJUI-[ ]-20	1-1/4	1.500	4.000	2.500	3.500	2.000	3.000	#10 7/32	0.438	3.625	2.625	0.068	2.122	0.625
OJUI-[ ]-24	1-1/2	1.750	4.750	2.875	4.125	2.500	3.500	1/4 9/32	0.500	4.000	3.000	0.086	2.519	0.750
OJUI-[ ]-32	2	2.125	6.000	3.625	5.250	3.250	4.500	3/8 13/32	0.625	5.000	4.000	0.103	3.182	1.000

Supplement the part number with one of the following choices.

Example: OJUI-[ ]-04 for a self aligning version

For Straight bearing use [11] (see page 49.16)

For Self-Aligning bearing use [13] (see page 49.17)

For Low Clearance Straight use [31] (see page 49.16)


For Low Clearance Self-Aligning use [33] (see page 49.17)



Online lifetime calculation  
[www.igus.com](http://www.igus.com)


### Load Data

Part No.	pmax. Dynamic Load			pmax. Static Load			0°	90°	180°			
	P = 725 psi			P = 5075 psi								
	0°	90°	180°	0°	90°	180°						
OJUI-[XX]-08	226	154	80	1585	1078	555						
OJUI-[XX]-10	340	231	118	2378	1617	832						
OJUI-[XX]-12	408	277	143	2854	1942	998						
OJUI-[XX]-16	590	400	206	4123	2804	1443						
OJUI-[XX]-20	1189	809	416	8323	5659	2912						
OJUI-[XX]-24	1631	1109	571	11418	7765	3996						
OJUI-[XX]-32	2900	1972	1015	20300	13804	7104						

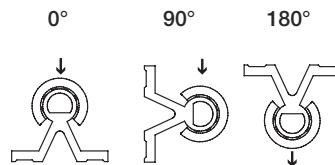

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

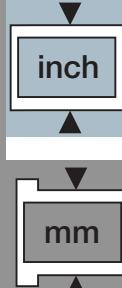



**igus®**

## DryLin® R Straight Bearing, Closed Twin Pillow Block, inch,

DryLin® R  
Linear Guide Systems



Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- Closed, anodized aluminum housing, twin design
- Liner JUI-01 made of iglide® J is contained according to standard tolerances
- Can be fitted with iglide® T500 liner material for temperatures up to 356°F
- Low clearance liners optional
- Dimensionally interchangeable with ball bearings

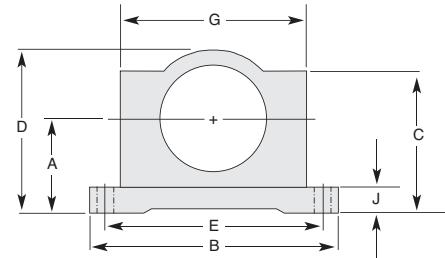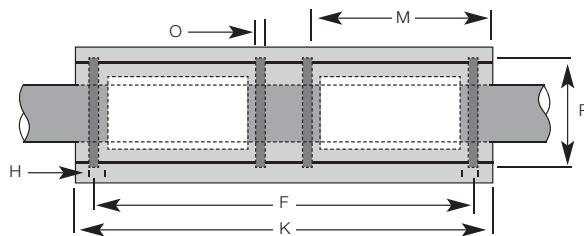

## RJUI-XX-XXTW, Twin Pillow Block

### Dimensions (inch)

Part No.	Nom. Size	A $\pm .001$	B	C	D $\pm .010$	E $\pm .010$	F	G	H BOLT HOLE	J	K	M	O	P
RJUI-[ ]-04TW	1/4	0.437	1.625	0.750	0.813	1.312	2.000	1.000	#6 5/32	0.188	2.500	0.750	0.039	0.532
RJUI-[ ]-06TW	3/8	0.500	1.750	0.875	0.938	1.437	2.250	1.125	#6 5/32	0.188	2.750	0.875	0.039	0.665
RJUI-[ ]-08TW	1/2	0.687	2.000	1.125	1.250	1.688	2.500	1.375	#6 5/32	0.250	3.500	1.250	0.046	0.931
RJUI-[ ]-10TW	5/8	0.875	2.500	1.438	1.625	2.125	3.000	1.750	#8 3/16	0.281	4.000	1.500	0.056	1.197
RJUI-[ ]-12TW	3/4	0.937	2.750	1.563	1.750	2.375	3.500	1.875	#8 3/16	0.313	4.500	1.625	0.056	1.330
RJUI-[ ]-16TW	1	1.187	3.250	1.938	2.188	2.875	4.500	2.375	#10 7/32	0.375	6.000	2.250	0.068	1.671
RJUI-[ ]-20TW	1-1/4	1.500	4.000	2.500	2.813	3.500	5.500	3.000	#10 7/32	0.438	7.500	2.625	0.068	2.122
RJUI-[ ]-24TW	1-1/2	1.750	4.750	2.875	3.250	4.125	6.500	3.500	1/4 9/32	0.500	9.000	3.000	0.086	2.519
RJUI-[ ]-32TW	2	2.125	6.000	3.625	4.063	5.250	8.250	4.500	3/8 13/32	0.625	10.000	4.000	0.103	3.182

Supplement the part number with one of the following choices.

Example: RJUI-[ ]-04TW for a self aligning version

For Straight bearing use [11] (see page 49.12)

For Self-Aligning bearing use [13] (see page 49.13)

For Low Clearance Straight use [31] (see page 49.12)

For Low Clearance Self-Aligning use [33] (see page 49.13)



Online lifetime calculation  
[www.igus.com](http://www.igus.com)

### Load Data

Part No.

Part No.	Dynamic Load (lbs) P = 725 psi		Static Load (lbs) P = 5075 psi	
RJUI-[XX]-04TW	135		946	
RJUI-[XX]-06TW	118		828	
RJUI-[XX]-08TW	225		1575	
RJUI-[XX]-10TW	338		2365	
RJUI-[XX]-12TW	439		3077	
RJUI-[XX]-16TW	811		5678	
RJUI-[XX]-20TW	1184		8287	
RJUI-[XX]-24TW	1622		11358	
RJUI-[XX]-32TW	2885		20198	



# DryLin® R Straight Bearing, Open Twin Pillow Block, inch

**igus®**



## Special Properties

- Open, anodized aluminum housing, twin design
- Liner JUIO-01 made of iglide® J is contained according to standard tolerances
- Can be fitted with iglide® T500 liner material for temperatures up to 356°F
- Low clearance liners optional
- Dimensionally interchangeable with ball bearings

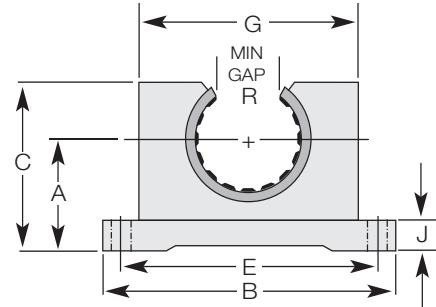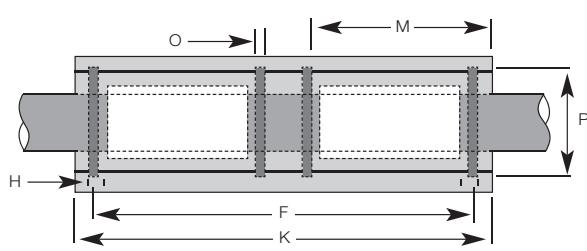

## OJUI-XX-XXTW, Straight Bearing

### Dimensions (inch)

Part No.	Nom. Size	A	B	C	E	F	G	H	J	K	M	O	P	R
		$\pm .001$			$\pm .010$	$\pm .010$		BOLT HOLE						
OJUI-[ ]-08TW	1/2	0.687	2.000	1.125	1.688	2.500	1.375	#6 5/32	0.250	3.500	1.250	0.046	0.931	0.313
OJUI-[ ]-10TW	5/8	0.875	2.500	1.438	2.125	3.000	1.750	#8 3/16	0.281	4.000	1.500	0.056	1.197	0.375
OJUI-[ ]-12TW	3/4	0.937	2.750	1.563	2.375	3.500	1.875	#8 3/16	0.313	4.500	1.625	0.056	1.330	0.438
OJUI-[ ]-16TW	1	1.187	3.250	1.938	2.875	4.500	2.375	#10 7/32	0.375	6.000	2.250	0.068	1.671	0.563
OJUI-[ ]-20TW	1-1/4	1.500	4.000	2.500	3.500	5.500	3.000	#10 7/32	0.438	7.500	2.625	0.068	2.122	0.625
OJUI-[ ]-24TW	1-1/2	1.750	4.750	2.875	4.125	6.500	3.500	1/4 9/32	0.500	9.000	3.000	0.086	2.519	0.750
OJUI-[ ]-32TW	2	2.125	6.000	3.625	5.250	8.250	4.500	3/8 13/32	0.625	10.000	4.000	0.103	3.182	1.000

Supplement the part number with one of the following choices.

Example: OJUI-[ ]-04TW for a self aligning version

For Straight bearing use [11] (see page 49.16)

For Self-Aligning bearing use [13] (see page 49.17)

For Low Clearance Straight use [31] (see page 49.16)


For Low Clearance Self-Aligning use [33] (see page 49.17)



Online lifetime calculation  
[www.igus.com](http://www.igus.com)

## Load Data

Part No.	pmax. Dynamic Load			pmax. Static Load			0°	90°	180°			
	P = 725 psi			P = 5075 psi								
	0°	90°	180°	0°	90°	180°						
OJUI-[XX]-08TW	226	154	80	1585	1078	555						
OJUI-[XX]-10TW	340	231	118	2378	1617	832						
OJUI-[XX]-12TW	408	277	143	2854	1942	998						
OJUI-[XX]-16TW	590	400	206	4123	2804	1443						
OJUI-[XX]-20TW	1189	809	416	8323	5659	2912						
OJUI-[XX]-24TW	1631	1109	571	11418	7765	3996						
OJUI-[XX]-32TW	2900	1972	1015	20300	13804	7104						

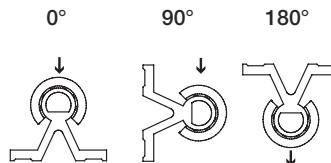

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch




mm



## DryLin® R Flange Pillow Block, inch

### Special Properties

- Flange housing made of anodized aluminum, square flange
- Liner JUI-02 made of iglide® J
- Can be fitted with iglide® T500 liner material for temperatures up to 356°F
- Low clearance liners optional

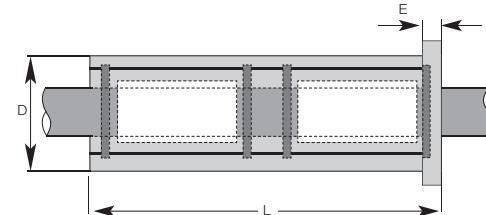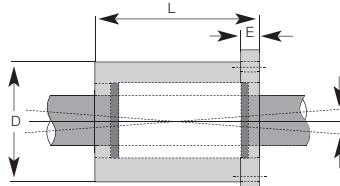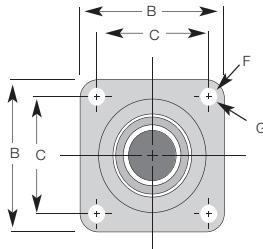

### FJUI-XX, Pillow Blocks

#### Dimensions (inch)

#### Flange, Square

Part no.	Bearing ID	B	C	D	E	F Bolt Size	G	L
FJUI-[ ]-08	1/2	1.63	1.25	1.25	.250	#8	.187	1.687
FJUI-[ ]-12*	3/4	2.38	1.75	1.75	.375	#10	.219	2.067
FJUI-[ ]-16*	1	2.75	2.125	2.25	.500	1/4	.281	2.812



#### Twin Flange, Square

Part no.	Bearing ID	B	C	D	E	F Bolt Size	G	L
FJUI-[ ]-08TW	1/2	1.63	1.25	1.25	.250	#8	.187	3.375
FJUI-[ ]-12TW	3/4	2.38	1.75	1.75	.375	#10	.219	4.188
FJUI-[ ]-16TW	1	2.75	2.125	2.25	.500	1/4	.281	5.625

Supplement the part number with one of the following choices.

Example: FJUI-[ ]-08TW for a self aligning version

For Straight bearing use [11] (see page 49.12)

For Self-Aligning bearing use [13] (see page 49.13)

For Low Clearance Straight use [31] (see page 49.12)

For Low Clearance Self-Aligning use [33] (see page 49.13)



## FJUIT-01-XX, Twin Flange Pillow Block, Round, Low cost



#### Special Properties

- Flange housing made of anodized aluminum, round flange
- 2x liner JUI-01 made of iglide® J
- More sizes may be available upon request
- Can be fitted with iglide® T500 liner material for temperatures up to 356°F
- Low clearance liners optional

#### Dimensions (inch)

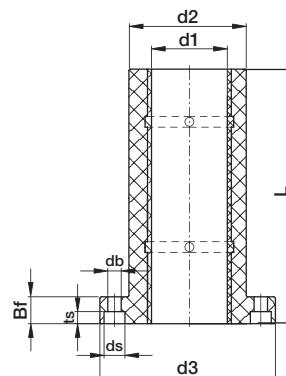

Part No.	d1	d2 ISO h7	d3	dt	L	Bf	ts	db	ds	Bolt Screw size
FJUIT-01-12	3/4	1.260	2.126	1.693	2.72	.433	.203	.219	.343	#10
FJUIT-01-16	1	1.575	2.441	2.000	3.98	.433	.203	.219	.343	#10

**Properties**

<b>Material:</b>	6061-T6
<b>Tolerance:</b>	+0/-0.001"
<b>Straightness:</b>	.001"/ft
<b>Hardness:</b>	75 HB
<b>Surface:</b>	hard-anodized mil-A-8625 Type III Class I < .002"

<b>Layer Thickness:</b>	> .0016"
<b>Surface Hardness:</b>	450-550 HV approx. (60 RC)
<b>Roughness:</b>	RMS = 4-20
<b>Spec. Electr. Resistance:</b>	4*10 <sup>11</sup> Ohm mm <sup>2</sup> /m
<b>Chemical Resistance:</b>	2<ph<9

**Dimensions (inch)**

Part No.	Design	Diameter	Max. Length*	Weight (lbs/ft)
AWI-04- L in inches	Solid	.2500	72	.057
AWI-06- L in inches	Solid	.3750	72	.130
AWI-08- L in inches	Solid	.5000	72	.231
AWI-10- L in inches	Solid	.6250	72	.361
AWI-12- L in inches	Solid	.7500	72	.519
AWI-16- L in inches	Solid	1.0000	72	.924
AWI-20- L in inches	Solid	1.2500	72	1.44
AWI-24- L in inches	Solid	1.5000	72	2.08
AWI-32- L in inches	Solid	2.0000	72	3.70



Longer sizes available upon request  
Metric sizes are also available. See Page 49.61



\*Shaft supports available upon request

**DryLin® S Supported Aluminum Shaft, AWUI-XX****Properties**

<b>Material:</b>	6063-T6
<b>Surface:</b>	hard-anodized aluminum mil-A-8625 Type III Class I < .002"

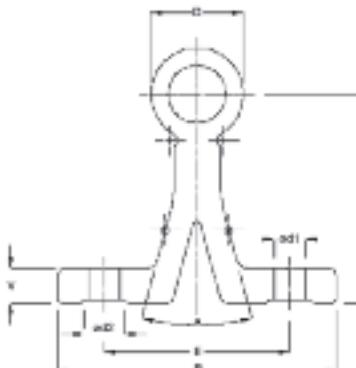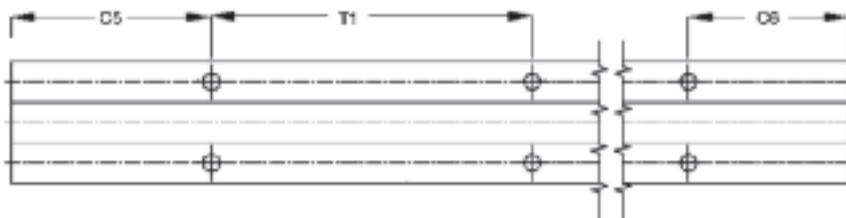**Dimensions (inch)**

Part No.	D	B	H	V	d1	d2	(°)	E	T1	C5/C6	Max. Length	Weight (lbs/ft)
			±0.008					±.008	Bore Spacing	min. max.		
AWUI-08- L in mm	.500 (-.006)	1.50	1.125	.190	.169	.217	30°	1.000	4.00	1 2.95	144	.6
AWUI-10- L in mm	.625 (.006)	1.62	1.125	.252	.193	.256	30°	1.125	4.00	1 3.95	144	.9
AWUI-12- L in mm	.750 (-.006)	1.75	1.500	.252	.220	.276	30°	1.250	6.00	1 3.95	144	1.2
AWUI-16- L in mm	1.000 (-.006)	2.13	1.750	.252	.280	.335	30°	1.500	6.00	1 3.95	144	1.5
AWUI-24- L in mm	1.500 (-.006)	3.00	2.500	.374	.343	.394	30°	2.250	8.00	1 3.95	144	2.6

Please contact igus for additional sizes

Order example: AWUI-16-500 corresponds to supported aluminum shaft diameter 1", 500 mm long


Other shaft materials available upon request



**DryLin® R**  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

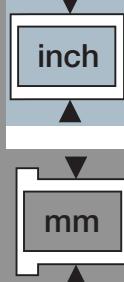



**igus®**

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

## DryLin® R - Liner, mm

JUM-01, Standard, JUM-02 Short Standard  
JUM-20, Low Clearance, JUM-22 Short Low Clearance  
TUM-01, High Temp

### Special Properties




- Very low coefficients of friction while running dry
- Very high wear resistance
- Maintenance-free
- Vibration dampening
- Very low moisture absorption
- High chemical resistance
- Suitable for rotating, oscillating and linear movements



JUM-01-XX  
JUM-20-XX



JUM-02-XX  
JUM-22-XX

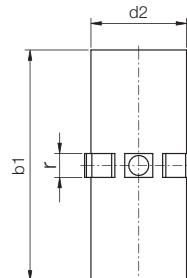

Material: iglide® J

Temp. range: -40°F to +194°F

Best Shaft Material: DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless Maximum static surface pressure: 5,075 psi (35 MPa)

### Standard Clearance

Part No.		d1	Tolerance*	d2	b1 JUM-01 standard	b1 JUM-02 short	r -0.1 -0.2	t -0.1	z -0.5	Weight (g)
JUM-01-10	JUM-02-10	10	.0300 -.0700	12	29	25	3.0	0.8	2.5	0.98
JUM-01-12	JUM-02-12	12	.0300 -.0700	14	31	27	3.0	0.8	3.0	1.38
JUM-01-16	JUM-02-16	16	.0300 -.0700	18	35	29	3.5	0.8	3.5	1.82
JUM-01-20	JUM-02-20	20	.0300 -.0700	23	44	29	5.0	0.8	3.5	3.25
JUM-01-25	JUM-02-25	25	.0300 -.0700	28	57	39	5.0	0.8	4.0	5.80
JUM-01-30	JUM-02-30	30	.0400 -.0850	34	67	49	5.0	0.8	4.0	11.15
JUM-01-40	JUM-02-40	40	.0400 -.0850	44	79	59	6.0	1.3	5.0	18.01
JUM-01-50	JUM-02-50	50	.0500 -.1000	55	99	69	7.0	1.3	6.0	32.60



### Low Clearance

JUM-20-10	JUM-22-10	10	.0150 -.0350	12	29	25	3.0	0.8	2.5	0.98
JUM-20-12	JUM-22-12	12	.0150 -.0350	14	31	27	3.0	0.8	3.0	1.38
JUM-20-16	JUM-22-16	16	.0150 -.0350	18	35	29	3.5	0.8	3.5	1.82
JUM-20-20	JUM-22-20	20	.0150 -.0350	23	44	29	5.0	0.8	3.5	3.25
JUM-20-25	JUM-22-25	25	.0150 -.0350	28	57	39	5.0	0.8	4.0	5.80
JUM-20-30	JUM-22-30	30	.0200 -.0425	34	67	49	5.0	0.8	4.0	11.15
JUM-20-40	JUM-22-40	40	.0200 -.0425	44	79	59	6.0	1.3	5.0	18.01
JUM-20-50	JUM-22-50	50	.0250 -.0500	55	99	69	7.0	1.3	6.0	32.60

### Housing Bore for Liner JUM-01, JUM-02, JUM-20, JUM-22

#### Dimensions (mm)

Part No.	Nominal	di	B 01/20 Standard	B 02/22 Short	r	t	f	z
	Size	H7	h10		+0.05	+0.1	+0.5	+0.2
JUM-01/JUM-02/JUM-20/JUM-22-10	10	12	29	26	3.0	0.8	1.0	2.6
JUM-01/JUM-02/JUM-20/JUM-22-12	12	14	32	28	3.0	0.8	1.5	3.1
JUM-01/JUM-02/JUM-20/JUM-22-16	16	18	36	30	3.5	0.8	1.7	3.6
JUM-01/JUM-02/JUM-20/JUM-22-20	20	23	45	30	5.0	0.8	2.0	3.6
JUM-01/JUM-02/JUM-20/JUM-22-25	25	28	58	40	5.0	0.8	2.0	4.1
JUM-01/JUM-02/JUM-20/JUM-22-30	30	34	68	50	5.0	0.8	2.0	4.1
JUM-01/JUM-02/JUM-20/JUM-22-40	40	44	80	60	6.0	1.3	2.5	5.1
JUM-01/JUM-02/JUM-20/JUM-22-50	50	55	100	70	7.0	1.3	2.5	6.1



# DryLin® R - Liner, mm

## JUMO-01, Open, Standard


## JUMO-20, Open, Low Clearance

**igus®**



### Special Properties

- Open design for supported shafts
- Very low coefficients of friction while running dry
- Very high wear resistance
- Maintenance-free
- Vibration dampening
- Very low moisture absorption
- High chemical resistance
- Suitable for rotating, oscillating and linear movements
- Recommended housing bore H7
- Maximum static surface pressure: 5,075 psi (35 MPa)

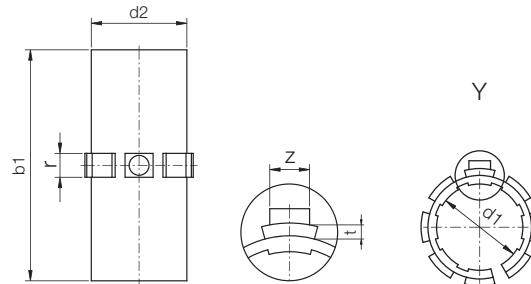

Part No.	d1	Tolerance*	d2	b1	W +0.2	r -0.1	t -0.1	z -0.5	Weight (g)
----------	----	------------	----	----	-----------	-----------	-----------	-----------	---------------

### Standard Clearance

JUMO-01-10	10	.0300 -.0700	12	29	7.3	3.0	0.8	2.5	0.8
JUMO-01-12	12	.0300 -.0700	14	31	9.0	3.0	0.8	3.0	1.7
JUMO-01-16	16	.0300 -.0700	18	35	11.6	3.5	0.8	3.5	2.5
JUMO-01-20	20	.0300 -.0700	23	44	12.0	5.0	0.8	3.5	4.2
JUMO-01-25	25	.0300 -.0700	28	57	14.5	5.0	0.8	4.0	5.9
JUMO-01-30	30	.0400 -.0850	34	67	16.6	5.0	0.8	4.0	12.0
JUMO-01-40	40	.0400 -.0850	44	79	21.0	6.0	1.3	5.0	20.0
JUMO-01-50	50	.0500 -.1000	55	99	25.5	7.0	1.3	6.0	36.0

### Low Clearance

JUMO-20-10	10	.0150 -.0350	12	29	7.3	3.0	0.8	2.5	0.8
JUMO-20-12	12	.0150 -.0350	14	31	9.0	3.0	0.8	3.0	1.7
JUMO-20-16	16	.0150 -.0350	18	35	11.6	3.5	0.8	3.5	2.5
JUMO-20-20	20	.0150 -.0350	23	44	12.0	5.0	0.8	3.5	4.2
JUMO-20-25	25	.0150 -.0350	28	57	14.5	5.0	0.8	4.0	5.9
JUMO-20-30	30	.0200 -.0425	34	67	16.6	5.0	0.8	4.0	12.0
JUMO-20-40	40	.0200 -.0425	44	79	21.0	6.0	1.3	5.0	20.0
JUMO-20-50	50	.0250 -.0500	55	99	25.5	7.0	1.3	6.0	36.0

\* according to igus® testing method ► Page 49.57

JUMO-01/20



Material: iglide® J

Temp. range: -40°F to +194°F

Best Shaft Material: DryLin® AWI hard anodized aluminum, case hardened steel, 300 series stainless

\*\*Call for high temperature options

### Liners of the Series

JUMO-01 are used in:



- OJUM-01, Page 49.36
- OJUM-03, Page 49.38
- OJUM-06, Page 49.46

### Installation Drawings

#### Housing Bore, Dimensions (mm)

Part No.	Nominal Size	di H7	B h10	r +0.05	t +0.1	f +0.5	z +0.2	W +0.2
JUMO-01 / JUMO-20-10	10	12	29	3.0	0.8	1.0	2.6	7.3
JUMO-01 / JUMO-20-12	12	14	32	3.0	0.8	1.5	3.1	9.0
JUMO-01 / JUMO-20-16	16	18	36	3.5	0.8	1.7	3.6	11.6
JUMO-01 / JUMO-20-20	20	23	45	5.0	0.8	2.0	3.6	12.0
JUMO-01 / JUMO-20-25	25	28	58	5.0	0.8	2.0	4.1	14.5
JUMO-01 / JUMO-20-30	30	34	68	5.0	0.8	2.0	4.1	16.6
JUMO-01 / JUMO-20-40	40	44	80	6.0	1.3	2.5	5.1	21.0
JUMO-01 / JUMO-20-50	50	55	100	7.0	1.3	2.5	6.1	25.5

\* according to igus® testing method ► Page 49.57



DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch


mm

**Special Properties**

- Made of iglide® T500 (in two parts)
- Recommended for high temperature applications over 176°F up to 482°F (80°C up to 250°C)
- Recommended for use on stainless steel or hard chromed steel
- High chemical resistance
- Maintenance-free
- Very low moisture absorption
- Available for all adapters and pillow blocks ( $\varnothing$ 12 mm - 30 mm)
- Maximum static surface pressure = 21,750 psi (150 MPa)

**Liners of the Series****JUM-01 are used in:**

- RJUM-01, Page 49.28
- RJUM-03, Page 49.30
- RJUM-06, Page 49.43
- TJUM-01, Page 49.32
- TJUM-03, Page 49.34
- FJUM-01, Page 49.49
- FJUM-02, Page 49.50

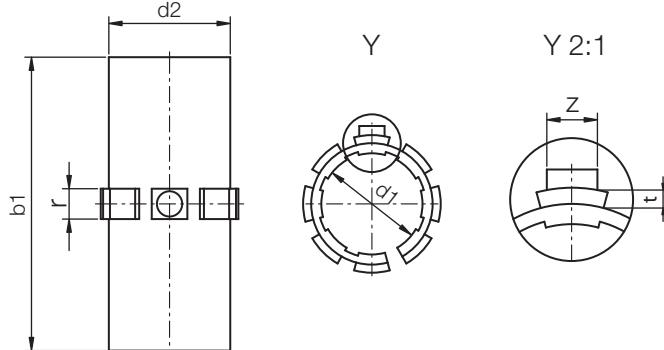
**Dimensions (mm)**

Part No.	d1	Tolerance*	d2	b1	r -0.1/-0.2	t -0.1	z -0.5	Weight (oz) -0.2
TUMO-01-10**	10	.0000 -.0700	12	28	3.0	0.8	2.5	0.035
TUM-01-12	12	.0300 -.0700	14	31	3.0	0.8	3.0	0.048
TUM-01-16	16	.0300 -.0700	18	35	3.5	0.8	3.5	0.064
TUM-01-20	20	.0300 -.0700	23	44	5.0	0.8	3.5	0.114
TUM-01-25	25	.0300 -.0700	28	57	5.0	0.8	4.0	0.203
TUM-01-30	30	.0400 -.0850	34	67	5.0	0.8	4.0	0.390

\* according to igus® testing method ► Page 49.57

**Housing bore Dimensions (mm)**

Part No.	Nominal	di	B	r	t	f	z
	Size	H7	h10	+0.05	+0.1	+0.5	+0.2
TUMO-01-10**	10	12	29	3.0	1.0	1.0	2.6
TUM-01-12	12	14	32	3.0	1.0	1.5	3.1
TUM-01-16	16	18	36	3.5	1.0	1.7	3.6
TUM-01-20	20	23	45	5.0	1.0	2.0	3.6
TUM-01-25	25	28	58	5.0	1.0	2.0	4.1
TUM-01-30	30	34	68	5.0	1.0	2.0	4.1




\*\* Only available in the open design

Liners of Series TUM-01 can be used in all housings designed for DryLin® R standard series. (Call for assistance)



### Special Properties

- Plain bearing made of all plastic
- Dimensions corresponds to the standard for recirculating ball bearings
- Recommended housing bore H7
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Designed as a press-fit part, it will be oversized in free-state

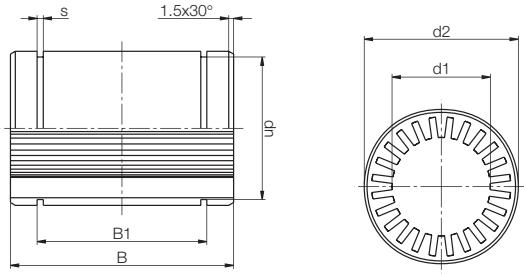

**Liners of the Series**  
RJM-01 are used in:  
 ► RQA-04, Page 49.53  
 ► RTA-04, Page 49.54  
 ► RGA-04, Page 49.55  
 ► RGAS-04, Page 49.56

### Dimensions (mm)

Part No.	d1	d2	B	B1	s	dn
RJM-01-08	8	16	25	16.2	1.10	15.2
RJM-01-10	10	19	29	21.6	1.30	17.5
RJM-01-12	12	22	32	22.6	1.30	20.5
RJM-01-16	16	26	36	24.6	1.30	24.2
RJM-01-20	20	32	45	31.2	1.60	29.6
RJM-01-25	25	40	58	43.7	1.85	36.5
RJM-01-30	30	47	68	51.7	1.85	43.5
RJM-01-40	40	62	80	60.3	2.15	57.8
RJM-01-50	50	75	100	77.3	2.65	70.5

\* according to igus® testing method ► Page 49.57

### Technical Data

Part No.	Nominal Size	Housing Bore		Tolerance for d1	pmax. Dynamic Load p = 2.5 MPa (N)	pmax. Static Load p = 17.5 MPa (N)	Weight (g)
		Max.	Min.				
RJM-01-08	8	16.018	16.000	.0250 - .0610	250	1750	9
RJM-01-10	10	19.021	19.000	.0320 - .0750	363	2538	14
RJM-01-12	12	22.021	22.000	.0320 - .0750	480	3360	21
RJM-01-16	16	26.021	26.000	.0320 - .0750	720	5040	28
RJM-01-20	20	32.025	32.000	.0400 - .0920	1125	7875	49
RJM-01-25	25	40.025	40.000	.0400 - .0920	1813	12688	108
RJM-01-30	30	47.025	47.000	.0400 - .0920	2550	17850	162
RJM-01-40	40	62.030	62.000	.0500 - .1120	4000	28000	334
RJM-01-50	50	75.030	75.000	.0600 - .1340	6250	43750	579

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
 CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch


mm

**Special Properties**

- Closed, anodized aluminum adapter
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUM-01 liner made of iglide® J
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7

**RJUM-01 Bearings  
are used in:**

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

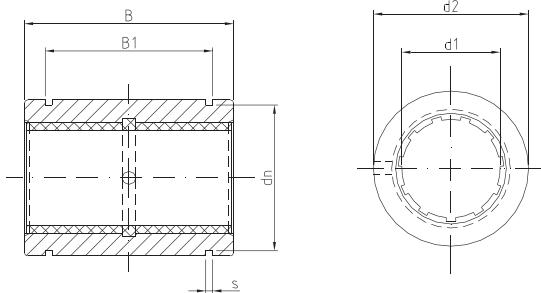**Dimensions (mm)**

Part No.	d1	d2 h7	B h10	B1	s	dn
RJZM-01-05*	5	12	22	14.2	1.10	11.5
RJZM-01-08*	8	16	25	16.2	1.10	15.2
RJUM-01-10	10	19	29	21.6	1.30	17.5
RJUM-01-12	12	22	32	22.6	1.30	20.5
RJUM-01-16	16	26	36	24.6	1.30	24.2
RJUM-01-20	20	32	45	31.2	1.60	29.6
RJUM-01-25	25	40	58	43.7	1.85	36.5
RJUM-01-30	30	47	68	51.7	1.85	43.5
RJUM-01-40	40	62	80	60.3	2.15	57.8
RJUM-01-50	50	75	100	77.3	2.65	70.5

**Housing Bore Dimensions**

Nominal Size	METRIC	
	Min.	Max.
8	16.000	16.018
10	19.000	19.021
12	22.000	22.021
16	26.000	26.021
20	32.000	32.025
25	40.000	40.025
30	47.000	47.025
40	62.000	62.030
50	75.000	75.030

\* nominal width under 10 mm are delivered with pressfit cylindrical plain bearings

\*\* according to igus® testing method ► Page 49.57

**Load Data**

Part No.	Nominal Size	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight	
					(g)	
RJZM-01-05*	5	.0250 - .0600	525	3675	5	
RJZM-01-08*	8	.0320 - .0700	960	6720	9	
RJUM-01-10	10	.0300 - .0880	725	5075	14	
RJUM-01-12	12	.0300 - .0880	960	6720	21	
RJUM-01-16	16	.0300 - .0880	1440	10080	28	
RJUM-01-20	20	.0300 - .0910	2250	15750	49	
RJUM-01-25	25	.0300 - .0910	3625	25375	108	
RJUM-01-30	30	.0400 - .1100	5100	35700	162	
RJUM-01-40	40	.0400 - .1150	8000	56000	334	
RJUM-01-50	50	.0500 - .1300	12500	87500	579	

# DryLin® R Straight, Low Clearance Linear Bearing RJUM-21, mm

**igus®**




## Special Properties

- Closed, anodized aluminum adapter
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUM-20 liner made of iglide® J
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7

RJUM-21 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

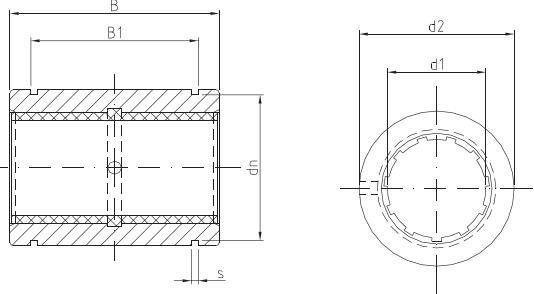

## Dimensions (mm)

Part No.	d1	d2 h7	B h10	B1	s	dn
RJUM-21-10	10	19	29	21.6	1.30	17.5
RJUM-21-12	12	22	32	22.6	1.30	20.5
RJUM-21-16	16	26	36	24.6	1.30	24.2
RJUM-21-20	20	32	45	31.2	1.60	29.6
RJUM-21-25	25	40	58	43.7	1.85	36.5
RJUM-21-30	30	47	68	51.7	1.85	43.5
RJUM-21-40	40	62	80	60.3	2.15	57.8
RJUM-21-50	50	75	100	77.3	2.65	70.5

\* nominal width under 10 mm are delivered with pressfit cylindrical plain bearings

\* according to igus® testing method ► Page 49.57

## Load Data

Part No.	Nominal Size	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
			(N)	(N)	
RJUM-21-10	10	.0150 - .0440	725	5075	14
RJUM-21-12	12	.0150 - .0440	960	6720	21
RJUM-21-16	16	.0150 - .0440	1440	10080	28
RJUM-21-20	20	.0150 - .0440	2250	15750	49
RJUM-21-25	25	.0150 - .0440	3625	25375	108
RJUM-21-30	30	.0200 - .0550	5100	35700	162
RJUM-21-40	40	.0200 - .0575	8000	56000	334
RJUM-21-50	50	.0250 - .0650	12500	87500	579

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch


mm

**Special Properties**

- Closed aluminum adapter with
  - reduced outer diameter
  - spherical area on the outer diameter for automatic alignment compensation
  - O-rings for elastic seating
  - hard-anodized
- Equipped with JUM-01 liner made of iglide® J
- Dimensions otherwise equivalent to the standard for recirculating ball bearings
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7
- O-ring grease recommended for install

RJUM-03 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

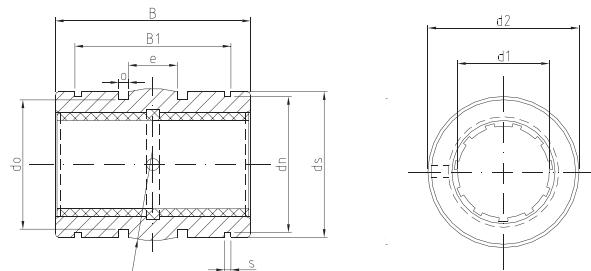**Housing Bore Dimensions**

Nominal Size	METRIC	
	Min.	Max.
8	16.000	16.018
10	19.000	19.021
12	22.000	22.021
16	26.000	26.021
20	32.000	32.025
25	40.000	40.025
30	47.000	47.025
40	62.000	62.030
50	75.000	75.030

**Dimensions (mm)**

Part No.	d1	d2 h8	B h10	B1 H10	s H10	dn h10	ds h10	do h10	o +0.1	e	R
RJZM-03-08*	8	15.8	24.9	16.4	1.10	15.0	15.5	13.2	1.86	5.0	20.0
RJUM-03-10	10	18.8	28.9	21.8	1.30	17.5	18.5	15.4	1.86	5.0	13.0
RJUM-03-12	12	21.8	31.9	22.8	1.30	20.5	21.5	18.4	1.86	6.0	18.0
RJUM-03-16	16	25.8	35.9	24.9	1.30	24.2	25.5	20.4	2.86	8.0	32.0
RJUM-03-20	20	31.8	44.8	31.5	1.60	29.6	31.5	26.4	2.86	10.0	50.0
RJUM-03-25	25	39.8	57.8	44.1	1.85	36.5	39.5	34.4	2.86	12.5	39.0
RJUM-03-30	30	46.7	67.8	52.1	1.85	43.5	46.0	41.4	2.86	15.0	57.0
RJUM-03-40	40	61.7	79.8	60.9	2.15	57.8	61.0	56.4	2.86	20.0	100.0
RJUM-03-50	50	74.7	99.8	78.0	2.65	70.5	74.0	69.4	2.86	25.0	157.0

**Load Data**

Part No.	Nominal Size	Housing Bore i.d. h7 (mm)	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
RJZM-03-08*	8	16	.0320 - .0700	960	6720	8
RJUM-03-10	10	19	.0300 - .0880	725	5075	11
RJUM-03-12	12	22	.0300 - .0880	960	6720	17
RJUM-03-16	16	26	.0300 - .0880	1440	10080	23
RJUM-03-20	20	32	.0300 - .0910	2250	15750	44
RJUM-03-25	25	40	.0300 - .0910	3625	25375	92
RJUM-03-30	30	47	.0400 - .1100	5100	35700	145
RJUM-03-40	40	62	.0400 - .1150	8000	56000	311
RJUM-03-50	50	75	.0500 - .1300	12500	87500	542

\* nominal width under 10 mm are delivered with pressfit cylindrical plain bearings

\*\* according to igus® testing method ► Page 49.57

# DryLin® R Self-Aligning, Low Clearance Linear Bearing RJUM-23, mm

**igus®**




## Special Properties

- Closed aluminum adapter with
  - reduced outer diameter
  - spherical area on the outer diameter for automatic alignment compensation
  - O-rings for elastic seating
  - hard-anodized
- Equipped with JUM-20 liner made of iglide® J
- Dimensions otherwise equivalent to the standard for recirculating ball bearings
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7
- O-ring grease recommended for install

RJUM-23 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

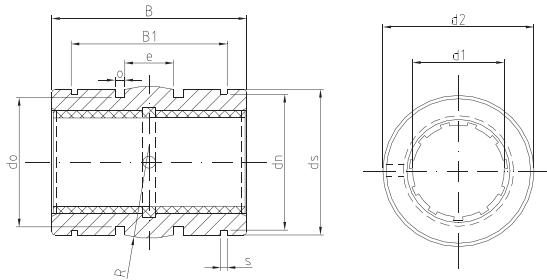

## Dimensions (mm)

Part No.	d1	d2	B	B1	s	dn	ds	do	o	e	R
		h8	h10	H10	H10	h10	h10	h10	+0.1		
RJZM-23-08*	8	15.8	24.9	16.4	1.10	15.0	15.5	13.2	1.86	5.0	20.0
RJUM-23-10	10	18.8	28.9	21.8	1.30	17.5	18.5	15.4	1.86	5.0	13.0
RJUM-23-12	12	21.8	31.9	22.8	1.30	20.5	21.5	18.4	1.86	6.0	18.0
RJUM-23-16	16	25.8	35.9	24.9	1.30	24.2	25.5	20.4	2.86	8.0	32.0
RJUM-23-20	20	31.8	44.8	31.5	1.60	29.6	31.5	26.4	2.86	10.0	50.0
RJUM-23-25	25	39.8	57.8	44.1	1.85	36.5	39.5	34.4	2.86	12.5	39.0
RJUM-23-30	30	46.7	67.8	52.1	1.85	43.5	46.0	41.4	2.86	15.0	57.0
RJUM-23-40	40	61.7	79.8	60.9	2.15	57.8	61.0	56.4	2.86	20.0	100.0
RJUM-23-50	50	74.7	99.8	78.0	2.65	70.5	74.0	69.4	2.86	25.0	157.0

## Load Data

Part No.	Nominal Size	Housing Bore i.d. (mm)	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
RJZM-23-08*	8	16	.0160 - .0350	960	6720	8
RJUM-23-10	10	19	.0150 - .0440	725	5075	11
RJUM-23-12	12	22	.0150 - .0440	960	6720	17
RJUM-23-16	16	26	.0150 - .0440	1440	10080	23
RJUM-23-20	20	32	.0150 - .0455	2250	15750	44
RJUM-23-25	25	40	.0150 - .0455	3625	25375	92
RJUM-23-30	30	47	.0200 - .0550	5100	35700	145
RJUM-23-40	40	62	.0200 - .0575	8000	56000	311
RJUM-23-50	50	75	.0250 - .0650	12500	87500	542

\* nominal width under 10 mm are delivered with pressfit cylindrical plain bearings

\* according to igus® testing method ► Page 49.57

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



**igus®**

# DryLin® R Straight, Split Linear Bearing TJUM-01, mm

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>






## Special Properties

- Split, anodized aluminum adapter
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUM-01 liner made of iglide® J
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7

TJUM-01 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

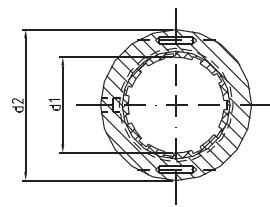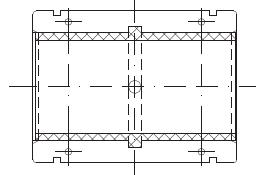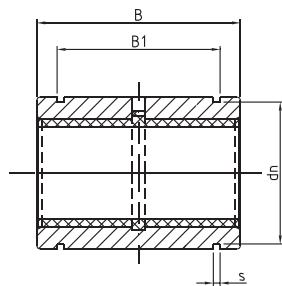

Housing Bore Dimensions

Nominal Size	METRIC	
	Min.	Max.
8	16.000	16.018
10	19.000	19.021
12	22.000	22.021
16	26.000	26.021
20	32.000	32.025
25	40.000	40.025
30	47.000	47.025
40	62.000	62.030
50	75.000	75.030

## Dimensions (mm)

Part No.	d1	d2	Tolerance	B h10	B1 H10	s H10	dn
TJUM-01-10	10	19	-.0200 /-.0400	29	21.6	1.30	17.5
TJUM-01-12	12	22	-.0200 /-.0400	32	22.6	1.30	20.5
TJUM-01-16	16	26	-.0200 /-.0400	36	24.6	1.30	24.2
TJUM-01-20	20	32	-.0200 /-.0450	45	31.2	1.60	29.6
TJUM-01-25	25	40	-.0300 /-.0550	58	43.7	1.85	36.5
TJUM-01-30	30	47	-.0300 /-.0550	68	51.7	1.85	43.5
TJUM-01-40	40	62	-.0300 /-.0600	80	60.3	2.15	57.8
TJUM-01-50	50	75	-.0300 /-.0600	100	77.3	2.65	70.5

## Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
			(N)	(N)	
TJUM-01-10	10	.0300 - .0920	725	5075	14
TJUM-01-12	12	.0300 - .0970	960	6720	19
TJUM-01-16	16	.0300 - .0970	1440	10080	27
TJUM-01-20	20	.0300 - .1030	2250	15750	49
TJUM-01-25	25	.0300 - .1030	3625	25375	106
TJUM-01-30	30	.0400 - .1240	5100	35700	166
TJUM-01-40	40	.0400 - .1240	8000	56000	347
TJUM-01-50	50	.0500 - .1460	12500	87500	577

\* according to igus® testing method ► Page 49.57

# DryLin® R Straight, Split, Low Clearance Linear Bearing TJUM-21, mm

**igus®**




## Special Properties

- Split, anodized aluminum adapter
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUM-20 liner made of iglide® J
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7

TJUM-21 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

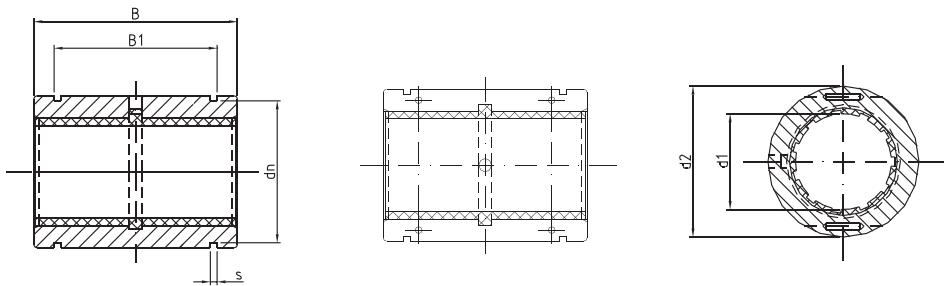

## Dimensions (mm)

Part No.	d1	d2	Tolerance	B h10	B1 H10	s H10	dn
TJUM-21-10	10	19	-.0200 /-.0400	29	21.6	1.30	17.5
TJUM-21-12	12	22	-.0200 /-.0400	32	22.6	1.30	20.5
TJUM-21-16	16	26	-.0200 /-.0400	36	24.6	1.30	24.2
TJUM-21-20	20	32	-.0200 /-.0450	45	31.2	1.60	29.6
TJUM-21-25	25	40	-.0300 /-.0550	58	43.7	1.85	36.5
TJUM-21-30	30	47	-.0300 /-.0550	68	51.7	1.85	43.5
TJUM-21-40	40	62	-.0300 /-.0600	80	60.3	2.15	57.8
TJUM-21-50	50	75	-.0300 /-.0600	100	77.3	2.65	70.5


## Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
TJUM-21-10	10	.0150 - .0460	725	5075	14
TJUM-21-12	12	.0150 - .0485	960	6720	19
TJUM-21-16	16	.0150 - .0485	1440	10080	27
TJUM-21-20	20	.0150 - .0515	2250	15750	49
TJUM-21-25	25	.0150 - .0515	3625	25375	106
TJUM-21-30	30	.0200 - .0620	5100	35700	166
TJUM-21-40	40	.0200 - .0620	8000	56000	347
TJUM-21-50	50	.0250 - .0730	12500	87500	577

\* according to igus® testing method ► Page 49.57

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

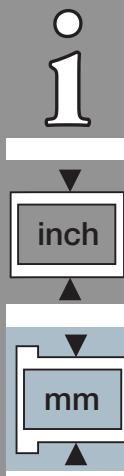



**igus®**

## DryLin® R Self-Aligning, Split Linear Bearing TJUM-03, mm

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>




### Special Properties

- Split aluminum adapter with
  - spherical area on the outer diameter for self-alignment purposes
  - O-rings for elastic seating
- Dimensions otherwise equivalent to the standard for recirculating ball bearings
- Equipped with JUM-01 liner made of iglide® J
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7
- O-ring grease recommended for install

TJUM-03 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

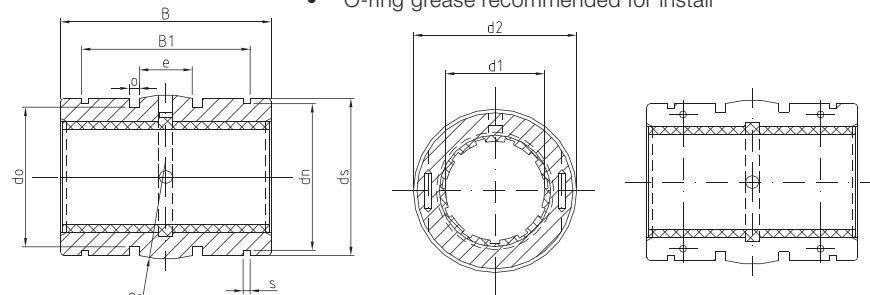

Housing Bore Dimensions

Nominal Size	METRIC	
	Min.	Max.
8	16.000	16.018
10	19.000	19.021
12	22.000	22.021
16	26.000	26.021
20	32.000	32.025
25	40.000	40.025
30	47.000	47.025
40	62.000	62.030
50	75.000	75.030

### Dimensions (mm)

Part No.	d1	d2	Tolerance	B h10	B1 H10	s H10	dn h10	ds h10	do +0.2	o 0.4	e	R
TJUM-03-10	10	19	-0.020 - 0.040	28.9	21.8	1.30	17.5	18.5	15.4	1.86	5.0	13.0
TJUM-03-12	12	22	0.020 - 0.040	31.9	22.8	1.30	20.5	21.5	18.4	1.86	6.0	18.0
TJUM-03-16	16	26	0.020 - 0.040	35.9	24.9	1.30	24.2	25.5	20.4	2.86	8.0	32.0
TJUM-03-20	20	32	0.020 - 0.045	44.8	31.5	1.60	29.6	31.5	26.4	2.86	10.0	50.0
TJUM-03-25	25	40	0.030 - 0.055	57.8	44.1	1.85	36.5	39.5	34.4	2.86	12.5	39.0
TJUM-03-30	30	47	-0.030 - 0.055	67.8	52.1	1.85	43.5	46.0	41.4	2.86	15.0	57.0
TJUM-03-40	40	62	0.030 - 0.060	79.8	60.9	2.15	57.8	61.0	56.4	2.86	20.0	100.0
TJUM-03-50	50	75	0.030 - 0.060	99.8	78.0	2.65	70.5	74.0	69.4	2.86	25.0	157.0

### Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
			(N)	(N)	
TJUM-03-10	10	.0300 - .0920	725	5075	11
TJUM-03-12	12	.0300 - .0970	960	6720	17
TJUM-03-16	16	.0300 - .0970	1440	10080	23
TJUM-03-20	20	.0300 - .1030	2250	15750	44
TJUM-03-25	25	.0300 - .1030	3625	25375	92
TJUM-03-30	30	.0400 - .1240	5100	35700	145
TJUM-03-40	40	.0400 - .1240	8000	56000	311
TJUM-03-50	50	.0500 - .1460	12500	87500	542

\* according to igus® testing method ► Page 49.57

# DryLin® R Self-Aligning, Split, Low Clearance Linear Bearing - TJUM-23, mm

**igus®**




## Special Properties

- Split aluminum adapter with
  - spherical area on the outer diameter for self-alignment purposes
  - O-rings for elastic seating
- Dimensions otherwise equivalent to the standard for recirculating ball bearings
- Equipped with JUM-20 liner made of iglide® J
- Secured by retaining clips according to DIN 471 or 472 (not included in delivery)
- Recommended housing bore H7
- O-ring grease recommended for install

TJUM-23 Bearings are used in:

- RQA-01, Page 49.53
- RTA-01, Page 49.54
- RGA-01, Page 49.55
- RGAS-01, Page 49.56

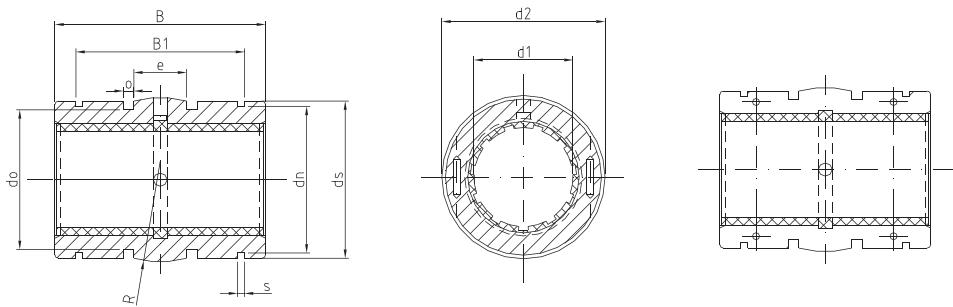

## Dimensions (mm)

Part No.	d1	d2 - Tolerance	B h10	B1 H10	s H10	dn h10	ds h10	do +0.2	o 0.4	e	R
TJUM-23-10	10	19 -0.020-0.040	28.9	21.8	1.30	17.5	18.5	15.4	1.86	5.0	13.0
TJUM-23-12	12	22 -0.020-0.040	31.9	22.8	1.30	20.5	21.5	18.4	1.86	6.0	18.0
TJUM-23-16	16	26 -0.020-0.040	35.9	24.9	1.30	24.2	25.5	20.4	2.86	8.0	32.0
TJUM-23-20	20	32 -0.020-0.045	44.8	31.5	1.60	29.6	31.5	26.4	2.86	10.0	50.0
TJUM-23-25	25	40 -0.030-0.055	57.8	44.1	1.85	36.5	39.5	34.4	2.86	12.5	39.0
TJUM-23-30	30	47 -0.030-0.055	67.8	52.1	1.85	43.5	46.0	41.4	2.86	15.0	57.0
TJUM-23-40	40	62 -0.030-0.060	79.8	60.9	2.15	57.8	61.0	56.4	2.86	20.0	100.0
TJUM-23-50	50	75 -0.030-0.060	99.8	78.0	2.65	70.5	74.0	69.4	2.86	25.0	157.0

## Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load		pmax. Static Load		Weight (g)
			P = 5 MPa (N)	P = 35 MPa (N)	P = 35 MPa (N)		
TJUM-23-10	10	.0150 - .0460	725	5075	5075	11	
TJUM-23-12	12	.0150 - .0485	960	6720	6720	17	
TJUM-23-16	16	.0150 - .0485	1440	10080	10080	23	
TJUM-23-20	20	.0150 - .0515	2250	15750	15750	44	
TJUM-23-25	25	.0150 - .0515	3625	25375	25375	92	
TJUM-23-30	30	.0200 - .0620	5100	35700	35700	145	
TJUM-23-40	40	.0200 - .0620	8000	56000	56000	311	
TJUM-23-50	50	.0250 - .0730	12500	87500	87500	542	

\* according to igus® testing method ► Page 49.57



**igus®**

## DryLin® R Straight, Open Linear Bearing - OJUM-01, mm

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>




### Special Properties

- Open, anodized aluminum adapter for supported shafts
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUMO liner made of iglide® J
- Recommended housing bore H7
- Secure the bearing with set screws (not included in the delivery)

OJUM-01 Bearings are used in:

- OQA-01, Page 49.53
- OTA-01, Page 49.54
- OGA-01, Page 49.55
- OGAS-01, Page 49.56

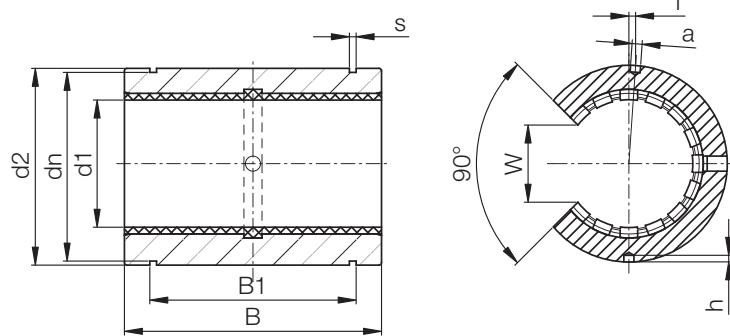


### Housing Bore Dimensions

Nominal Size	METRIC	
	Min.	Max.
8	16.000	16.018
10	19.000	19.021
12	22.000	22.021
16	26.000	26.021
20	32.000	32.025
25	40.000	40.025
30	47.000	47.025
40	62.000	62.030
50	75.000	75.030

### Dimensions (mm)

Part No.	d1	d2 h7	B h10	W	a +0.1	dn h10	B1 H10	s H10	f ±0.2	h -0.5
OJUM-01-10	10	19	29	7.3	0.0	17.5	21.6	1.30	0	1.2
OJUM-01-12	12	22	32	9.0	3.0	20.5	22.6	1.30	1.33 (7°)	1.2
OJUM-01-16	16	26	36	11.6	2.2	24.2	24.6	1.30	0	1.2
OJUM-01-20	20	32	45	12.0	2.2	29.6	31.2	1.60	0	1.2
OJUM-01-25	25	40	58	14.5	3.0	36.5	43.7	1.85	-1.5 (-4.3°)	1.5
OJUM-01-30	30	47	68	16.6	3.0	43.5	51.7	1.85	2 (4.9°)	2.0
OJUM-01-40	40	62	80	21.0	3.0	57.8	60.3	2.15	1.5 (2.8°)	2.0
OJUM-01-50	50	75	100	25.5	5.0	70.5	77.3	2.65	2.5 (3.8°)	2.0

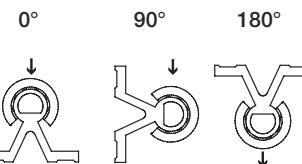

### Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)			pmax. Static Load P = 35 MPa (N)			Weight (g)
			0°	90°	180°	0°	90°	180°	
OJUM-01-10	10	.0300 - .0880	725	500	196	5075	3500	1370	11
OJUM-01-12	12	.0300 - .0880	960	635	240	6720	4445	1680	15
OJUM-01-16	16	.0300 - .0880	1440	990	396	10080	6943	2772	21
OJUM-01-20	20	.0300 - .0910	2250	1800	900	15750	12600	6300	42
OJUM-01-25	25	.0300 - .0910	3625	2953	1523	25375	20670	10658	70
OJUM-01-30	30	.0400 - .1100	5100	4250	2278	35700	29735	15946	132
OJUM-01-40	40	.0400 - .1150	8000	6810	3800	56000	47660	26660	278
OJUM-01-50	50	.0500 - .1300	12500	10750	6125	87500	75265	42875	479

\* according to igus® testing method ► Page 49.57

# DryLin® R Straight, Open, Low Clearance Linear Bearing - OJUM-21, mm

**igus®**




## Special Properties

- Open, anodized aluminum adapter for supported shafts
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUMO-20 liner made of iglide® J
- Recommended housing bore H7
- Secured the bearing with set screws (not included in the delivery)


OJUM-21 Bearings are used in:

- OQA-01, Page 49.53
- OTA-01, Page 49.54
- OGA-01, Page 49.55
- OGAS-01, Page 49.56

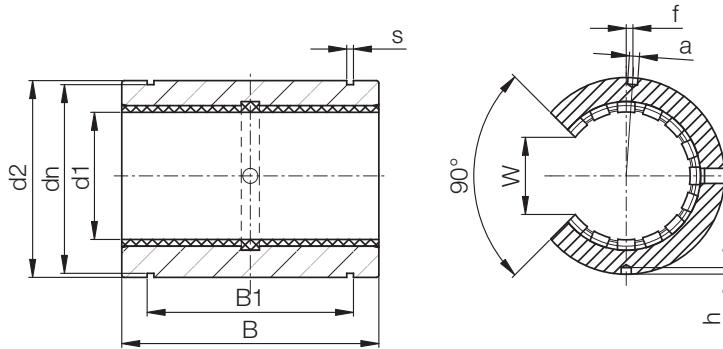

## Dimensions (mm)

Part No.	d1	d2 h7	B h10	W	a +0.1	dn h10	B1 H10	s H10	f ±0.2	h -0.5
OJUM-21-10	10	19	29	7.3	0.0	17.5	21.6	1.30	0	1.2
OJUM-21-12	12	22	32	9.0	3.0	20.5	22.6	1.30	1.33 (7°)	1.2
OJUM-21-16	16	26	36	11.6	2.2	24.2	24.6	1.30	0	1.2
OJUM-21-20	20	32	45	12.0	2.2	29.6	31.2	1.60	0	1.2
OJUM-21-25	25	40	58	14.5	3.0	36.5	43.7	1.85	-1.5 (-4.3°)	1.5
OJUM-21-30	30	47	68	16.6	3.0	43.5	51.7	1.85	2 (4.9°)	2.0
OJUM-21-40	40	62	80	21.0	3.0	57.8	60.3	2.15	1.5 (2.8°)	2.0
OJUM-21-50	50	75	100	25.5	5.0	70.5	77.3	2.65	2.5 (3.8°)	2.0

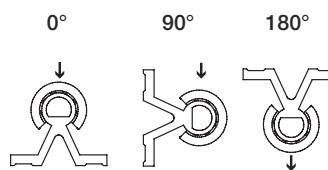

## Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load			pmax. Static Load			Weight (g)	
			P = 5 MPa			P = 35 MPa				
			0°	90°	180°	0°	90°	180°		
OJUM-21-10	10	.0150 - .0440	725	500	196	5075	3500	1370	11	
OJUM-21-12	12	.0150 - .0440	960	635	240	6720	4445	1680	15	
OJUM-21-16	16	.0150 - .0440	1440	990	396	10080	6943	2772	21	
OJUM-21-20	20	.0150 - .0455	2250	1800	900	15750	12600	6300	42	
OJUM-21-25	25	.0150 - .0455	3625	2953	1523	25375	20670	10658	70	
OJUM-21-30	30	.0200 - .0550	5100	4250	2278	35700	29735	15946	132	
OJUM-21-40	40	.0200 - .0575	8000	6810	3800	56000	47660	26660	278	
OJUM-21-50	50	.0250 - .0650	12500	10750	6125	87500	75265	42875	479	

\* according to igus® testing method ► Page 49.57



DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10  
inch  
mm



**igus®**

## DryLin® R Self Aligning, Open Linear Bearing - OJUM-03, mm

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>




### Special Properties

- Open, aluminum adapter with
  - reduced outer diameter
  - spherical area on the outer diameter for automatic alignment compensation
  - O-rings for elastic seating
  - hard-anodized
- Dimensions correspond to the standard for recirculating ball bearings
- Equipped with JUMO liner made of iglide® J
- Recommended housing bore H7
- Attachment by mounting bolts (not included in delivery)


OJUM-03 Bearings are used in:

- OQA-01, Page 49.53
- OTA-01, Page 49.54
- OGA-01, Page 49.55
- OGAS-01, Page 49.56

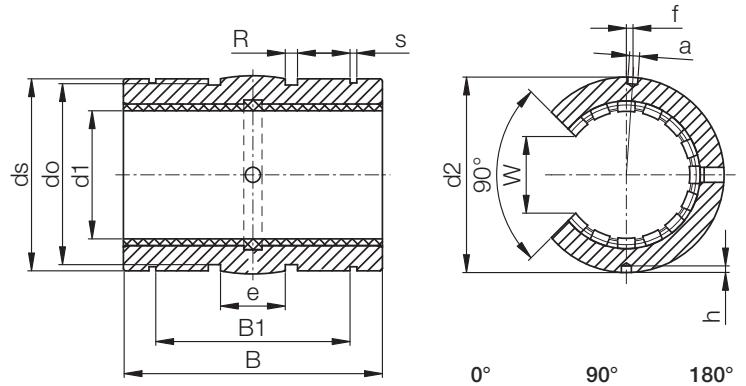

### Housing Bore Dimensions

Nominal Size	METRIC	
	Min.	Max.
8	16.000	16.018
10	19.000	19.021
12	22.000	22.021
16	26.000	26.021
20	32.000	32.025
25	40.000	40.025
30	47.000	47.025
40	62.000	62.030
50	75.000	75.030

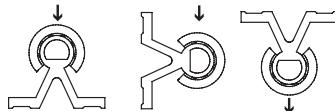

### Dimensions (mm)

Part No.	d2 h7	ds h10	e	o +0.1	do h10	B1 H10	s H10	B h10	R	W	a +0.1	f ±0.2	h	a
OJUM-03-10	18.8	18.5	5.0	1.86	15.4	21.8	1.30	28.9	13.0	7.3	0.0	0	1.2	10
OJUM-03-12	21.8	21.5	6.0	1.86	18.4	22.8	1.30	31.9	18.0	9.0	3.0	1.33 (7°)	1.2	12
OJUM-03-16	25.8	25.5	8.0	2.86	20.4	24.9	1.30	35.9	32.0	11.6	2.2	0	1.2	16
OJUM-03-20	31.8	31.5	10.0	2.86	26.4	31.5	1.60	44.8	50.0	12.0	2.2	0	1.2	20
OJUM-03-25	39.8	39.0	12.5	2.86	34.4	44.1	1.85	57.8	39.0	14.5	3.0	-1.5 (-4.3°)	1.5	25
OJUM-03-30	46.7	46.0	15.0	2.86	41.4	52.1	1.85	67.8	57.0	16.6	3.0	2 (4.9°)	2	30
OJUM-03-40	61.7	61.0	20.0	2.86	56.4	60.9	2.15	79.8	100.0	21.0	3.0	1.5 (2.8°)	2	40
OJUM-03-50	74.7	74.0	25.0	2.86	69.4	78.0	2.65	99.8	157.0	25.5	5.0	2.5 (3.8°)	2	50

### Load Data

Part No.	Nominal Size	Housing bore	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa			pmax. Static Load P = 35 MPa			Weight (g)
				0°	90°	180°	0°	90°	180°	
OJUM-03-10	10	19	.0300 - .0880	725	500	196	5075	3500	1370	10
OJUM-03-12	12	22	.0300 - .0880	960	635	240	6720	4445	1680	13
OJUM-03-16	16	26	.0300 - .0880	1440	990	396	10080	6943	2772	19
OJUM-03-20	20	32	.0300 - .0910	2250	1800	900	15750	12600	6300	38
OJUM-03-25	25	40	.0300 - .0910	3625	2953	1523	25375	20670	10658	63
OJUM-03-30	30	47	.0400 - .1100	5100	4250	2278	35700	29735	15946	119
OJUM-03-40	40	62	.0400 - .1150	8000	6810	3800	56000	47660	26660	250
OJUM-03-50	50	75	.0500 - .1300	12500	10750	6125	87500	75265	42875	431

\* according to igus® testing method ► Page 49.57

# DryLin® R Self Aligning, Open, Low Clearance Linear Bearing - OJUM-23, mm

**igus®**




## Special Properties

- Open, aluminum adapter with
  - reduced outer diameter
  - spherical area on the outer diameter for automatic alignment compensation
  - O-rings for elastic seating
  - hard-anodized
- Dimensions correspond to the standard for recirculating ball bearings
- Equipped with JUMO-20 liner made of iglide® J
- Recommended housing bore H7
- O-ring grease recommended for install
- Attachment by mounting bolts (not included in delivery)

OJUM-23 Bearings are used in:

- OQA-01, Page 49.55
- OTA-01, Page 49.56
- OGA-01, Page 49.57
- OGAS-01, Page 49.58

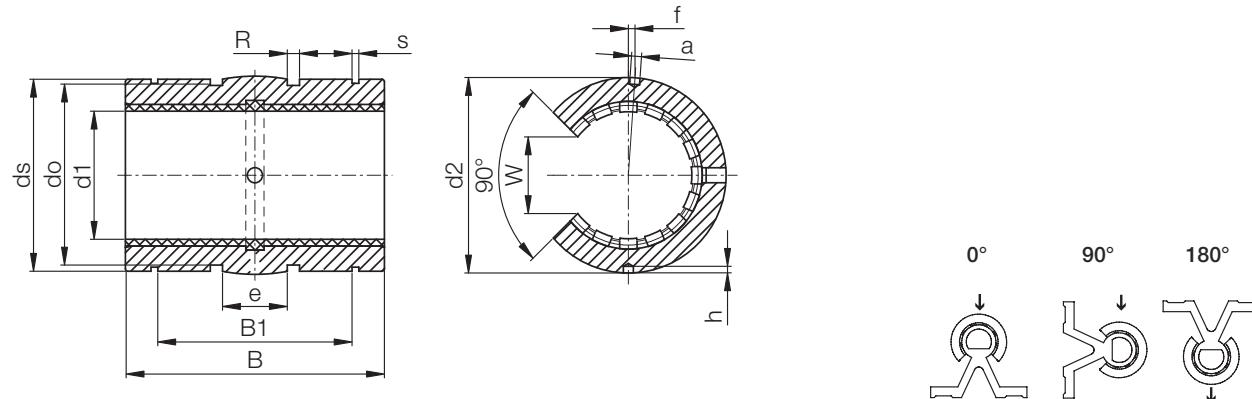

## Dimensions (mm)

Part No.	d2 h7	ds h10	e	o +0.1	do h10	B1 H10	s H10	B h10	R	W	+0.1	f ±0.2	h	a -0.5
OJUM-23-10	18.8	18.5	5.0	1.86	15.4	21.8	1.30	28.9	13.0	7.3	0.0	0	1.2	10
OJUM-23-12	21.8	21.5	6.0	1.86	18.4	22.8	1.30	31.9	18.0	9.0	3.0	1.33 (7°)	1.2	12
OJUM-23-16	25.8	25.5	8.0	2.86	20.4	24.9	1.30	35.9	32.0	11.6	2.2	0	1.2	16
OJUM-23-20	31.8	31.5	10.0	2.86	26.4	31.5	1.60	44.8	50.0	12.0	2.2	0	1.2	20
OJUM-23-25	39.8	39.0	12.5	2.86	34.4	44.1	1.85	57.8	39.0	14.5	3.0	-1.5 (-4.3°)	1.5	25
OJUM-23-30	46.7	46.0	15.0	2.86	41.4	52.1	1.85	67.8	57.0	16.6	3.0	2 (4.9°)	2	30
OJUM-23-40	61.7	61.0	20.0	2.86	56.4	60.9	2.15	79.8	100.0	21.0	3.0	1.5 (2.8°)	2	40
OJUM-23-50	74.7	74.0	25.0	2.86	69.4	78.0	2.65	99.8	157.0	25.5	5.0	2.5 (3.8°)	2	50

## Load Data

Part No.	Nominal Size	Housing bore	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa			pmax. Static Load P = 35 MPa			Weight (g)
				0°	90°	180°	0°	90°	180°	
OJUM-23-10	10	19	.0150 - .0440	725	500	196	5075	3500	1370	10
OJUM-23-12	12	22	.0150 - .0440	960	635	240	6720	4445	1680	13
OJUM-23-16	16	26	.0150 - .0440	1440	990	396	10080	6943	2772	19
OJUM-23-20	20	32	.0150 - .0455	2250	1800	900	15750	12600	6300	38
OJUM-23-25	25	40	.0150 - .0455	3625	2953	1523	25375	20670	10658	63
OJUM-23-30	30	47	.0200 - .0550	5100	4250	2278	35700	29735	15946	119
OJUM-23-40	40	62	.0200 - .0575	8000	6810	3800	56000	47660	26660	250
OJUM-23-50	50	75	.0250 - .0650	12500	10750	6125	87500	75265	42875	431

\* according to igus® testing method ► Page 49.57

10

inch


mm

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

**Special Properties**

- Closed, anodized aluminum adapter
- Dimensions equivalent to the standard for recirculating ball bearings
- Equipped with JUM-02 liner made of iglide® J
- Secured by pressfit in a recommended housing bore
- Recommended housing bore H7 for steel housings or K7 for aluminum

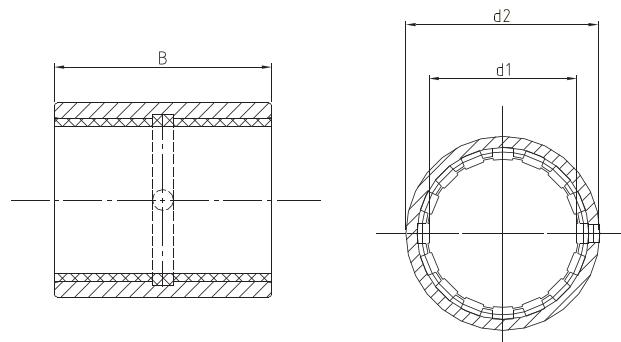**RJUM-02, Standard Clearance**

## Dimensions (mm)

Part No.	Nominal Size	Housing Bore i.d. h7	Tolerance** Bearing i.d. Min. Max.	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)	d1	d2 k7	B h10
RJZM-02-08*	8	15	.0320 - .0700	650	4550	6	8	15	24
RJUM-02-10	10	17	.0300 - .0880	650	4550	8	10	17	26
RJUM-02-12	12	19	.0300 - .0880	840	5880	10	12	19	28
RJUM-02-16	16	24	.0300 - .0880	1200	8400	17	16	24	30
RJUM-02-20	20	28	.0300 - .0910	1500	10500	18	20	28	30
RJUM-02-25	25	35	.0300 - .0910	2500	17500	42	25	35	40
RJUM-02-30	30	40	.0400 - .1100	3750	26250	56	30	40	50
RJUM-02-40	40	52	.0400 - .1150	6000	42000	113	40	52	60
RJUM-02-50	50	60	.0500 - .1300	8750	61250	147	50	60	70


**RJUM-22, Low Clearance**

## Dimensions (mm)

Part No.	Nominal Size	Housing Bore i.d.	Tolerance** Bearing i.d. Min. Max.	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)	d1	d2 k7	B h10
RJZM-22-08*	8	15	.0160 - .0350	215	1510	6	8	15	24
RJUM-22-10	10	17	.0150 - .0440	146	1022	8	10	17	26
RJUM-22-12	12	19	.0150 - .0440	188	1321	10	12	19	28
RJUM-22-16	16	24	.0150 - .0440	269	1888	17	16	24	30
RJUM-22-20	20	28	.0150 - .0455	337	2360	18	20	28	30
RJUM-22-25	25	35	.0150 - .0455	562	3934	42	25	35	40
RJUM-22-30	30	40	.0200 - .0550	843	5901	56	30	40	50
RJUM-22-40	40	52	.0200 - .0575	1348	9441	113	40	52	60
RJUM-22-50	50	60	.0250 - .0650	1967	13769	147	50	60	70


# DryLin® R Closed Pillow Block, Short Design Linear Bearing RJUM-05, mm

**igus®**



## Special Properties

- Closed, anodized aluminum housing, short design
- Contains JUM-02-XX liner

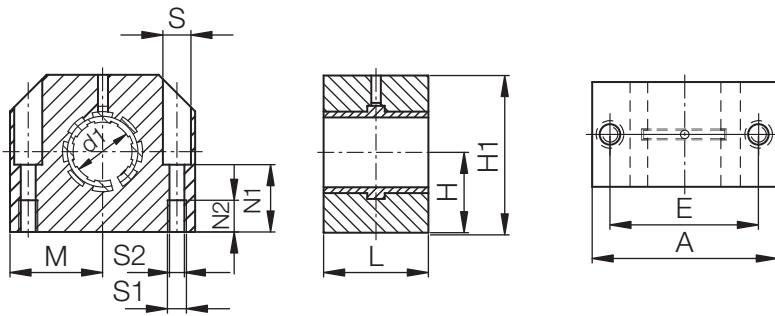

## Dimensions (mm)

Part No.	d1	H +0.01 -0.014	H1	A	M	E ±0.15	S	S1	S2	N1	N2	L
RJUM-[ ]-10	10	16	33	40	20.0	29	8.0	M 5	4.3	16	11	26
RJUM-[ ]-12	12	17	33	40	20.0	29	8.0	M 5	4.3	16	11	28
RJUM-[ ]-16	16	19	38	45	22.5	34	8.0	M 5	4.3	18	11	30
RJUM-[ ]-20	20	23	45	53	26.5	40	9.5	M 6	5.3	22	13	30
RJUM-[ ]-25	25	27	54	62	31.0	48	11.0	M 8	6.6	26	18	40
RJUM-[ ]-30	30	30	60	67	33.5	53	11.0	M 8	6.6	29	18	50
RJUM-[ ]-40	40	39	76	87	43.5	69	15.0	M10	8.4	38	22	60
RJUM-[ ]-50	50	47	92	103	51.5	82	18.0	M12	10.5	46	26	70

Supplement the part number with one of the following choices.  
Example: RJUM-[05]-10 for a standard version

For Standard version use [05] (See page 27.24)

For Low Clearance version use [35] (See page 27.24)

## Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
RJUM-[XX]-10	10	.0300 - .0880	650	4550	71
RJUM-[XX]-12	12	.0300 - .0880	840	5880	78
RJUM-[XX]-16	16	.0300 - .0880	1200	8400	106
RJUM-[XX]-20	20	.0300 - .0910	1500	10500	132
RJUM-[XX]-25	25	.0300 - .0910	2500	17500	253
RJUM-[XX]-30	30	.0400 - .1100	3750	26250	374
RJUM-[XX]-40	40	.0400 - .1150	6000	42000	713
RJUM-[XX]-50	50	.0500 - .1300	8750	61250	1.168

\* according to igus® testing method ► Page 49.57

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



**igus®**

## DryLin® R Adjustable Pillow Block, Short Design Linear Bearing RJUME-05, mm

DryLin® R  
Linear Guide Systems


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- Adjustable, anodized aluminum housing, short design
- Contains JUM-02-XX liner
- With adjustable clearance for shaft dimensions 12 to 40 mm

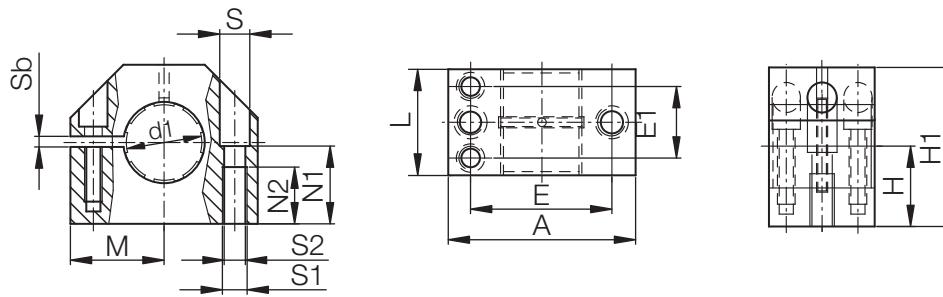

### Dimensions (mm)

Part No.	d1	H +0.01 -0.014	H1	A	M	E ±0.15	E1 ±0.15	S	S1	S2	Sb	N1	N2	L
RJUME-[ ]-12	12	17	33	40	20.0	29	18.0	8.0	4.3	M 5	2	16	11	28
RJUME-[ ]-16	16	19	38	45	22.5	34	19.0	8.0	4.3	M 5	2	18	11	30
RJUME-[ ]-20	20	23	45	53	26.5	40	20.0	9.5	5.3	M 6	2	22	13	30
RJUME-[ ]-25	25	27	54	62	31.0	48	25.5	11.0	6.6	M 8	2	26	18	40
RJUME-[ ]-30	30	30	60	67	33.5	53	30.5	11.0	6.6	M 8	2	29	18	50
RJUME-[ ]-40	40	39	76	87	43.5	69	36.0	15.0	8.4	M10	2	38	22	60

Supplement the part number with one of the following choices.

Example: RJUME-[05]-12 for a standard version

For Standard version use [05] (See page 27.24)

For Low Clearance version use [35] (See page 27.24)

### Load Data

Part No.	Nominal Size	Tolerance Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
RJUME-[XX]-12	12	adjustable	840	5880	78
RJUME-[XX]-16	16	adjustable	1200	8400	106
RJUME-[XX]-20	20	adjustable	1500	10500	132
RJUME-[XX]-25	25	adjustable	2500	17500	253
RJUME-[XX]-30	30	adjustable	3750	26250	374
RJUME-[XX]-40	40	adjustable	6000	42000	713


# DryLin® R Closed Pillow Block, Long Design Linear Bearing RJUM-06, mm

**igus®**



## Special Properties

- Closed, anodized aluminum housing, long design
- Contains JUM-01-XX liner

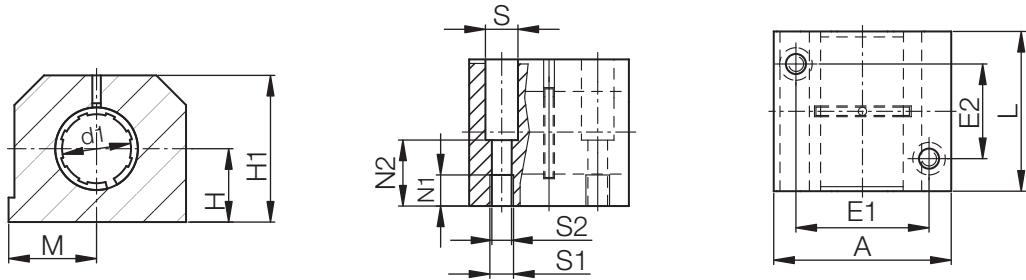

## Dimensions (mm)


Part No.	d1	H	H1	A	M	E1	E2	S	S1	S2	N1	N2	L
RJUM-[ ]-12	12	18	35	43	21.5	32	23	8.0	M 5	4.3	16.5	11	39
RJUM-[ ]-16	16	22	42	53	26.5	40	26	10.0	M 6	5.3	21.0	13	43
RJUM-[ ]-20	20	25	50	60	30.0	45	32	11.0	M 8	6.6	24.0	18	54
RJUM-[ ]-25	25	30	60	78	39.0	60	40	15.0	M10	8.4	29.0	22	67
RJUM-[ ]-30	30	35	70	87	43.5	68	45	15.0	M10	8.4	34.0	22	79
RJUM-[ ]-40	40	45	90	108	54.0	86	58	18.0	M12	10.5	44.0	26	91
RJUM-[ ]-50	50	50	105	132	66.0	108	50	20.0	M16	13.5	49.0	34	113

Supplement the part number with one of the following choices.  
Example: RJUM-[06]-12 for a standard version

For Standard version use [06] (See page 27.24)

For Low Clearance version use [36] (See page 27.24)

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

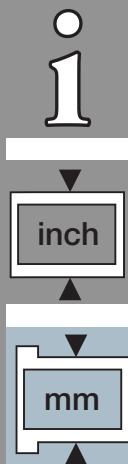

## Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (kg)
RJUM-[XX]-12	12	.0300 - .0880	960	6720	0.121
RJUM-[XX]-16	16	.0300 - .0880	1440	10080	0.211
RJUM-[XX]-20	20	.0300 - .0910	2250	15750	0.323
RJUM-[XX]-25	25	.0300 - .0910	3625	25375	0.651
RJUM-[XX]-30	30	.0400 - .1100	5100	35700	1.050
RJUM-[XX]-40	40	.0400 - .1150	8000	56000	1.820
RJUM-[XX]-50	50	.0500 - .1300	12500	87500	3.250

\* according to igus® testing method ► Page 49.57



**igus®**

## DryLin® R Floating Pillow Block RJUM-06 LL, mm

DryLin® R  
Linear Guide Systems


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- For extreme misalignments
- Closed, anodized aluminum housing, long design
- Contains JUM-01-XX liner
- Compensation of angle errors +/- 3.5°
- Same properties as standard pillow block
- Compensation of parallelism errors up to 6mm
- Compensates for angular errors and bending of the shaft

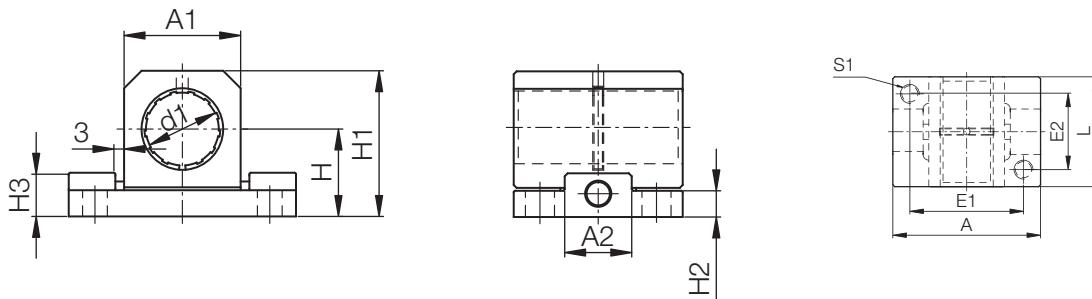

### Dimensions (mm)

Part No.	d1	H	H1	A	E1 ±0.15	E2 ±0.15	S1	L	A1	A2	H2	H3
RJUM-[XX]-12 LL	12	18	28	43	32	23	M 5	39	20	13	6	11
RJUM-[XX]-16 LL	16	22	35	53	40	26	M 6	43	26	15	7	11
RJUM-[XX]-20 LL	20	25	41	60	45	32	M 8	54	32	19	7	12.5
RJUM-[XX]-25 LL	25	30	50	78	60	40	M 10	67	40	23	9	15
RJUM-[XX]-30 LL	30	35	59	87	68	45	M 10	79	48	28	10	15

Supplement the part number with one of the following choices.

Example: RJUM-[06]-12 LL for a standard floating version

For Standard floating version use [06] (See page 27.24)

For Low Clearance floating version use [36] (See page 27.24)

### Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. (N)	Weight (kg)
RJUM-[XX]-12 LL	12	.0300 - .0880	560	0.050
RJUM-[XX]-16 LL	16	.0300 - .0880	920	0.080
RJUM-[XX]-20 LL	20	.0300 - .0910	2100	0.130
RJUM-[XX]-25 LL	25	.0300 - .0910	3550	0.280
RJUM-[XX]-30 LL	30	.0400 - .1100	5300	0.430

\* according to igus® testing method ► Page 49.57

# DryLin® R Split Pillow Block


## TJUM-05, mm

**igus®**



### Special Properties

- Split, anodized aluminum housing, bolted
- Contains JUM-02-XX liner
- Replacement of the liner without disassembling the shaft

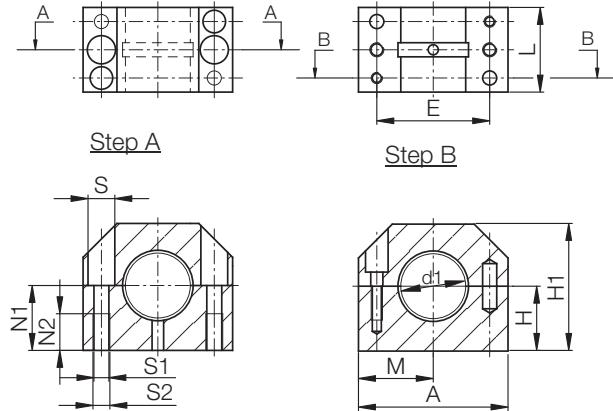

### Dimensions (mm)

Part No.	d1	H ±0.02	H1	A	M	E ±0.15	S	S1	S2	N1	N2	L
TJUM-[ ]-16	16	19	38	45	22.5	34	8.0	M 5	4.3	18	11	30
TJUM-[ ]-20	20	23	45	53	26.5	40	9.5	M 6	5.3	22	13	30
TJUM-[ ]-25	25	27	54	62	31.0	48	11.0	M 8	6.6	26	18	40
TJUM-[ ]-30	30	30	60	67	33.5	53	11.0	M 8	6.6	29	18	50
TJUM-[ ]-40	40	39	76	87	43.5	69	15.0	M10	8.4	38	22	60

Supplement the part number with one of the following choices.  
Example: TJUM-[05]-16 for a standard version

For Standard version use [05] (See page 27.24)

For Low Clearance version use [35] (See page 27.24)

### Load Data

Part No.	Nominal Size	Tolerance Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	Weight (g)
TJUM-[XX]-16	16	.0300-.1200	1200	8400	105
TJUM-[XX]-20	20	.0300-.1200	1500	10500	137
TJUM-[XX]-25	25	.0300-.1200	2500	17500	253
TJUM-[XX]-30	30	.0400-.1350	3750	26250	377
TJUM-[XX]-40	40	.0400-.1350	6000	42000	720

\* according to igus® testing method ► Page 49.57

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10  
↓

inch  
↑

mm  
↑



**igus®**

## DryLin® R Open Pillow Block, Long Design Linear Bearing OJUM-06, mm

DryLin® R  
Linear Guide Systems




Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- Open, anodized aluminum housing, long design
- Contains JUMO-01-XX liner

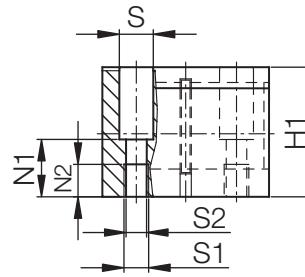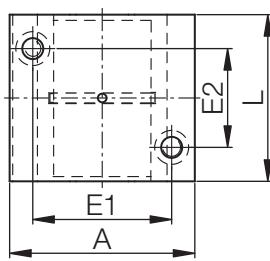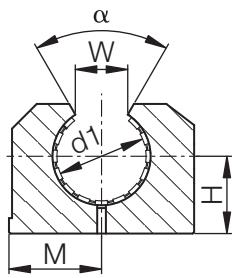

### Dimensions (mm)

Part No.	d1	H	H1	A	M	E	E2	S	S1	S2	N1	N2	W	α (r)	L
		+0.01				±0.15	±0.15								
OJUM-[ ]-12	12	18	28	43	21.5	32	23	8.0	M 5	4.3	16.5	11	10.2	78	39
OJUM-[ ]-16	16	22	35	53	26.5	40	26	10.0	M 6	5.3	21.0	13	11.6	78	43
OJUM-[ ]-20	20	25	42	60	30.0	45	32	11.0	M 8	6.6	24.0	18	12.0	60	54
OJUM-[ ]-25	25	30	51	78	39.0	60	40	15.0	M10	8.4	29.0	22	14.5	60	67
OJUM-[ ]-30	30	35	60	87	43.5	68	45	15.0	M10	8.4	34.0	22	16.6	57	79
OJUM-[ ]-40	40	45	77	108	54.0	86	58	18.0	M12	10.5	44.0	26	21.0	56	91
OJUM-[ ]-50	50	50	88	132	66.0	108	50	20.0	M16	13.5	49.0	34	25.5	54	113

Supplement the part number with one of the following choices.

Example: OJUM-[ ]-12 for a standard version

For Standard version use [06] (See page 27.25)

For Low Clearance version use [36] (See page 27.25)

### Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)			pmax. Static Load P = 35 MPa (N)			Weight (kg)
			0°	90°	180°	0°	90°	180°	
OJUM-[XX]-12	12	.0300 - .0880	960	635	240	6720	4445	1680	0.095
OJUM-[XX]-16	16	.0300 - .0880	1440	990	396	10080	6943	2772	0.158
OJUM-[XX]-20	20	.0300 - .0910	2250	1800	900	15750	12600	6300	0.266
OJUM-[XX]-25	25	.0300 - .0910	3625	2953	1523	25375	20670	10658	0.530
OJUM-[XX]-30	30	.0400 - .1100	5100	4250	2278	35700	29735	15946	0.818
OJUM-[XX]-40	40	.0400 - .1150	8000	6810	3800	56000	47660	26660	1.485
OJUM-[XX]-50	50	.0500 - .1300	12500	10750	6125	87500	75265	42875	2.750

\* according to igus® testing method ► Page 49.57


# DryLin® R Adjustable Pillow Block, Long Design Linear Bearing OJUME-06, mm

**igus®**



## Special Properties

- Open, anodized aluminum housing, standard
- Contains JUMO-01-XX liner made of iglide® J is fitted as standard
- Adjustable clearance: with 2 set screws (DIN 913) one side of the block can be adjusted
- Recommended tolerance for the shaft: h6-h10 (see igus® supported shafts Page 49.61)
- Also available with the following liners:  
TUMO-01: for high temperatures up to 356°F, material iglide® T500 - Example: OTUM-06-16  
JUMO-11: with reduced maximum clearance, material iglide® J - Example: OJUM-20-16

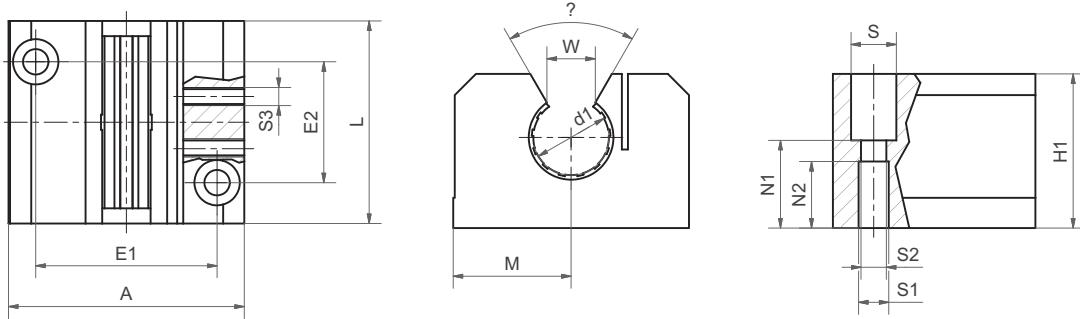

## Dimensions (mm)


Part No.	d1	H	H1	A	M	E	E2	S	S1	S2	N1	N2	W	α (r)	L
OJUME-[ ]-12	12	18	28	43	21.5	$\pm 0.15$	$\pm 0.15$	8.0	M 5	4.3	16.5	11	10.2	78	39
OJUME-[ ]-16	16	22	35	53	26.5	40	26	10.0	M 6	5.3	21.0	13	11.6	78	43
OJUME-[ ]-20	20	25	42	60	30.0	45	32	11.0	M 8	6.6	24.0	18	12.0	60	54
OJUME-[ ]-25	25	30	51	78	39.0	60	40	15.0	M10	8.4	29.0	22	14.5	60	67
OJUME-[ ]-30	30	35	60	87	43.5	68	45	15.0	M10	8.4	34.0	22	16.6	57	79
OJUME-[ ]-40	40	45	77	108	54.0	86	58	18.0	M12	10.5	44.0	26	21.0	56	91
OJUME-[ ]-50	50	50	88	132	66.0	108	50	20.0	M16	13.5	49.0	34	25.5	54	113

Supplement the part number with one of the following choices.

Example: OJUME-[06]-12 for a standard version

For Standard version use [06] (See page 27.25)

For Low Clearance version use [36] (See page 27.25)

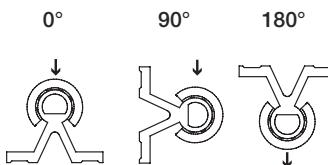

## Load Data


Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa						pmax. Static Load P = 35 MPa						Weight (kg)			
			0°			90°			180°			0°			90°			
			(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)	(N)		
OJUME-[XX]-12	12	.0300 - .0880	960	635	240	6720	4445	1680	0.095									
OJUME-[XX]-16	16	.0300 - .0880	1440	990	396	10080	6943	2772	0.158									
OJUME-[XX]-20	20	.0300 - .0910	2250	1800	900	15750	12600	6300	0.266									
OJUME-[XX]-25	25	.0300 - .0910	3625	2953	1523	25375	20670	10658	0.530									
OJUME-[XX]-30	30	.0400 - .1100	5100	4250	2278	35700	29735	15946	0.818									
OJUME-[XX]-40	40	.0400 - .1150	8000	6810	3800	56000	47660	26660	1.485									
OJUME-[XX]-50	50	.0500 - .1300	12500	10750	6125	87500	75265	42875	2.750									

\* according to igus® testing method ► Page 49.57



DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

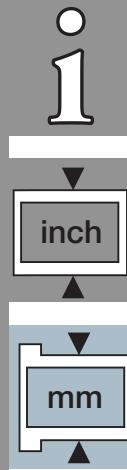



**igus®**

## DryLin® R Open Floating Pillow Block, Long Design Linear Bearing OJUM-06 LL, mm

DryLin® R  
Linear Guide Systems


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- For extreme misalignments
- Closed, anodized aluminum housing, long design
- Contains JUM-01-XX liner
- Compensation of angle errors +/- 3.5°
- Same properties as standard pillow block
- Compensation of parallelism errors up to 6mm
- Compensates for angular errors and bending of the shaft

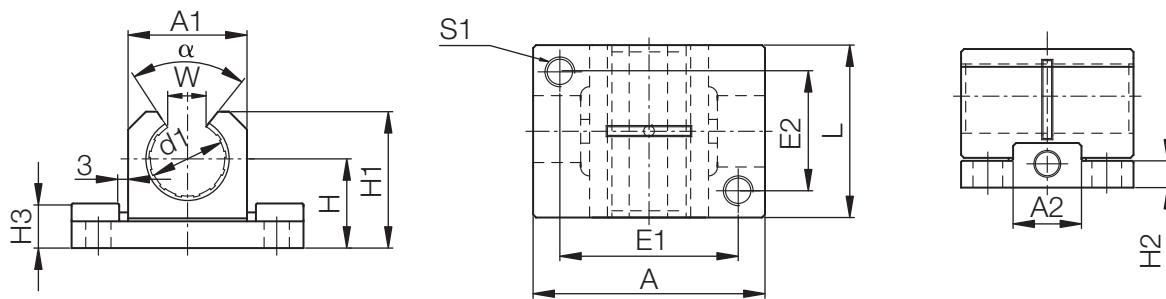

### Dimensions (mm)

Part No.	d1	H	H1	A	E1 ± 0.15	E2 ± 0.15	S1	L	A1	A2	H2	H3	W	α [-]
OJUM-[ ]-12 LL	12	18	24.5	43	32	23	M 5	39	20	13	6	11	10.2	90
OJUM-[ ]-16 LL	16	22	30.5	53	40	26	M 6	43	26	15	7	11	11.6	90
OJUM-[ ]-20 LL	20	25	37	60	45	32	M 8	54	32	19	7	12.5	12	60
OJUM-[ ]-25 LL	25	30	44	78	60	40	M10	67	40	23	9	15	14.5	60
OJUM-[ ]-30 LL	30	35	52.5	87	68	45	M10	79	48	28	10	15	16.8	60

Supplement the part number with one of the following choices.  
Example: OJUM-[06]-10 for a standard version


For Standard version use [06] (See page 27.25)

For Low Clearance version use [36] (See page 27.25)

### Load Data

Part No.	Nominal Size	Tolerance* Bearing Inner Diameter	pmax. (N) at 0°	pmax. (N) at 90°	pmax. (N) at 180°	Weight [kg]
OJUM-[XX]-12 LL	12	.0300 - .0880	560	NA	240	0.040
OJUM-[XX]-16 LL	16	.0300 - .0880	920	NA	400	0.070
OJUM-[XX]-20 LL	20	.0300 - .0910	2100	NA	900	0.115
OJUM-[XX]-25 LL	25	.0300 - .0910	3550	NA	1520	0.240
OJUM-[XX]-30 LL	30	.0400 - .1100	5300	NA	2280	0.370

\* according to igus® testing method ► Page 49.57

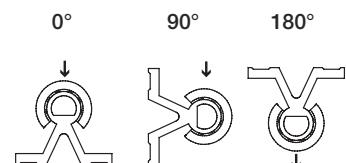


# DryLin® R Flange Pillow Block, Round Design FJUM-01, mm

**igus®**



## Special Properties

- Flange housing made of anodized aluminum, round flange
- Contains JUM-01-XX liner

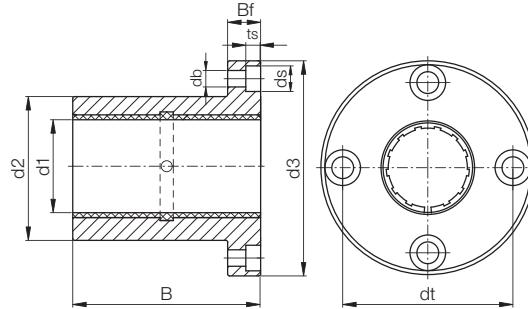

## Dimensions (mm)

Part No.	d1	d2 h7	dt	d3	B	Bf	ts	db	ds
FJZM-[ ]-08*	8	16	24	32	25	8	3.1	3.5	6.0
FJUM-[ ]-10	10	19	29	39	29	9	4.1	4.5	7.5
FJUM-[ ]-12	12	22	32	42	32	9	4.1	4.5	7.5
FJUM-[ ]-16	16	26	36	46	36	9	4.1	4.5	7.5
FJUM-[ ]-20	20	32	43	54	45	11	5.1	5.5	9.0
FJUM-[ ]-25	25	40	51	62	58	11	5.1	5.5	9.0
FJUM-[ ]-30	30	47	62	76	68	14	6.1	6.6	11.0
FJUM-[ ]-40	40	62	80	98	80	18	8.1	9.0	14.0
FJUM-[ ]-50	50	75	94	112	100	18	8.1	9.0	15.0

Supplement the part number with one of the following choices.

Example: FJUM-[01]-10 for a standard version

For Standard version use [01] (See page 27.24)

For Low Clearance version use [31] (See page 27.24)

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm

## Load Data

Part No.	Nominal Size	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load	pmax. Static Load	Weight (g)
			P = 5 MPa (N)	P = 35 MPa (N)	
FJZM-[XX]-08*	8	.0320 - .0700	960	6720	20
FJUM-[XX]-10	10	.0300 - .0880	725	5075	32
FJUM-[XX]-12	12	.0300 - .0880	960	6720	42
FJUM-[XX]-16	16	.0300 - .0880	1440	10080	51
FJUM-[XX]-20	20	.0300 - .0910	2250	15750	88
FJUM-[XX]-25	25	.0300 - .0910	3625	25375	152
FJUM-[XX]-30	30	.0400 - .1100	5100	35700	266
FJUM-[XX]-40	40	.0400 - .1150	8000	56000	552
FJUM-[XX]-50	50	.0500 - .1300	12500	87500	853

\* Nominal widths under 10mm are delivered with pressfit sleeve bearings

\* according to igus® testing method ► Page 49.57



**igus®**

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



## DryLin® R Flange Pillow Block, Square Design FJUM-02, mm

### Special Properties

- Flange housing made of anodized aluminum, square flange
- Contains JUM-01-XX liner

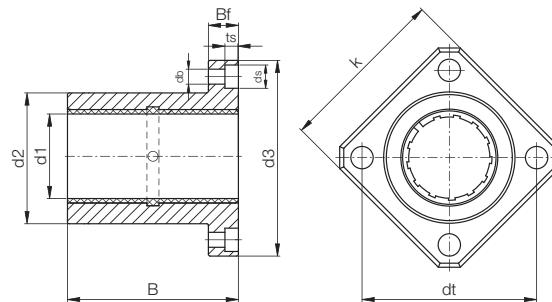

### Dimensions (mm)

Part No.	d1	d2 h7	d3	dt	k	B	Bf	ts	db	ds
FJZM-[ ]-08*	8	16	32	24	25	25	8	3.1	3.5	6.0
FJUM-[ ]-10	10	19	39	29	30	29	9	4.1	4.5	7.5
FJUM-[ ]-12	12	22	42	32	32	32	9	4.1	4.5	7.5
FJUM-[ ]-16	16	26	46	36	35	36	9	4.1	4.5	7.5
FJUM-[ ]-20	20	32	54	43	42	45	11	5.1	5.5	9.0
FJUM-[ ]-25	25	40	62	51	50	58	11	5.1	5.5	9.0
FJUM-[ ]-30	30	47	76	62	60	68	14	6.1	6.6	11.0
FJUM-[ ]-40	40	62	98	80	75	80	18	8.1	9.0	15.0
FJUM-[ ]-50	50	75	112	94	88	100	18	8.1	9.0	14.0

Supplement the part number with one of the following choices.  
Example: FJUM-[02]-10 for a standard version

For Standard version use [02] (See page 27.24)

For Low Clearance version use [32] (See page 27.24)

### Load Data

Part No.	Nominal Size	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa	pmax. Static Load P = 35 MPa	Weight (g)
FJZM-[XX]-08*	8	.0320 - .0700	960	6720	17
FJUM-[XX]-10	10	.0300 - .0880	725	5075	25
FJUM-[XX]-12	12	.0300 - .0880	960	6720	32
FJUM-[XX]-16	16	.0300 - .0880	1440	10080	41
FJUM-[XX]-20	20	.0300 - .0910	2250	15750	73
FJUM-[XX]-25	25	.0300 - .0910	3625	25375	135
FJUM-[XX]-30	30	.0300 - .1100	5100	35700	228
FJUM-[XX]-40	40	.0300 - .1150	8000	56000	454
FJUM-[XX]-50	50	.0300 - .1300	12500	87500	735

\* Nominal widths under 10mm are delivered with pressfit sleeve bearings

\*\* according to igus® testing method ► Page 49.57



# DryLin® R Twin Flange Pillow Block Round Design FJUMT-01, mm

**igus®**



## Special Properties

- Flange housing made of anodized aluminum, round flange
- Contains 2 of the JUM-02-XX liners

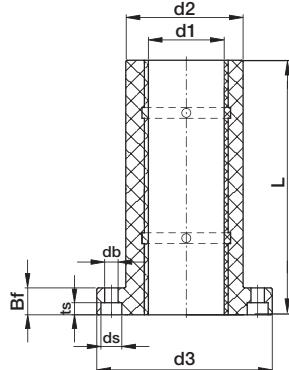

## Dimensions (mm)

Part No.	d1	d2 h7	d3	dt	k	B	Bf	ts	db	ds
FJZMT-01-08*	8	16	32	24	25	45	8	3.1	3.5	6.0
FJUMT-01-10	10	19	39	29	30	52	9	4.1	4.5	7.5
FJUMT-01-12	12	22	42	32	32	57	9	4.1	4.5	7.5
FJUMT-01-16	16	26	46	36	35	70	9	4.1	4.5	7.5
FJUMT-01-20	20	32	54	43	42	80	11	5.1	5.5	9.0
FJUMT-01-25	25	40	62	51	50	112	11	5.1	5.5	9.0
FJUMT-01-30	30	47	76	62	60	123	14	6.1	6.6	11.0
FJUMT-01-40	40	62	98	80	75	151	18	8.1	9.0	14.0
FJUMT-01-50	50	75	112	94	88	192	18	8.1	9.0	14.0

Part No.	Nominal Size	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	For a Low Clearance version use part number FJUMT-31-XX
			P = 5 MPa (N)	P = 35 MPa (N)	
FJZMT-01-08*	8	.0320 - .0700	1913	13430	
FJUMT-01-10	10	.0300 - .0880	1450	10150	
FJUMT-01-12	12	.0300 - .0880	1913	13430	
FJUMT-01-16	16	.0300 - .0880	2874	20160	
FJUMT-01-20	20	.0300 - .0910	4493	31490	
FJUMT-01-25	25	.0300 - .0910	7251	50750	
FJUMT-01-30	30	.0400 - .1100	10200	71390	
FJUMT-01-40	40	.0400 - .1150	16000	112000	
FJUMT-01-50	50	.0500 - .1300	25000	175000	

## Comparison of Flange Length and Bearing Surface of FJUM and FJUMT

Part No.	Nominal Diameter (mm)	Flange Length (mm)			Effective Surface Area (mm²)		
		FJUM-01-..	FJUMT-01-..	Difference (%)	FJUM-01-..	FJUMT-01-..	Difference (%)
FJZMT-01-08	08*	25	45	+80	192	256	+33
FJUMT-01-10	10	29	52	+80	145	250	+72
FJUMT-01-12	12	32	57	+78	186	324	+74
FJUMT-01-16	16	36	70	+94	280	464	+66
FJUMT-01-20	20	45	80	+78	440	580	+32
FJUMT-01-25	25	58	112	+93	712	975	+37
FJUMT-01-30	30	68	123	+81	1005	1470	+46
FJUMT-01-40	40	80	151	+89	1580	2360	+49
FJUMT-01-50	50	100	192	+92	2475	3450	+39

\* FJZMT-01-08 are equipped with 2 pieces JSM-0810-16

\* Nominal widths under 10mm are delivered with pressfit sleeve bearings

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



**igus®**

## DryLin® R Twin Flange Pillow Block Square Design FJUMT-02, mm

DryLin® R  
Linear Guide Systems


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- Flange housing made of anodized aluminum, square flange
- Contains 2 of the JUM-02-XX liners

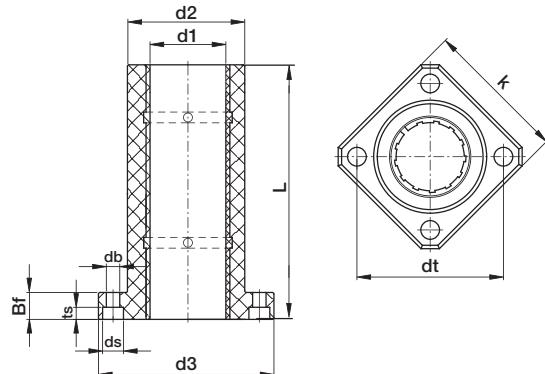

### Dimensions (mm)

Part No.	d1	d2 h7	d3	dt	k	B	Bf	ts	db	ds
FJZMT-02-08*	8	16	32	24	25	45	8	3.1	3.5	6.0
FJUMT-02-10	10	19	39	29	30	52	9	4.1	4.5	7.5
FJUMT-02-12	12	22	42	32	32	57	9	4.1	4.5	7.5
FJUMT-02-16	16	26	46	36	35	70	9	4.1	4.5	7.5
FJUMT-02-20	20	32	54	43	42	80	11	5.1	5.5	9.0
FJUMT-02-25	25	40	62	51	50	112	11	5.1	5.5	9.0
FJUMT-02-30	30	47	76	62	60	123	14	6.1	6.6	11.0
FJUMT-02-40	40	62	98	80	75	151	18	8.1	9.0	14.0
FJUMT-02-50	50	75	112	94	88	192	18	8.1	9.0	14.0

### Load Data

Part No.	Nominal Size	Tolerance** Bearing Inner Diameter	pmax. Dynamic Load P = 5 MPa (N)	pmax. Static Load P = 35 MPa (N)	For a Low Clearance version use part number FJUMT-32-XX
			(N)	(N)	
FJZMT-02-08*	8	.0320 - .0700	1913	13430	
FJUMT-02-10	10	.0300 - .0880	1450	10150	
FJUMT-02-12	12	.0300 - .0880	1913	13430	
FJUMT-02-16	16	.0300 - .0880	2874	20160	
FJUMT-02-20	20	.0300 - .0910	4493	31490	
FJUMT-02-25	25	.0300 - .0910	7251	50750	
FJUMT-02-30	30	.0400 - .1100	10200	71390	
FJUMT-02-40	40	.0400 - .1150	16000	112000	
FJUMT-02-50	50	.0500 - .1300	25000	175000	

### Comparison of Flange Length and Bearing Surface of FJUM and FJUMT

Part No.	Nominal Diameter (mm)	Flange Length (mm)			Effective Surface Area (mm²)		
		FJUM-02-..	FJUMT-02-..	Difference (%)	FJUM-02-..	FJUMT-02-..	Difference (%)
FJZMT-02-08*	08*	25	45	+80	192	256	+33
FJUMT-02-10	10	29	52	+80	145	250	+72
FJUMT-02-12	12	32	57	+78	186	324	+74
FJUMT-02-16	16	36	70	+94	280	464	+66
FJUMT-02-20	20	45	80	+78	440	580	+32
FJUMT-02-25	25	58	112	+93	712	975	+37
FJUMT-02-30	30	68	123	+81	1005	1470	+46
FJUMT-02-40	40	80	151	+89	1580	2360	+49
FJUMT-02-50	50	100	192	+92	2475	3450	+39

\* FJZMT-02-08 are equipped with 2 pieces JSM-0810-12

\* Nominal widths under 10mm are delivered with pressfit sleeve bearings



Quad block, with DryLin® R linear bearings

For a Low Clearance version  
use part number  
RQA-31-XX for standard  
RQA-33-XX for self-aligning



## Special Properties

- Housing: aluminum
- Equipped with DryLin® R linear plain bearings, part no. RJUM-01- $\varnothing$ , RJUM-03- $\varnothing$ , or RJM-01
- Bearings are secured with retaining rings according to DIN 472
- Mounting bolts DIN 912-8.8, lock washer DIN 7980

Also available as  
driven systems



**HTS**  
Page  
30.17

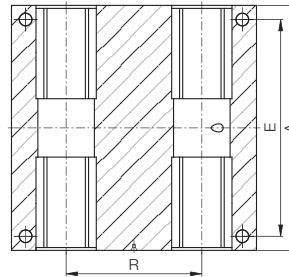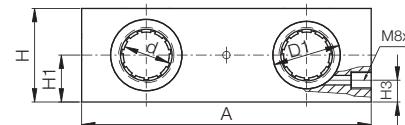

## Dimensions (mm)

Standard with RJUM-01	Self-Aligning with RJUM-03	All Plastic with RJM-01	d	D1	A	H	H1	H3	R	N	E	S	S1
RQA-01-08	RQA-03-08	RQA-04-08	8	16	65	23	11.5	8	32	11	55	4.3	M5
RQA-01-12	RQA-03-12	RQA-04-12	12	22	85	32	16	13	42	13	73	5.3	M6
RQA-01-16	RQA-03-16	RQA-04-16	16	26	100	36	18	15	54	13	88	5.3	M6
RQA-01-20	RQA-03-20	RQA-04-20	20	32	130	46	23	19	72	18	115	6.6	M8
RQA-01-25	RQA-03-25	RQA-04-25	25	40	160	56	28	24	88	22	140	8.4	M10
RQA-01-30	RQA-03-30	RQA-04-30	30	47	180	64	32	27	96	26	158	10.5	M12
RQA-01-40	RQA-03-40	RQA-04-40	40	62	230	80	40	35	122	34	202	13.5	M16

## OQA - Quad Block, Open, mm





Quad block open with DryLin® R linear bearings

For a Low Clearance version  
use part number  
OQA-31-XX for standard  
OQA-33-XX for self-aligning

## Special Properties

- Housing: aluminum
- Equipped with DryLin® R linear plain bearings, Part no. OJUM-01- $\varnothing$  or OJUM-03- $\varnothing$
- Maintenance-free
- Mounting bolts DIN 912-8.8, lock washer DIN 7980
- Securing of the bearing in the housing is done using set screws

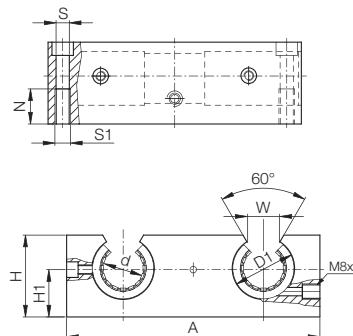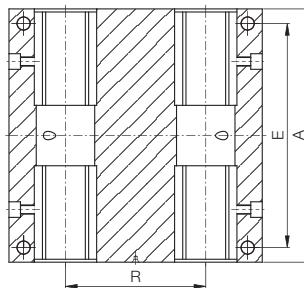


## Dimensions (mm)

Standard with OJUM-01	Self-Aligning with OJUM-03	d	D1	A	H	H1	W	R	N	E	S	S1
OQA-01-12	OQA-03-12	12	22	85	30	18	14	42	13	73	5.3	M6
OQA-01-16	OQA-03-16	16	26	100	35	22	17	54	13	88	5.3	M6
OQA-01-20	OQA-03-20	20	32	130	42	25	17	72	18	115	6.8	M8
OQA-01-25	OQA-03-25	25	40	160	51	30	21	88	22	140	9.0	M10
OQA-01-30	OQA-03-30	30	47	180	60	35	21	96	26	158	10.5	M12
OQA-01-40	OQA-03-40	40	62	230	77	45	27	122	34	202	13.5	M16

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

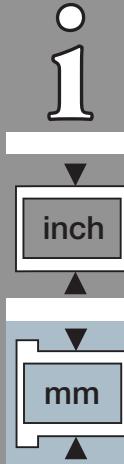



**igus®**

## RTA - Pillow Block, Closed, Twin Design, mm

## Special Properties

- Housing: aluminum
  - Equipped with DryLin® R linear plain bearings, part no. RJUM-01-ø, RJUM-03-ø or. RJM-01
  - Can be combined with DryLin® R housing bearing, Part No. RJUM-06-ø
  - Bearings are secured with retaining rings according to DIN 472
  - Mounting bolts DIN 912-8.8, lock washer DIN 7980




Pillow block ,twin design with DryLin® R linear plain bearings

For a Low Clearance version  
use part number


RTA-31-XX for standard  
RTA-33-XX for self-aligning

## Dimensions (mm)

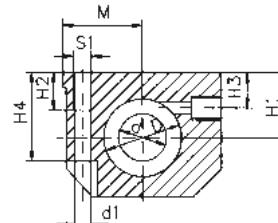

Part No.			d	D H6	H	H1 +0.01	H2	H3	H4	S1	B	L +0.3	M ±0.02	E1 ±0.15	E2 ±0.15	d1	d2
Standard with RJUM-01	Self-Aligning with RJUM-03	All Plastic with RJM-0				-0.02											
RTA-01-08	-	RTA-04-08	8	16	28	13	13	8	14	M 5	35	62	17.5	35	25	4.20	8
RTA-01-12	RTA-03-12	RTA-04-12	12	22	35	18	13	10	25	M 6	43	76	21.5	40	30	5.20	10
RTA-01-16	RTA-03-16	RTA-04-16	16	26	42	22	13	12	30	M 6	53	84	26.5	45	36	5.20	10
RTA-01-20	RTA-03-20	RTA-04-20	20	32	50	25	18	13	24	M 8	60	104	30.0	55	45	6.80	11
RTA-01-25	RTA-03-25	RTA-04-25	25	40	60	30	22	15	40	M10	78	130	39.0	70	54	8.60	15
RTA-01-30	RTA-03-30	RTA-04-30	30	47	70	35	26	16	48	M12	87	152	43.5	85	62	10.30	18
RTA-01-40	RTA-03-40	RTA-04-40	40	62	90	45	34	20	60	M16	108	176	54.0	100	80	14.25	20

## OTA - Pillow Block, Open, Twin Design, mm

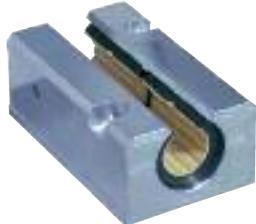


Pillow block, twin design, open  
with DryLin® R linear plain  
bearings

For a Low Clearance version  
use part number  
OTA-31-XX for standard  
OTA-33-XX for self-aligning

## Special Properties

- Housing: aluminum
  - Equipped with DryLin® R linear plain bearings, Part No. OJUM-01-ø or OJUM-03-ø
  - Can be combined with DryLin® R housing bearing, Part No. OJUM-06-ø
  - Securing of the bearing in the housing is done using set screws
  - Mounting bolts DIN 912-8.8, washer DIN 7980

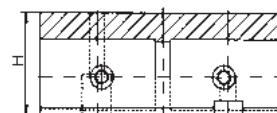

## Dimensions (mm)

Part No.		d	D	H	H1 +0.01	H2	H3	H4	S1	B	L +0.3	M ±0.02	E1 ±0.15	E2 ±0.15	d1	d2	W
Standard with OJUM-01	Self-Aligning with OJUM-03		H6		-0.02												
OTA-01-12	OTA-03-12	12	22	30	18	13	10	25	M 6	43	76	21.5	40	30	5.20	10	14
OTA-01-16	OTA-03-16	16	26	35	22	13	12	30	M 6	53	84	26.5	45	36	5.20	10	17
OTA-01-20	OTA-03-20	20	32	42	25	18	13	24	M 8	60	104	30.0	55	45	6.80	11	17
OTA-01-25	OTA-03-25	25	40	51	30	22	15	40	M10	78	130	29.0	70	54	8.60	15	21
OTA-01-30	OTA-03-30	30	47	60	35	26	16	48	M12	87	152	43.5	85	62	10.30	18	21
OTA-01-40	OTA-03-40	40	62	77	45	34	20	60	M16	108	176	54.0	100	80	14.25	20	27

# RGA Pillow Block, Closed, Long Design, mm

**igus®**



## Special Properties


- Housing: aluminum
- Equipped with DryLin® R linear plain bearings, Part No. RJUM-01- $\varnothing$ , RJUM-03- $\varnothing$  or RJM-01
- Can be combined with DryLin® R housing bearing, Part No. RJUM-06- $\varnothing$
- Bearings are secured with retaining rings according to DIN 472

For a Low Clearance version

use part number

RGA-31-XX for standard

RGA-33-XX for self-aligning



## Dimensions (mm)

Part No.			d	D H6	H	H1 +0.01 -0.02	H2	H3	H4	S1	B	L ±0.03	M ±0.15	E1 ±0.15	E2	d1	d2
Standard with RJUM-01	Self-Aligning with RJUM-03	All Plastic with RJM-01															
RGA-01-08	-	RGA-04-08	8	16	28	13	10	8	14	M 4	35	32	17.5	20	25	3.2	6
RGA-01-12	RGA-03-12	RGA-04-12	12	22	35	18	11	10	25	M 5	43	39	21.5	23	32	4.2	6
RGA-01-16	RGA-03-16	RGA-04-16	16	26	42	22	13	12	30	M 6	53	43	26.5	26	40	5.2	10
RGA-01-20	RGA-03-20	RGA-04-20	20	32	50	25	18	13	24	M 8	60	54	30.0	32	45	6.8	11
RGA-01-25	RGA-03-25	RGA-04-25	25	40	60	30	22	15	40	M10	78	67	39.0	40	60	8.6	15
RGA-01-30	RGA-03-30	RGA-04-30	30	47	70	35	22	16	48	M10	87	79	43.5	45	68	8.6	15
RGA-01-40	RGA-03-40	RGA-04-40	40	62	90	45	26	20	60	M12	108	91	54.0	58	86	10.3	18

# OGA Pillow Block, Open, Long Design, mm



## Special Properties


- Housing: aluminum
- Equipped with DryLin® linear plain bearings OJUM-01- $\varnothing$  or OJUM-03- $\varnothing$
- Can be combined with DryLin® R housing bearing OJUM-06- $\varnothing$
- Bearings are secured with retaining rings according to DIN 472

For a Low Clearance version

use part number


OGA-31-XX for standard

OGA-33-XX for self-aligning



## Dimensions (mm)


Part No..			d	D H6	H	H1 +0.01 -0.02	H2	H3	H4	S1	B +0.3	L ±0.03	M ±0.15	E1 ±0.15	E2	d1	d2	W +0.6
Standard with OJUM-01	Self- Self-Aligning with OJUM-03																	
OGA-01-12	OGA-03-12	OGA-04-12	12	22	28	18	11	8	25	M 5	43	39	21.5	23	32	4.2	8	14
OGA-01-16	OGA-03-16	OGA-04-16	16	26	35	22	13	12	30	M 6	53	43	26.5	26	40	5.2	10	17
OGA-01-20	OGA-03-20	OGA-04-20	20	32	42	25	18	13	24	M 8	60	54	30.0	32	45	6.8	11	17
OGA-01-25	OGA-03-25	OGA-04-25	25	40	51	30	22	15	40	M10	78	67	39.0	40	60	8.6	15	21
OGA-01-30	OGA-03-30	OGA-04-30	30	47	60	35	22	16	48	M10	87	79	43.5	45	68	8.6	15	21
OGA-01-40	OGA-03-40	OGA-04-40	40	62	77	45	26	20	60	M12	108	91	54.0	58	86	10.3	18	27



For a Low Clearance version  
use part number  
RGAS-31-XX for standard  
RGAS-33-XX for self-aligning

### Special Properties


- Housing: aluminum
- Equipped with DryLin® R linear plain bearings, Part No. RJUM-01- $\varnothing$ , RJUM-03- $\varnothing$  or RJM-01
- Can be combined with DryLin® R housing bearing RJUM-06- $\varnothing$
- Bearings are secured with retaining rings according to DIN 472

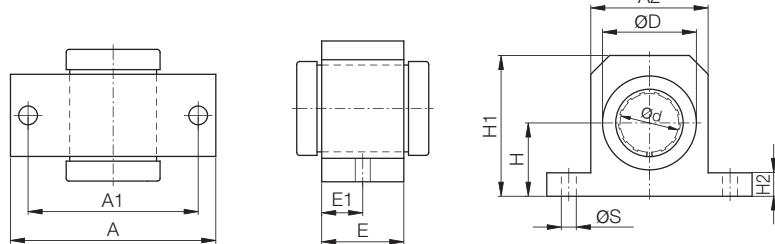

### Dimensions (mm)

Part No. Standard with RJUM-01	Self-Aligning with RJUM-03	All Plastic with RJM-01	d	D	H	H1	A	A1	A2	E	E1	S
RGAS-01-12	RGAS-03-12	RGAS-04-12	12	22	18	35	52	42	30	20	10	5.3
RGAS-01-16	RGAS-03-16	RGAS-04-16	16	26	22	40.5	56	46	34	22	11	5.3
RGAS-01-20	RGAS-03-20	RGAS-04-20	20	32	25	48.0	70	58	40	28	14	6.4
RGAS-01-25	RGAS-03-25	RGAS-04-25	25	40	30	58.0	80	68	50	40	20	6.4
RGAS-01-30	RGAS-03-30	RGAS-04-30	30	47	35	67.0	88	76	58	48	24	6.4
RGAS-01-40	RGAS-03-40	RGAS-04-40	40	62	45	85.0	108	94	74	56	28	8.4


## OGAS Pillow Block, Open, Short Design, mm

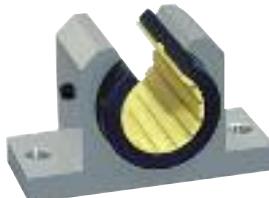

For a Low Clearance version  
use part number  
OGAS-31-XX for standard  
OGAS-33-XX for self-aligning

### Special Properties

- Housing: aluminum
- Equipped with DryLin® R linear plain bearings, Part No. OJUM-01- $\varnothing$  or OJUM-03- $\varnothing$
- Can be combined with DryLin® R housing bearing, Part No. OJUM-06- $\varnothing$
- Securing of the bearing in the housing is done using set screws

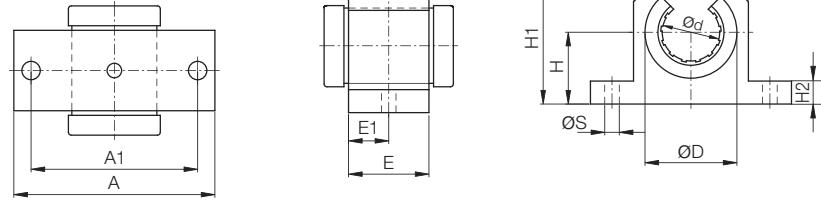

### Dimensions (mm)

Part No. Standard with OJUM-01	Self-Aligning with OJUM-03	d	D	H	H1	A	A1	A2	E	E1	E3	(°)	S
OGAS-01-12	OGAS-03-12	12	22	18	28	52	42	30	20	10	14	78	5.3
OGAS-01-16	OGAS-03-16	16	26	22	33.5	56	46	34	22	11	17	78	5.3
OGAS-01-20	OGAS-03-20	20	32	25	42	70	58	40	28	14	17	60	6.4
OGAS-01-25	OGAS-03-25	25	40	30	51	80	68	50	40	20	21	60	6.4
OGAS-01-30	OGAS-03-30	30	47	35	60	88	76	58	48	24	21	54	6.4
OGAS-01-40	OGAS-03-40	40	62	45	77	108	94	74	56	28	27	54	8.4



## igus® testing method for determining the tolerance of DryLin® Linear Plain Bearings

In order to ensure the function of the DryLin® linear plain bearing, it is necessary to use the bearing with a defined clearance. The quality control of this product line is performed with a cylinder gauge test. For this

purpose, a certain force is defined, with which the cylinder gauge is loaded when the plain bearing is tested.

Part	Test Force (lbs)	Test Housing i.d.	min. Bearing øi (Cylinder Gauge Free)	max. Bearing øi (Cylinder Gauge Hangs)
JUM-01/02-10	0.221	12.000 mm	10.030 mm	10.070 mm
JUM-01/02-12	0.309	14.000 mm	12.030 mm	12.070 mm
JUM-01/02-16	0.419	18.000 mm	16.030 mm	16.070 mm
JUM-01/02-20	0.595	23.000 mm	20.030 mm	20.070 mm
JUM-01/02-25	0.838	28.000 mm	25.030 mm	25.070 mm
JUM-01/02-30	1.081	34.000 mm	30.040 mm	30.085 mm
JUM-01/02-40	1.588	44.000 mm	40.040 mm	40.085 mm
JUM-01/02-50	2.205	55.000 mm	50.050 mm	50.100 mm
JUI-01-06	0.221	0.4684 inch	0.3768 inch	0.3776 inch
JUI-01-08	0.309	0.5934 inch	0.5016 inch	0.5024 inch
JUI-01-10	0.419	0.7184 inch	0.6268 inch	0.6276 inch
JUI-01-12	0.595	0.8747 inch	0.7516 inch	0.7524 inch
JUI-01-16	0.838	1.1247 inch	1.0016 inch	1.0024 inch
JUI-01-20	1.081	1.4058 inch	1.2520 inch	1.2531 inch
JUI-01-24	1.588	1.6558 inch	1.5020 inch	1.5031 inch
JUI-01-32	2.205	2.1870 inch	2.0024 inch	2.0039 inch
RJM-01-08	0.221	16.000 mm	8.025 mm	8.061 mm
RJM-01-10	0.221	19.000 mm	10.025 mm	10.061 mm
RJM-01-12	0.309	22.000 mm	12.032 mm	12.075 mm
RJM-01-16	0.419	26.000 mm	16.032 mm	16.075 mm
RJM-01-20	0.595	32.000 mm	20.040 mm	20.092 mm
RJM-01-25	0.838	40.000 mm	25.040 mm	25.092 mm
RJM-01-30	1.081	47.000 mm	30.040 mm	30.092 mm
RJM-01-40	1.588	62.000 mm	40.050 mm	40.112 mm
RJM-01-50	2.205	75.000 mm	50.050 mm	50.112 mm
RJI-01-06	0.221	0.6250 inch	0.3762 inch	0.3776 inch
RJI-01-08	0.309	0.8750 inch	0.5013 inch	0.5030 inch
RJI-01-10	0.419	1.1250 inch	0.6265 inch	0.6282 inch
RJI-01-12	0.595	1.2500 inch	0.7516 inch	0.7536 inch
RJI-01-16	0.838	1.5625 inch	1.0035 inch	1.0056 inch
RJI-01-20	1.081	2.0000 inch	1.2520 inch	1.2544 inch
RJI-01-24	1.588	2.3750 inch	1.5020 inch	1.5044 inch
RJI-01-32	2.205	3.0000 inch	2.0024 inch	2.0053 inch

When using a plain bearing (JUM/RJM..) in connection with an adapter/housing (RJUM, OJUM, RGA..) the manufacturing tolerance of the housing bore (standard case: H7) is also added to the minimum play listed above. The total from these two values then produces the maximum possible bearing tolerance.

DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm




**igus®**

## DryLin® R Linear Plain Bearing

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

DryLin® R  
Linear Guide Systems

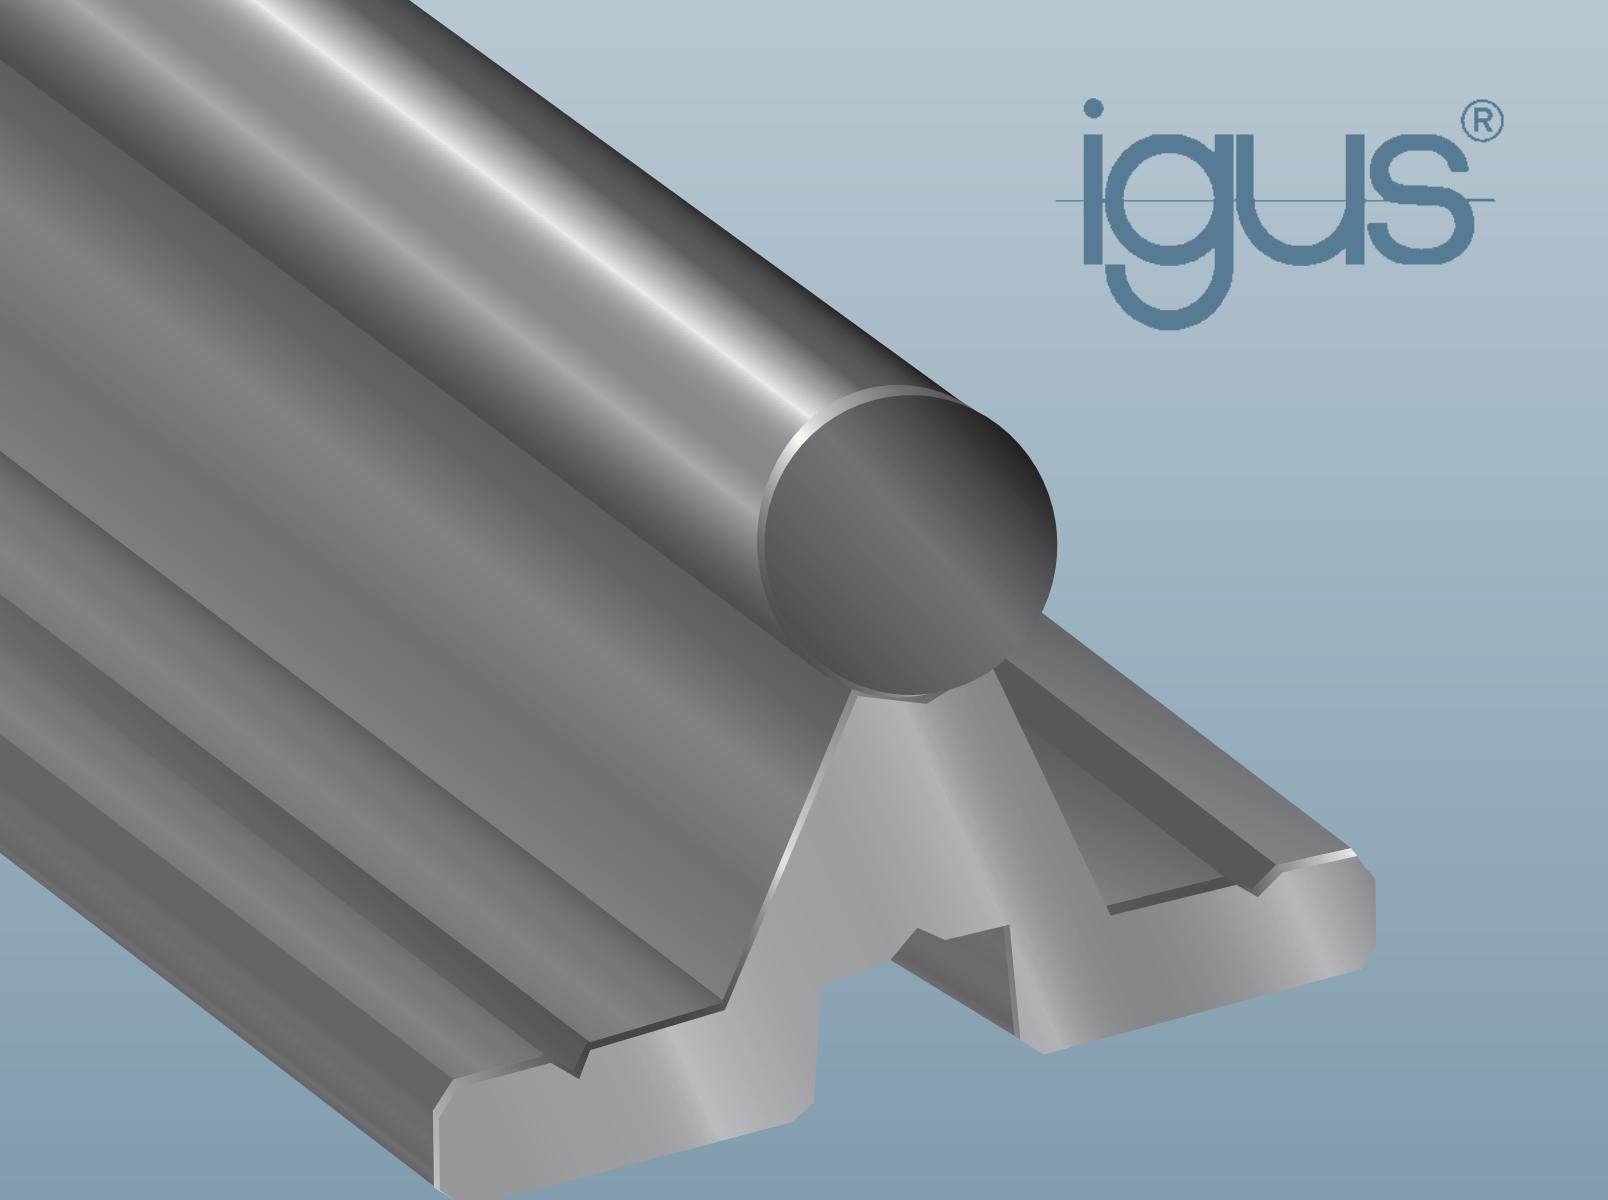


**igus®**

## DryLin® Metric Shafting

- Supported shafts available
- Lightweight aluminum
- Corrosion-resistant stainless steel
- Diameters from 6 to 50 mm





**igus®**

## DryLin® Metric Shafting

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

	Aluminum			Steel				Stainless, hardened				Soft Stainless	
	●	○	○	●	○	○	●	○	○	○	○	●	●
	SWUM	SWUMN	SWUMH	SWM	SWMHN	SWUHM	EWUM	EWUMN	EEWUM	EEWUMN	EEWUMH	EWUM	EWMS
Material	EN AW 6061/6063			Case hardened		Hard chromed		440c		420c		304	316
Ø 6	●			▲		▲		▲ <sup>2</sup>		▲			
Ø 8	●			▲		▲		▲ <sup>2</sup>		▲			
Ø 10	●	●		▲		▲		▲ <sup>2</sup>		▲		▲	▲
Ø 12	●	●		▲	▲	▲	▲	▲	▲	▲	▲	▲	■
Ø 16	●	●		▲	▲	▲	▲	▲	▲	▲	▲	▲	■
Ø 20	●	●	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
Ø 25	●	●	●	▲	▲	▲	▲	▲	▲	▲	▲	▲	■
Ø 30	● <sup>1</sup>	●		▲	▲	▲	▲	▲	▲	▲	▲	▲	■
Ø 40	● <sup>1</sup>	●		▲	▲	▲	▲	▲	▲	▲	▲		
Ø 50	● <sup>1</sup>			▲	▲	▲	▲	▲	▲	▲	▲		

Tolerance	h8	-0.1	h9	h6	h6	h7	h7	h6	h6	h6	h6	h9	h9
Max. Length Ø 8-10	3000			3000		3000		3000		3000			
Max. Length Ø 12-50	3000	4000	3000	6000	6000	6000	6000	6000	6000	6000	6000	3000	3000
Surface	Hard Anodized			Hardened/Ground		Hard Chrome		Hardened/Ground		Hardened/Ground		Drawn/Polished	
Surface Roughness	<0.6			0.15 - 0.3		0.15 - 0.3		0.15 - 0.3		0.15 - 0.3		0.3 - 0.6	
Surface Hardness	450-550 HV			60+4 HRC		60+4 HRC		52+8 HRC		52+8 HRC		Non Hardened	
Roundness	DIN EN 12020			<1/2 Tolerance		<1/2 Tolerance		<1/2 Tolerance		<1/2 Tolerance		<1/2 Tolerance	

Inch sizes are also available. See Page 49.23


### ISO Tolerances for Shafts (ISO 286-2)

Nominal Shaft Size (mm)

Over Including	3	6	10	18	30	40	50
	6	10	18	30	40	50	65
h6	+0/-0.008	+0/-0.009	+0/-0.011	+0/-0.013	+0/-0.016	+0/-0.016	+0/-0.019
h7	+0/-0.012	+0/-0.015	+0/-0.018	+0/-0.021	+0/-0.025	+0/-0.025	+0/-0.030
h8	+0/-0.018	+0/-0.022	+0/-0.027	+0/-0.033	+0/-0.039	+0/-0.039	+0/-0.046
h9	+0/-0.030	+0/-0.036	+0/-0.043	+0/-0.052	+0/-0.062	+0/-0.062	+0/-0.074
h10	+0/-0.048	+0/-0.058	+0/-0.070	+0/-0.084	+0/-0.100	+0/-0.100	+0/-0.120

### Order Example

AWUM	-12	-500	-T1
------	-----	------	-----

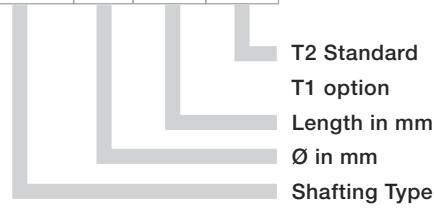

### Example:

AWUM-12-500 hard anodized aluminum shaft,  
12 mm OD, 500 mm length

# DryLin® S Aluminum Shaft, mm

**igus®**



## Properties

Material:	EN AW 6061/6060
Tolerance:	h8
Roundness:	DIN 1798
Straightness:	DIN 1798
Hardness:	75 HB
Surface:	hard-anodized


Surface Hardness:	450-550 HV
Spec. Electr. Resistance:	$4 \times 10^{11} \text{ Ohm mm}^2/\text{m}$
Chemical Resistance:	$2 < \text{ph} < 9$

## Dimensions (mm)

Part No.	Design	OD	Wall Thickness	ID	Max. Length	Weight (kg/m)
AWM-06- L in mm	Solid	6	-	-	3000	0.08
AWM-08- L in mm	Solid	8	-	-	3000	0.14
AWM-10- L in mm	Solid	10	-	-	3000	0.22
AWM-12- L in mm	Solid	12	-	-	3000	0.32
AWM-16- L in mm	Solid	16	-	-	3000	0.56
AWM-20- L in mm	Solid	20	-	-	3000	0.88
AWMR-20- L in mm	Hollow	20	2	16	3000	0.32
AWM-25- L in mm	Solid	25	-	-	3000	1.37
AWMR-25- L in mm	Hollow	25	3	19	3000	0.59
AWM-30- L in mm	Hollow	30 x 7.5	7.5	-	3000	1.48
AWM-40- L in mm	Hollow	40 x 10	10	20	3000	2.63
AWM-50- L in mm	Hollow	50 x 11	11	28	3000	3.75

Order example: AWM-16-500 corresponds to an aluminum shaft diameter of 16mm, 500 mm long

Inch sizes are also available. See Page 49.23

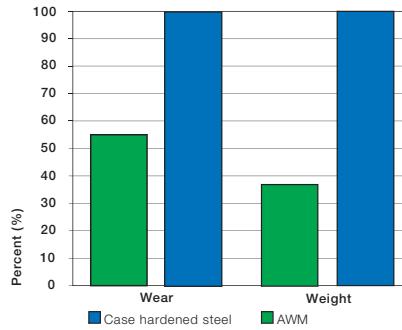

Comparison of wear with iglide® J and weight between DryLin® aluminum shafts and cold rolled steel



## DryLin® Supported Aluminum Shaft, mm



## Properties

Material:	EN 6061/6060/6063
Roundness:	DIN 1798
Straightness:	DIN 1798
Hardness:	75 HB

Surface:	hard-anodized, oxidation (wear-resistant Al-oxide)
Surface Hardness:	450-550 HV
Spec. Electr. Resistance:	$4 \times 10^{11} \text{ Ohm mm}^2/\text{m}$
Chemical Resistance:	$2 < \text{ph} < 9$

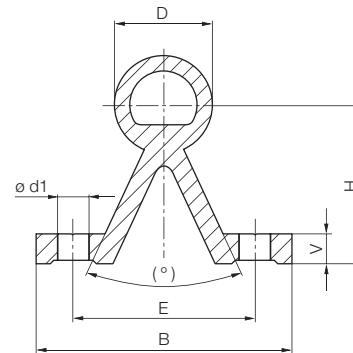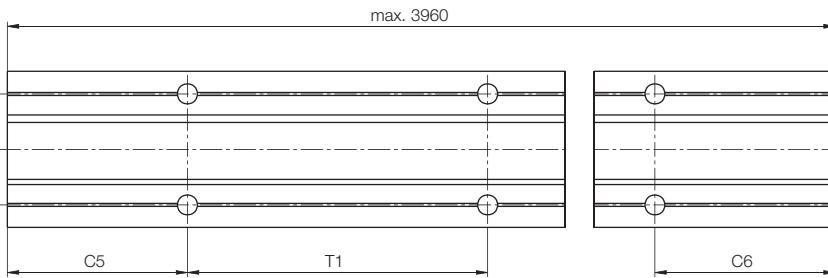

## Dimensions (mm)

Part No.	D -0.1	B	H ±0.25	V	d1	(°)	E ±0.15	Bore Hole Spacing T1	C5/C6 min.	C5/C6 max.	Max. Length	Weight (kg/m)
AWUM-12- L in mm	12	40	22	5	4.5	50	29	75	20	57	3950	0.750
AWUM-16- L in mm	16	45	26	5	5.5	50	33	100	20	69	3950	1.000
AWUM-20- L in mm	20	52	32	6	6.6	50	37	100	20	69	3950	1.415
AWUM-25- L in mm	25	57	36	6	6.6	50	42	120	20	79	3950	1.805
AWUM-30- L in mm	30	69	42	7	9.0	50	51	150	20	94	3950	2.690

Order example: AWUM-16-500 corresponds to supported aluminum shaft diameter 16 mm, 500 mm long


DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



- Materials available
  - 1050 Case Hardened Steel
  - 1050 Case Hardened, Chrome-plated Steel
- Available supported or unsupported
- Max undersupport rail length - 600 mm
- T2 hole spacing standard
- T1 optional
- Symmetric hole pattern C5 = C6


## Dimensions (mm) – Case hardened steel (1050)

Part No.	d Tolerance ISO h6	Weight (kg/m)	Max. Length (mm)	Hardness Depth (mm)
SWM-06	06	0.222	3000	0.8
SWM-08	08	0.359	4000	0.9
SWM-10	10	0.617	4000	0.9
SWM-12	12	0.888	6000	1.0
SWM-16	16	1.578	6000	1.2
SWM-20	20	2.466	6000	1.6
SWM-25	25	3.853	6000	1.8
SWM-30	30	5.549	6000	2.0
SWM-40	40	9.865	6000	2.2
SWM-50	50	15.413	6000	2.4


## Dimensions (mm) – Chrome-plated case hardened steel (1050)

Part No.	d Tolerance ISO h7	Weight (kg/m)	Max. Length (mm)	Hardness Depth (mm)
SWMH-06	06	0.222	3000	0.8
SWMH-08	08	0.359	4000	0.9
SWMH-10	10	0.617	4000	0.9
SWMH-12	12	0.888	6000	1.0
SWMH-16	16	1.578	6000	1.2
SWMH-20	20	2.466	6000	1.6
SWMH-25	25	3.853	6000	1.8
SWMH-30	30	5.549	6000	2.0
SWMH-40	40	9.865	6000	2.2
SWMH-50	50	15.413	6000	2.4



Order example: SWM-16-500 corresponds to supported aluminum shaft diameter 16 mm, 500 mm long



**SWUM**

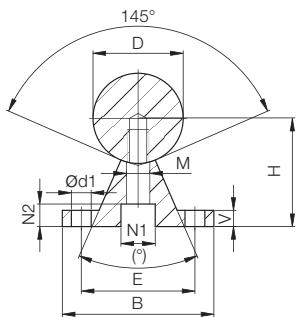

**SWUMN**

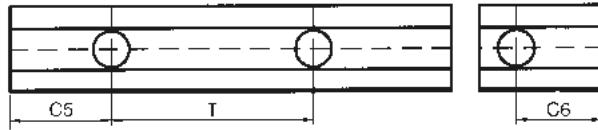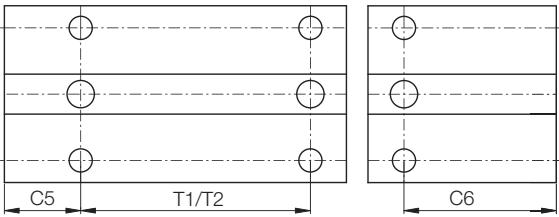

**Dimensions (mm) – Case hardened steel (1050)**

Part No.	D (mm) h6	B (mm)	H (mm) ±0.02	V (mm)	N1 (mm)	N2 (mm)	d1 (mm)	M (mm)	(°)	E (mm) ±0.15	C5/C6		T2 (mm)	C5/C6		Weight (kg/m)	
											min.	max.		min.	max.		
SWUM-12	12	40	22	5	8.0	5.0	4.5	5.8	50	29	75	20	57	120	20	79	1.75
SWUM-16	16	45	26	5	9.5	6.0	5.5	7.0	50	33	100	20	69	150	20	94	2.64
SWUM-20	20	52	32	6	11.0	6.5	6.6	8.3	50	37	100	20	69	150	20	94	3.97
SWUM-25	25	57	36	6	14.0	8.5	6.6	10.8	50	42	120	20	79	200	20	119	5.65
SWUM-30	30	69	42	7	17.0	10.5	9.0	11.0	50	51	150	20	94	200	20	119	7.93
SWUM-40	40	73	50	8	17.0	10.5	9.0	15.0	50	55	200	20	119	300	20	169	12.88
SWUM-50	50	84	60	9	19.0	12.5	11.0	19.0	46	63	200	20	119	300	20	169	19.60

\* T1 optional, T2 standard

For chrome-plated supported shafting use part number SWMH-XX, tolerance is h7

**Dimensions (mm) – Case hardened steel (1050)**

Part No.	d (mm) h6	H (mm)	H1 (mm) ±0.02	A (mm)	A1 (mm)	A2 (mm) ±0.02	d1	d2 (mm)	T (mm)	C5/C6		C5/C6 max.	Weight (kg/m)
										min.	max.		
SWUMN-12	12	14.5	3	11	5.5	5.4	M4	4.5	75	20	57	1.62	
SWUMN-16	16	18	3	14	7.0	7.0	M5	5.5	75	20	57	2.54	
SWUMN-20	20	22	3	17	8.5	8.1	M6	6.6	75	20	57	3.81	
SWUMN-25	25	26	3	21	10.5	10.3	M8	9.0	75	20	57	5.62	
SWUMN-30	30	30	3	23	11.5	11.0	M10	11.0	100	20	69.5	7.63	
SWUMN-40	40	39	4	30	15.0	15.0	M12	13.5	100	20	69.5	13.47	
SWUMN-50	50	46	5	35	17.5	19.0	M14	15.5	100	20	69.5	20.31	

Narrow undersupported rail comes unassembled

For chrome-plated supported shafting use part number SWUMHN-XX, tolerance is h7


DryLin® R  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm



**igus®**

## DryLin® R Stainless Steel Shafting - EWM / EEWM / EWMR / EWMS

DryLin® R  
Linear Guide Systems

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



- Materials available
  - (440c) Hard stainless
  - (420c) Hard stainless
  - (304) Soft stainless
  - (316) Soft stainless
- Supported or unsupported
- T2 hole spacing standard, T1 optional
- Max undersupport rail length - 600 mm
- Symmetric hole pattern C5 = C6

### Dimensions (mm) – Hardened Stainless (440c/1.4125)

Part No.	d ISO h6	Weight (kg/m)	Max. Length (mm)	Hardness Depth (mm)
EWM-06	06	0.222	3000	0.8
EWM-08	08	0.359	4000	0.9
EWM-10	10	0.617	4000	0.9
EWM-12	12	0.888	6000	1.0
EWM-16	16	1.578	6000	1.2
EWM-20	20	2.466	6000	1.6
EWM-25	25	3.853	6000	1.8
EWM-30	30	5.549	6000	2.0
EWM-40	40	9.865	6000	2.2
EWM-50	50	15.413	6000	2.4

### Dimensions (mm) – Hardened Stainless (420c/1.4034)




Part No.	d ISO h6	Weight (kg/m)	Max. Length (mm)	Hardness Depth (mm)
EEWM-06	06	0.222	3000	0.8
EEWM-08	08	0.359	4000	0.9
EEWM-10	10	0.617	4000	0.9
EEWM-12	12	0.888	6000	1.0
EEWM-16	16	1.578	6000	1.2
EEWM-20	20	2.466	6000	1.6
EEWM-25	25	3.853	6000	1.8
EEWM-30	30	5.549	6000	2.0
EEWM-40	40	9.865	6000	2.2
EEWM-50	50	15.413	6000	2.4

### Dimensions (mm) – Soft Stainless (304/1.4301)

Part No.	d ISO h9	Weight (kg/m)	Max. Length (mm)
EWMR-10	10	0.617	4000
EWMR-12	12	0.888	6000
EWMR-16	16	1.578	6000
EWMR-20	20	2.466	6000
EWMR-25	25	3.853	6000
EWMR-30	30	5.549	6000

### Dimensions (mm) – Soft Stainless (316/1.4571)

Part No.	d ISO h9	Weight (kg/m)	Max. Length (mm)
EWMS-10	10	0.617	4000
EWMS-20	20	2.466	6000

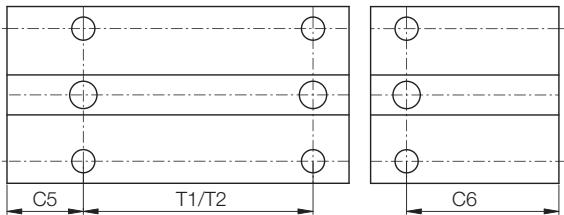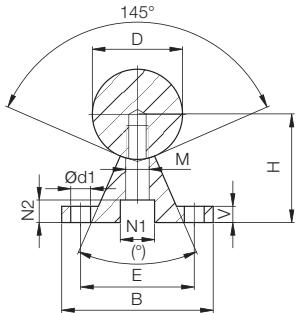**EWUMN****EWUM****Dimensions (mm) – Supported Stainless (440c)**

Part No. 	D (mm)	B (mm)	H (mm) ±0.02	V (mm)	N1 (mm)	N2 (mm)	d1 (mm)	M (mm)	(°)	E (mm)	T1* (mm) ±0.15	C5/C6 min. max. for T1	T2 (mm)	C5/C6 min. max. for T2 Standard	Weight (kg/m)
	h6														
EWUM-12	12	40	22	5	8.0	5.0	4.5	5.8	50	29	75	20	57	120	20 79 1.75
EWUM-16	16	45	26	5	9.5	6.0	5.5	7.0	50	33	100	20	69	150	20 94 2.64
EWUM-20	20	52	32	6	11.0	6.5	6.6	8.3	50	37	100	20	69	150	20 94 3.97
EWUM-25	25	57	36	6	14.0	8.5	6.6	10.8	50	42	120	20	79	200	20 119 5.65
EWUM-30	30	69	42	7	17.0	10.5	9.0	11.0	50	51	150	20	94	200	20 119 7.93
EWUM-40	40	73	50	8	17.0	10.5	9.0	15.0	50	55	200	20	119	300	20 169 12.88
EWUM-50	50	84	60	9	19.0	12.5	11.0	19.0	46	63	200	20	119	300	20 169 19.60

\* T1 optional, T2 standard

**Dimensions (mm) – Narrow Supported Stainless (440c)**

Part No. 	d (mm) h6	H (mm)	H1 (mm) ±0.02	A (mm)	A1 (mm)	A2 (mm) ±0.02	d1	d2 (mm)	T (mm)	C5/C6 min.	C5/C6 max.	Weight (kg/m)
EWUMN-12	12	14.5	3	11	5.5	5.4	M4	4.5	75	20	57	1.62
EWUMN-16	16	18	3	14	7.0	7.0	M5	5.5	75	20	57	2.54
EWUMN-20	20	22	3	17	8.5	8.1	M6	6.6	75	20	57	3.81
EWUMN-25	25	26	3	21	10.5	10.3	M8	9.0	75	20	57	5.62
EWUMN-30	30	30	3	23	11.5	11.0	M10	11.0	100	20	69.5	7.63
EWUMN-40	40	39	4	30	15.0	15.0	M12	13.5	100	20	69.5	13.47
EWUMN-50	50	46	5	35	17.5	19.0	M14	15.5	100	20	69.5	20.31

Narrow supports are not assembled

**DryLin® R**  
Linear Guide Systems


PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch




mm

49.65



## Special Properties

- Material: aluminum

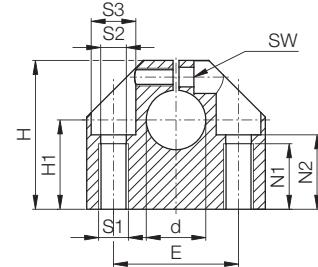

## Dimensions (mm)

Part No.	d	B	H	H1 $\pm 0,02$	L	S1	S2	S3	E $\pm 0,1$	N1	N2	SW	Weight (kg)
WA-08	8	18	28	15	32	M4	3.3	6	22	9	13.0	2.5	0.04
WA-12	12	20	35	20	43	M6	5.2	10	30	13	16.5	3.0	0.10
WA-16	16	24	42	25	53	M8	6.8	11	38	18	21.0	4.0	0.15
WA-20	20	30	50	30	60	M10	8.6	15	42	22	25.0	5.0	0.23
WA-25	25	38	60	35	78	M12	10.3	18	56	26	30.0	6.0	0.41
WA-30	30	40	70	40	87	M12	10.3	18	64	26	34.0	6.0	0.53
WA-40	40	48	90	50	108	M16	14.25	20	82	34	44.0	8.0	0.99
WA-50*	50	58	105	60	132	M20	17.5	26	100	43	49.0	10.0	1.25




\* on request

## WAC Shaft Block, Compact Design, mm



## Special Properties


- Material: aluminum

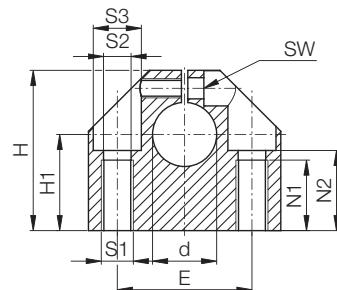

## Dimensions (mm)



Part No.	d	B	H	H1 $\pm 0,01$	L	S1	S2	S3	E $\pm 0,12$	N1	N2	SW	Weight (kg)
WAC-06*	6	16	27	15	32	M5	4.2	8	22	11	13	2.5	0.03
WAC-08	8	16	27	16	32	M5	4.2	8	22	11	13	2.5	0.03
WAC-10	10	18	33	18	40	M6	5.2	10	27	13	16	3.0	0.05
WAC-12	12	18	33	19	40	M6	5.2	10	27	13	16	3.0	0.05
WAC-14*	14	20	38	20	45	M6	5.2	10	32	13	18	3.0	0.07
WAC-16	16	20	38	22	45	M6	5.2	10	32	13	18	3.0	0.07
WAC-20	20	24	45	25	53	M8	6.8	11	39	18	22	4.0	0.12
WAC-25	25	28	54	31	62	M10	8.6	15	44	22	26	5.0	0.17
WAC-30	30	30	60	34	67	M10	8.6	15	49	22	29	5.0	0.22
WAC-40	40	40	76	42	87	M12	10.3	18	66	26	38	6.0	0.48
WAC-50*	50	50	92	50	103	M16	14.25	20	80	34	46	8.0	0.82

\* on request



### Special Properties


- Material: aluminum

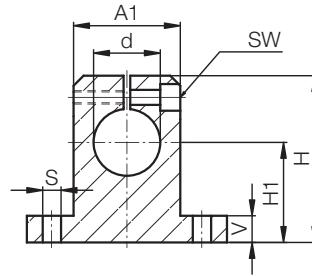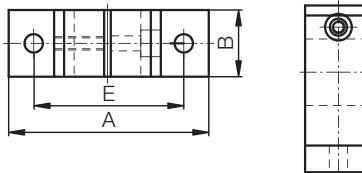


### Dimensions (mm)

Part No.	d	H	H1 ±0.02	A	A1	B	E	S	V	SW	Weight (kg)
WAS-08	8	27	15	32	16	10	25	4.5	5.0	2.5	0.012
WAS-12	12	35	20	42	20	12	32	5.5	5.5	3.0	0.023
WAS-16	16	42	25	50	26	16	40	5.5	6.5	3.0	0.035
WAS-20	20	50	30	60	32	20	45	5.5	8.0	3.0	0.067
WAS-25	25	58	35	74	38	25	60	6.6	9.0	4.0	0.140
WAS-30	30	68	40	84	45	28	68	9.0	10.0	5.0	0.200
WAS-40	40	86	50	108	56	32	86	11.0	12.0	6.0	0.480

[PDF: www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
[CAD: www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
[RoHS info: www.igus.com/RoHS](http://www.igus.com/RoHS)

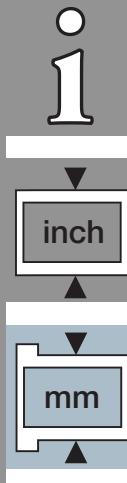



**igus®**

## TA Shaft End Support, Movable\*, mm

DryLin® R  
Linear Guide Systems



Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special Properties

- Material: aluminum
- Thread hole mount

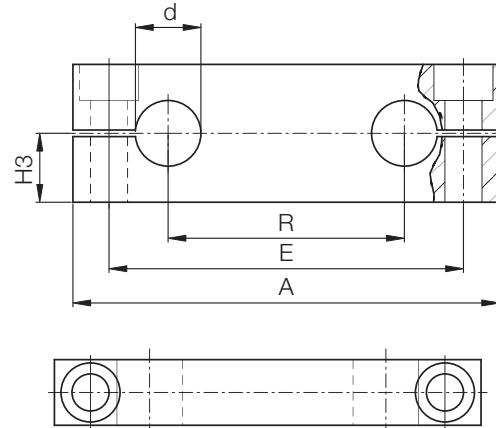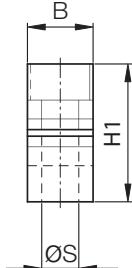

### Dimensions (mm)

Part No.	d	A	B	H1	H3 $\pm 0,015$	S	E	R	Weight (kg)
TA-08	8	65	12	22	11	M5	52	32	0.04
TA-12	12	85	14	28	14	M6	70	42	0.07
TA-16	16	100	18	32	16	M8	82	54	0.13
TA-20	20	130	20	42	21	M10	108	72	0.22
TA-25	25	160	25	52	26	M12	132	88	0.44
TA-30	30	180	25	58	29	M12	150	96	0.56
TA-40	40	230	30	72	36	M16	190	122	1.00



\*To be used when linear glide carriage is mounted and shaft is driven

## TAF Shaft End Support, Fixed\*, mm



### Special Properties

- Material: aluminum
- Plain bore

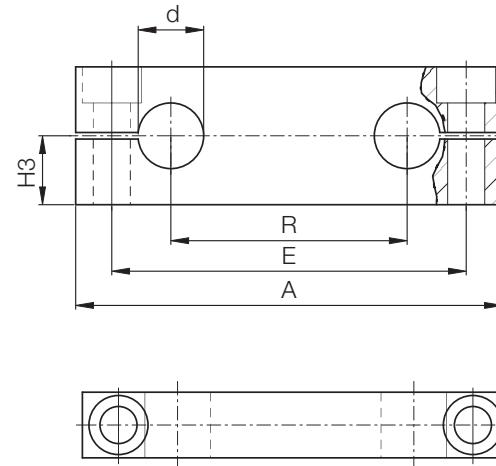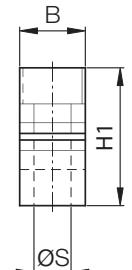

### Dimensions (mm)

Part No.	d	A	B	H1	H3 $\pm 0,015$	R	S	E	Weight (kg)
TAF-08	8	65	12	23	12.5	32	5.5	52	0.04
TAF-12	12	85	14	32	18.0	42	6.6	70	0.09
TAF-16	16	100	18	36	20.0	54	9.0	82	0.14
TAF-20	20	130	20	46	25.0	72	11.0	108	0.25
TAF-25	25	160	25	56	30.0	88	13.5	132	0.47
TAF-30	30	180	25	64	35.0	96	13.5	150	0.62
TAF-40	40	230	30	80	44.0	122	17.5	190	1.15

\*To be used when shaft is stationary and the carriage is driven

# DryLin® Analysis Worksheet

Online Lifetime  
Calculation  
[www.igus.com](http://www.igus.com)

**igus®**

Please enter as much data as possible.

Most applications questions can be answered with just a partial amount of data.

**Please call us if you have any questions (Tel: 1-888-803-1895).**

**You may fax this worksheet to 401-438-7680**

Application: .....

Current guide system: .....

Installation position (1=horizontal, 2=vertical, 3=lateral): .....

Number of bearings per rail/shaft: ..... Number of rails/shafts: .....

Type of drive: ..... Drive force [lbs]: .....

Average speed: ..... Maximum speed: .....

Length of stroke: ..... Expected service life: .....

Operating time: .....

Ambient temperature ..... Maximum temperature: .....

Surrounding medium: ..... Lubrication: .....

Static Load: ..... Dynamic Load: .....

For the following data, the drawings on the reverse side will help you!

Distance between bearings/carriages on a rail/shaft (wx) : .....

Distance between rails/shafts (b) : .....

Distance of the mass force in the x-direction (Sx) : .....

Distance of the mass force in the y-direction (Sy) : .....


Distance of the mass force in the z-direction (Sz) : .....

Distance of the drive force in the y-direction (ay) : .....


Distance of the drive force in the z-direction (az) : .....

Please enter all the data you know and if possible make a schematic drawing.





**Horizontal Orientation**

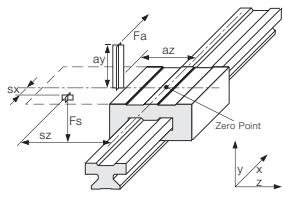

**Lateral Orientation**



**Vertical Orientation**

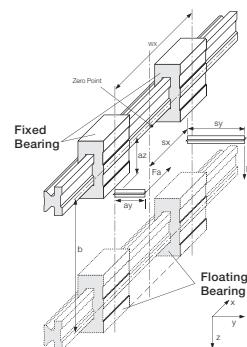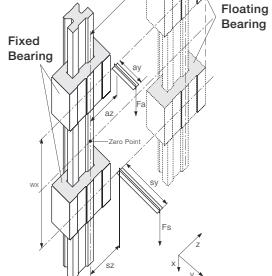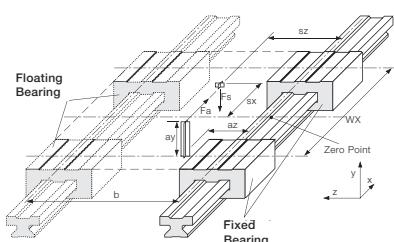

**DryLin® R**  
Linear Guide Systems

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

inch

mm




**igus®**

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270




DryLin® R  
Linear Guide Systems

**igus®**

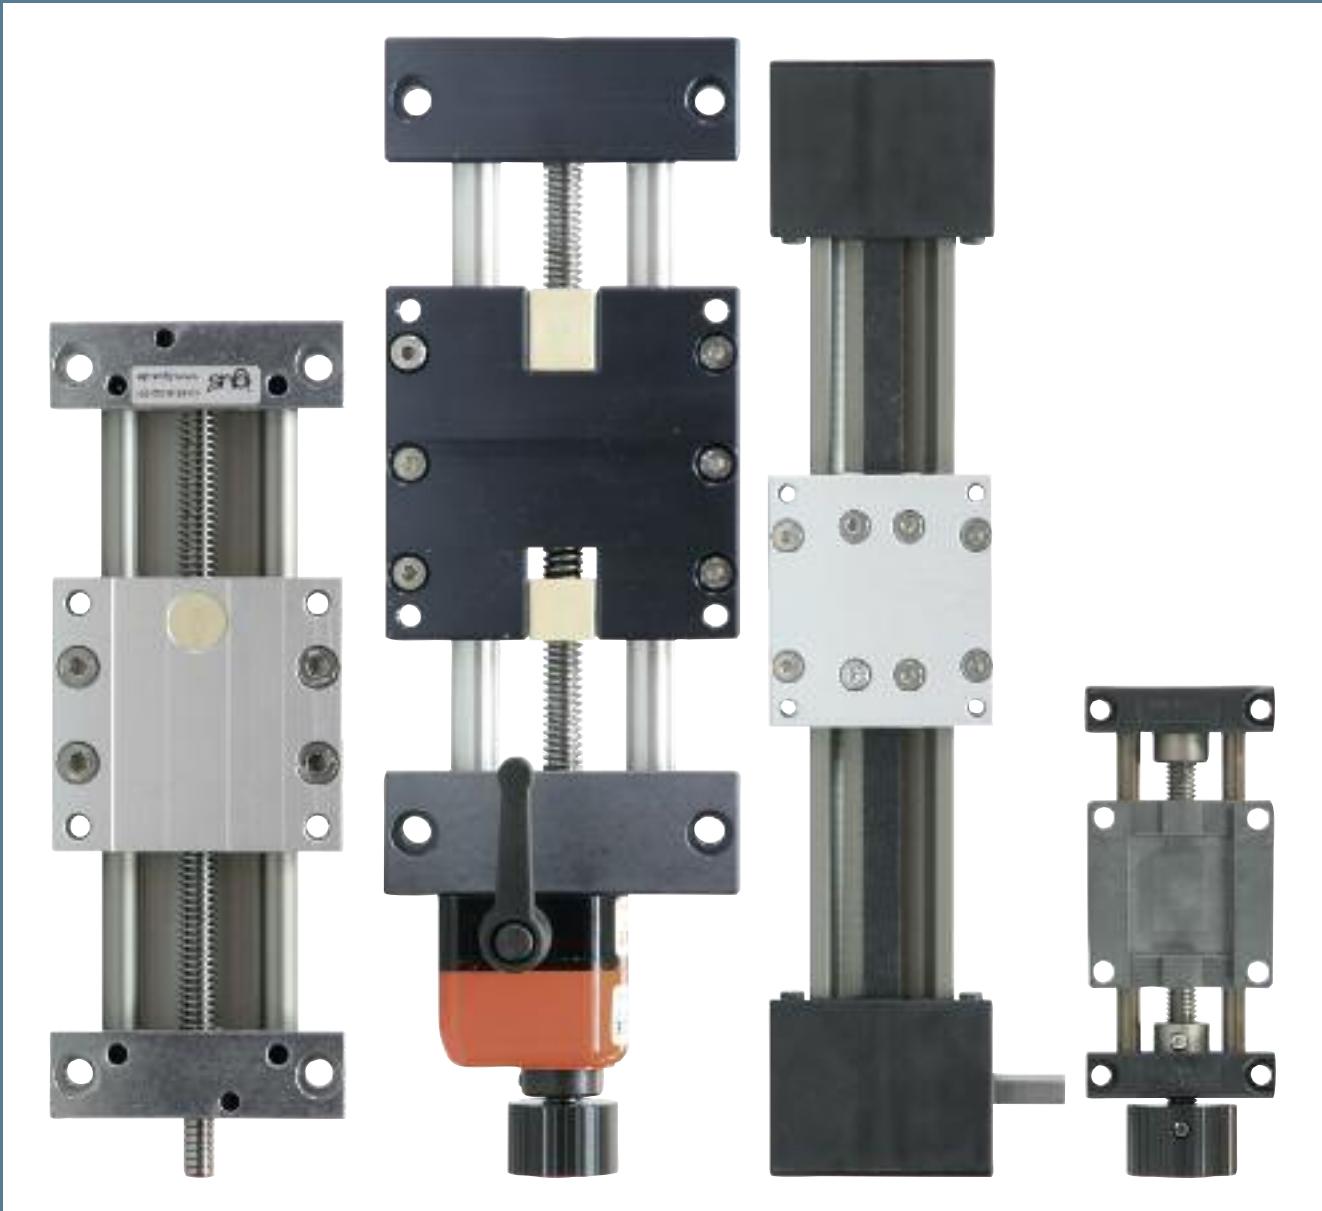

# DryLin® Linear Drive Technology

# DryLin® Slide Table Selection Guide

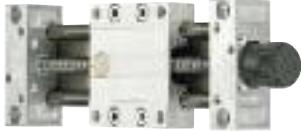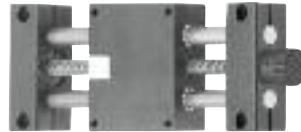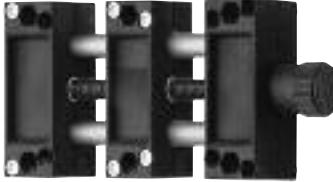		Features	Options
	<b>SLW</b>	Cost + Performance Fully supported for rigidity  Ideal dimensions to add motor	(SLWE-PL) Preloaded with adjustable clearance  Motor, couplings, flanges, sensors  
	<b>SAW</b>		
	<b>HTS(C)</b>	Flexible Many shaft/screw options	(HTS-PL) Preloaded and adjustable clearance (HTSC) Compact carriage  
	<b>HTSP</b>	Plastic blocks Lightweight Corrosion-resistant	Many shaft/screw combinations  Fast Forward (FF)  
	<b>SET Easy Tube</b>	For simple positioning	Locking carriage integrated scale
	<b>ZLW</b> <b>Belt Drive System</b>	For high-speed/low load applications Maintenance-free	Motor mounts Motor couplings

Accessories Available




**XY  
Brackets**



**Position Indicator**




**Rotary Knob  
Hand Wheel**

Lead Screw and Nut Type		XY Available	Specialty Tables
Low-Speed Positioning	Hi-Speed		
SLW(ES) - Metric and trapezoidal	(SLWS) Hi-Helix Lead Screw (SLW-BB) up to 1500 rpm	Yes 	SLW-1040-ES Stainless Steel
Trapezoidal lead screws	(HTSS) Hi-Helix Lead Screw (HTSCS) Hi-Helix Lead Screw	Yes 	HTS-HTX High Temperature to 356°F  HTS-HYD Stainless Hygienic Design  HTS-FF Quick adjust then fine tune
Metric and trapezoidal lead screws	Hand-powered only	No	HTSP-FF Quick adjust then fine tune
Metric and trapezoidal lead screws	Hand-powered only	No	—
Belt driven up to 5 m/s possible	Belt-driven up to 5 m/s possible	No	—



V-Drive

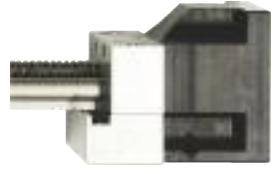

Motor Flange



Coupling



Belt Drive Motor Flange



Threaded nuts are available as separate parts.  
Please see Section 51 for more information.




### MILLING HEAD POSITIONING

The lack of oil means aluminum chips and dust cannot contaminate the bearing system



### HEIGHT ADJUSTMENT OF CODING DEVICE

The DryLin® HTS lead screw unit gives variable and precise adjustment, free from any maintenance or lubrication.

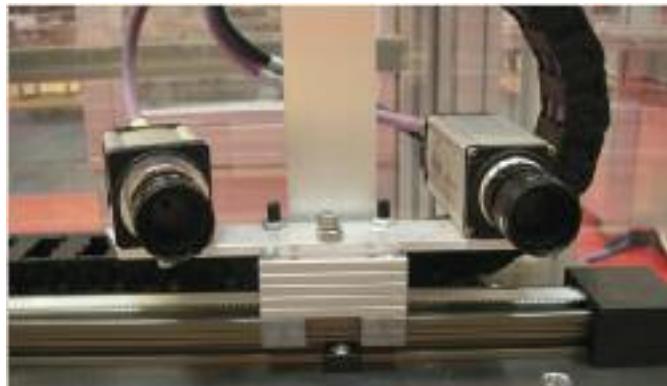

### CAMERA ADJUSTMENT

The DryLin® Z LW belt drive gives quiet, smooth, and lubrication-free operation for this adjustable camera mount on a conveyor system.



### CUT OFF SAW

Lead screw table used for fine adjustment on aluminum cut-off saw



### ADJUSTMENT OF INSPECTION CAMERA

DryLin® Z LW toothed belt axis in an inspection camera adjustment, used for checking the position of seals.




### WEB EDGE DETECTION

The DryLin® SLW lead screw unit with position indicator and hand wheel adjusts the sensors which detect the edge of the webbing and print marks on this packaging machine.



10 pcs In-House Costs vs. 1 pc DryLin Assembly  
1/2" Bearing ID with 24" Stroke

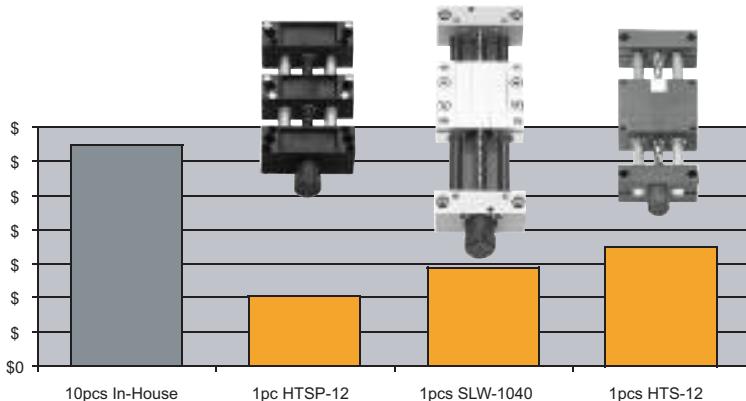


#### Reduce engineering/manufacturing time and costs

- Save on engineering costs
- Eliminate researching catalogs or internet
- Eliminate drawing or work instructions for assembly
- Eliminate checking specifications of lead screws, shafting, blocks, acme nuts and bearings
- Eliminate waiting for quotes/samples/phone calls from suppliers
- Eliminate designing fabricated parts
- Able to spend time on other aspects of design

#### Reduce purchasing costs


- More cost-efficient to place order using one Purchase Order rather than ten
- Save hidden costs of: Processing, expediting late parts, freight, potential returns/claims, downtime
- Spend time reducing other machine costs

Cost Analysis: 10 Slide Tables Designed  
in-House/ 7 component suppliers

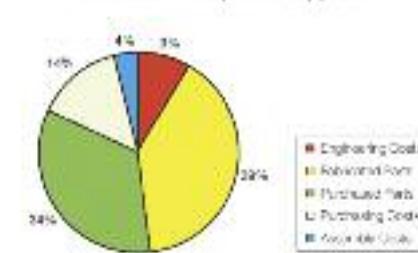

#### OPTIONS:

CUSTOM MACHINING  
CAPABILITY

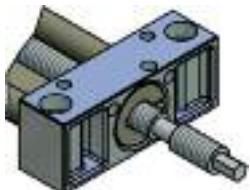

SELF-CENTERING  
(left/right) Tables available




CUSTOM PLATE CAPABILITY



RADIAL CLEARANCE  
ADJUSTMENT



RADIAL CLEARANCE  
ADJUSTMENT

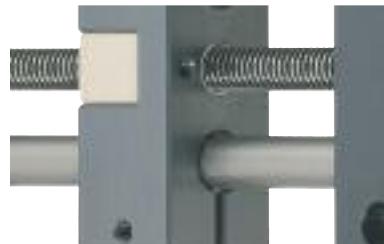

AXIAL PRELOAD





At igus® we manufacture plastic bearings with the fundamental belief that they can help machinery last longer, at a lower cost, without the need for maintenance. DryLin® linear slide tables are the latest evolution of over 40-years of testing and development of plastic bearing materials. After noticing that many of our customers were fabricating their own linear systems with belts or lead screws, with parts from multiple suppliers, we designed our own.

You can of course piece together your own lead screw driven assembly – but why?

After you factor in the research, design, drawing, purchasing, QC, and assembly, you could have purchased a finished DryLin® unit from stock and designed several other aspects of your equipment – saving time and hidden costs.

- Off-the-shelf, ready to ship assemblies in stock
- Cut-to-order lengths can ship in less than 1-2 days
- Custom machining possible
- Downloadable CAD
- One part number; one purchase order; one supplier




## Lead Screw Assemblies



**SLW/SAW:** Great blend of performance and value

- Hi helix available for high rpm
- Ball bearing (axial) version available for high rpm
- All stainless version available (SLW-1040 only)

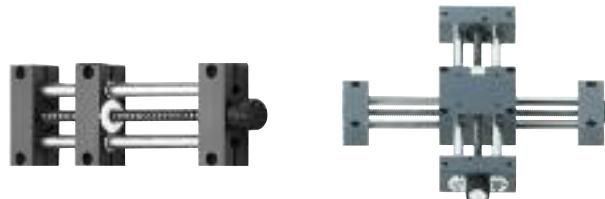


**HTS(C):** Our most flexible system, available in a variety of materials and configurations

- Hi helix available for high rpm
- All stainless hygienic version available
- Hi-temp to 356°F available



**Easy Tube:** Simple design for low-cost positioning

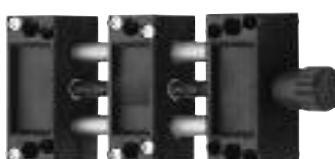

**HTSP:** All-plastic table with aluminum or stainless shafting for low cost and corrosion resistance

## Belt-Drive Assemblies



**ZLW-1040 basic/standard configurations**

For fast positioning of small loads, cost-effective vs. ball bearing systems



**ZLW-0630 basic/standard miniature slide**

High performance for small spaces  
.5" (31mm) height x 2.1" (54mm) width



**ZAW-1040 cantilever axis**

Lightweight and ideal for applications where you want the rail to move, and the carriage static, such as Z-axis applications




**ZLW-1040-OD: Opposite drive**

2 carriage opposite drive for bi-directional movement




Tech support available at:  
**1-888-803-1895 or [www.igus.com](http://www.igus.com)**

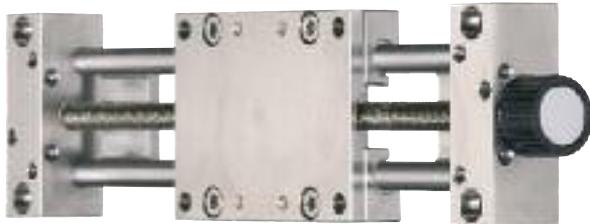

igus lead screw nuts were developed specifically to be bearing surfaces. The wear is much lower than simple plastics, and they do not require wet lubrication like bronze or other metallic nuts. The lead screws are available in either mild or stainless steel.

- Better wear resistance than other plastics
- Constant coefficient of friction
- Downloadable CAD
- No oil/maintenance like bronze or brass
- Anti-backdriving/self-locking
- Quiet operation
- Work well in aggressive environments
- Custom machining available
- Anti-backlash and adjustable clearance optional

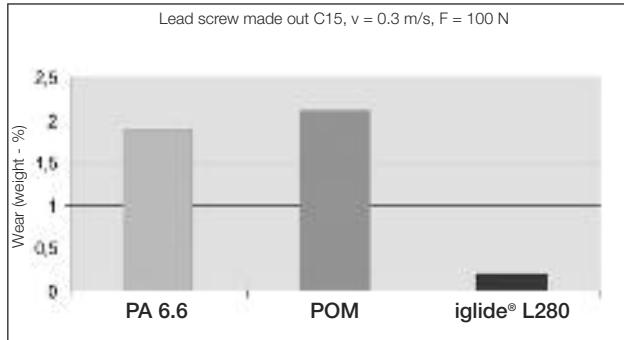

Wear of iglide® vs. simple plastic lead screw nuts 22.5 lb axial load, rotating at 1 fps on cold-rolled steel



Format adjustment using DryLin® Easy Tube



Lead screw table used to position milling heads in aluminum window manufacturing




**igus®**

## DryLin® Linear Slide Table

DryLin®  
Linear Slide TablesTelephone 1-800-521-2747  
Fax 1-401-438-7270Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

DryLin® linear lead screw units have been developed for position settings of all types. The linear setting is achieved by means of lead screw that can be operated manually or by low speed motor. The maximum linear continuous speed is 5.25 ft/min (1.6 m/min.) Use the graphs below to check suitability.

Horizontal (radial)

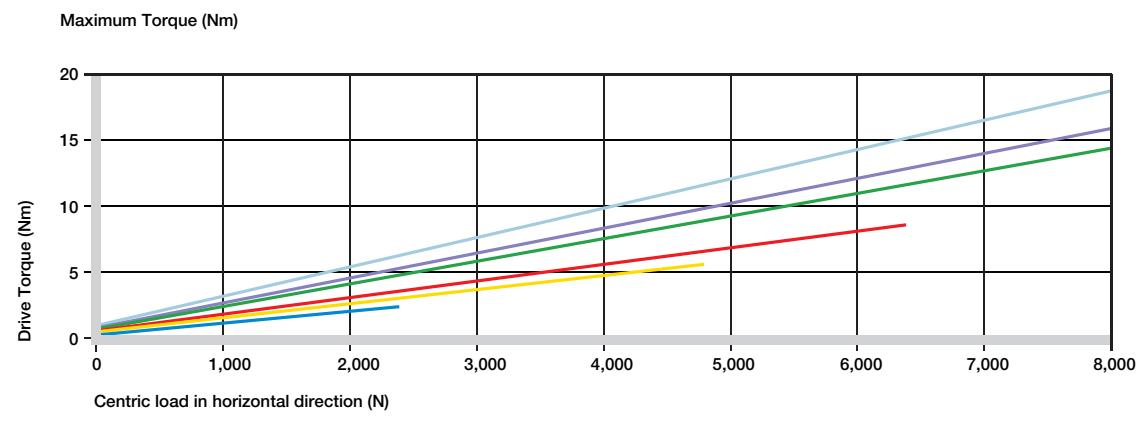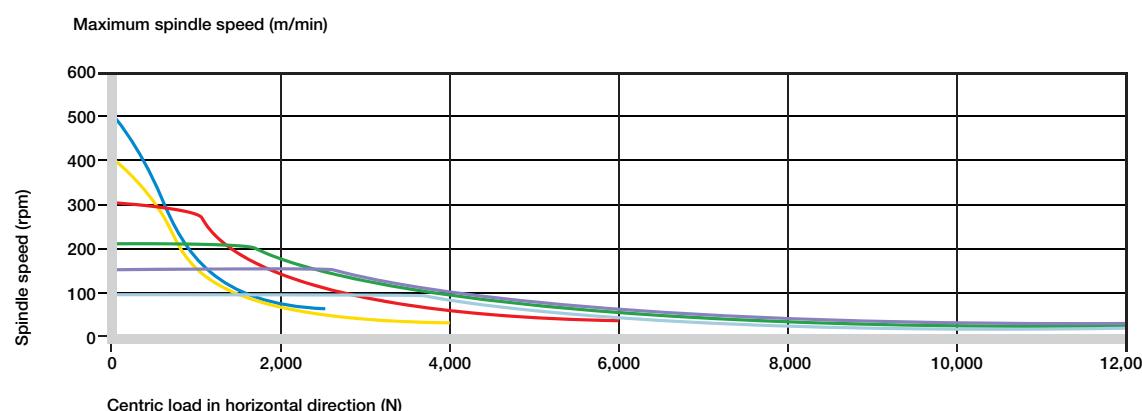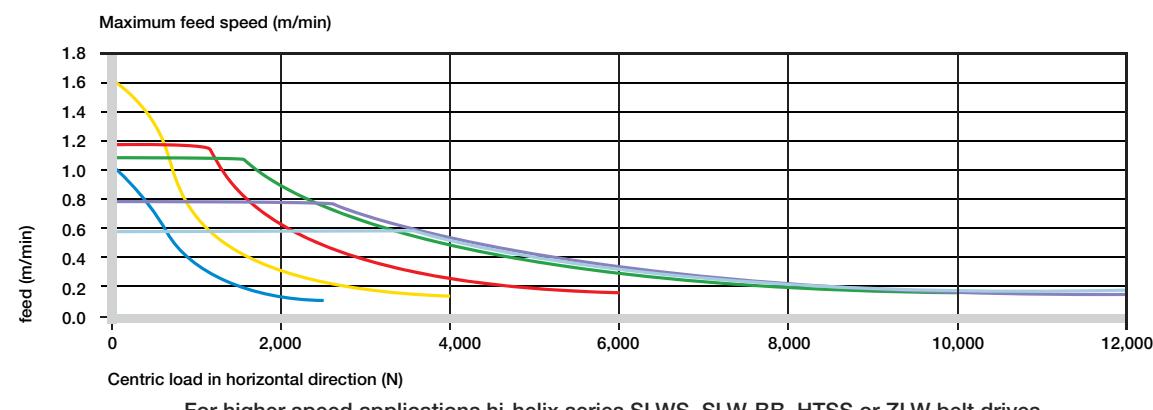


1N = .225 lbf, 1 m/min = 3.28 fpm, 1 Nm = 0.74 lbf x ft

# DryLin® Linear Slide Tables





The following trapezoidal lead screw drive sizes are used in DryLin® linear tables:

- TR 10x2: HTS-12, HTSC-12, HTSP-12, SLW-1040, SLW-1080, SLW-1040-ES, SET-25, SAW-1040
- TR 14x4: SLW-1660
- TR 18x4: HTS-20, HTS-20, SLW-2080
- TR 24x5: HTS-30, HTS-30
- TR 26x5: HTSC-40
- TR 30x6: HTSC-50

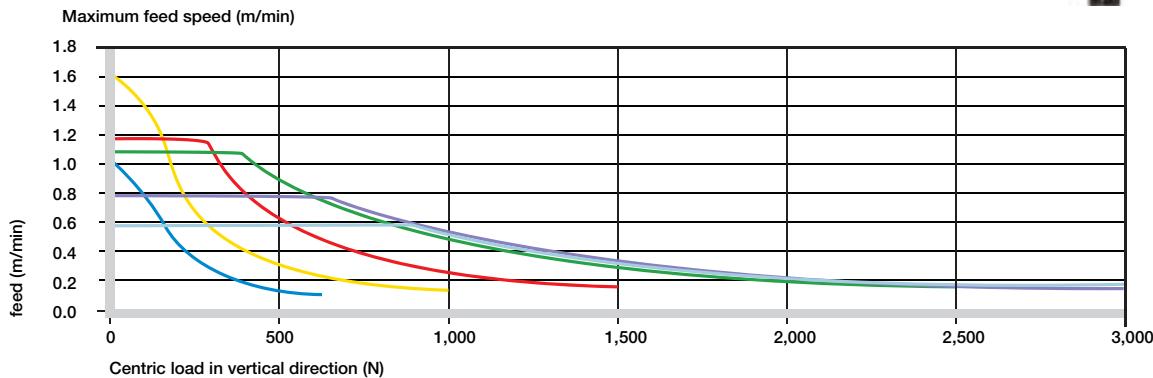

For higher speed applications hi-helix series SLWS, SLW-BB, HTSS or ZLW belt drives

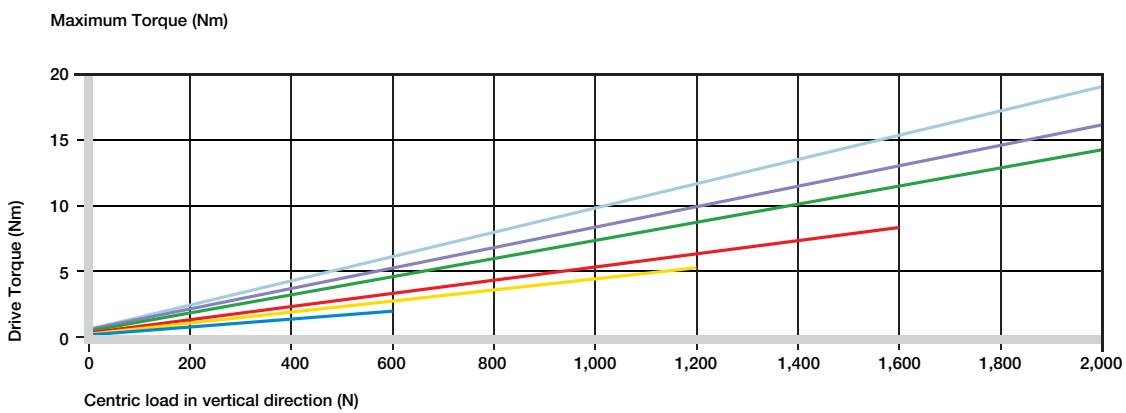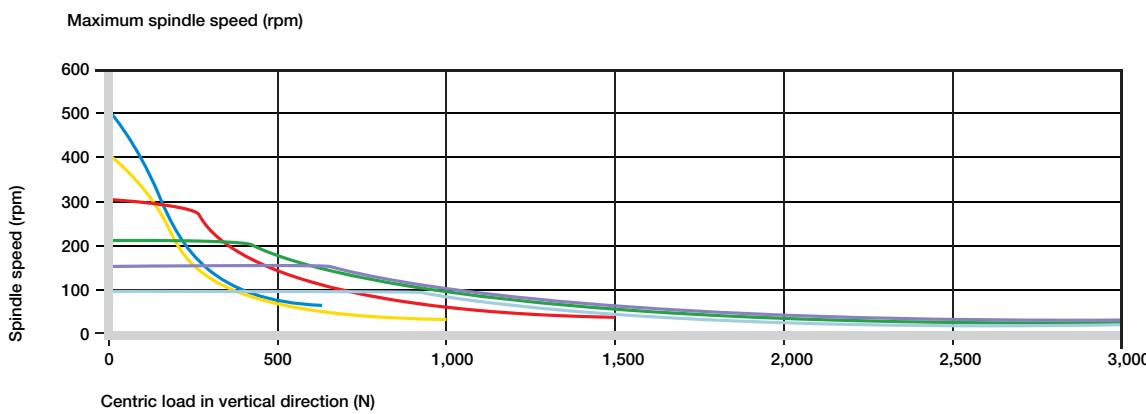

1N = .225 lbf, 1 m/min = 3.28 fpm, 1 Nm = 0.74 lbf x ft



**igus®**

## DryLin® Linear Slide Tables Technical Data

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Liner Module	Shaft Diameter (mm)	Thread	Lead Screw OD x Lead	Spindle Auto Locking Mechanism	Bearing Type	Carriage Length (mm)	
HTS-12(-PL)	12	Trapezoidal	10x2	+	Plain Bearing	85	
HTS-20(-PL)	20	Trapezoidal	18x4	+	Plain Bearing	130	
HTS-30(-PL)	30	Trapezoidal	24x5	+	Plain Bearing	180	
HTSC-12	12	Trapezoidal	10x2	+	Plain Bearing	30	
HTSC-20	20	Trapezoidal	18x4	+	Plain Bearing	36	
HTSC-30	30	Trapezoidal	24x5	+	Plain Bearing	50	
HTSC-40	40	Trapezoidal	26x5	+	Plain Bearing	70	
HTSC-50	50	Trapezoidal	30x6	+	Plain Bearing	80	
HTS-BB-12(-PL)	12	Trapezoidal	10x2	+	Ball Bearing	85	
HTS-BB-20(-PL)	20	Trapezoidal	18x4	+	Ball Bearing	130	
HTS-BB-30(-PL)	30	Trapezoidal	24x5	+	Ball Bearing	180	
HTSS-12	12	High Helix	10x50	-	Plain Bearing	85	
HTSS-20	20	High Helix	18x100	-	Plain Bearing	130	
SLW-0630	<input type="checkbox"/> 5	Trapezoidal	8x1.5	+	Plain Bearing	60/100	
SLW(E)-1040(-PL)	10	Trapezoidal	10x2	+	Plain Bearing	69/100/150	
SLW(E)-1080(-PL)	10	Trapezoidal	10x2	+	Plain Bearing	69/100/150	
SLW(E)-1660(-PL)	16	Trapezoidal	14x4	+	Plain Bearing	100/150/200	
SLW(E)-2080(-PL)	20	Trapezoidal	18x4	+	Plain Bearing	150/200/250	
SLW-BB-0630(-PL)	<input type="checkbox"/> 5	Trapezoidal	8x1.5	+	Ball Bearing	60/100	
SLW-BB-1040(-PL)	10	Trapezoidal	10x2	+	Ball Bearing	69/100/150	
SLW-BB-1660(-PL)	16	Trapezoidal	14x4	+	Ball Bearing	100/150/200	
SLW-BB-2080(-PL)	20	Trapezoidal	18x4	+	Ball Bearing	150/200/250	
SLWS-0630	<input type="checkbox"/> 5	High Helix	8x1.5	-	Plain Bearing	60/100	
SAW-0630-0015	<input type="checkbox"/> 5	Trapezoidal	8x1.5	+	Ball Bearing	150	
SAW-0630-0150	<input type="checkbox"/> 5	High Helix	8x15	-	Ball Bearing	150	
SAW-1040-0020	10	Trapezoidal	10x2	+	Ball Bearing	150	
SAW-1040-0030	10	Trapezoidal	10x3	+	Ball Bearing	150	
SAW-1040-0120	10	High Helix	10x12	-	Ball Bearing	150	
SAW-1040-0500	10	High Helix	10x50	-	Ball Bearing	150	
HTSP-01-06	6	Metric	M8	+	Plain Bearing	45	
HTSP-01/02-12	12	Trapezoidal	10X2	+	Plain Bearing	30	
SET-12	12	Metric	M4	+	Plain Bearing	30	
SET-25(-F)	25	Trapezoidal	10X2	+	Plain Bearing	55	

Belt Drive	Shaft (mm)	Material	Reinforcement		Belt Tension (N)	MM/Rev	Carriage Length (mm)	
			Belt	Geometry				
ZLW-0630-B	<input type="checkbox"/> 5	Black Neoprene	GF	9 HTD 3M	75	54	60/100	
ZLW-0630-S	<input type="checkbox"/> 5	White Polyurethane	Steel	9 MTD 3M	100	54	60/100	
ZLW-1040-B	10	Black Neoprene	GF	15 RPP3	150	66	100/150/200	
ZLW-1040-S	10	White Polyurethane	Steel	16 AT 5	200	70	100/150/200	
ZLW-1660-S	16	White Polyurethane	Steel	32 AT 5	500	120	100/150/200/250	
ZAW-1040-B	10	Black Neoprene	GF	15 RPP3	150	66	150	
ZAW-1040-S	10	White Polyurethane	Steel	16 AT 5	200	70	150	
ZLW-OD-0630-B	<input type="checkbox"/> 5	Black Neoprene	GF	9 HTD 3M	75	54	60/100	
ZLW-OD-0630-S	<input type="checkbox"/> 5	White Polyurethane	Steel	9 MTD 3M	100	54	60/100	
ZLW-OD-1040-B	10	Black Neoprene	GF	15 RPP3	150	66	100/150/200	
ZLW-OD-1040-S	10	White Polyurethane	Steel	16 AT 5	200	70	100/150/200	

# DryLin® Linear Slide Tables

## Technical Data



Maximum Stroke (mm)	Maximum Static Load		Maximum RPM	Maximum Speed (m/min.)
	Axial (N)	Radial (N)		
750	700	2800	500	1
1,000	1600	6400	300	1.2
1,250	2500	10000	220	1.1
750	700	2800	500	1
1,000	1600	6400	300	1.2
1,250	2500	10000	220	1.1
1,500	4000	16000	160	0.8
1,500	6500	25000	100	0.6
500	350	1400	1500	3
900	1000	4000	1500	6
1,000	1500	6000	1200	6
750	100	400	200	10
1,000	400	1600	150	15
300	50	200	150	0.2
750	700	2800	500	1
750	700	2800	500	1
750	1200	4600	400	1.6
1,000	1600	6400	300	1.2
300	100	200	1000	1.5
500	500	2000	1500	3
750	700	2800	1500	6
900	1250	5000	1500	6
300	50	200	200	3
300	100	400	1000	1.5
300	50	400	600	10
500	500	2000	1500	3
500	500	2000	1000	3
500	200	2000	400	4.8
500	100	2000	200	10
300	50	200	150	0.18
500	200	800	250	0.5
200	10	20	-	-
850	150	300	-	-

1N = .225 lbf  
1 m/min = 3.28 fpm  
1 Nm = 0.74 lbf x ft

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

Maximum Stroke (mm)	Maximum Static Load		Maximum Speed (m/s)	Linear positioning tolerance (mm)	Minimum Drive Torque No Load (Nm)	Maximum Drive Torque (Nm)
	Radial (N)	Axial (N)				
1,000	100	2	0.35	0.1	0.75	
1,000	150	2	0.3	0.15	1	
2,000	200	3	0.3	0.15	1.75	
2,000	300	5	0.2	0.25	2.4	
3,000	2000	5	0.3	0.4	10	
1,000	12 Nm	0.5	0.3	0.2	1.75	
1,000	12 Nm	0.5	0.2	0.3	2.4	
1,000	50	1	0.35	0.1	0.75	
1,000	75	1	0.3	0.15	1	
1,500	100	1.5	0.3	0.15	1.75	
1,500	150	2.5	0.2	0.25	2.4	






**igus®**

## DryLin® Linear Slide Table - SAW Slide Table System

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

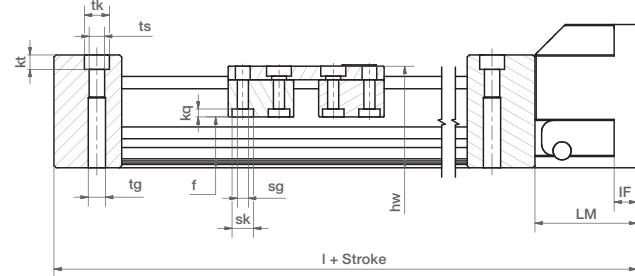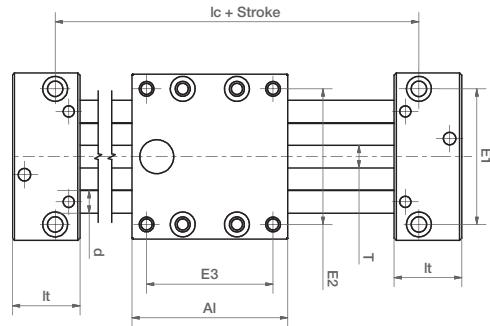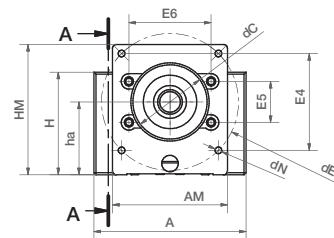

### Length and weight (mm)

Part No.	Stroke length (mm)	Speed		Shaft weight (kg)	Max. static load-bearing capacity	
		mm/rev			axial (N)	radial (N)
SAW-0630	300		1.25	0.2	100	400
SAW-1040	500		2	0.7	500	2000

Higher pitch lead screws upon request  
(1N = .225 lbs)

### Dimensions (mm)

Part No.	A -0.3	AI -0.3	H	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	Ic	hw	f	It -0.1
SAW-0630	54	60/100	32	40	45	51	157	92	30	13.5	26
SAW-1040	74	69/100/150	50	60	60	56	174	91	45	22.5	30

Part No.	tk	ts	tg	kt ±0.1	sk	sg	kq	d	T	ha
SAW-0630	11	6.6	-	20	-	5	10	□ 5	8	21.5
SAW-1040	11	6.8	M8	6.4	9.5	M6	3.5	ø10	10	35.5

# DryLin® Linear Slide Table - SLW Slide Table System



## A good blend of performance and cost

**igus®**



Based on our innovative DryLin® W double rail system, the SLW offers a fully supported rail with resistance to twisting and deflection. SLW also offers a lower profile than most other lead screw tables and runs absolutely maintenance-free.


- Hand wheel option

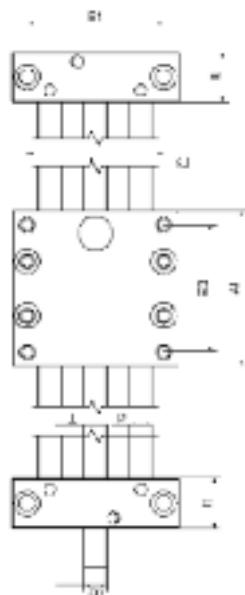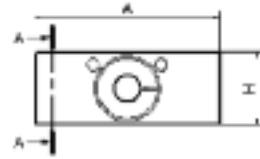

### Component Materials

Part No.	End blocks	Carriages	Lead screw
SLW-0630	Plastic***	Zinc	Stainless Steel
SLW-1040-PL	Zinc*	Zinc	Mild Steel**
SLW-1040-ES	Stainless Steel	Stainless Steel	Stainless Steel
SLW-1040-BB	Anodized AL	Zinc*	Mild Steel
SLW-1080	Anodized AL	Zinc*	Mild Steel**
SLW-1660	Anodized AL	Zinc*	Mild Steel**
SLW-2080	Anodized AL	Zinc*	Mild Steel**

\*Aluminum optional   \*\*Stainless Steel optional   \*\*\*Zinc optional

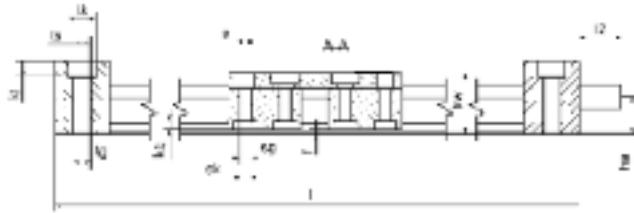

Can be assembled with Turn-To-Fit  
For clearance adjustment see page 47.13

### Length and weight (mm)

Part No.	Maximum stroke length (mm)	Linear travel mm/rev	Base weight (kg)		Additional weight (kg/100mm)	Max. static load-bearing capacity	
			axial (N)	radial (N)		axial (N)	radial (N)
SLW-0630	300	1.25	0.2		0.08	50	200
SLW-1040	750	2	0.7		0.1	700	2800
SLW-1080	750	2	0.9		0.2	700	2800
SLW-1660	1000	4	1.5		0.3	1200	4600
SLW-2080	1000	5	3.0		0.4	1600	6400

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A	AI**	H	E1	E2	E3	I	hw	f	lt	tk	ts	tg
	-0.3	-0.3		±0.15	±0.15	±0.15				-0.1			
SLW-0630	54	60	20	40	45	51	100	17.5	1.2	20	11	6.2	-
SLW-1040	74	69	29	60	60	56	113	24	1.5	22	11	6.8	M8
SLW-1080	108	100	29	94	94	87	144	24	1.5	22	11	7.1	M8
SLW-1660	104	100	37	84	86	82	150	35	1.5	25	15	9.0	M10
SLW-2080	134	150	46	116	116	132	206	44	1.5	28	15	8.6	M10

Part No.	kt ±0.1	s	sk	sg	kq	d	T	I2	d2 Standard	d2 Optional	ha
SLW-0630	8.0	4.5	7.0	M4	2.0	6	M8	15	M8	-	9.5
SLW-1040	6.4	6.6	9.5	M6	4.4	10	TR10x2	17	TR10x2*	6h9	14.5
SLW-1080	6.4	6.6	9.5	M6	4.4	10	TR10x2	17	TR10x2*	6h9	14.5
SLW-1660	8.6	9.0	11	M8	5.5	16	TR14x4	20	TR14x4*	8h9	18.5
SLW-2080	8.6	9.0	14.0	M8	5.5	20	TR18x4	26	12 h9	-	23.0

\* end of lead screw not machined/journalized

\*\* Carriages also available in 100, 150, 200 and 250 mm lengths

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10




**igus®**

## DryLin® Linear Slide Tables - HTS SLWE-BB - With ball bearing lead screw supports

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

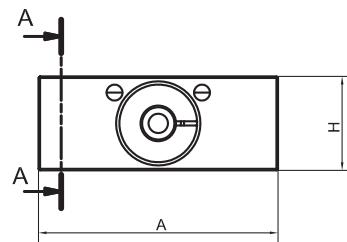


### Special properties

- Lower drive force
- Optimized clearance
- Up to 1,500 rpm  
(depending on length and load)
- Quiet operation
- Available accessories

### Component Materials

Part No.	End blocks	Carriages	Lead screw
SLW-1040-BB	Anodized AL	Zinc*	**Mild Steel

\*Aluminum optional    \*\*Stainless Steel optional

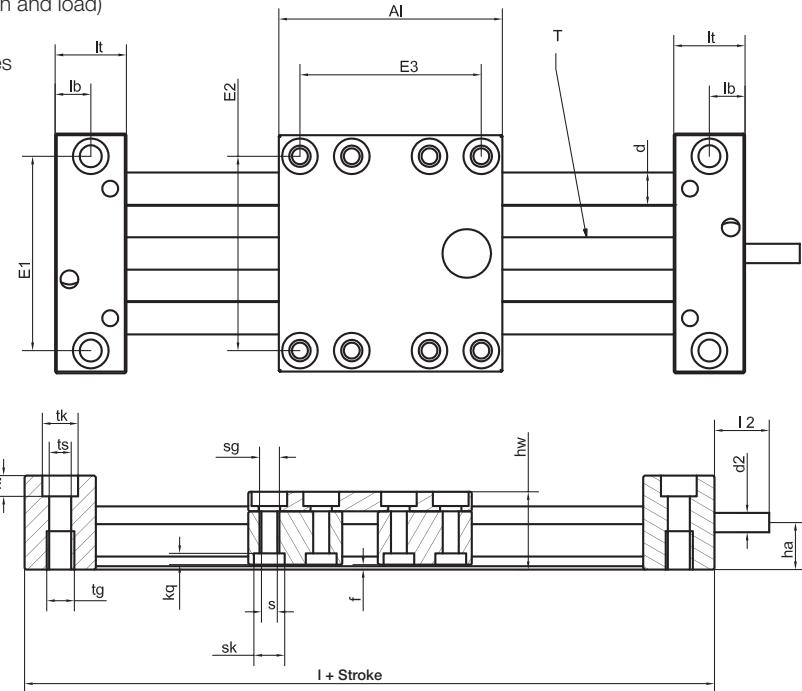

### Technical Data

Part No.	Maximum stroke (mm)	Base weight (kg)	Additional weight (kg/100 mm)	Max. static load capacity		(1/min.)	(m/min.)
				axial (N)	radial (N)		
SLWE-BB-0630	300	0.25	0.08	100	200	1,000	1.5
SLWE-BB-1040	500	0.90	0.10	500	2,000	1,500	3.0
SLWE-BB-1660	750	1.80	0.30	700	2,800	1,500	6.0
SLWE-BB-2080	900	3.30	0.40	1,250	5,000	1,500	6.0

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A -0.3	AI -0.3	H	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	hw	f	It ±0.1	lb	tk	ts
SLW-BB-0630	54	60	20	40	45	51	112	18	1.2	26	14	11	6.2
SLWE-BB-1040	74	69	19	60	60	56	129	24	1.5	30	19	11	6.8
SLWE-BB-1660	108	100	37	84	86	82	170	35	1.5	35	22.5	15	9.0
SLWE-BB-2080	134	150	46	116	116	132	230	44	1.5	40	26	15	8.6

Part No.	tg	kt ±0.1	s	sk	sg	kq	d	T		I2	d2 Standard	d2* Optional	ha
SLWE-BB-0630	M8	8.0	4.5	7.0	M4	2.0	6	TR08x15		15	TR08x15	—	9.5
SLWE-BB-01040	M8	6.4	6.6	9.5	M6	4.4	10	TR10x12		17	TR10x12	6h9	14.5
SLWE-BB-01660	M10	8.6	9.0	11.0	M8	5.5	16	TR14X4		20	TR14X4	8h9	18.5
SLWE-BB-02080	M10	8.6	9.0	14.0	M8	5.5	20	TR18x4		26	12 h9	—	23.0

\*ends may be journaled

# DryLin® Linear Slide Table



## SLWS - Hi-helix Lead Screw Tables

**igus®**



Based on our innovative DryLin® W double rail system, the SLWS offers a fully supported rail with resistance to twisting and deflection.


- Hand wheel option

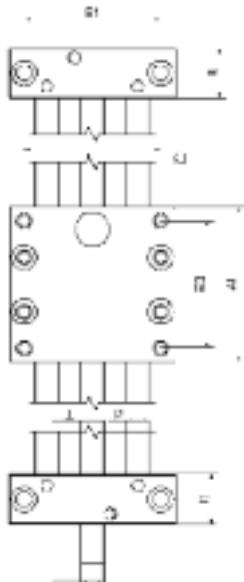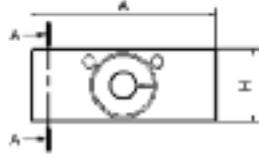

### Component Materials

Part No.	End blocks	Carriages	Lead screw
SLWS-0630	Plastic	Zinc*	Stainless Steel
SLWS-1040	Zinc*	Zinc*	Stainless Steel
SLWS-1080	Aluminum	Zinc*	Stainless Steel
SLWS-2080	Aluminum	Zinc*	Stainless Steel

\*Aluminum optional

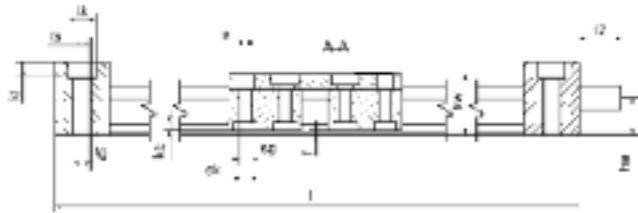

Can be assembled with Turn-To-Fit  
For clearance adjustment see page 47.13

### Length and weight (mm)

Part No.	Maximum stroke length (mm)	Linear travel mm/rev	Shaft weight (kg)	Additional weight (kg/100mm)		Max. static load-bearing capacity	
				axial (N)	radial (N)	axial (N)	radial (N)
SLWS-0630	300	15	0.2	0.08	25	100	
SLWS-1040	750	12/50	0.7	0.1	150/100 <sup>1)</sup>	600/400	
SLWS-1080	750	12/50	0.9	0.2	150/100	600/400	
SLWS-2080	1000	100	3.0	0.4	300	1200	

<sup>1)</sup> Dependent on screw pitch 10x12 or 10x50

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A	A1**	H	E1	E2	E3	I	hw	f	lt	tk	ts	tg
SLWS-0630	54	60	20	40	45	51	100	17.5	1.2	20	11	6.2	–
SLWS-1040	74	69	29	60	60	56	113	24	1.5	22	11	6.8	M8
SLWS-1080	108	100	29	94	94	87	144	24	1.5	22	11	7.1	M8
SLWS-2080	134	150	46	116	116	132	206	44	1.5	28	15	8.6	M10

Part No.	kt ±0.1	s	sk	sg	kq	d	T	l2	d2		ha
									Standard	Optional	
SLWS-0630	8.0	4.5	7.0	M4	2.0	6	8x15	15	8x15	–	9.5
SLWS-1040	6.4	6.6	9.5	M6	4.4	10	10x12/10x50	17	10x12/10x50	6h9	14.5
SLWS-1080	6.4	6.6	9.5	M6	4.4	10	10x12/10x50	17	10x12/10x50	6h9	18.5
SLWS-2080	8.6	9.0	14.0	M8	5.5	20	18x100	26	12 h9	–	23.0

\* end of lead screw not machined/journalized

\*\* Carriages also available in 100, 150, 200 and 250 mm lengths

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® Linear Slide Table - HTS SLWE-PL Preload




DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



- Hand wheel option available at additional cost

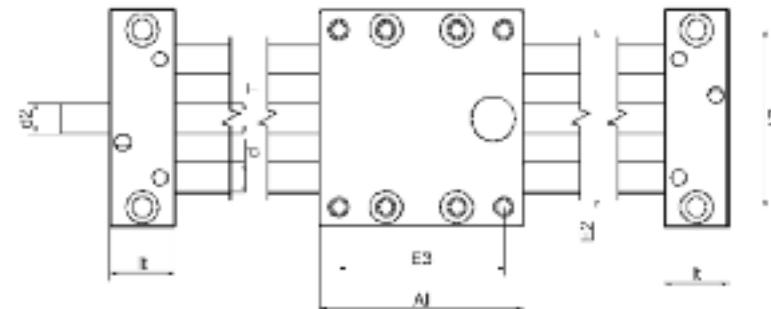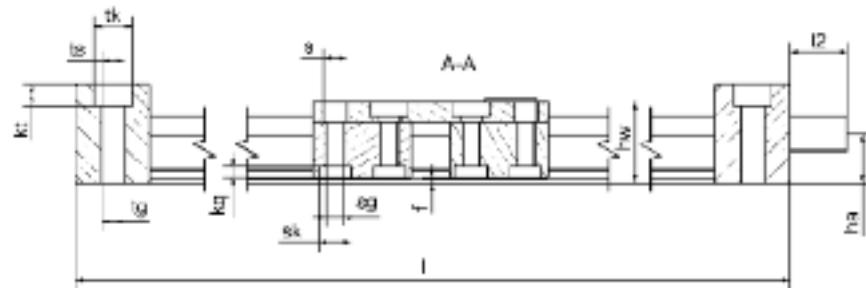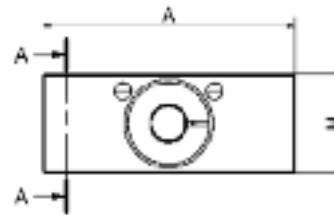

### Length and weight (mm)

Part No.	Maximum stroke length (mm)	Linear travel mm/rev	Shaft weight (kg)	Additional weight (kg/100mm)	Max. static load-bearing capacity	
					axial (N)	radial (N)
SLWE-1040	750	2	0.7	0.1	700	2800
SLWE-1080	750	2	0.9	0.2	700	2800
SLWE-1660	1000	4	1.5	0.3	1200	4600
SLWE-2080	1000	5	3.0	0.4	1600	6400


### Dimensions (mm)

Part No.	A	Al**	H	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	hw	f	It -0.1	tk	ts	tg
SLWE-1040	74	69	29	60	60	56	113	24	1.5	22	11	6.8	M8
SLWE-1080	108	100	29	94	94	87	144	24	1.5	22	11	7.1	M8
SLWE-1660	104	100	37	84	86	82	150	35	1.5	25	15	9.0	M10
SLWE-2080	134	150	46	116	116	132	206	44	1.5	28	15	8.6	M10


Part No.	kt ±0.1	s	sk	sg	kq	d	T	l2	d2 Standard	d2 Optional	ha
SLWE-1040	6.4	6.6	9.5	M6	4.4	10	TR10x2	17	TR10x2*	6h9	14.5
SLWE-1080	6.4	6.6	9.5	M6	4.4	10	TR10x2	17	TR10x2*	6h9	14.5
SLWE-1660	8.6	9.0	11	M8	5.5	16	TR14x4	20	TR14x4*	8h9	18.5
SLWE-2080	8.6	9.0	14.0	M8	5.5	20	TR18x4	26	12 h9	-	23.0

\* end of lead screw not machined/journalled

\*\* Carriages also available in 100, 150, 200 and 250 mm lengths

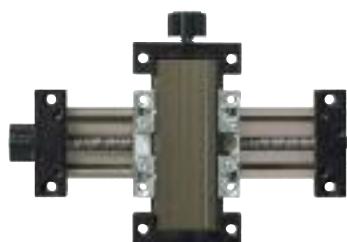



SLW-XY-0630

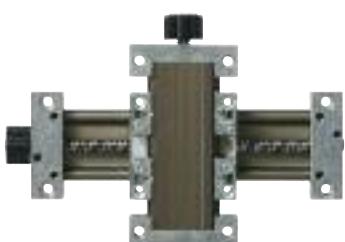

SLW-XY-1040



SLW-XY-1080

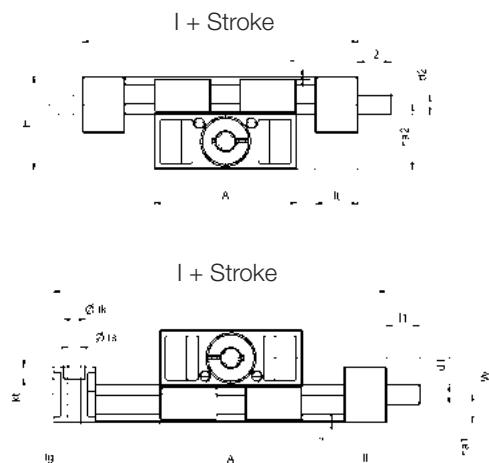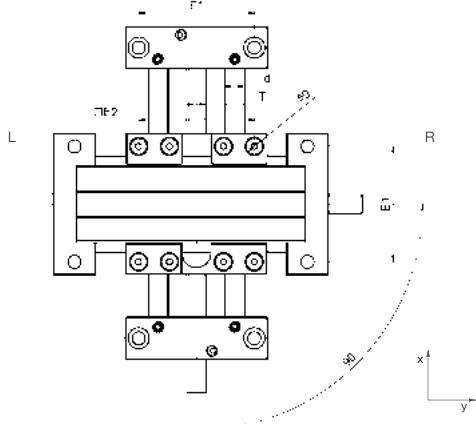

Can be assembled  
with Turn-To-Fit  
for clearance  
adjustment (size  
1040 only)

## Component Materials

Part No.	End blocks	Carriages	Lead screw	Maximum stroke
SLW-XY-0630	Plastic	Zinc*	Stainless Steel	300
SLW-XY-1040	Zinc*	Zinc*	Mild Steel**	750
SLW-XY-1080	Aluminum	Zinc*	Mild Steel**	750

\*Aluminum optional   \*\*Stainless Steel optional

## Dimensions (mm)

Part No.	Linear travel/rev (mm)	A -0.3 (mm)	H (mm)	E1 ±0.15 (mm)	E2 ±0.15 (mm)	Basic length lx (mm)	Basic length ly (mm)	f (mm)	lt (mm)	tk ±0.1 (mm)	ts (mm)	tg (mm)	kt (mm)
SLW-XY-0630	1.25	54	38	40	45	94	94	1.2	20	11	6	-	8
SLW-XY-1040	2	74	48	60	60	117	117	1.5	22	11	6.6	M8	6.4
SLW-XY-1080	108	48	94	94	152	152	152	1.5	22	11	6.6	M8	6.4

Part No.	sg (mm)	d (mm)	T (mm)	I1 (mm)	d1 standard	d1 optional	I2 (mm)	d2 standard	d2 optional	ha1 (mm)	ha2 (mm)	W ha2 - ha1 (mm)
SLW-XY-0630	M4	5	M8	15	M8	NA	15	M8	NA	9.5	27.9	18.4
SLW-XY-1040	M6	10	TR10x2	17	TR10x2	6h9	17	TR10x2	6h9	18	38	20
SLW-XY-1080	M6	10	TR10x2	17	TR10x2	6h9	17	TR10x2	6h9	14.5	33.5	19

The hand wheel on the y-axis can be ordered installed on the left or the right side.

Order example for left SLW-XY-1040-L-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

Order example for left SLW-XY-1040-R-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

Lifetime calculation, CAD files online: [www.igus.com](http://www.igus.com)



**igus®**

## DryLin® Linear Slide Tables - HTS SLW-ES - Stainless Steel

DryLin®  
Linear Slide Tables


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special properties

- Stainless steel version with corrosion-resistant steel components
- Choice of bearing material:
  - iglide® J - standard
  - iglide® A180 - FDA
  - iglide® T500 - high temperature up to 482°F
- Available accessories

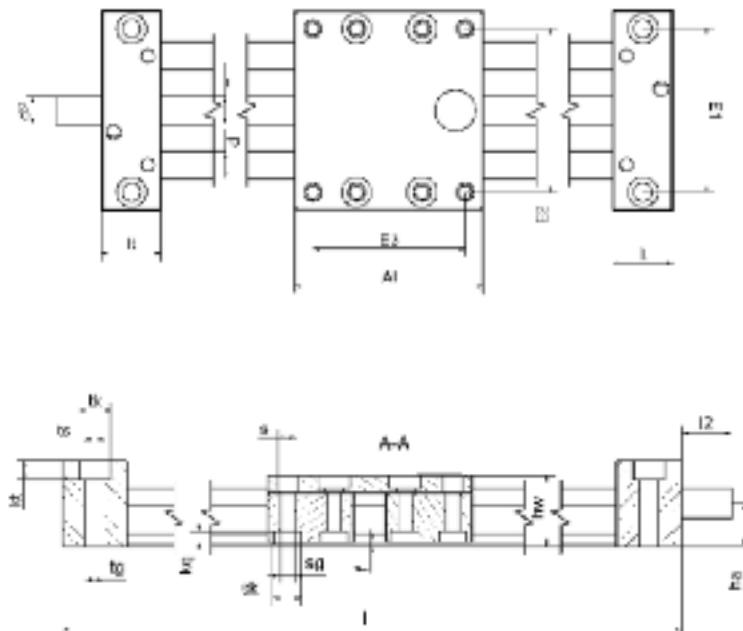

Can be assembled with Turn-To-Fit  
For clearance adjustment see page 47.13

### Dimensions (mm)

Part No.	A	Al**	H	E1	E2	E3	I	hw	f	lt	tk	ts	tg
SLW-ES-1040	74	-0.3	100	29	60	60	87	113	24	1.5	22	11	6.8 M8
SLW-ES-2080	134	-0.3	150	46	116	116	132	206	44	1.5	28	15	8.0 M10

Part No.	kt	s	sk	sg	kq	d	T	I2	d2	d2	ha
	±0.1								Standard	Optional	
SLW-ES-1040	6.4	6.6	9.5	M6	4.4	10	TR10x2	17	TR10x2*	6h9	14.5
SLW-ES-2080	8.6	9.0	14.0	M8	5.5	20	TR18x4	26	12 h9	-	23.0

\* end of lead screw not machined/journalized

\*\* Carriages also available in 100, 150, 200 and 250 mm lengths

### Length and weight (mm)



Part No.	Maximum stroke length (mm)	Linear travel/rev (mm)	Lead screw diameter (mm)	Shaft weight (kg)	Additional weight (kg/100mm)	Max. static load-bearing capacity axial (N)	Max. static load-bearing capacity radial (N)
SLW-ESJ-1040	750	1.25	10	0.2	0.08	50	200
SLW-ESX-1040	750	2	10	0.7	0.1	700	2800
SLW-ESA180-1040	750	2	10	0.9	0.2	700	2800
SLW-ESJ-2080	1000	4	18	1.5	0.3	1200	4600
SLW-ESA180-2080	1000	5	18	3.0	0.4	1600	6400

1N = .225 lbs



#### Special properties

- For manual adjustments
- Flat and compact
- High torsional stability stiffness
- Complete design with stainless steel 316
- 100% lubrication-free
- Chemical and Corrosion-resistant
- Accessories optional

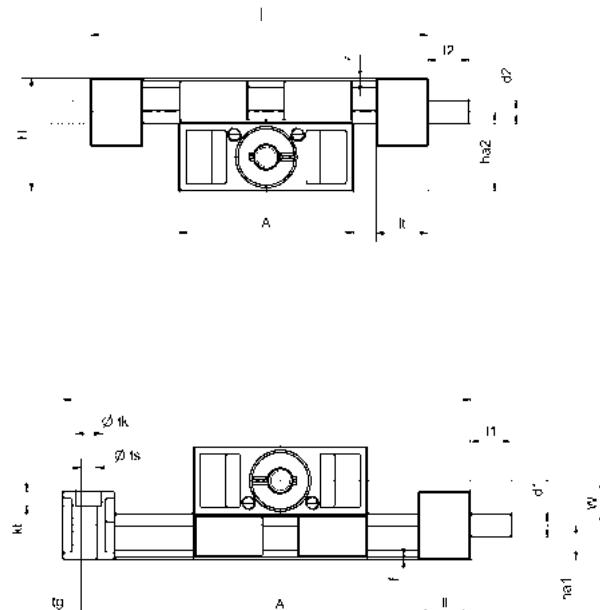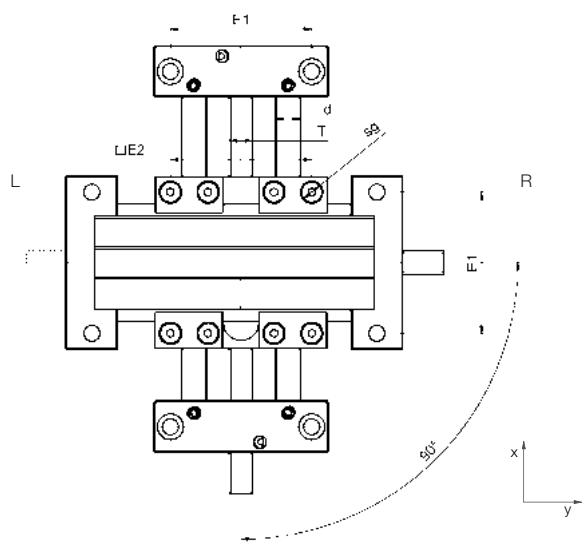

#### Dimensions (mm)

Part No.	A	H	E1	E2	Base Length lx	Base Length ly	f	It	tk	ts	tg	kt
SLW-XY-ESJ-1040	-0.3	48	±0.15	±0.15	118	118	1.5	22	-0.1	6.6	M8	6.4

Part No.	sg	d	T	l1	d1 Standard	d1 Optional	l2	d2 Standard	d2 Optional	ha1	ha2	W
SLW-XY-ESJ-1040	M6	10	TR10x2	17	TR10x2	6h9	17	TR10x2	6h9	14.5	33.5	19

The hand wheel on the y-axis can be ordered installed on the left or the right side.

Order example for left SLW-XY-ESJ-1040-AWM-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

Order example for left SLW-XY-ESJ-1040-AWM-R-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.



**igus®**



## DryLin® Linear Slide Tables HTS Slide Table System

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Tough and adaptable, HTS is the most flexible system and is available with several shaft and screw combinations, including hard anodized aluminum and stainless steel. All HTS tables are designed to be simple bolt-on solutions. HTSC offers a compact(act carriage).

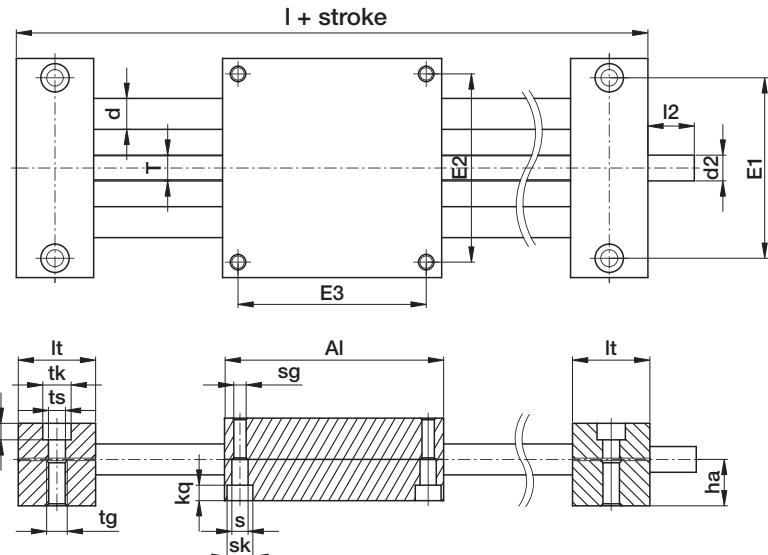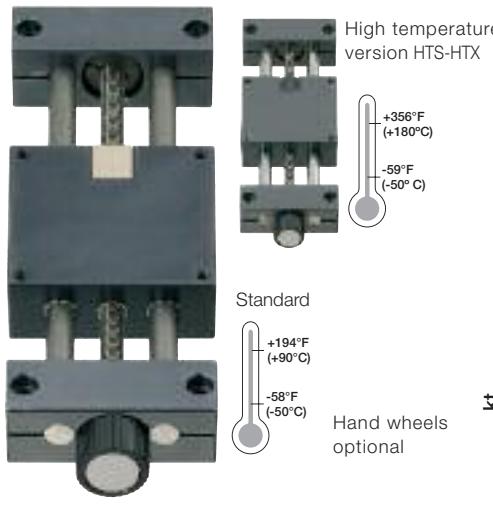

### Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTS	Hard Anodized AL*	Anodized AL	iglide® plastic	Mild Steel**
HTS-HTX	Stainless 440C	Anodized AL	iglide® plastic	Stainless 304

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

\*\*Stainless (304SS) optional

### Length (mm) and Weight

Part No.	Maximum stroke length (mm)	Linear travel/rev (mm)	Aluminum Shaft weight add'l weight (per 100 mm)		Steel Shaft weight add'l weight (per 100 mm)	Max. static load-bearing capacity axial (N) radial (N)	
			(kg)	(kg)		(kg)	(kg)
HTS-12-AWM	750	2	1.1	0.1	1.3	0.2	700 2800
HTS-20-AWM	1000	4	3.2	0.3	3.9	0.6	1600 6400
HTS-30-AWM	1250	5	8.6	0.6	10.9	1.4	2500 10000

### Hi Temperature (-59°F - 356°F)

HTS-12-EWM-HTX**	750	2	1.1	0.1	1.3	0.2	700	2800
(1N = .225 lbs)								

### Dimensions (mm)

Part No.	A -0.3	AI -0.3	H	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	R	f	It ±0.1	tk	ts
HTS-12-AWM	85	85	34	70	73	73	145	42	2	30	11	6.6
HTS-20-AWM	130	130	48	108	115	115	202	72	2	36	15	9.0
HTS-30-AWM	180	180	68	150	158	158	280	96	4	50	20	13.5

### Hi Temperature (-59°F - 356°F)

HTS-12-EWM-HTX**	85	85	34	70	73	73	145	42	2	30	11	6.6
------------------	----	----	----	----	----	----	-----	----	---	----	----	-----

Part No.	tg	kt ±0.1	s	sk	sg	kq	d	T	I2	d2 Standard	ha
HTS-12-AWM	M8	6.4	6.3	10	M6	6.0	12	TR10 x 2	17	TR10 x 2*	18
HTS-20-AWM	M10	8.6	6.4	11	M8	7.0	20	TR18 x 4	26	12 h9	23
HTS-30-AWM	M16	12.6	11.0	18	M12	10.6	30	TR24 x 5	38	14 h9	36

### Hi Temperature (-59°F - 356°F)

HTS-12-EWM-HTX**	M8	6.4	6.3	10	M6	6.0	12	TR10 x 2	17	TR10 x 2*	18
------------------	----	-----	-----	----	----	-----	----	----------	----	-----------	----

\* TR10x2 lead screw end unmachined (10 mm OD x 2 mm pitch), optional 6mm available

# DryLin® Linear Slide Table



## HTS-PL Adjustable Clearance and Anti-Backlash

**igus®**





### Special properties

- Lubricant-free
- Preloaded trapezoidal lead screw nut,
- Pretension force 11.2 lbf (50 N)
- Radial clearance is adjustable from both sides
- Low weight

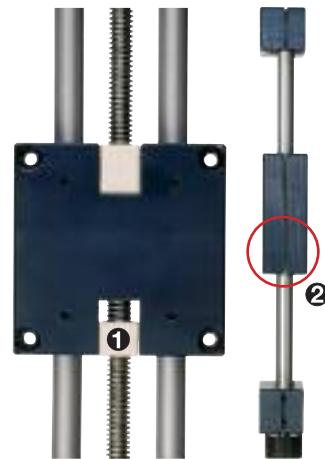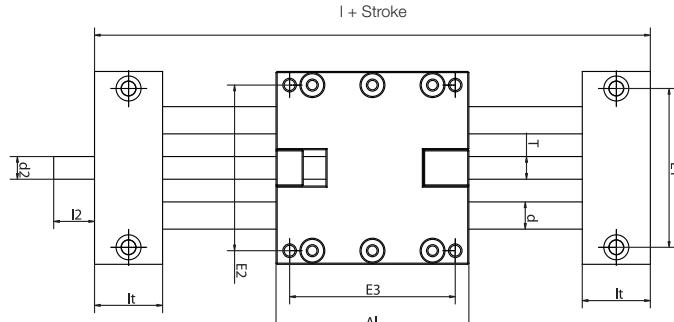

① Preloaded trapezoidal lead  
② screw nut  
Radial clearance  
adjustable from both sides  
with adjustment screws

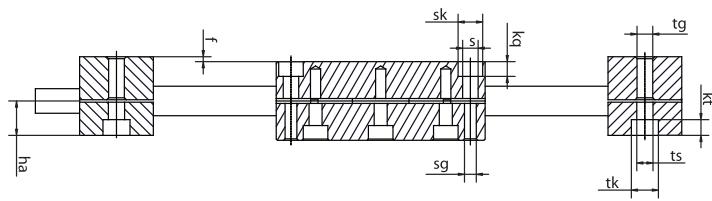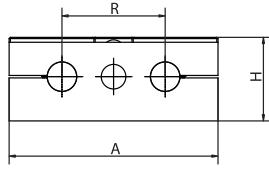

### Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
----------	----------	----------------------	----------	------------

HTS	Hard Anodized AL*	Anodized AL	iglide® plastic	Mild Steel**
-----	-------------------	-------------	-----------------	--------------

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

\*\*Stainless (304SS) optional

### Length (mm) and Weight

Part No.	Maximum stroke length (mm)	Linear travel/rev (mm)	Aluminum shaft weight (kg)	add 'I' weight (per 100 mm) (kg)	Steel shaft weight (kg)	add 'I' weight (per 100 mm) (kg)	Max. static load-bearing capacity axial (N)	radial (N)
HTS-12-AWM-PL	750	2	1.1	0.1	1.3	0.2	700	2800
HTS-20-AWM-PL	1000	4	3.2	0.3	3.9	0.6	1600	6400
HTS-30-AWM-PL	1250	5	8.6	0.6	10.9	1.4	2500	10000

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A -0.3	AI -0.3	H	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	R	f	lt ±0.1	tk	ts
HTS-12-AWM-PL	85	85	34	70	73	73	145	42	2	30	11	6.6
HTS-20-AWM-PL	130	130	48	108	115	115	202	72	2	36	15	9.0
HTS-30-AWM-PL	180	180	68	150	158	158	280	96	4	50	20	13.5

Part No.	tg	kt ±0.1	s	sk	sg	kq	d	T	I2	d2 Standard	ha
HTS-12-AWM-PL	M8	6.4	6.3	10	M6	6.0	12	TR10x2	17	TR10x2*	18
HTS-20-AWM-PL	M10	8.6	6.4	11	M8	7.0	20	TR18x4	26	12 h9	23
HTS-30-AWM-PL	M16	12.6	11.0	18	M12	10.6	30	TR24x5	38	14 h9	36

\* TR10x2 lead screw end unmachined, optional 6mm available

Lifetime calculation, CAD files online: [www.igus.com](http://www.igus.com)

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® Linear Slide Tables HTS-BB Slide Table System

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270



Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



Hand wheel optional

### Special properties

- Higher speeds
- Higher precision
- Constant torque

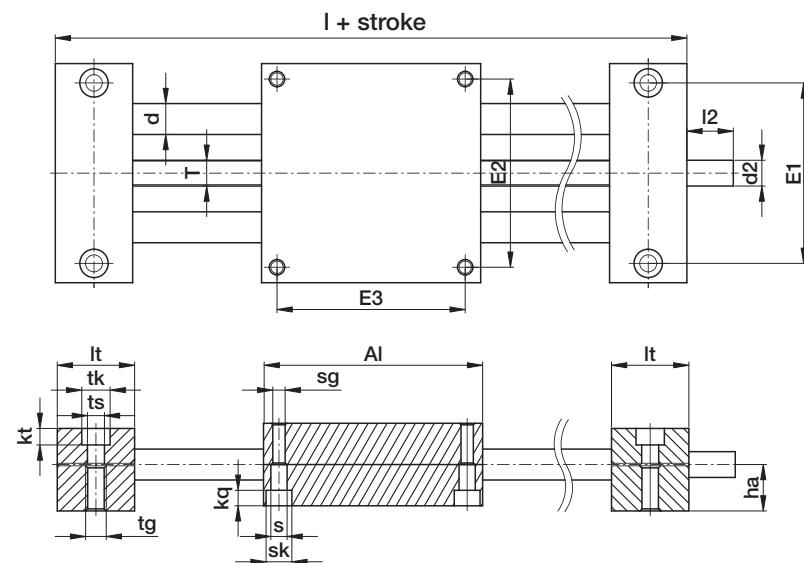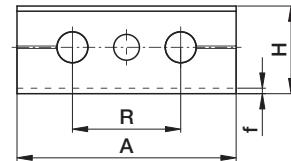

### Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTS-BB	Hard Anodized AL*	Anodized AL	iglide® plastic	Mild Steel**

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

\*\*Stainless (304SS) optional

### Length (mm) and Weight

Part No.	Maximum stroke length (mm)	Aluminum Shaft weight add'l weight (per 100 mm)		Steel Shaft weight add'l weight (per 100 mm)		Max. static load-bearing capacity axial (N) radial (N)	
		(kg)	(kg)	(kg)	(kg)	(N)	(N)
HTS-BB-12	500	0.7	0.1	0.8	0.2	350	1,400
HTS-BB-20	900	1.9	0.3	2.3	0.6	1,000	4,000
HTS-BB-30	1,000	4.6	0.6	5.8	1.4	1,500	6,000

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A -0.3	AI -0.3	H	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	R	f	lt ±0.1	tk	ts
HTS-BB-12-AWM-Stroke	85	85	34	70	73	73	145	42	2	30	11	6.6
HTS-BB-20-AWM-Stroke	130	130	48	108	115	115	202	72	2	36	15	9.0
HTS-BB-30-AWM-Stroke	180	189	68	150	158	158	280	96	4	50	20	13.5

Part No.	tg	kt ±0.1	s	sk	sg	kq	d	T	l2	d2 Standard	ha
HTS-BB-12-AWM-PL	M8	6.4	6.3	10	M6	6.0	12	TR10x2	17	TR10x2*	18
HTS-BB-20-AWM-PL	M10	8.6	6.4	11	M8	7.0	20	TR18x4	26	12 h9	23
HTS-BB-30-AWM-PL	M16	12.6	11.0	18	M12	10.6	30	TR24x5	38	14 h9	36


# DryLin® Linear Slide Table HTSS Fast Pitch Lead screws

**igus®**



## Special properties

- High helix pitch lead screw
- HTSS-12 moves 10x12/10x50
- HTSS-20 moves 18x100
- High-speed solution
- Maintenance-free
- Dry running
- Hand wheel option

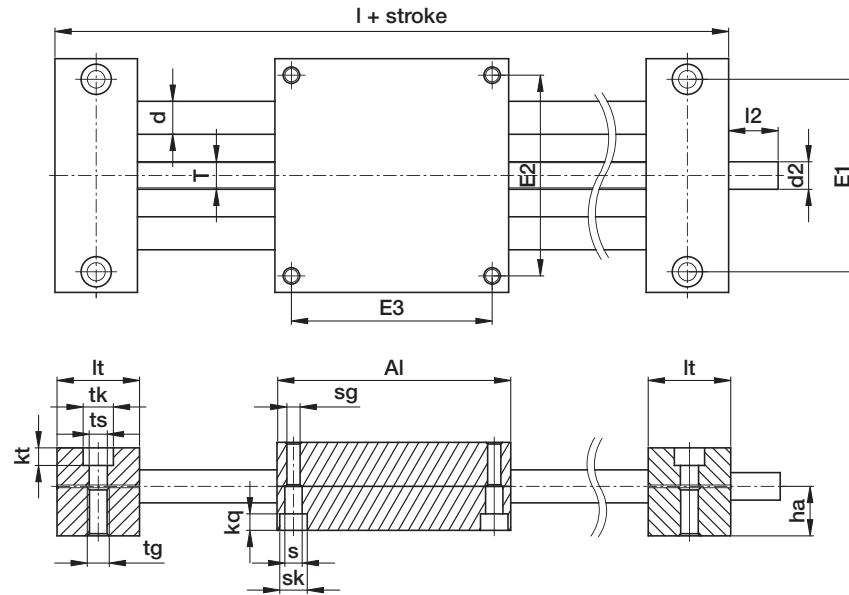

## Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTSS	Hard Anodized AL*	Anodized AL	iglide® plastic	Stainless

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

## Length (mm) and Weight

Part No.	Linear travel/rev (mm)	Maximum stroke length (mm)	Aluminum shaft weight (kg)		Max. static load-bearing capacity axial (N) radial (N)	
			add'l weight (per 100 mm) (kg)			
HTSS-12-AWM	12/50	750	0.7	0.1	150/100 <sup>1)</sup>	600/400
HTSS-20-AWM	100	1000	1.9	0.3	300	1200

<sup>1)</sup> Dependent on screw pitch 10x12 or 10x50

(1N = .225 lbs)

## Dimensions (mm)

Part No.	A -0.3	AI -0.3	H ±0.15	E1 ±0.15	E2 ±0.15	E3 ±0.15	I	R	f ±0.1	lt	tk	ts	tg
HTSS-12-AWM	85	85	34	70	73	73	145	42	2	30	11	6.6	M8
HTSS-20-AWM	130	130	48	108	115	115	202	72	2	36	15	9.0	M10

Part No.	kt ±0.1	s	sk	sg	kq	d	T	l2	d2 Standard	ha
HTSS-12-AWM	6.4	6.3	10	M6	6.0	12	TR10x50	17	TR10x50*	18
HTSS-20-AWM	8.6	6.4	11	M8	7.0	20	TR18x100	26	12 h9	23

\* TR10x50 supplied with lead screw end unmachined, optional 6mm available

Available lead screws: 10 mm OD w/ 50 mm pitch

18 mm OD w/100 mm pitch

Lifetime calculation, CAD files online: [www.igus.com](http://www.igus.com)

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® Linear Slide Table - HTS HTS-FF - Fast Forward

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270



Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



HTS linear tables with quick release mechanism offer a combination of accurate positioning and quick manual adjustment.


### Special properties

- Aluminum carriage and end blocks
- For fast format adjustments
- Variable stroke length
- Only recommended for horizontal applications
- Max. static axial load 200 N (horizontal installation position)
- Max. dynamic axial load 50 N
- Hand wheel optional

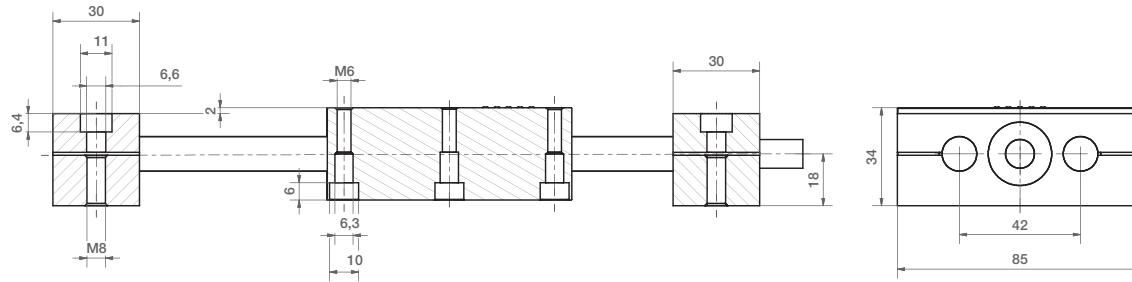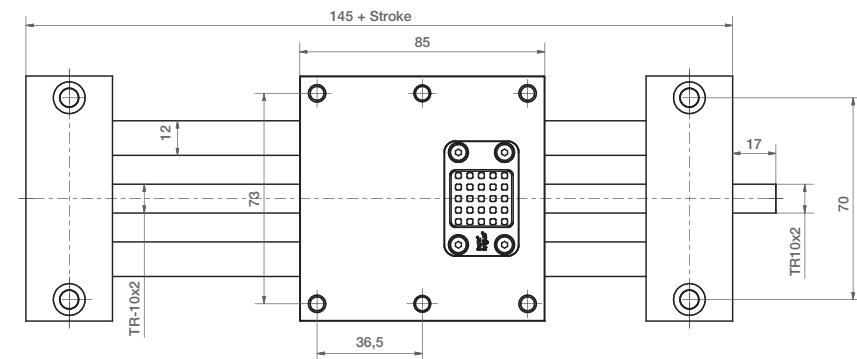

Part number	Max. length of stroke (mm)	Weight (kg)	Additional weight pro 100 mm
HTS-12-AWM-FF	750	1.1	0.1

1.

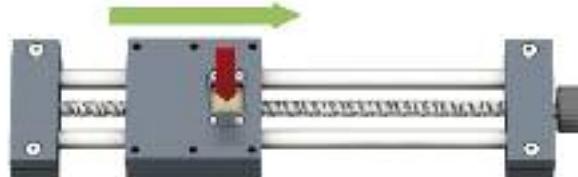


2.



Press > disengage > move manually > click into place > fine-tune

# DryLin® Linear Slide Table - HTS HTS-PL XY Table

**igus®**

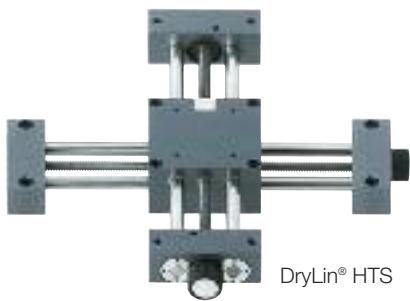




DryLin® HTS



DryLin® HTS-PL

## Special properties

- High precision, extreme stiffness and exact alignment, single piece carriage
- Available as standard and preloaded
- Hand wheel optional

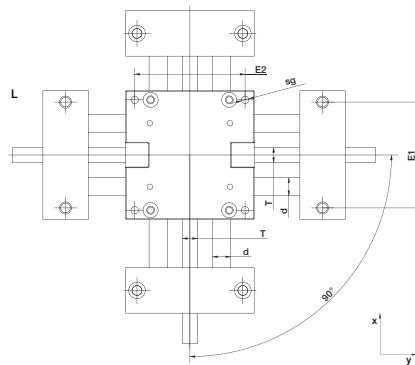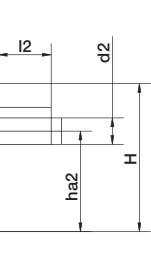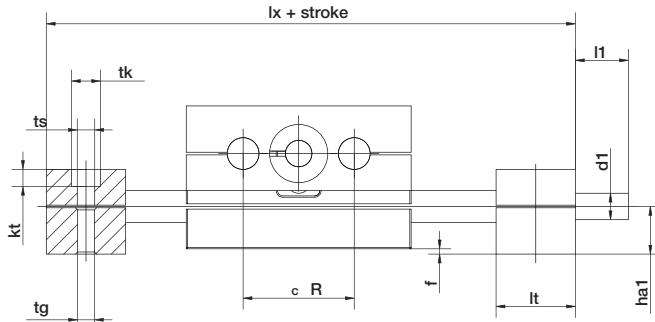

## Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTS	Hard Anodized AL*	Anodized AL	iglide® plastic	Mild Steel**

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

\*\*Stainless (304SS) optional

## Length (mm) and Weight

Part No.	Linear travel/rev (mm)	A -0.3 (mm)	H (mm)	E1 ±0.15 (mm)	E2 ±0.15 (mm)	Basic length lx (mm)	Basic length ly (mm)	R (mm)	f (mm)	lt ±0.1 (mm)	tk (mm)	ts (mm)	tg (mm)	kt (mm)
HTS-XY-12	2	85	56	70	73	145	145	42	2	30	11	6.6	M8	6.4
HTS-XY-12-PL	2	85	56	70	73	145	145	42	2	30	11	6.6	M8	6.4
HTS-XY-20-EWM-PL	4	130	86	108	115	202	202	72	2	36	15	9.0	M10	8.6

## Dimensions (mm)

Part No.	sg (mm)	d (mm)	T (mm)	l1 (mm)	d1 standard	d1 optional	l2 (mm)	d2 standard	d2 optional	ha1 (mm)	ha2 (mm)	W ha2-hat (mm)
HTS-XY-12	M6	12	TR10x2	17	TR 10x2	6h9	17	TR10x2	6h9	18	38	20
HTS-XY-12-PL	M6	12	TR10x2	17	TR 10x2	6h9	17	TR10x2	6h9	18	38	20

PL = HTS-Preload-version

## Order example:

The rotary knob on the y-axis can be ordered installed on the left or on the right side.

**Order example for left** HTS-XY-12-L-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

**Order example for left** HTS-XY-12-R-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10




**igus®**

## DryLin® Linear Slide Tables - HTS HTSC - Compact Carriages

DryLin®  
Linear Slide Tables


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

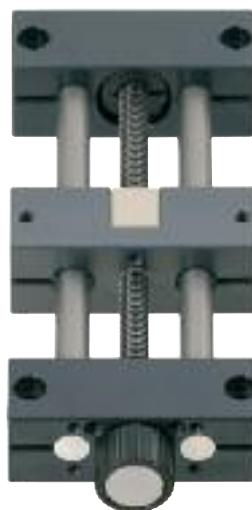

### Special properties

- Solid flexible design
- Ideal for 2 carriages
- Dry running and maintenance-free
- Hand wheel optional
- Adjustable radial clearance

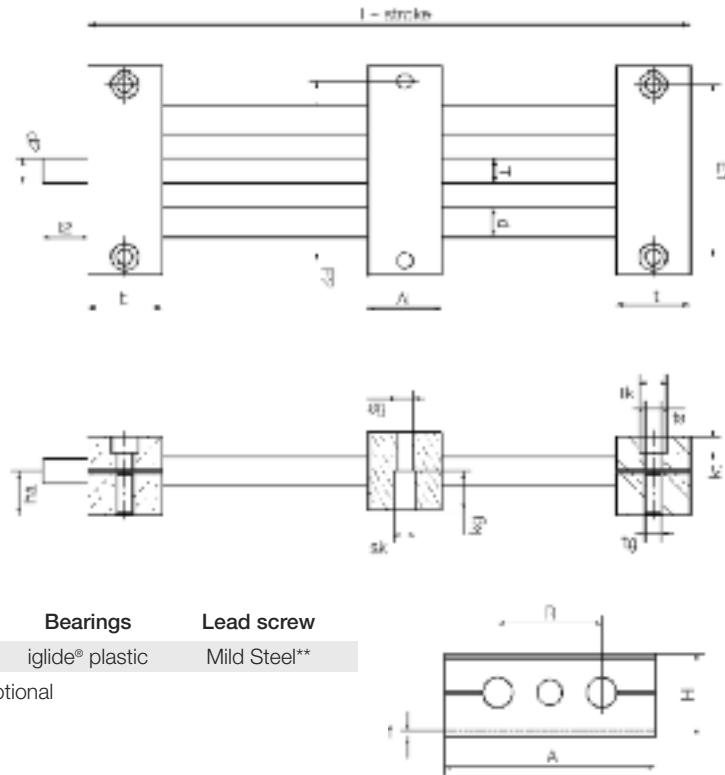

### Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTSC	Hard Anodized AL*	Anodized AL	iglide® plastic	Mild Steel**

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

\*\*Stainless (304SS) optional

### Length (mm) and Weight

Part No.	Maximum stroke length (mm)	Linear travel/rev (mm)	Aluminum shaft weight add'l weight (per 100 mm)		Steel shaft weight add'l weight (per 100 mm)		Max. static load-bearing capacity axial (N) radial (N)	
			(kg)	(kg)	(kg)	(kg)	Axial (N)	Radial (N)
HTSC-12-AWM	750	2	0.7	0.1	0.8	0.2	700	2800
HTSC-20-AWM	1000	4	1.9	0.3	2.3	0.6	1600	6400
HTSC-30-AWM	1250	5	4.6	0.6	5.8	1.4	2500	10000
HTSC-40-AWM	1500	5	11.0	0.9	16.0	2.4	4000	16000
HTSC-50-AWM	1500	6	17.0	1.2	26.3	3.5	6250	25000

(1N = .225 lbs)

### Dimensions (mm)


Part No.	A	AI -0.3	H -0.3	E1	E2 ±0.15	I ±0.15	R	f	It	tk ±0.1	ts	tg
HTSC-12-AWM	85	30	34	70	73	90	42	2	30	11	6.6	M8
HTSC-20-AWM	130	36	48	108	115	108	72	2	36	15	9.0	M10
HTSC-30-AWM	180	50	68	150	158	150	96	4	50	20	13.5	M16
HTSC-40-AWM	230	70	84	202	202	210	122	4	70	20	13.5	M16
HTSC-50-AWM	280	80	100	250	250	240	152	4	80	20	13.5	M16

Part No.	kt ±0.1	sk	sg	kq	d	T	I2	d2 Standard	ha
HTSC-12-AWM	6.4	10	M6	6.0	12	TR10x2	17	TR10x2*	18
HTSC-20-AWM	8.6	11	M8	7.0	20	TR18x4	26	12 h9	23
HTSC-30-AWM	12.6	18	M12	10.6	30	TR24x5	38	14 h9	36
HTSC-40-AWM	12.6	20	M16	39	40	TR26x5	45	16	44
HTSC-50-AWM	12.6	20	M16	49	50	TR30x6	50	20	52

\* TR10x2 supplied with lead screw end unmachined, optional 6mm available



Based on the "hygienic design" idea, this version offers an easily cleaned solution. Even screw connectors are designed easily accessible and the gap dimensions accordingly generous. The materials used are plastic and 300 series stainless steel.

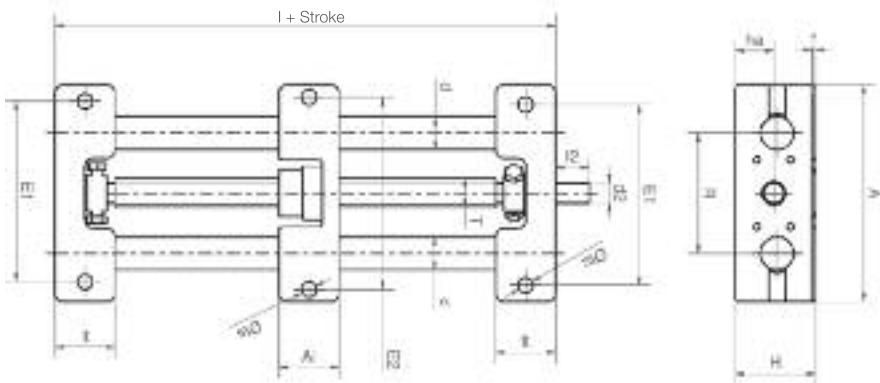

#### Dimensions (mm)

Part No.	A	AI	H	E1	E2	I	R	f	lt	ts	d	T	I2	d2	ha		
HTSC-20-EWM-HYD	-0.3	-0.3	48	±0.15	±0.15	108	115	108	72	2	36	9.0	20	tr18x4	26	12h9	23



**igus®**

## DryLin® Linear Slide Table - HTS HTSP - Small, Low Cost and Corrosion Resistant

HTSP is the most cost-effective and lightweight unit available. Recommended for handling low weight applications by hand or low-speed motor. HTSP works well in corrosive environments.

DryLin®  
Linear Slide Tables


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Special properties

- Small version
- Very low weight
- Low cost
- Corrosion resistant
- Accessories optional (rotary knob, position indicator ...)
- Carriage and end blocks made from high performance polymers
- Hand wheel optional
- For hand powered applications only

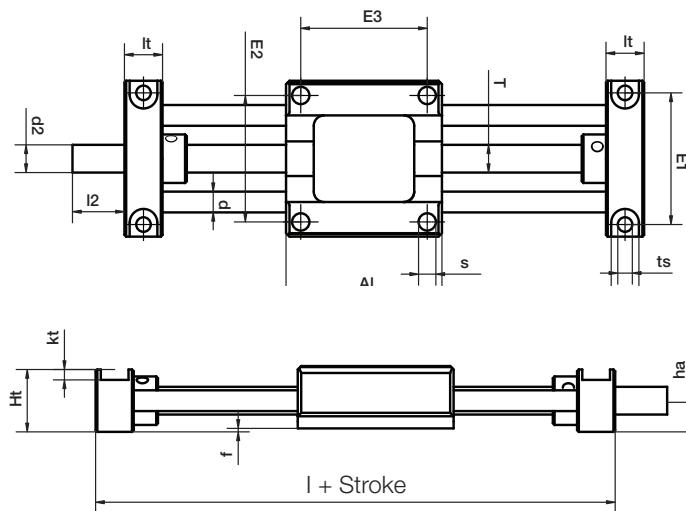

### Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTSP	Hard Anodized AL*	Anodized AL	iglide® plastic	Stainless Steel

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

### Lengths (mm) and Weight

Part No.	Linear travel/rev	Maximum stroke length (mm)	Aluminum shaft weight (kg)		Special properties
			(kg)	Add'l weight (kg) (per 100 mm)	
HTSP-01-06	1.25	300	0.11	0.06	Square carriage with four symmetrical connection bores

### Dimensions (mm)

Part No.	A	A1	H	Ht	E1	E2	E3	I	R	f	It	tk	ts
HTSP-01-06	45	45	19	18	38	36.5	36.5	67	25	1	11	8	4.2

Part No.	s	sg	d	T	I2	d2* standard	ha	Max. static load-bearing capacity		
								axial (N)	radial (N)	
HTSP-01-06	5.1	-	6	M8	15	M8	9	50	200	(1N = .225 lbs)

\* Standard versions supplied with lead screw end unmachined  
Lead screw clamp not available


Lifetime calculation, CAD files online: [www.igus.com](http://www.igus.com)

# DryLin® Linear Slide Table - HTS

## HTSP - Low Cost and Corrosion Resistance




**igus®**

HTSP is the most cost-effective and lightweight unit available. Recommended for handling low weight applications by hand or low-speed motor. HTSP works well in corrosive environments.

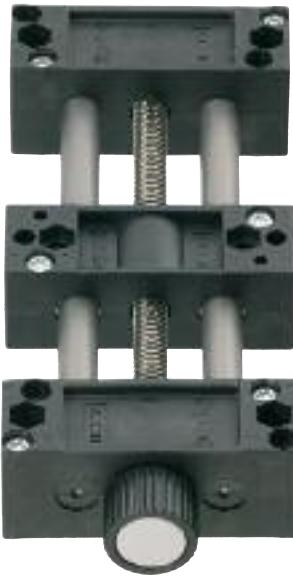

### Special properties

- Solid plastic version
- Light weight
- Cost-effective
- Corrosion resistant
- Hand wheel optional

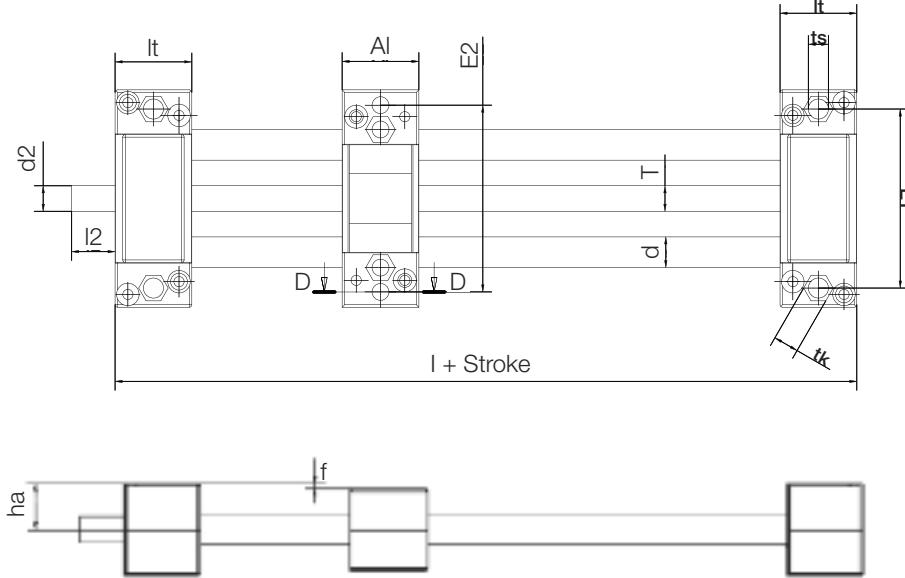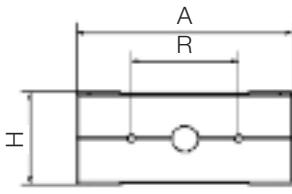

### Component Materials

Part No.	Shafting	End blocks/Carriages	Bearings	Lead screw
HTSP	Hard Anodized AL*	iglide® plastic	iglide® plastic	Mild Steel**

\*Case hardened carbon (1050) & Hardened stainless (440C) optional

\*\*Stainless (304SS) optional

### Length (mm) and Weight

Part No.	Linear travel/rev	Maximum stroke length (mm)	Aluminum shaft		Special properties
			weight (kg)	Add'l weight (kg per 100 mm)	
HTSP-01-12	2	500	0.35	0.11	Liners and TR nuts made from iglide® J
HTSP-02-12	2	500	0.35	0.11	Bearing and nut integrated into carriage

### Dimensions (mm)

Part No.	A	AI	H	E1	E2	E3	I	R	f	It	tk	ts
HTSP-01-12	85	30	36	70	73	-	90	42	2	30	10	6.6
HTSP-02-12	85	30	36	70	73	-	90	42	2	30	10	6.6
Part No.	s	sg	d	T standard	I2	d2*	ha	Max. static load-bearing capacity				
HTSP-01-12	6.3	M6	12	TR10x2	17	TR10x2	18	axial (N)				
HTSP-02-12	6.3	M6	12	TR10x2	17	TR10x2	18	radial (N)				

(1N = .225 lbs)

\* Standard versions supplied with lead screw end unmachined, optional 6mm available

Lifetime calculation, CAD files online: [www.igus.com](http://www.igus.com)

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10




**igus®**

## DryLin® Linear Slide Table - HTS HTSP-FF - Fast Forward

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270




Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

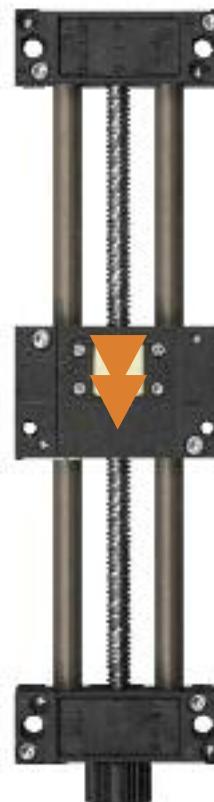

HTSP linear tables with quick release mechanism offer a combination of accurate positioning and quick manual adjustment.



### Special properties

- Light solid polymer carriages and end blocks
- For fast format adjustments
- Including self-locking brake
- Variable stroke length
- Only recommended for horizontal applications
- Max. static axial load 200 N
- Max. dynamic axial load 50 N
- Hand wheel optional

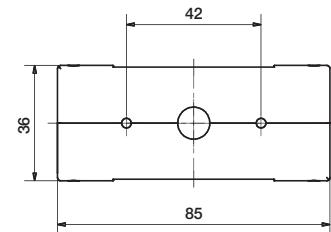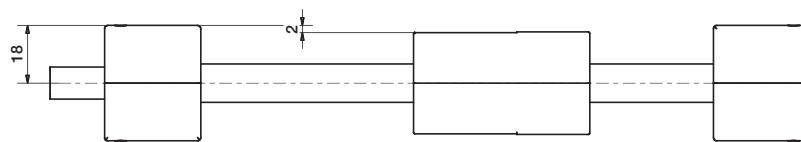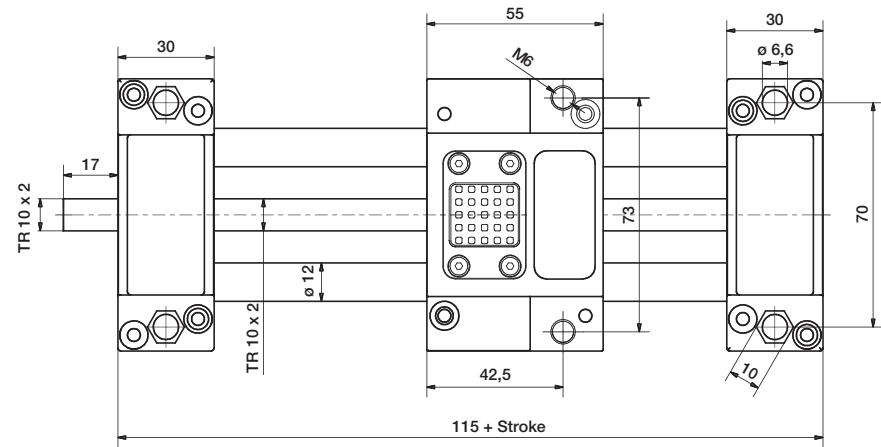

Part number	Max. length of stroke (mm)	Weight (kg)	Additional weight pro 100 mm
HTSP-01-12-AWM-FF*	750	1.1	0.1

\*Liners and trapezoidal lead screw nut made of iglide® J

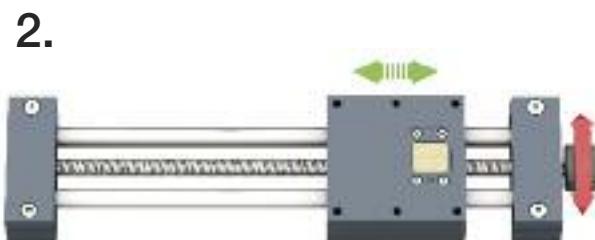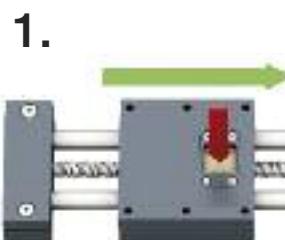

Press > disengage > move manually > click into place > fine-tune

# DryLin® Linear Slide Table - SET Easy Tube

igus®



3 Dimensions  
2 Styles

The DryLin® SET slide table range has a simple but solid design; the complete system only consists of a few components. The anodized aluminum tube guides the slide carriage and at the same time protects the lead screw. The carriage and the trapezoidal nut are manufactured from a high performance polymer bearing material. The system runs without any lubrication, and gives a low friction value combined with an excellent wear rate.




Flange version



Easy Tube with  
optional accessory  
(rotary knob,  
position indicator)

## Special properties

- Totally lubrication-free
- Corrosion-resistant when specified with a stainless lead screw
- Lightweight (aluminum and polymer)
- Can be driven from both sides by hand or motor drive
- Temperature-resistant up to 176°F (80°C)
- Ideal for washdown applications
- Covered lead screw

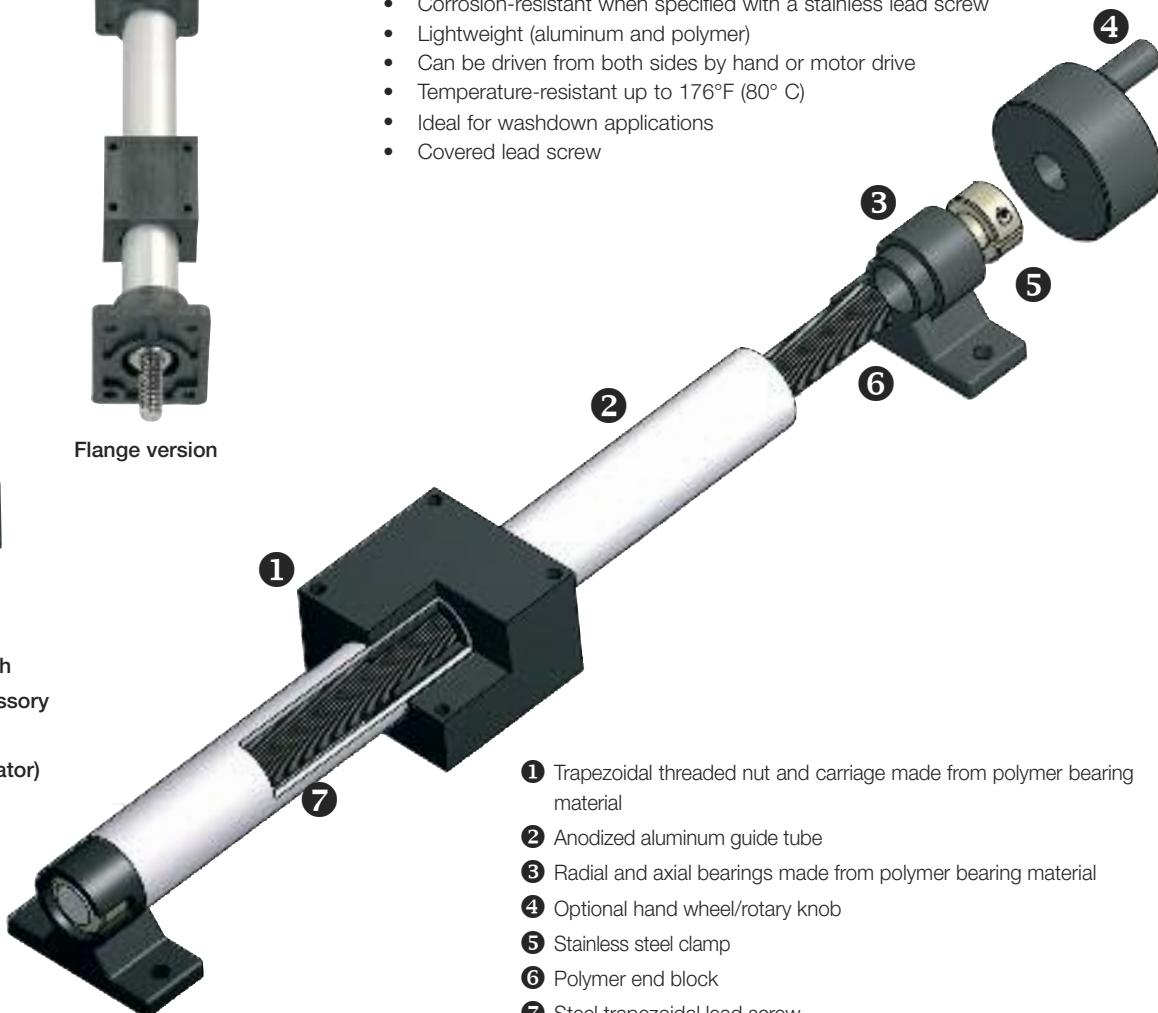

Flange version

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10






**igus®**

## DryLin® Linear Slide Table - SET Easy Tube

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

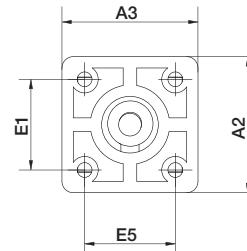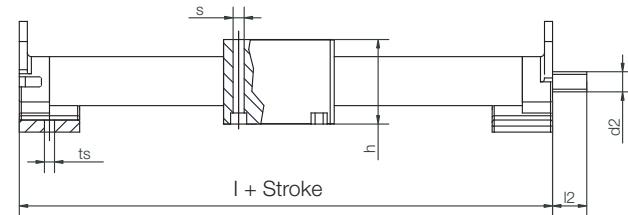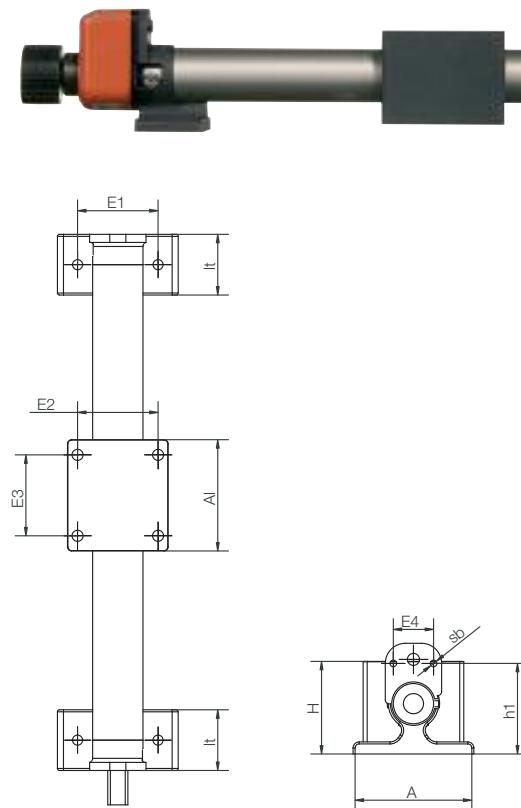

also available as flange version  
(for axial fitting)

Stainless shaft/lead screw available upon request

### Length (mm) and Weight

Part No.	Linear travel/rev (mm)	Maximum stroke length (mm)	Aluminum Shaft weight (kg)		add'l weight (per 100 mm) (kg)		Max. static load-bearing capacity axial (N)		radial (N)	
			Aluminum Shaft weight (kg)	add'l weight (per 100 mm) (kg)	Max. static load-bearing capacity axial (N)	radial (N)				
SET-12-AWM	7	200	0.05	0.03	10	20				
SET-25-AWM	2	850	0.15	0.12	150	300				
SET-30-AWM	3	850	0.20	0.21	200	400				

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A	A1	H	E1	E2	E3	E4	I	h	h1	lt	ts	sb	I2	d2
SET-12-AWM	30	30	23.5	20	20	20	-	60	22	-	15	3.3	4.2	-	M4*
SET-25-AWM	60	55	44	40	40	40	20	115	39	45	30	5.2	5.2	M4	17 TR10x2*
SET-30-AWM	80	55	49	60	40	40	20	125	39	50	35	6.5	5.2	M4	20 TR12x3*

### Dimensions (mm) – flange version


Part No.	A2	A3	H	E1	E2	E3	E5	I	h	lt	ts	s	I2	d2
SET-25-AWM-F	60	60	49	40	40	40	40	117	39	30	5.2	5.2	27	TR10x2*
SET-30-AWM-F	80	60	59	60	40	40	40	125	39	35	6.5	5.2	30	TR12x3*

\* lead screw end unmachined



### Special properties

- Reduce weight and costs
- Simplified self assembly
- Light, clean and low noise
- Maximum stroke length: 750 mm
- Maximum static carrying capacity: 150N, 300N

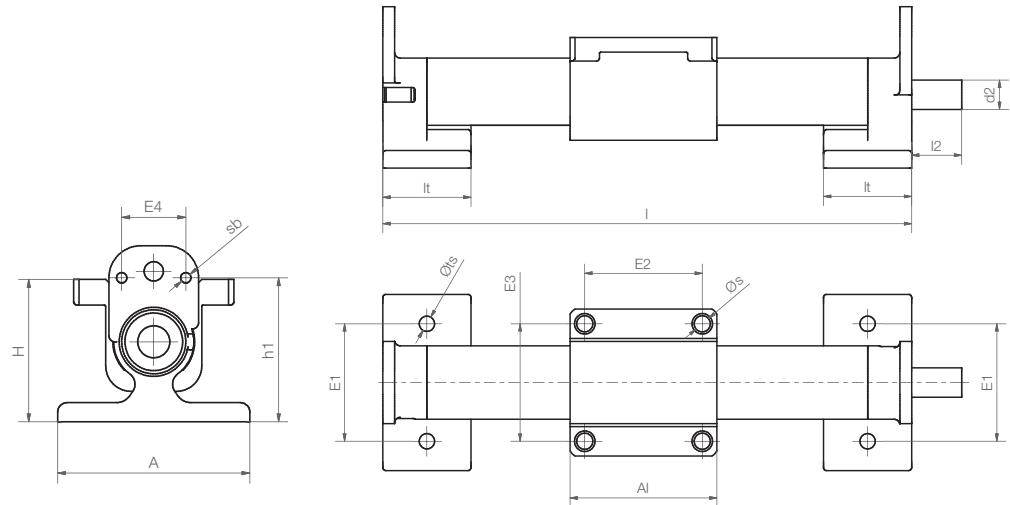

### Length (mm) and Weight

Part No.	Weight (kg)	Maximum stroke length (mm)	Max. static load-bearing capacity	
			axial (N)	radial (N)
<b>SETC-25-AWM</b>	2	850	150	300

(1N = .225 lbs)

### Dimensions (mm)

Part No.	A	A1	H	E1	E2	E3	E4	I max.	h1	lt	ts	s	sb	I2	d2
<b>SETC-25-AWM</b>	60	55	44	40	40	40	20	115	45	30	5.2	5.2	M4	17	TR10x2



**igus®**


## DryLin® Linear Slide Table - HTS Accessories

DryLin®  
Linear Slide Tables


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

### Brackets for X-Y Axes

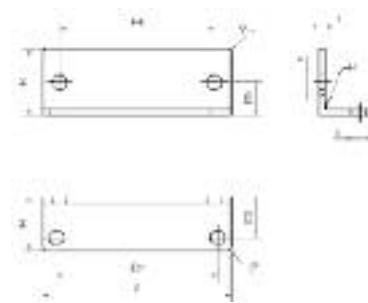

Part No.	A (mm)	H (mm)	B (mm)	E2 (mm)	E3 (mm)	E4 (mm)	E5 (mm)	s (mm)	t (mm)
HTS-WS-12	85	26.5	30	73	20.5	70	15	6.5	3
HTS-WS-20	130	36	35	108	18	115	35	8.5	5

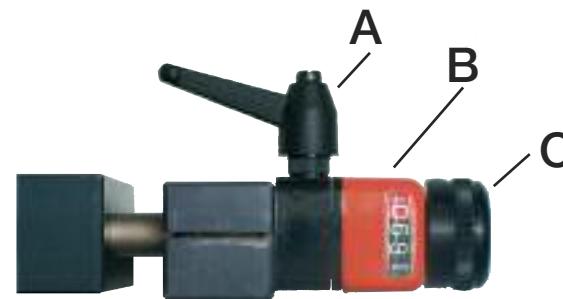


**A - Lead screw clamp**



### Special properties

- Shaft clamping flange for attachment to the position indicator and subsequent mounting on the lead screw
- Provides a mechanical brake to the lead screw
- Material: Plastic housing with aluminum shaft clamp
- Color: Black

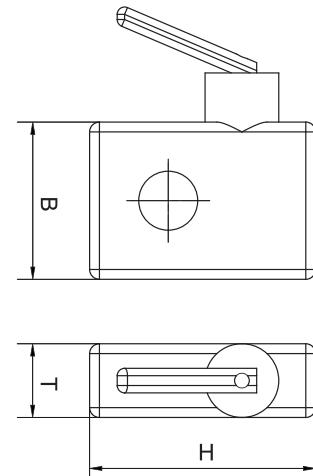

Part No.

HTS-HK-12

HTS-HK-16

HTS-HK-20

HTS-HK-30

Lead screw size

TR10x2

TR14x4

TR18x4

TR24x5

Dimensions (BxHxT) in mm

32x46x15

32x46x15

32x46x15

32x46x15

### Corresponding Slide Tables

HTS

HTS-12

HTS-20

HTS-30

HTSC

HTSC-12

HTSC-20

HTSC-30

HTSP

HTSP-12

SLW(S)

SLW-1040\*

SLW-1660\*

SLW-2080\*

SET

SET-25

\* Only possible with an adapter plate

# DryLin® Linear Slide Tables - HTS Accessories



**igus®**

## B - Position indicator



### Special properties

- Plastic analog indicator for adjustment and direct reading of slide position
- 4-digit counter (red digit indicates tenths)
- Counting takes place clockwise
- Color: Orange

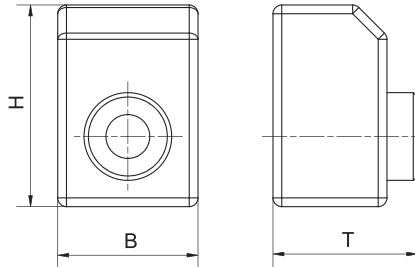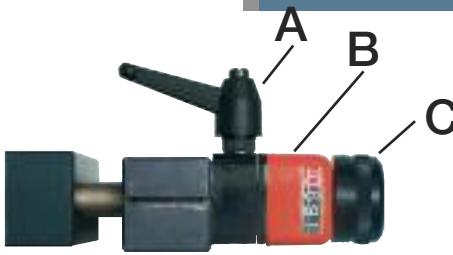

Part No.	Lead screw Size	Dimensions B x H x T (mm)	HTS	Corresponding Slide Tables			
				HTSC	HTSP	SLW	SET
HTS-PA-06	M8 TR8x1.25	22x33x31	HTSP-01-06*				
HTS-PA-12	TR10x2	32x46x33	HTS-12	HTSC-12	HTSP-12	SLW-1040*	SET-25
	10x12						
	10x50						
	TR10x3						
HTS-PA-16	TR14x4	32x46x33				SLW-1660*	
HTS-PA-20	TR18x4	32x46x33	HTS-20	HTSC-20		SLW-2080*	
	18x100						
HTS-PA-30	TR24x5	32x46x33	HTS-30	HTSC-30			

\* Only possible with an adapter plate



0 degrees



90 degrees



180 degrees



270 degrees




A (standard)



B (optional)  
for vertical fitting position:  
display turned 180°

Pitch	For lead screw	Display after 1 rotation
1.25	M8 x 1.25; TR8x1.25	001.25
2	TR10x2	002.0
3	TR10x3; TR12x3	003.0
4	TR18x4; TR14x4	004.0
5	TR24x5	005.0
12	10 x 12	012.0
50	10 x 50	005.0
100	18 x 100	001.0

The pitch depends on the lead screw used

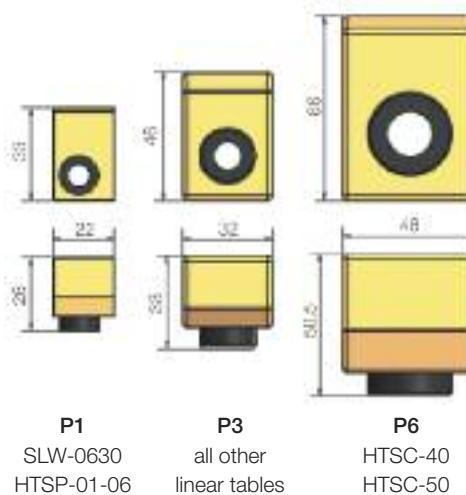

P1  
SLW-0630  
HTSP-01-06

P3  
all other  
linear tables

P6  
HTSC-40  
HTSC-50

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® Linear Slide Tables - HTS Accessories

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270



Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

### C - Rotary knob



#### Special properties

- Rotary knob for attachment to the end of the lead screw
- For positioning
- Material: Aluminum and Polymer
- Color: Black

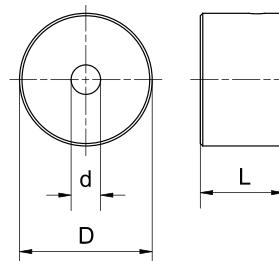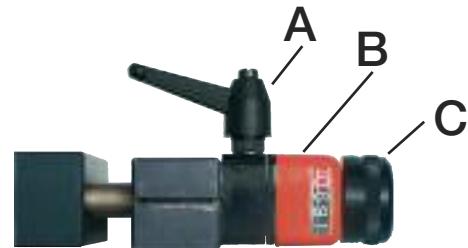


### Dimensions (mm)

Part No.	D	L	d	For Slide Tables
HTS-HR-06	27	17	8	HTSP-06, SLW-0630
HTS-HR-12	27	17	10	SLW-1040, SLWS-1040, HTS / HTSC / HTSS / HTSP / 12, SET-25
HTS-HR-16	34	20	14	SLW-1660
HTS-HR-20	42	23	12	SLW-2080, HTS / HTSC / HTSS20
HTS-HR-30	42	23	14	HTS / HTSC-30

### Hand Wheel




- Large diameter hand wheel
- Handles are fixed

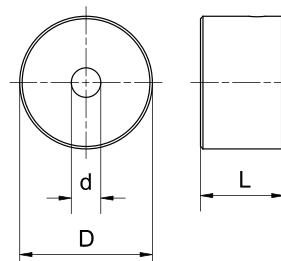

### Dimensions (mm)

Part No.	D	L	d	For Slide Tables
HTS-HR12-80RH	27	17	8	SLW-1040, SLWS-1040, HTS / HTSC / HTSS / HTSP/12, SET-25
HTS-HR12-100RH	27	17	10	SLW-1040, SLWS-1040, HTS / HTSC / HTSS / HTSP/12, SET-25
HTS-HR16-120RH	34	20	14	SLW-1660, HTS / HTSC / HTSS30
HTS-HR20-100RH	42	23	12	SLW-2080, HTS / HTSC / HTSS20

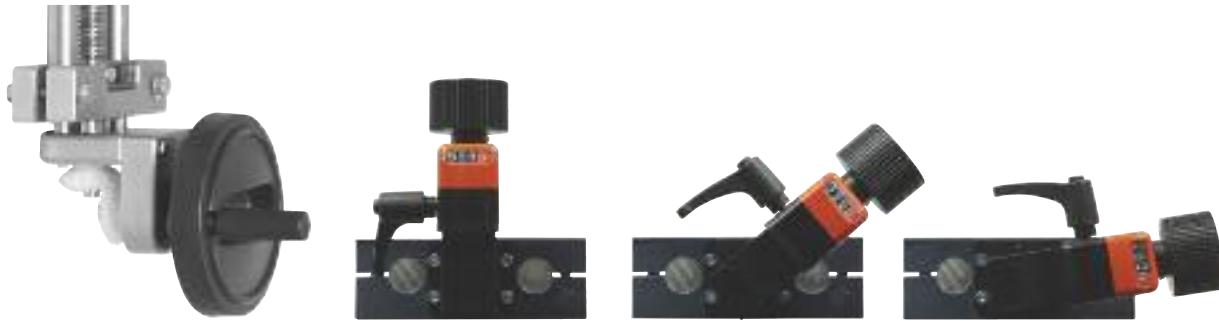

### HTS standard V-drive



The standard for three dimensions as closed system with aluminum housing.

- Suits any application with continuously variable adjustment (can be oscillated 360°)
- Motor or manual operation
- Max. torque 3 Nm
- Adapter for DryLin® lead screw clamp and position indicator
- Compatible with DryLin® HTS/HTSC/HTSS (dimensions 12, 20 and 30)

### Hygienic Design V-drive

V-drives are also available as maintenance-free, washdown resistant “hygienic design” with stainless steel and plastic parts.

- Lubrication-free
- Max. torque 3 Nm
- Single parts made of stainless steel
- Easy to clean with water
- Compatible with DryLin® HTS/HTSC (dimensions 20 and 30)

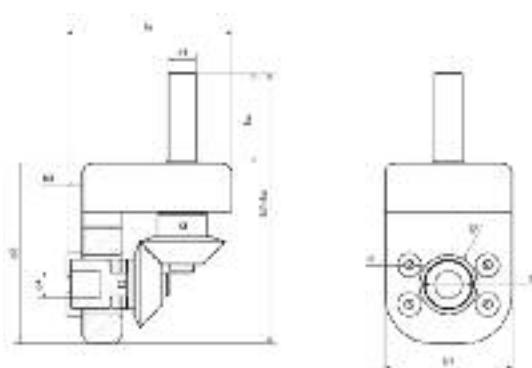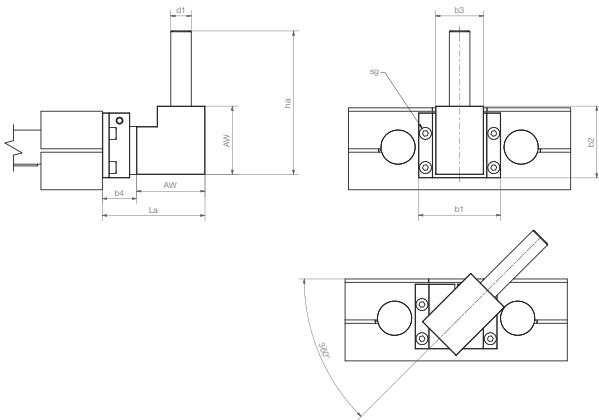

### Dimensions (mm)

Part No.	I	AW	La	b1	b2	b3	b4	ha	d1	sg
HTS-WT-3000	30	30	23.5	20	20	20	—	60	22	—

Part No.	I	kt	La	b2+ha	b1	b2	b3	b4	ha	d1	d2	d3	sg
HTSWT20ESHYD	01:01	45	84	variable	65	92	8	8	variable	14	25	30	14

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch  
mm



**igus®**

## DryLin® Linear Slide Tables - HTS Accessories

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>




\* Motor not supplied

### Spacer

The spacer elevates the linear unit to the correct height for use with your NEMA23 motor. These can be retrofitted to existing units

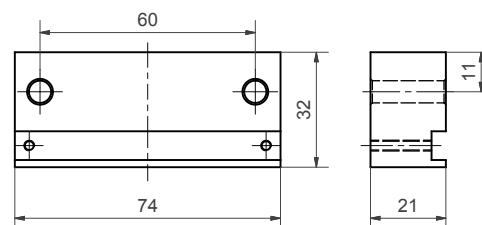


STY-104001

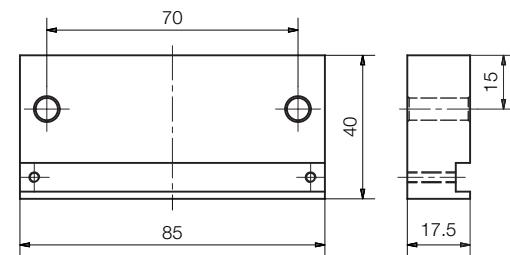

STY-121001

Part No.	For linear unit	For Motor type	Material
STY-104001	SLW-1040 / SLWE-1040	NEMA23	Aluminum, clear anodized
STY-121001	HTS-12 / HTSC-12 / HTS-12-PL / HTSS-12	NEMA23	Aluminum, blue-grey anodized

### Motor Flange



The motor flange incorporates the coupling and offers the correct mating dimensions for your NEMA17/23/34 frame motor. Contact igus® for part numbers

Part No.	For linear unit	For Motor type	Material
MF-XXXX	SAW-1040 / SLW-1040 / SLWE-1040 HTS-12 / HTSC-12 / HTS-12-PL / HTSS-12	NEMA23	Aluminum, black anodized

### Coupling



igus® couplings are available to connect lead screw output shafts to motor spindles. Available for NEMA 17/23/34. Contact igus® for part numbers

Part No.	Motor	ID1 (mm)	ID2 in. (mm)	OD (mm)	Length (mm)	For tables
C-XXX	NEMA17	6mm*	10mm 0.19" (5)	32	32	ZLW-0630/1040
C-XXX	NEMA23	6mm*	10mm 0.25" (6.5)	32	32	ZLW-0630/1040
C-XXX	NEMA34	10mm	0.31" (8)	32	32	ZLW-1040



DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® Linear Slide Table ZLW Belt-Drive System

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

- Developed for high-speed applications with low loads
- Extremely cost-effective versus ball bearing drive systems
- Work well in dirty, dusty environments and clean environments
- Better for high accelerations than ball bearings
- Low-temperature and underwater versions available
- Quiet operation



ZLW-1040 (45mm H x 74mm W)

**ZLW-1040-LCB:** (Formerly ZLW-1040-B "basic") Low cost basic version uses a glass-reinforced neoprene belt and is meant for lower load and speed applications than version S

**ZLW-1040-S:** Standard table with steel-reinforced polyurethane belt, enhanced pulley system and other components for higher speed and load applications than version LC

**ZLW-1040-UW:** Specially made for underwater applications

**ZLW-1040-LT:** Low temperature version for temps -7.6°F




ZLW-0630 miniature version (31mm H x 54mm W)

**ZLW-0630-LCB:** (Formerly ZLW-0630-B "basic") Low cost basic version uses a glass-reinforced neoprene belt and is meant for lower load and speed applications than version S

**ZLW-0630-S:** Standard table with steel-reinforced polyurethane belt, enhanced pulley system and other components for higher speed and load applications than version LC

**Maximum load**  
**ZLW-0630/1040**  
**100% operating time**

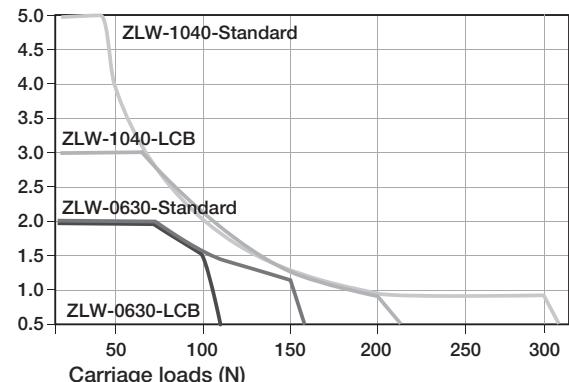

The diagram accounts for the sum of all forces active on the carriage



ZLW used on plasma TV CNC cutting machine

All dimensions in mm (1 mm = 0.04") - 1 N = .225 lbs. See catalog for more details.

### Technical Data

	Weight without stroke (kg)	Weight 100 mm stroke (kg)	Max. stroke length* (mm)	Linear travel per rev. (mm)	Gear-teeth	Toothed belt-material	Toothed belt-width (mm)	-tension N	Max. radial stress N (lbf)	Belt Pulley	Max. Speed at 60% operation (m/s)	Linear positioning tolerance
ZLW-1040												
LCB	0.9	0.14	2,000	66	RPP 3M	Neoprene with GF	15	150	200 (45)	ball bearing	3	±0.35
Standard	1.0	0.14	2,000	70	AT 5	PU + steel cord	16	200	300 (67)	ball bearing	5	±0.2
ZLW-0630												
LCB	0.43	0.08	1,000	54	HDT 3•4	Neoprene with GF	9	75	100 (22)	ball bearing	2	±0.35
Standard	0.43	0.08	1,000	54	MTD 3	PU + steel cord	9	100	150 (34)	ball bearing	2	±0.30

\*Larger stroke lengths upon request

\*\*These values were measured with maximum load in horizontal orientation



## ZAW-1040 carriage drive

Lightweight and ideal for applications where you want the rail to move, and the carriage static, such as Z-axis applications




## ZLW-1040-OD: Opposite drive

2 carriage opposite drive for bi-directional movement

### Clearance Adjustment Available



ZLW-1040 can be fitted with Turn-To-Fit carriages for clearance adjustment

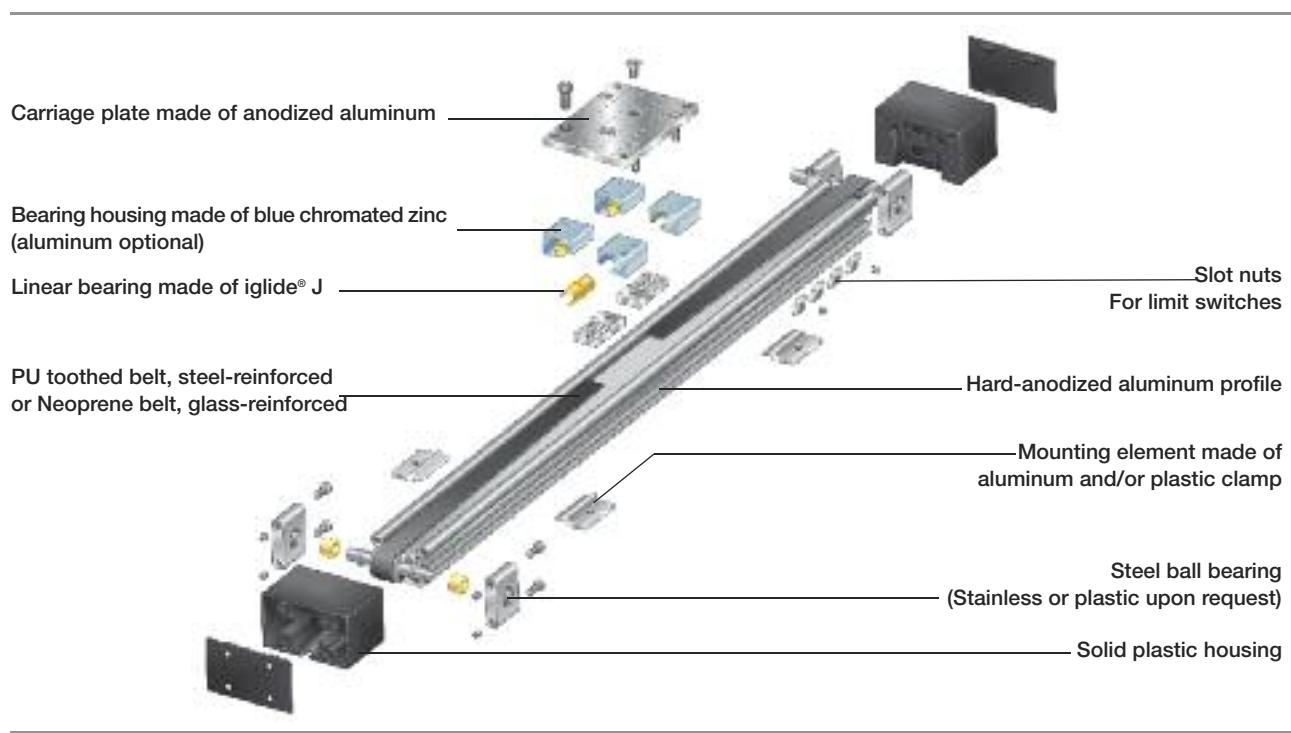

### Assembly of the part number

ZLW -1040 -02 -B -100 L XX

Stroke length in mm

L = drive shaft on the left

R = drive shaft on the right

L/R = drive shafts left and right

Slide length in mm (Standard: 100, on request: 50/200 mm)

Size 1040: 100 (optional 150/200 mm)

Size 0630: 60

B = LCB

S = Standard series

Version 01 (optional) – Drive shaft with L250 plain bearings

Version 02 (faster speed) – Drive shafts with ball bearings

Size 1040 (Guide shaft diameter 10 / Shaft width 40 mm)

Size 0630 (Guide shaft diameter 6 / Shaft width 30 mm)


DryLin® W toothed belt linear drive

Right or left positioning for drive shaft.  
Position determined by view towards x!

1 = Left drive shaft

2 = Right drive shaft

x = Line of vision

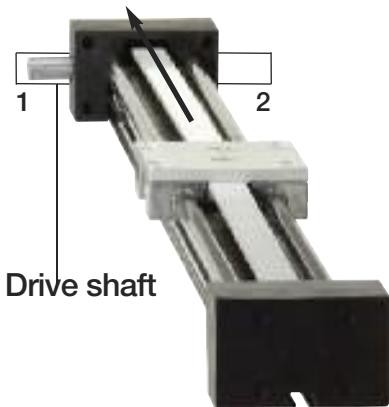



**igus®**

## DryLin® Linear Slide Table - ZLW 0630 Belt Drive

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



**ZLW-0630-LCB:** (Formerly ZLW-0630-B "basic") Low cost basic version uses a glass-reinforced neoprene belt and is meant for lower load and speed applications than version S

**ZLW-0630-S:** Standard table with steel-reinforced polyurethane belt, enhanced pulley system and other components for higher speed and load applications than version LC

### Special properties

- Compact size
- Speeds up to 6.5 ft/s
- Maintenance-free
- For strokes up to 1000 mm
- Available in both LC and S versions




**Couplings available**

### Technical Data

	Weight without stroke (kg)	Weight 100 mm stroke (kg)	max. stroke length* (mm)	Trans-mission (mm/U)	Gear-teeth	Toothed belt-material	Toothed belt-width (mm)	-tension (N)	max. radial stress (N)	Pulley	max. speed at 60% operation (m/s)	Linear positioning tolerance
ZLW-0630												
LCB	0.43	0.08	1.000	54	AT 5	Neoprene with GF	9	75	100	ball bearing	2.5	±0.35
Standard	0.43	0.08	1.000	54	MTD3	PU + steel cord	9	100	150	ball bearing	2	±0.30

\* Larger stroke lengths upon request.

\*\* These values were measured with maximum load in horizontal orientation

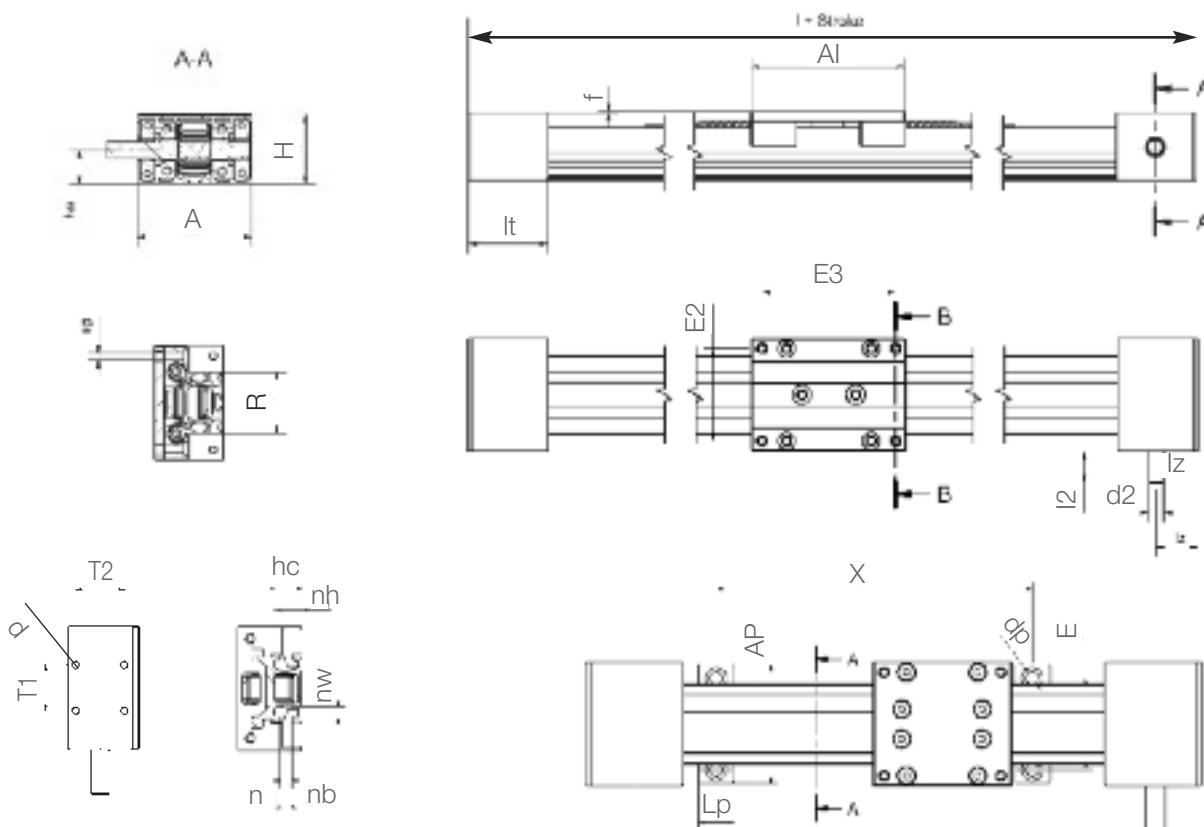

### Dimensions (mm) for LCB and S versions

Part No.	A	Al	H	E2	I	hc	E3	R	f	It	sg	ha	lz	I2	d2
ZLW-0630-02-...	-0.3	60	31	±0.15	45	144	13.5	51	30	±0.3	M4	14	22	20	*8/10

Part No.	X	E	AP	LP	dp	n	nb	nw	nh	T1	T2	d
ZLW-0630-02-...	variable	±0.2	-1	52	15	5.5	5.2	9.5	4.3	±0.25	±0.25	3.2


\* 'LCB' version has a 6mm square output shaft with 10mm OD plastic adapter. Stainless adapter optional (ZTY-104027)



## Horizontal orientation

ZLW-0630-02-LCB


Required drive torque\*

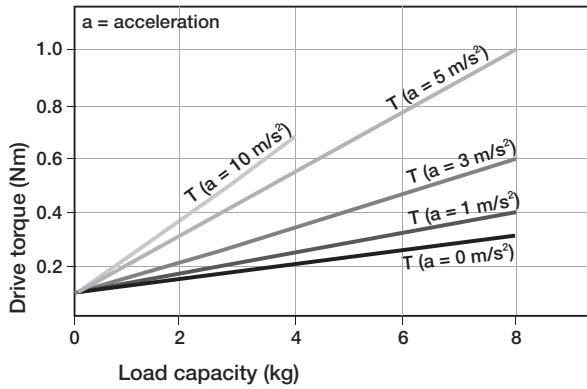

## Vertical orientation

ZLW-0630-02-LCB


Required drive torque\*

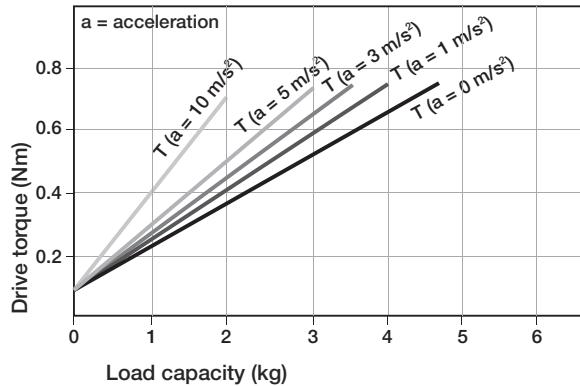

## Horizontal orientation

ZLW-0630-02-S


Required drive torque\*

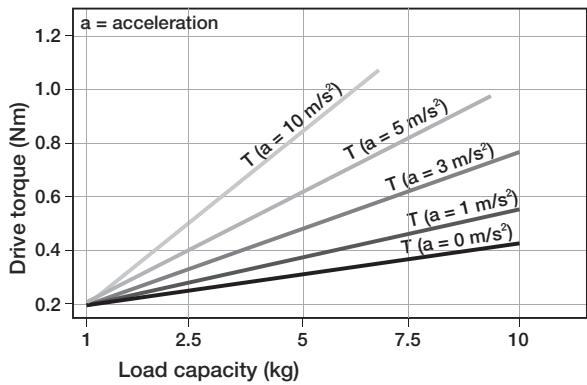

## Vertical orientation

ZLW-0630-02-S

Required drive torque\*

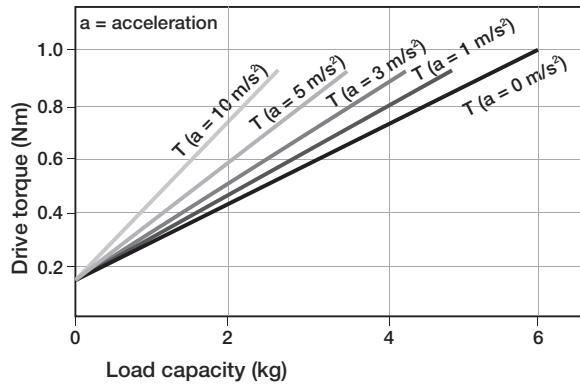


\* Assumption: The moving mass is located in a circumscribed circle with a max. R = 100 mm to the middle of the guiding rail, max. permissible torque version 01: 1.3 Nm,  $a = 0 \text{ m/s}^2$ ; version 02: 2.4 Nm,  $a = 0 \text{ m/s}^2$ ; constant drive without nominal value acceleration

## Maximum load

ZLW-0630/1040


100% operating time

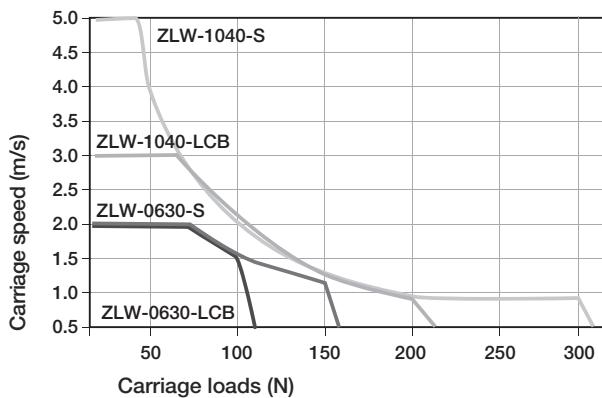

## For unsupported applications

Rail deflection between supports

Versions LCB and S

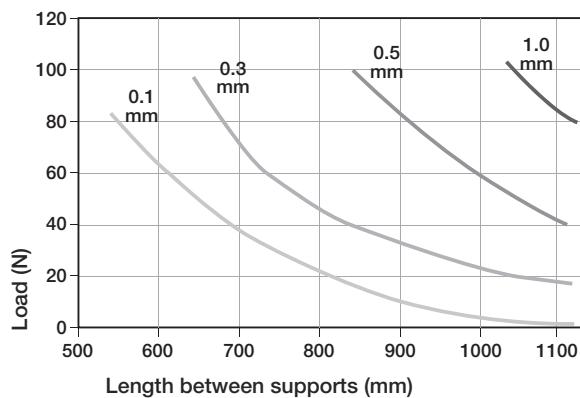

The diagram accounts for the sum of all forces active on the carriage.

Sag permissible up to maximum 2 mm.



**igus®**

## DryLin® Linear Slide Table - ZLW 1040 Belt Drive

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>


50.44



**ZLW-1040-LCB:** (Formerly ZLW-1040-B "basic") Cost-effective version uses a glass-reinforced neoprene belt and is meant for lower load and speed applications than version S

**ZLW-1040-S:** Standard table with steel-reinforced polyurethane belt, enhanced pulley system and other components for higher speed and load applications than version LC

	Weight without stroke (kg)	Weight 100 mm stroke (kg)	max. stroke length* (mm)	Transmission (mm/U)	Gear-teeth	Toothed belt-material	-width (mm)	-tension (N)	max. radial stress (N)	Pulley	max. speed at 60% operation (m/s)	Linear positioning tolerance
ZLW-1040												
LCB	0.9	0.14	2,000	66	RPP 3M	Neoprene with GF	15	150	200	ball bearing	3	±0.35
Standard	1.0	0.14	2,000	70	AT 5	PU + steel cord	16	200	300	ball bearing	5	±0.2

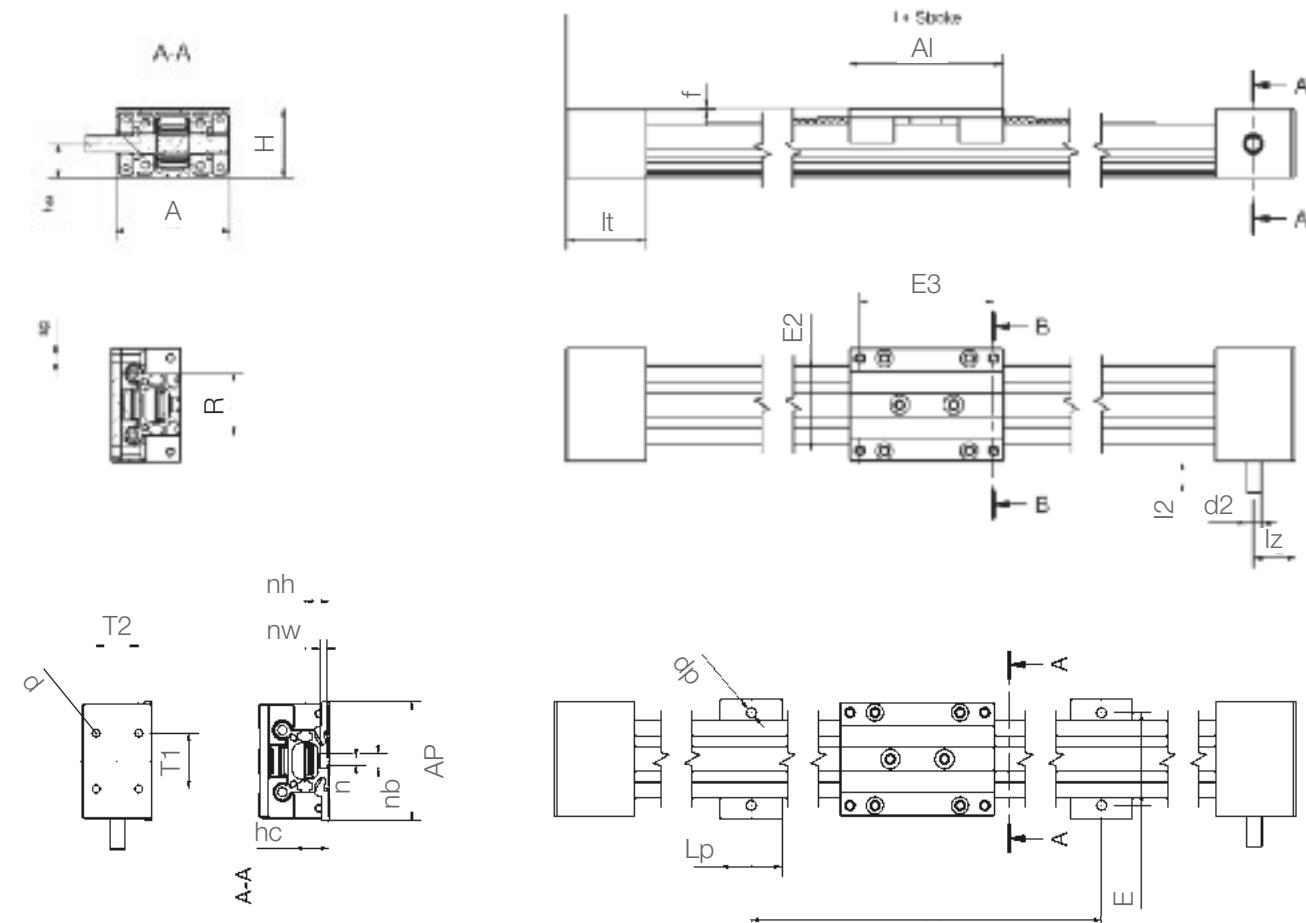

### Dimensions (mm)

Part No.	A	AI	H	E2	I	hc	E3	R	f	lt	sg	ha	lz	I2	d2
ZLW-1040-02....	74	100	45	60	204	22.5	87	40	1	52	M6	22	27	20	*10

Part No.	X	E	AP	LP	dp	n	nb	nw	nh	T1	T2	d
ZLW-1040-02....	variable	±0.2	-1	78	40	6,4	5.2	9.5	4.3	±0.25	±0.25	5.0

\* 'LCB' version has a 6mm square output shaft with 10mm OD plastic adapter. Stainless adapter optional


# DryLin® Linear Slide Table - ZLW 1040 Belt Drive

**igus®**




## Horizontal orientation ZLW-1040-02-LCB

Required drive torque, Nm

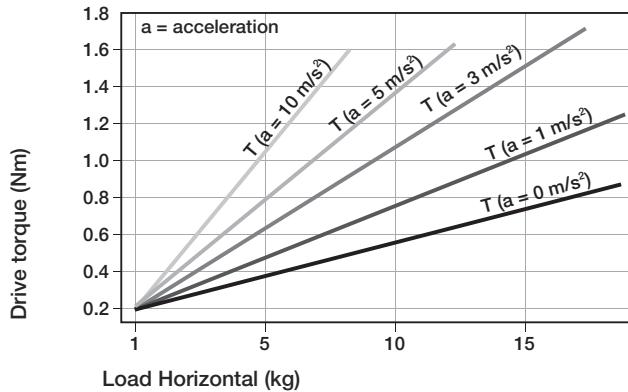


## Vertical orientation ZLW-1040-02-LCB

Required drive torque, Nm

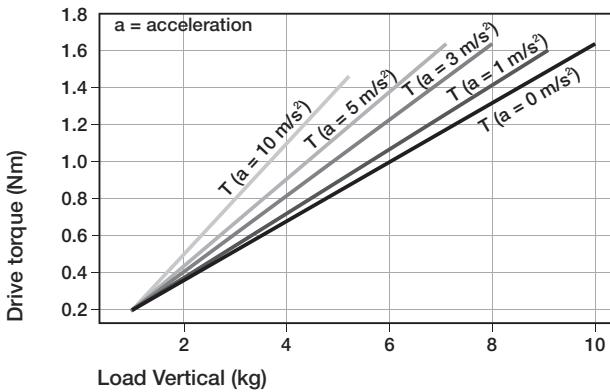


## Horizontal orientation ZLW-1040-02-S

Required drive torque, Nm

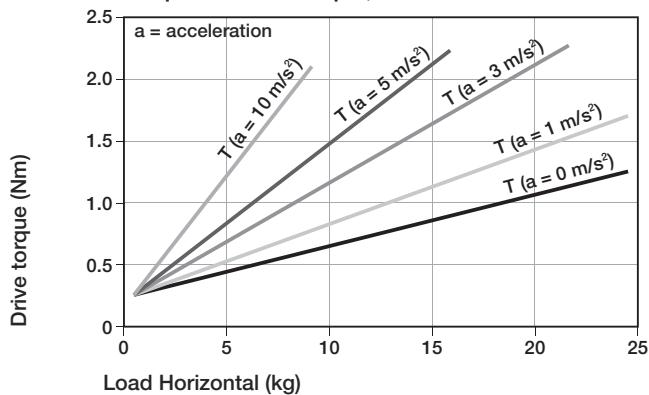

## Vertical orientation ZLW-1040-02-S

Required drive torque, Nm

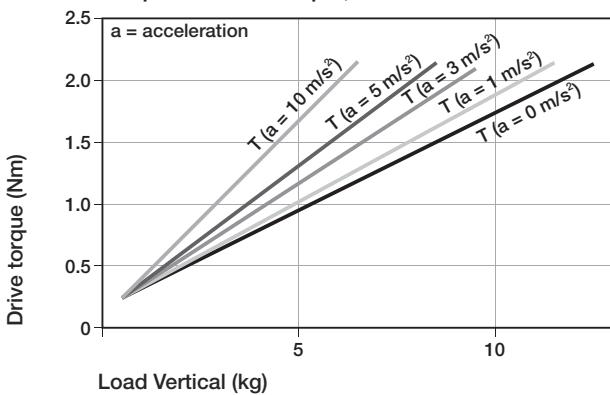


\* Assumption: The moving mass is located in a circumscribed circle with a max. R = 100 mm to the middle of the guiding rail, max. permissible torque version 01: 1.3 Nm, a = 0 m/s²; version 02: 2.4 Nm, a = 0 m/s²; constant drive without nominal value acceleration

## Maximum load comparison ZLW-0630 and ZLW-1040 100% operating time



## For unsupported applications Rail deflection between supports Versions LCB and S

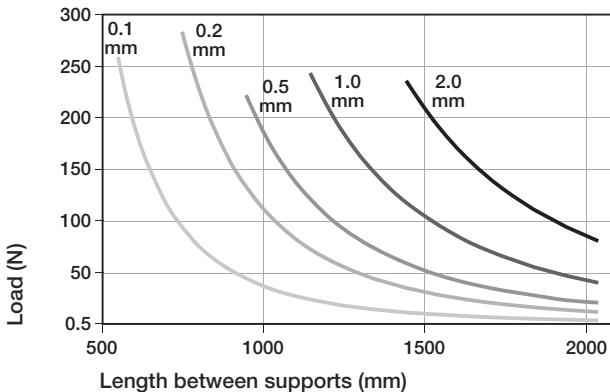

The diagram accounts for the sum of all forces active on the carriage.

Sag permissible up to maximum 2 mm.

DryLin®  
Linear Slide Tables

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10





**igus®**

## DryLin® Linear Slide Table - ZAW

DryLin®  
Linear Slide Tables

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

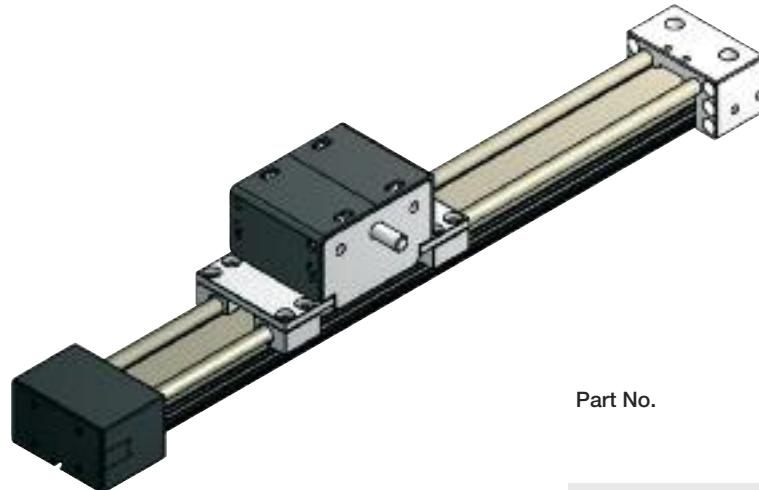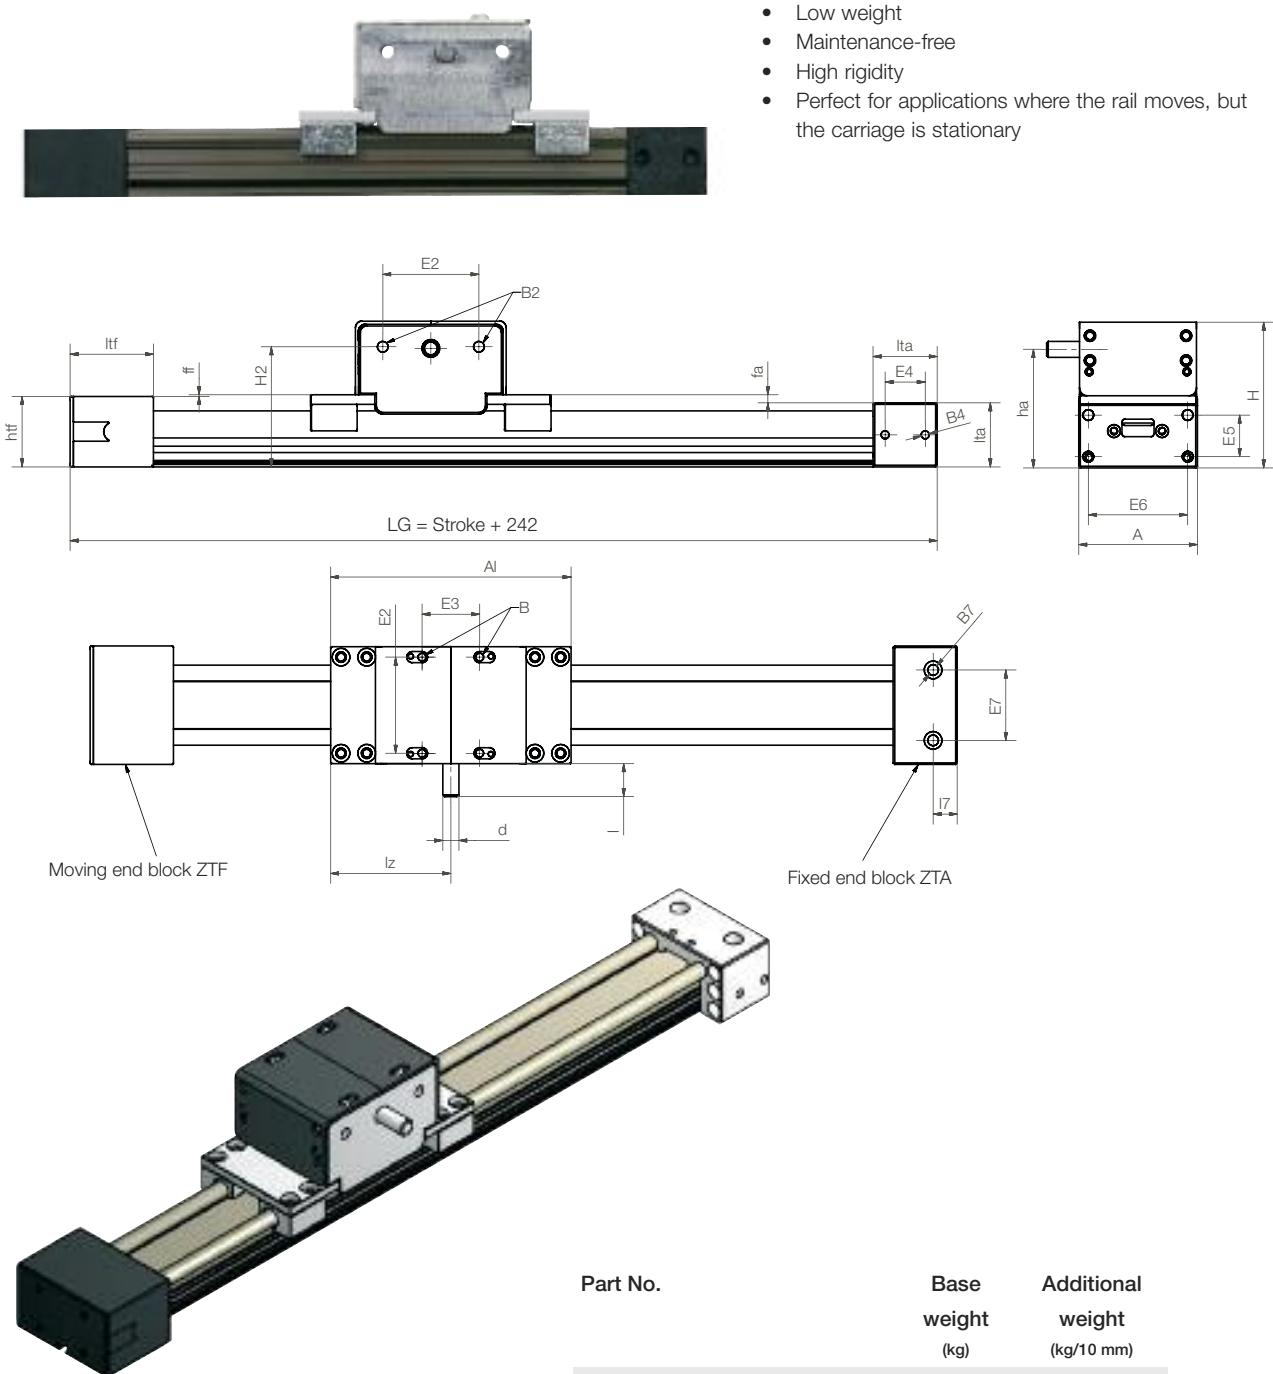

Part No.	Base weight (kg)	Additional weight (kg/10 mm)
ZAW-1040-02-R/L-LG	0.08	100

### Dimensions (mm)

Part No.	A -0.3 (mm)	H (mm)	LG Hub (mm)	A1 ±0.3 (mm)	ha ±0.1 (mm)	d h9 (mm)	l +1 (mm)	lz (mm)	E2 ±0.15 (mm)	E3 ±0.15 (mm)
ZAW-1040-02-R/L-LG	74	91	242	150	74	10	20	75	60	60

Part No.	B -0.3	B2	htf Hub (mm)	Itf ±0.3 (mm)	ff ±0.1 (mm)	fa h9 (mm)	Ita +1 (mm)	E4 (mm)	B4 ±0.15	E5 ±0.15 (mm)	E6 (mm)
ZAW-1040-02-R/L-LG	M6	M8	44	52	2	5	40	25	M6	26	62

# DryLin® Linear Slide Table - ZLW Belt Drive

**igus®**

The DryLin® ZLW belt drive can be fastened in different ways (clamp and slot nuts included in delivery):

The orientation of the drive is optional. Overhead installation is the best option against fouling.

1. **Clamping** offers an easy fastening option for the drive, on aluminum machine profiles and other surfaces.

Part numbers ZLW-0630 = ZTZ-063006

ZLW-1040 = 75.40.

2. **Slot nuts (M5)** enable the mounting on 3 sides (1040: left, right, below) or 2 sides (0630: left, right) as well as the fixing of sensors and proximity switches.

3. **Screw connection:** Threaded holes are located at each end block face.

## 1. Clamp mount



Included in delivery

## 2. Slot nuts (M5)



Ideal for limit switches  
Included in delivery

## 3. Screw connection



4 x M6/M4 (optional)

Directions for installation: The end blocks should not be used as a mechanical stop under any circumstances. A minimum spacing of 10 mm should be provided on both sides.


## Motor flange



The motor flange can be fastened onto the end block with four screws. Different types of motor flanges are available.



The DryLin® ZLW belt drive is also available with hand crank.

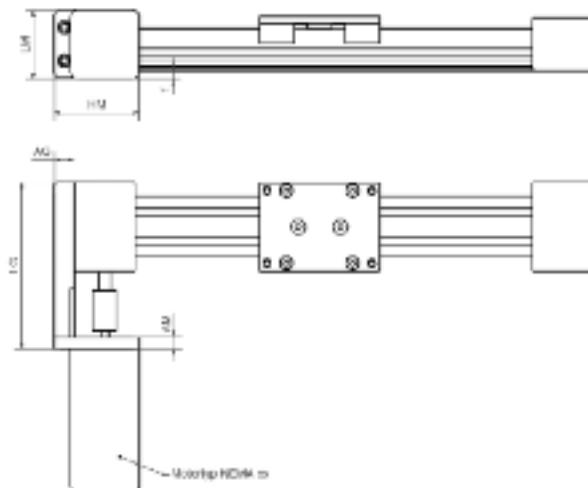

Dimensions in mm

Part number

Part number	Base plate				Motor Flange		
	AG	LG	LK	AM	HM	LM	f
MF-0630-NEMA23-S	12	99.5	35.5	10	59	56	17
MF-0630-NEMA23-L	12	110.5	46.5	10	59	56	17
MF-1040-NEMA23-S	17	119	35	10	70.7	56.4	7
MF-1040-NEMA23-L	17	138	54	10	70.7	56.4	7
MF-1040-NEMA34-S	17	119	35	10	85	85	20.5
MF-1040-NEMA34-L	17	138	54	10	85	85	20.5

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



## Coupling



igus® couplings are available to connect the ZLW output shafts to motor spindles.

Available for NEMA 17/23/34 and others.

Contact igus® for part numbers

20 variations

Part No.	Motor	ID1 (mm)	ID2 in. (mm)	OD (mm)	Length (mm)	For tables
C-XXX	NEMA17	6mm*10mm	0.19" (5)	32	32	ZLW-0630/1040
C-XXX	NEMA23	6mm*10mm	0.25" (6.5)	32	32	ZLW-0630/1040
C-XXX	NEMA34	10mm	0.31" (8)	32	32	ZLW-1040



End- and reference switch

- High protection class
- Flush mounting bracket for the guide profile
- Normally open/normally closed available

Please contact igus® for part numbers

**igus®**



**DryLin® TR Lead Screw Drives**



## DryLin® TR Lead Screw Drives

### Product Range

- 20 dimensions
- Up to 5 nut geometries

### Special Features

Cleanroom certified - IPA Fraunhofer

ESD compatible (electrostatic discharge)

Free of toxins - RoHS 2002/95/EC

### Technical Data

#### Nuts:

Maintenance-free polymer

#### Materials:

- iglide® L280
- iglide® J

### Temperatures

-40°F to +194°F

(-40°C to +90 °C)

### Optional Features

- Anti backlash
- Self-locking
- High speed pitch

### Usage Guidelines




- Dry-running, no lubrication is required
- When dirt/dust resistance is necessary
- If corrosion resistance is required




- If positioning accuracy below 10 µm (0.0004")
- For dynamic load applications
- For required efficiency higher than the 50%

Lead screw drives convert a rotary motion into a linear motion. DryLin® TR Lead Screw Drives are based on oil-free self lubricating plastic nuts offering long life. They are ideal for sensitive laboratory and hospital equipment as well as very dirty or corrosive environments.

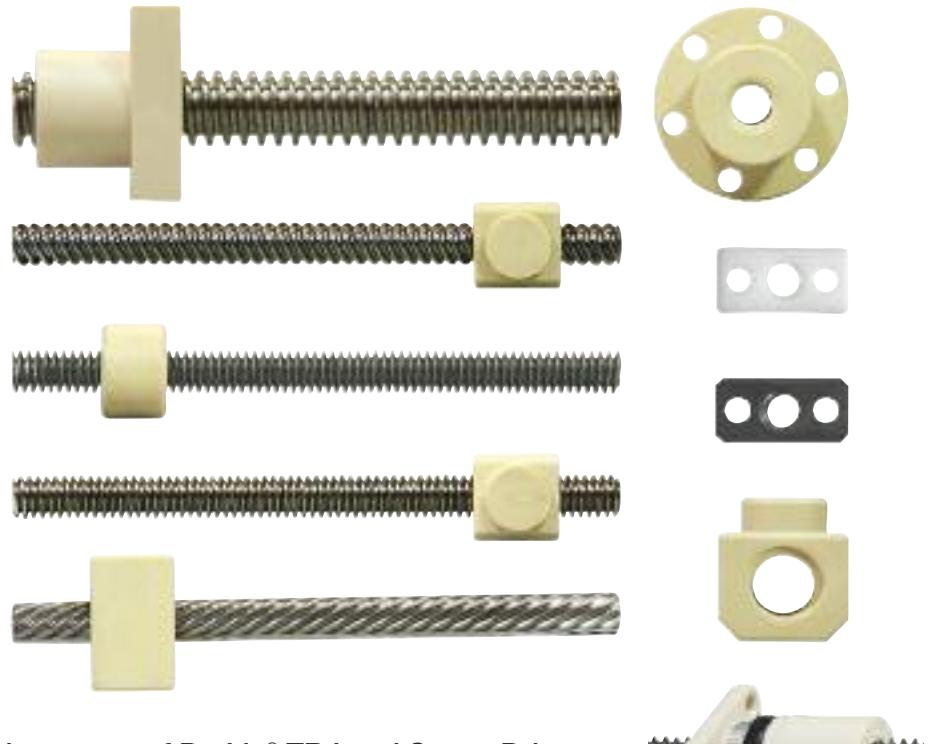

### Advantages of DryLin® TR Lead Screw Drives

- High load capacity
- Quiet operation
- Trapezoidal lead screws available in steel, stainless steel and anodized aluminum (on request)
- Left-handed lead screw nuts on request

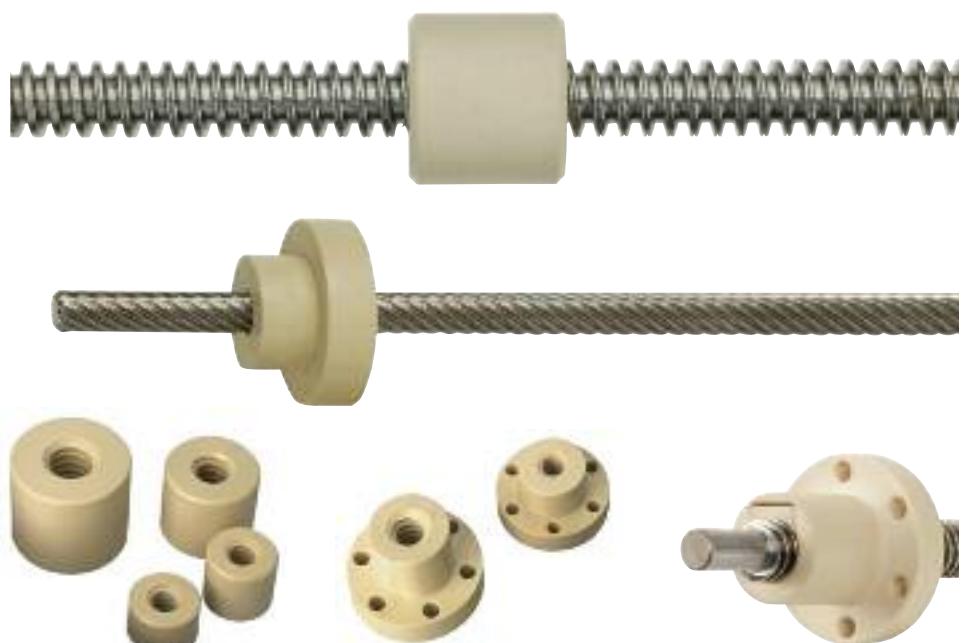

Sleeve

Flange

Anti-backlash




## Typical industries and applications

- Lab/medical equipment
- Packaging
- Format adjustment
- Architectural
- Aircraft interiors
- Storage retrieval




Two component mixing unit

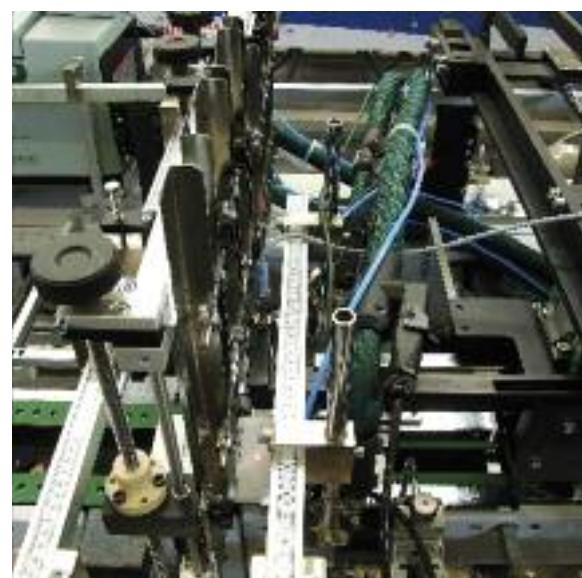

Inspection machinery



Commercial can opener

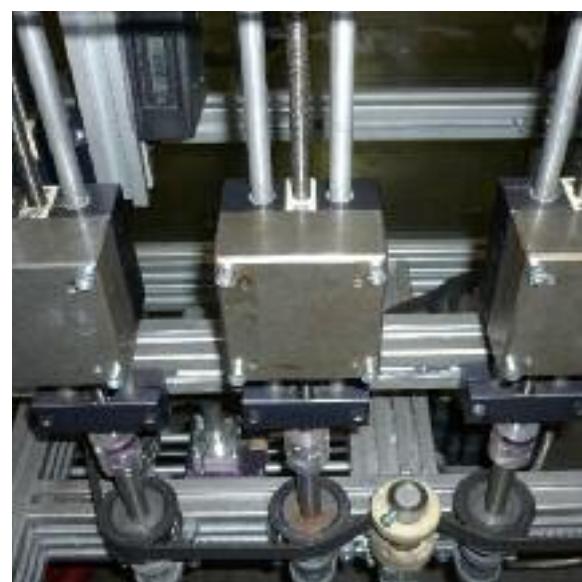

Height adjustment



DryLin® lead screw nuts outperform bronze and other polymer lead screw nuts in many applications, and do not require messy lubrication or continuous maintenance. This makes them particularly ideal for applications in sensitive lab, food, or electronics manufacturing, as well as resistant to dirty environments.

### Wet environments

For highly humid applications we recommend nuts made from iglide® J material as it has a very low level of moisture absorption. For applications with extremely critical precision requirements in conjunction with very high heat or humidity please contact igus® for design guidance.

### Specifications


DryLin® TR lead screw systems are made in accordance with DIN 103, and checked through the use of plug gauges.

### Performance vs. Simple Plastics

igus® has developed plastic bearing compounds for over 50 years. These products have been created to replace metals as well as simple plastic parts. Solid polymer lubricants engineered into the base plastics embed themselves into the microfinish of the lead screw — resulting in a low-friction dry-running system. The over 5000 tests we perform each year results in lower wear and friction plastics.


### HTS and SLW

igus® also offers lead screw systems integrated into our HTS and SLW lead screw tables, pre-assembled and cut-to-length from stock. Please refer to Section 30 for more details.




**SLW**  
Page  
30.10

**HTS**  
Page  
30.17

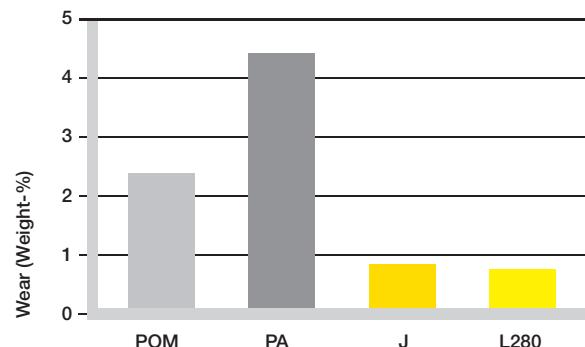

Wear test with 100N (45 lbf) axial load using a cold rolled screw

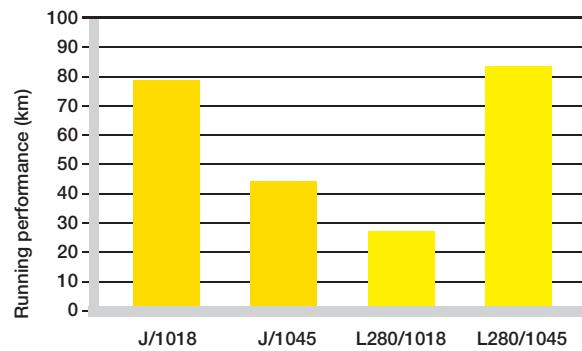

Wear test with 200N (90 lbf) axial load and 50% duty cycle



Base plastics without reinforcing materials with solid lubricants, magnified 200 times, dyed.



Base plastics with fibers and solid lubricants, magnified 200 times, dyed



### Lead screw nut assembly for parts shown on page 51.23

DryLin® lead screw nuts must be secured against twisting.

#### Flanged lead screw nuts

The maximum tightening torque for the assembly of flanged lead screw nuts is 2.5 Nm. We recommend that assembly screws are secured with a third medium (e.g. liquid screw lock). Metal fasteners should be used for even higher tightening torques.



Press nut ① and counternut ④ over the adjusting ring. Please ensure that the adjusting ring maintains its preloaded position.

#### Sleeve-style lead screw nuts

The outside diameter of sleeve-style lead screw nuts is made to a tolerance of h9. We therefore recommend the use of a form fit as a locking feature, for instance by installing keyways. In practice, a screw mount has proven to be effective with low forces. Gluing lead screw nuts is principally not recommended and must be testing before using.



The adjusting ring can now be released. The nut will now assume a preloaded position on the lead screw.

#### Assembly of zero backlash lead screw nuts

- ① Nut
- ② Adjusting ring with torsion spring
- ③ Friction disc
- ④ Counternut



Screw the adjusting ring with the spring ②

Approximately half-way onto the nut ① and fix the ends of the spring in the corresponding holes.



Continue to screw the adjusting ring onto the nut until the end to tension the torsion spring.



Slide the friction disc ③ and the counternut ④ over the adjusting ring. Please ensure that the adjusting ring does not rotate.

#### Lead screw selection

The suitability and the operating behavior of the system largely depend on the lead screws as the counter partner. We principally recommend purchasing the nut and lead screw as a system from a single source. Lead screws are inspected with DIN 103 compliant rim gauges. In principle, DryLin® lead screw units can be used in combination with lead screws made from steel, stainless steel, or hard-anodized aluminum. "Split" lead screws (right and left-handed threads on one lead screw) are available in addition to right-handed and left-handed versions.

#### Custom lead screws

Take advantage of our machining service - we manufacture ready to install lead screws based on your needs. Please send us your drawing for a quotation.



#### Custom lead screw example

**Custom nuts**

Take advantage of our machining service - we manufacture lead screw nuts based on your needs. Please send us your drawing.

**Custom nut examples****Material selection**

Standard DryLin® lead screw nuts are offered in 4 materials:

- iglide® J:** This material is characterized by the best friction values with the most counter partners and low moisture absorption.
- iglide® L280:** This material features high static strength
- iglide® A180:** This material meets the requirements of the FOOD AND DRUG ADMINISTRATION (FDA) and can therefore be used in direct contact with foods and pharmaceuticals. Please note that lead screw nuts from this material are made to order.
- iglide® J350:** This material features high resistance to temperatures. Lead screw nuts from iglide® J350 can be used up to 302°F. Please note that lead screw nuts from this material are made to order.

**iglide® material Max. Surface Pressure (psi)**

iglide® J	580
iglide® L280	725
iglide® A180	507
iglide® J350	435

**Permitted continuous surface pressure in the threads****Service life**

DryLin® lead screw nuts are made from tribologically optimized materials. In order to make the most precise statements about service life and wear resistance, several hundred tests are conducted each year on the test stands at the igus® test lab in Cologne.

**Trapezoidal thread calculation**

The load capacity of igus lead screw nuts is dependent on the surface pressure, the surface speed and the resultant temperature. The temperature behavior is additionally influenced by the duty cycle, the lead screw length, as well as lead screw material and its heat conductivity.

**iglide® material Rotating, long-term fpm**

iglide® J	295
iglide® L280	196
iglide® A180	157
iglide® J350	256

**iglide® materials gliding speeds in m/s****Lead Screw Formula chart****Effective load carrying area:**

$$A_e = \frac{F_{\text{axial}}}{p_{\text{zul.}} [\text{mm}^2]}$$

**Selection of the required thread size and determination of the actual surface pressure:**

$$p_{\text{real}} = \frac{F_{\text{axial}}}{A_e \text{ real} [\text{MPa}]}$$

**pv value:**

$$pv = p_{\text{real}} \cdot v$$

**Surface speeds:**

$$v = \frac{n \cdot d_1 \cdot \pi}{60,000 [\text{m/s}]}$$

**RPMs:**

$$n = \frac{v \cdot 1,000 \cdot 60}{\pi \cdot d_1 [\text{1/min}]}$$

**Linear Feed rate:**

$$s = \frac{n \cdot p}{60,000 [\text{m/s}]}$$

**Drive torque:**

$$M_{ta} = \frac{F_{\text{axial}} \cdot p}{2,000 \cdot \pi \cdot n}$$

$$M_{te} = \frac{F_{\text{axial}} \cdot p \cdot \eta}{2,000 \cdot \pi}$$

**Formula Chart Legend**



F <sub>axial</sub>	Axial force	M <sub>ta</sub>	Drive torque [Nm] when converting a rotating motion into a linear motion
p <sub>real</sub>	Actual load based in nut dimensions	M <sub>te</sub>	Drive torque [Nm] when converting a linear motion into a rotating motion
P <sub>zul.</sub>	maximum permitted surface pressure	v	Surface speeds [m/s]
A <sub>e</sub> real	Percentage of surface contact area of the selected lead screw nut	s	Feed [m/s]
p	Lead	n	RPMs [min <sup>-1</sup> ]
pv-value	p <sub>real</sub> x v	η	Efficiency
d <sub>1</sub>	Diameter		

**Maximum acceptable pv-value:**

With the pv-value and the surface bearing length ratio specified in the dimension tables, the permissible surface speed and the linear feed rate can be determined for each thread size.

Duty cycle	$pv$ value $_{max}$ (MPa • m/s)	(Applies to iglide® J, L280, A180 and J350)
100%	0.08	
50%	0.20	
10%	0.40	

Reference values when using drylin® plastic nuts without lubrication (with stroke 500 mm). A compensation factor must be used with very short or very long strokes.

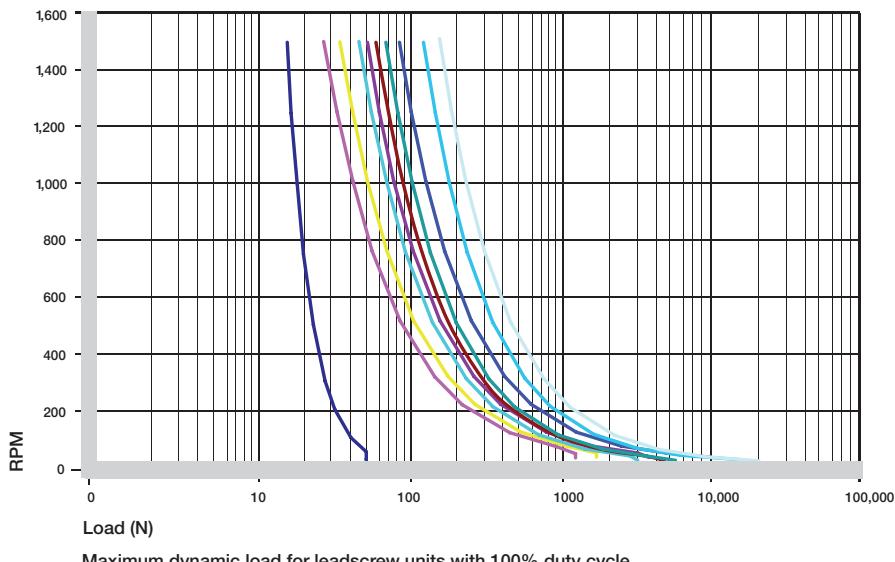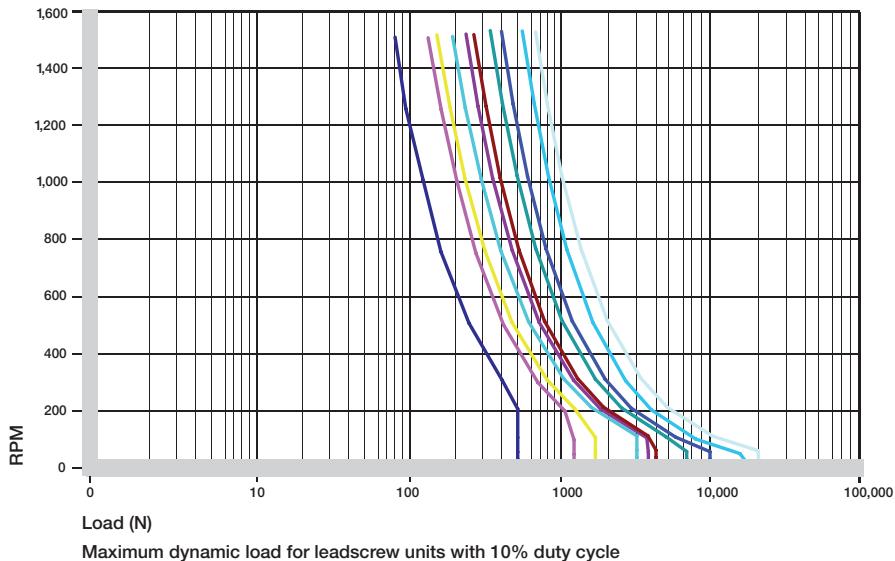

TR8x1.5  
TR20x4

TR10x2  
TR24x5

TR12x3  
TR30x6

TR16x4  
TR40x7

TR18x4  
TR50x8



**igus®**


## DryLin® TR Lead Screw Drives

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

### Trapezoidal Lead Screws

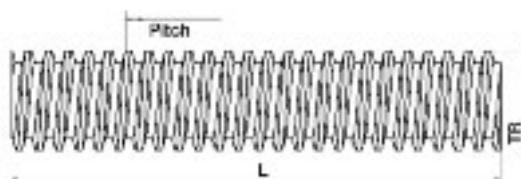

#### Part number structure

**PTGSG 10 x 2 01 R-ES-1000**

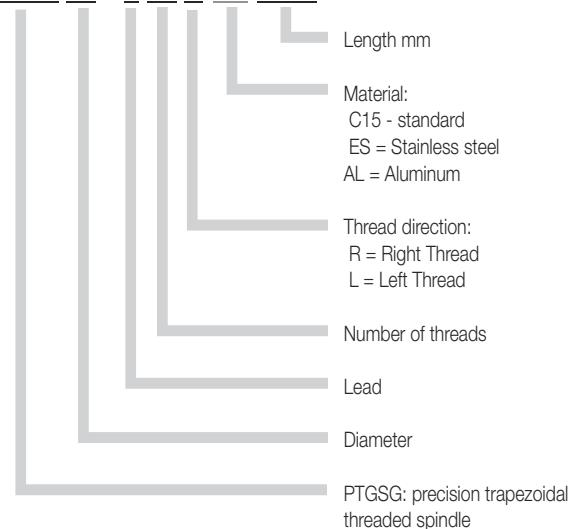

PTGSG: precision trapezoidal threaded spindle

#### Dimensions (mm)

Part No.	Thread	Diameter	Lead	Max. Length (mm)
<b>Single start</b>				
PTGSG08x1.5R or L	TR8 x 1.5	8	1.5	1,000
PTGSG10x2R or L	TR10 x 2	10	2	1,000
PTGSG10x3R or L	TR10 x 3	10	3	1,000
PTGSG12x3R or L	TR12 x 3	12	3	2,000
PTGSG14x4R or L	TR14 x 4	14	4	3,000
PTGSG16x4R or L	TR16 x 4	16	4	3,000
PTGSG18x4R or L	TR18 x 4	18	4	3,000
PTGSG20x4R or L	TR20 x 4	20	4	3,000
PTGSG24x5R or L	TR24 x 5	24	5	3,000
PTGSG26x5R or L	TR26 x 5	26	5	3,000
PTGSG28x5R or L	TR28 x 5	28	5	3,000
PTGSG30x6R or L	TR30 x 6	30	6	3,000
PTGSG36x6R or L	TR36 x 6	36	6	3,000
PTGSG40x7R or L	TR40 x 7	40	7	3,000
PTGSG50x8R or L	TR50 x 8	50	8	3,000

Part No.	Thread	Diameter	Lead	Max. Length (mm)
<b>Two start</b>				
PTGSG12x6P3R or L	TR12x6P3	12	6	2,000
PTGSG16x8P4R or L	TR16x8P4	16	8	3,000
PTGSG18x8P4R or L	TR18x8P4	18	8	3,000
PTGSG20x8P4R or L	TR20x8P4	20	8	3,000

DryLin® precision spindles are available in 1018 cold-rolled or stainless steel


Left-right and alternative thread shapes are available on request.

Pitch deviation 0.1/300 mm, straightness 0.3/300 mm



## Trapezoidal Lead Screws

### Anodized aluminum

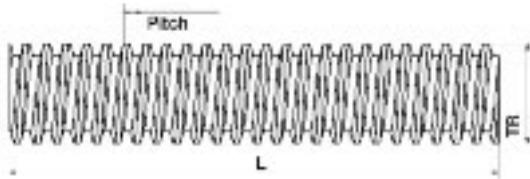

Dimensions (mm)



Part No.	Thread	Diameter	Lead	Max. Length (mm)
Single start				
PTGSG10x2R or L	TR10 x 2	10	2	1,000
PTGSG12x3R or L	TR12 x 3	12	3	1,000
PTGSG16x4R or L	TR16 x 4	16	4	1,000
PTGSG18x4R or L	TR18 x 4	18	4	2,000
PTGSG20x4R or L	TR20 x 4	20	4	2,000

May not be anodized where machined or cut

## Trapezoidal Lead Screws with journaling



Part number structure

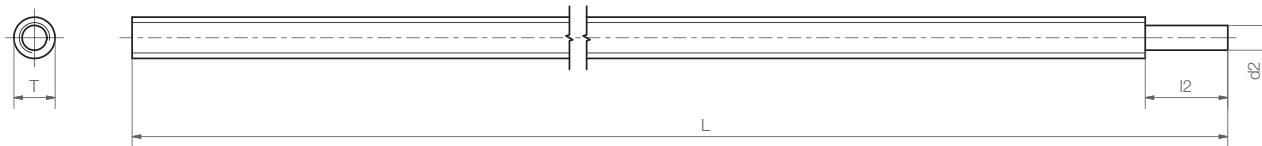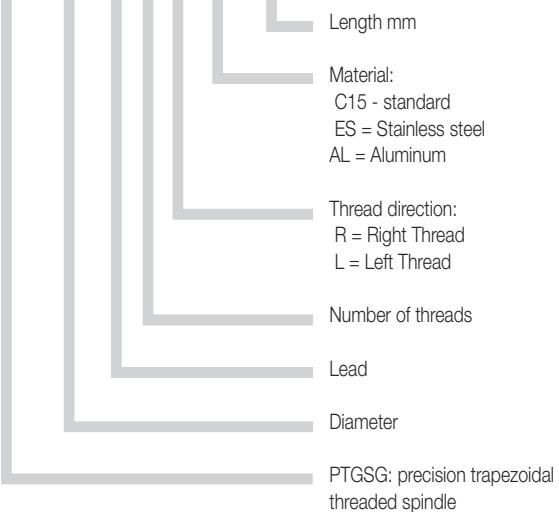PTGSG 10 x 2 01 R-ES-1000

Part No.	Thread	$l_2$	$d_2$ $h9$	Material	Max. Length (mm)
Single start					
PTGSG10x2-01R or L-Z17	TR10 x 2	17	6	C15	1,000
PTGSG10x2-01R or L-Z17-ES	TR10 x 2	17	6	ES	1,000
PTGSG14x4-01R or L-Z17	TR14 x 4	20	8	C15	3,000
PTGSG14x4-01R or L-Z17-ES	TR14 x 4	20	8	ES	3,000
PTGSG18x4-01R or L-Z17	TR18 x 4	118	12	C15	3,000
PTGSG18x4-01R or L-Z17-ES	TR18 x 4	118	12	ES	3,000
PTGSG24x5-01R or L-Z17	TR24 x 5	144	14	C15	3,000
PTGSG24x5-01R or L-Z17-ES	TR24 x 5	144	14	ES	3,000



**igus®**

## DryLin® TR Lead Screw Drives


### Trapezoidal Lead Screw - Sleeve - Right Thread

### iglide® J Material

DryLin®  
Lead  
Screw  
Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

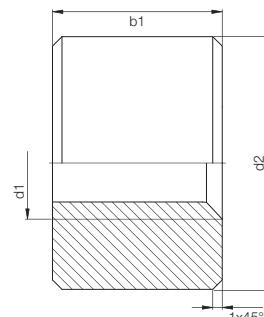

Part number structure

J S R M 22 15 TR 10x2

Thread (OD x pitch)

b1

d2

Metric

Rotating direction  
R = right

Type: sleeve

Material: iglide® J

#### Dimensions (mm)

Part No.	Effective surface area (mm <sup>2</sup> )	d1	d2	b1	Thread d1 x Pitch	Max. static F axial (N)
Long Version						
<b>JSRM1418TR8x1.5</b>	205	8	14	18	TR8x1.5	500*
<b>JSRM1812TR8x1.5</b>	136	8	18	12	TR8x1.5	544
<b>JSRM2215TR10x2</b>	212	10	22	15	TR10x2	848
<b>JSRM2220TR10x2</b>	282	10	22	20	TR10x2	1128
<b>JSRM2215TR10x3</b>	200	10	22	15	TR10x3	800
<b>JSRM2220TR10x3</b>	266	10	22	20	TR10x3	1064
<b>JSRM2618TR12x3</b>	297	12	26	18	TR12x3	1188
<b>JSRM2624TR12x3</b>	394	12	26	24	TR12x3	1576
<b>JSRM3021TR14x4</b>	396	14	30	21	TR14x4	1584
<b>JSRM3028TR14x3</b>	550	14	30	24	TR14x3	2200
<b>JSRM3028TR14x4</b>	526	14	30	28	TR14x4	2104
<b>JSRM3624TR16x2</b>	564	16	36	24	TR16x2	2256
<b>JSRM3632TR16x2</b>	702	16	36	32	TR16x2	2808
<b>JSRM3024TR16x4</b>	527	16	30	24	TR16x4	2108
<b>JSRM3624TR16x4</b>	526	16	36	24	TR16x4	2104
<b>JSRM3632TR16x4</b>	752	16	36	32	TR16x4	3008
<b>JSRM3027TR18x4</b>	678	18	30	27	TR18x4	2362*
<b>JSRM4027TR18x4</b>	678	18	40	27	TR18x4	2712
<b>JSRM4036TR18x4</b>	904	18	40	36	TR18x4	3616
<b>JSRM3025TR20x4</b>	706	20	30	25	TR20x4	2060*
<b>JSRM4530TR20x4</b>	848	20	45	30	TR20x4	3392
<b>JSRM4540TR20x4</b>	1130	20	45	40	TR20x4	4520
<b>JSRM5036TR24x5</b>	1214	24	50	36	TR24x5	4856
<b>JSRM5048TR24x5</b>	1620	24	50	48	TR24x5	6480
<b>JSRM5039TR26x5</b>	1438	26	50	39	TR26x5	5752
<b>JSRM5052TR26x5</b>	1918	26	50	52	TR26x5	7672
<b>JSRM6042TR28x5</b>	1680	28	60	40	TR28x5	6720
<b>JSRM6056TR28x5</b>	2240	28	60	56	TR28x5	8960
<b>JSRM6045TR30x6</b>	1906	30	60	45	TR30x6	7624
<b>JSRM6060TR30x6</b>	2542	30	60	60	TR30x6	10168
<b>JSRM6060TR32x6</b>	2730	32	60	62	TR32x6	10920
<b>JSRM7572TR36X6</b>	3732	36	75	72	TR36x6	15274
<b>JSRM7680TR40X7</b>	2542	40	76	800	TR40x7	17837
<b>JSRM90100TR50X8</b>	7225	50	90	100	TR50x7	20400


\*reduced axial load due to nut geometry

# DryLin® TR Lead Screw Drives

## Trapezoidal Lead Screw - Sleeve - Left Thread


### iglide® J Material

**igus®**

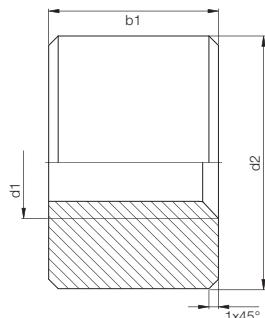

#### Part number structure

**J S R M 22 15 TR 10x2**

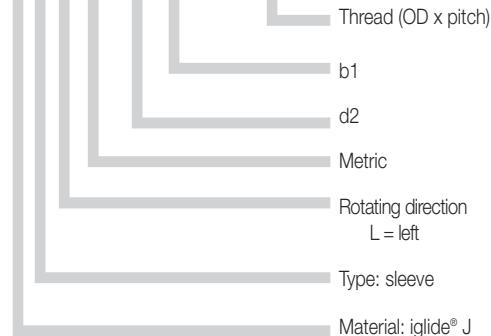

#### Dimensions (mm)

Part No.	Effective surface area (mm²)	d1	d2	b1	Thread d1 x Pitch	Max. static F axial (N)
<b>Long Version</b>						
<b>JSRM1418TR8x1.5</b>	205	8	14	18	TR8x1.5	500*
<b>JSRM1812TR8x1.5</b>	136	8	18	12	TR8x1.5	544
<b>JSRM2215TR10x2</b>	212	10	22	15	TR10x2	848
<b>JSRM2220TR10x2</b>	282	10	22	20	TR10x2	1128
<b>JSRM2215TR10x3</b>	200	10	22	15	TR10x3	800
<b>JSRM2220TR10x3</b>	266	10	22	20	TR10x3	1064
<b>JSRM2618TR12x3</b>	297	12	26	18	TR12x3	1188
<b>JSRM2624TR12x3</b>	394	12	26	24	TR12x3	1576
<b>JSRM3021TR14x4</b>	396	14	30	21	TR14x4	1584
<b>JSRM3028TR14x4</b>	526	14	30	28	TR14x4	2104
<b>JSRM3624TR16x2</b>	564	16	36	24	TR16x2	2256
<b>JSRM3632TR16x2</b>	702	16	36	32	TR16x2	2808
<b>JSRM3024TR16x4</b>	527	16	30	24	TR16x4	2108
<b>JSRM3624TR16x4</b>	526	16	36	24	TR16x4	2104
<b>JSRM3632TR16x4</b>	752	16	36	32	TR16x4	3008
<b>JSRM3027TR18x4</b>	678	18	30	27	TR18x4	2362*
<b>JSRM4027TR18x4</b>	678	18	40	27	TR18x4	2712
<b>JSRM4036TR18x4</b>	904	18	40	36	TR18x4	3616
<b>JSRM3025TR20x4</b>	706	20	30	25	TR20x4	2060*
<b>JSRM4530TR20x4</b>	848	20	45	30	TR20x4	3392
<b>JSRM4540TR20x4</b>	1130	20	45	40	TR20x4	4520
<b>JSRM5036TR24x5</b>	1214	24	50	36	TR24x5	4856
<b>JSRM5048TR24x5</b>	1620	24	50	48	TR24x5	6480
<b>JSRM5039TR26x5</b>	1438	26	50	39	TR26x5	5752
<b>JSRM5052TR26x5</b>	1918	26	50	52	TR26x5	7672
<b>JSRM6042TR28x5</b>	1680	28	60	40	TR28x5	6720
<b>JSRM6056TR28x5</b>	2240	28	60	56	TR28x5	8960
<b>JSRM6045TR30x6</b>	1906	30	60	45	TR30x6	7624
<b>JSRM6060TR30x6</b>	2542	30	60	60	TR30x6	10168
<b>JSRM6060TR32x6</b>	2730	32	60	62	TR32x6	10920
<b>JSRM7572TR36X6</b>	3732	36	75	72	TR36x6	15274
<b>JSRM7680TR40X7</b>	2542	40	76	800	TR40x7	17837
<b>JSRM90100TR50X8</b>	7225	50	90	100	TR50x7	20400

\*reduced axial load due to nut geometry

DryLin®  
Lead Screw Drives

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10





**igus®**

## DryLin® TR Lead Screw Drives Trapezoidal Lead Screw - Flange - Right Thread iglide® J Material

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

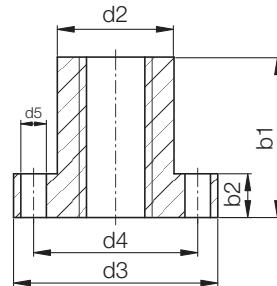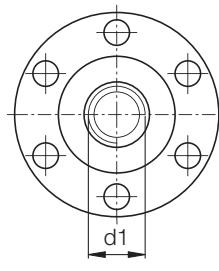

### Part number structure

J F R M 25 25 TR 10x2

- Thread (OD x pitch)
- b1
- d2
- Metric
- Rotating direction  
R = right
- Type: Flange
- Material:  
J = iglide® J

### Dimensions (mm)

Part No.	Effective surface area (mm²)	d1	d2	d3	d4	d5*	b1	b2	Thread d1 x Pitch	Max. static F axial (N)
JFRM2020TR8x1.5	225	8	20	36	28	4	20	8	TR8x1.5	900
JFRM2525TR10x2	352	10	25	42	34	5	25	10	TR10x2	1408
JFRM2835TR12x3	576	12	28	48	38	6	35	12	TR12x3	2304
JFRM2835TR14x3	687	14	28	48	38	6	35	12	TR14x3	2748
JFRM2835TR14x4	658	14	28	48	38	6	35	12	TR14x4	2632
JFRM2835TR16x4	768	16	28	48	38	6	35	12	TR16x4	3072
JFRM2835TR18x4	878	18	28	48	38	6	35	12	TR18x4	3512
JFRM3244TR20x4	1242	20	32	55	45	7	44	12	TR20x4	4968
JFRM3244TR24x5	1484	24	32	55	45	7	44	12	TR24x5	5936
JFRM3846TR26x5	1696	26	38	62	50	7	46	14	TR26x5	6320**
JFRM3846TR28x5	1840	28	38	62	50	7	46	14	TR28x5	4560**
JFRM3846TR30x6	1948	30	38	62	50	7	46	14	TR30x6	3576**
JFRM4546TR30x6	1948	30	45	70	58	7	46	16	TR30x6	9740

\* For 2.5 Nm maximum torque for fasteners. Liquid adhesive for thread locknuts recommended for mounting bolts



\*\*Reduced axial load through narrow flange shapes; special forms on request

# DryLin® TR Lead Screw Drives

## Trapezoidal Lead Screw - Flange - Left Thread


### iglide® J Material

**igus®**

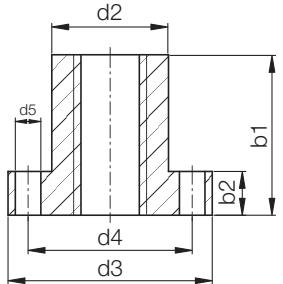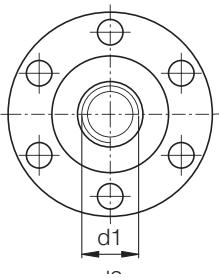

#### Part number structure

J F L M 25 25 TR 10x2

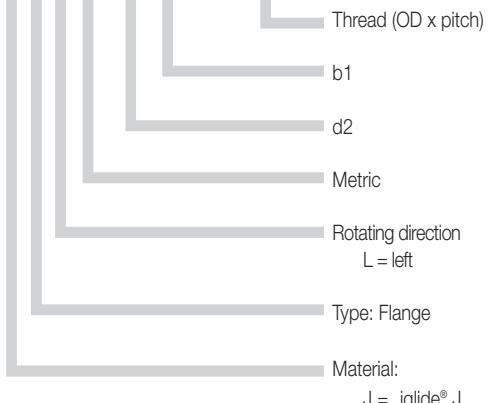

#### Dimensions (mm)

Part No.	Effective surface area (mm²)	d1	d2	d3	d4	d5*	b1	b2	Thread	Max. static F axial (N)
									d1 x Pitch	
JFLM2020TR8x1.5	225	8	20	36	28	4	20	8	TR8x1.5	900
JFLM2525TR10x2	352	10	25	42	34	5	25	10	TR10x2	1408
JFLM2835TR12x3	576	12	28	48	38	6	35	12	TR12x3	2304
JFLM2835TR14x4	658	14	28	48	38	6	35	12	TR14x4	2632
JFLM2835TR16x4	768	16	28	48	38	6	35	12	TR16x4	3072
JFLM2835TR18x4	878	18	28	48	38	6	35	12	TR18x4	3512
JFLM3244TR20x4	1242	20	32	55	45	7	44	12	TR20x4	4968
JFLM3244TR24x5	1484	24	32	55	45	7	44	12	TR24x5	5936
JFLM3846TR26x5	1696	26	38	62	50	7	46	14	TR26x5	6320**
JFLM3846TR28x5	1840	28	38	62	50	7	46	14	TR28x5	4560**
JFLM3846TR30x6	1948	30	38	62	50	7	46	14	TR30x6	3576**
JFLM4546TR30x6	1948	30	45	70	58	7	46	16	TR30x6	9740

\* For 2.5 Nm maximum torque for fasteners. Liquid adhesive for thread locknuts recommended for mounting bolts

\*\*Reduced axial load through narrow flange shapes; special forms on request

DryLin®  
Lead Screw Drives

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® TR Lead Screw Drives Anti-backlash thread nuts - Sleeve or Flange iglide® J material


DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>




Flange model shown

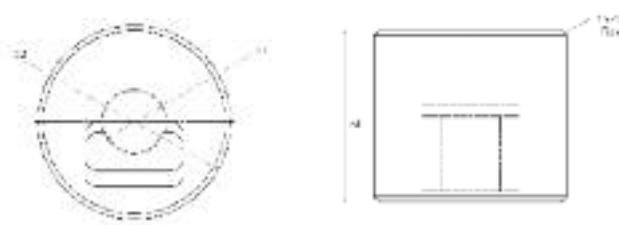


### Part number structure

**J S R 22 20 A 10x2**

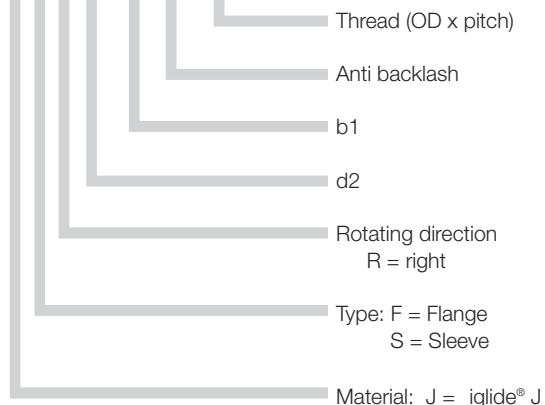

### Dimensions (mm)

Part No.	d1	d2	b1	TR d1 x P	Max. static F axial (N)
<b>Sleeve</b>					
JSR2220A8x1.5	8	26	22	TR8x1.5	500
JSR2220A10x2	10	22	20	TR10x2	840
JSR2624A12x3	12	26	24	TR12x3	1185
JSR3632A16x4	16	32	32	TR16x4	2110
JSR4036A18x4	18	40	36	TR18x4	2700
JSR5048A24x5	14	50	48	TR24x5	4800

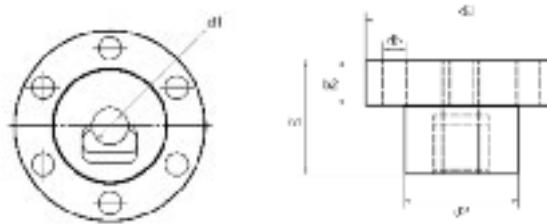

### Dimensions (mm)

Part No.	d1	d2	d3	d4	d5	b1	b2	Thread d1 x Pitch	Max. static F axial (N)
<b>Flange</b>									
JFR2525A10x2	10	25	42	34	5	25	10	TR10x2	1160
JFR2835A16x4	16	28	48	38	6	35	12	TR16x4	2520
JFR2835A18x4	18	28	48	38	6	35	12	TR18x4	2890
JFR3244A20x4	20	32	55	45	7	44	12	TR20x4	4080
JFR3244A24x5	14	32	55	45	7	44	12	TR24x5	4890



DryLin®  
Lead Screw Drives

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

1

1




**igus®**

## DryLin® TR Lead Screw Drives Trapezoidal Lead Screw - Sleeve - Right Thread iglide® L280 Material

DryLin®  
Lead Screw Drives


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

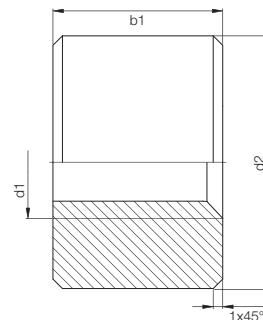

Part number structure

**W S R M 22 15 TR 10x2**

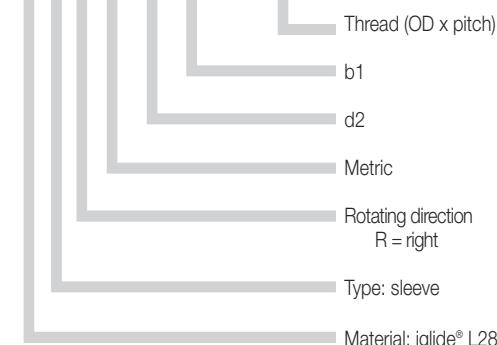

### Dimensions (mm)

Part No.	Effective surface area (mm <sup>2</sup> )	d1	d2	b1	Thread d1 x Pitch	Max. static F axial (N)
WSRM2215TR10x2	212	10	22	15	TR 10 x 2	1060
WSRM2215TR10x3	200	10	22	15	TR 10 x 3	1000
WSRM2618TR12x3	296	12	26	18	TR 12 x 3	1480
WSRM3021TR14x4	396	14	30	21	TR 14 x 4	1980
WSRM3624TR16x2	564	16	36	24	TR 16 x 2	2820
WSRM3024TR16x4	526	16	30	24	TR 16 x 4	2630
WSRM3624TR16x4	526	16	36	24	TR 16 x 4	2830
WSRM3027TR18x4	678	18	30	27	TR 18 x 4	3390
WSRM4027TR18x4	678	18	40	27	TR 18 x 4	3390
WSRM3025TR20x4	706	20	30	25	TR 20 x 4	3530
WSRM4530TR20x4	848	20	45	30	TR 20 x 4	4240
WSRM5036TR24x5	1214	24	50	36	TR 24 x 5	6070
WSRM5039TR26x5	1438	26	50	39	TR 26 x 5	7190
WSRM6042TR28x5	1680	28	60	42	TR 28 x 5	8400
WSRM6045TR30x6	1906	30	60	45	TR 30 x 6	9530


### Long Version

WSRM2220TR10x2	282	10	22	20	TR 10 x 2	1410
WSRM2220TR10x3	266	10	22	20	TR 10 x 3	1330
WSRM2624TR12x3	394	12	26	24	TR 12 x 3	1970
WSRM3028TR14x4	526	14	30	28	TR 14 x 4	2630
WSRM3632TR16x2	702	16	36	32	TR 16 x 2	3510
WSRM3632TR16x4	752	16	36	32	TR 16 x 4	3760
WSRM4036TR18x4	904	18	40	36	TR 18 x 4	4520
WSRM4540TR20x4	1130	20	45	40	TR 20 x 4	5650
WSRM5048TR24x5	1620	24	50	48	TR 24 x 5	8100
WSRM5052TR26x5	1918	26	50	52	TR 26 x 5	9590
WSRM6056TR28x5	2240	28	60	56	TR 28 x 5	11200
WSRM6060TR30x6	2542	30	60	60	TR 30 x 6	12710


# DryLin® TR Lead Screw Drives

## Trapezoidal Lead Screw - Sleeve - Left Thread

### iglide® L280 Material

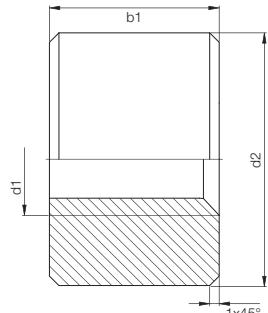

Part number structure  
**W S L M 22 15 TR 10x2**

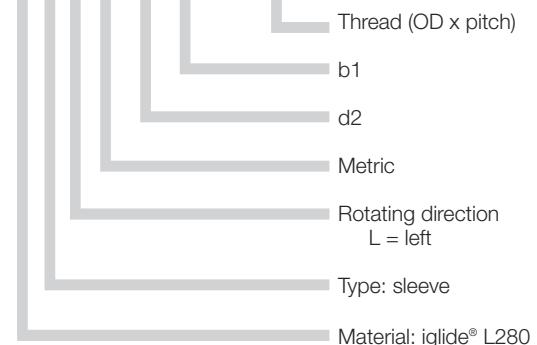

#### Dimensions (mm)

Part No.	Effective surface area (mm <sup>2</sup> )	d1	d2	b1	Thread d1 x Pitch	Max. static F axial (N)
WSRM2215TR10x2	212	10	22	15	TR 10 x 2	1060
WSRM2215TR10x3	200	10	22	15	TR 10 x 3	1000
WSRM2618TR12x3	296	12	26	18	TR 12 x 3	1480
WSRM3021TR14x4	396	14	30	21	TR 14 x 4	1980
WSRM3624TR16x2	564	16	36	24	TR 16 x 2	2820
WSRM3024TR16x4	526	16	30	24	TR 16 x 4	2630
WSRM3624TR16x4	526	16	36	24	TR 16 x 4	2830
WSRM3027TR18x4	678	18	30	27	TR 18 x 4	3390
WSRM4027TR18x4	678	18	40	27	TR 18 x 4	3390
WSRM3025TR20x4	706	20	30	25	TR 20 x 4	3530
WSRM4530TR20x4	848	20	45	30	TR 20 x 4	4240
WSRM5036TR24x5	1214	24	50	36	TR 24 x 5	6070
WSRM5039TR26x5	1438	26	50	39	TR 26 x 5	7190
WSRM6042TR28x5	1680	28	60	42	TR 28 x 5	8400
WSRM6045TR30x6	1906	30	60	45	TR 30 x 6	9530

#### Long Version

WSRM2220TR10x2	282	10	22	20	TR 10 x 2	1410
WSRM2220TR10x3	266	10	22	20	TR 10 x 3	1330
WSRM2624TR12x3	394	12	26	24	TR 12 x 3	1970
WSRM3028TR14x4	526	14	30	28	TR 14 x 4	2630
WSRM3632TR16x2	702	16	36	32	TR 16 x 2	3510
WSRM3632TR16x4	752	16	36	32	TR 16 x 4	3760
WSRM4036TR18x4	904	18	40	36	TR 18 x 4	4520
WSRM4540TR20x4	1130	20	45	40	TR 20 x 4	5650
WSRM5048TR24x5	1620	24	50	48	TR 24 x 5	8100
WSRM5052TR26x5	1918	26	50	52	TR 26 x 5	9590
WSRM6056TR28x5	2240	28	60	56	TR 28 x 5	11200
WSRM6060TR30x6	2542	30	60	60	TR 30 x 6	12710

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
 CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10

DryLin®  
Lead Screw Drives





**igus®**

## DryLin® TR Lead Screw Drives Trapezoidal Lead Screw - Flange - Right Thread iglide® L280 Material


DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

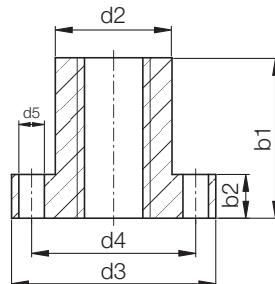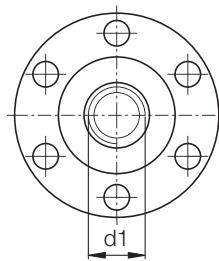

Part number structure  
W F R M 22 15 TR 10x2

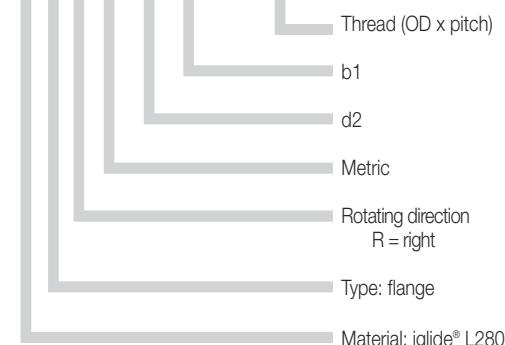

### Dimensions (mm)

Part No.	Effective surface area (mm²)	d1	d2	d3	d4	d5*	b1	b2	Thread d1 x Pitch	Max. static F axial (N)
WFRM2525TR10x2	352	10	25	42	34	5	25	10	TR10x2	1760
WFRM2835TR12x3	576	12	28	48	38	6	35	12	TR12x3	2880
WFRM2835TR14x4	658	14	28	48	38	6	35	12	TR14x4	3290
WFRM2835TR16x4	768	16	28	48	38	6	35	12	TR16x4	3840
WFRM2835TR18x4	878	18	28	48	38	6	35	12	TR18x4	4390
WFRM3244TR20x4	1242	20	32	55	45	7	44	12	TR20x4	6210
WFRM3244TR24x5	1484	24	32	55	45	7	44	12	TR24x5	7420
WFRM3846TR26x5	1696	26	38	62	50	7	46	14	TR26x5	7900*
WFRM3846TR28x5	1840	28	38	62	50	7	46	14	TR28x5	5900*
WFRM3846TR30x6	1948	30	38	62	50	7	46	14	TR30x6	4470*



\*reduced axial load due to flange geometry

# DryLin® TR Lead Screw Drives


## Trapezoidal Lead Screw - Flange - Left Thread

### iglide® L280 Material

**igus®**

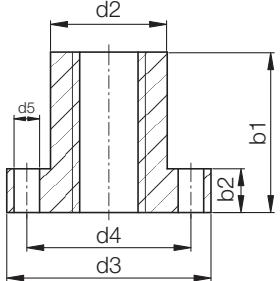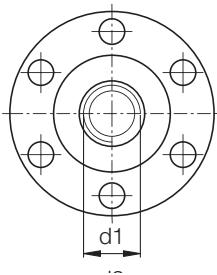

Part number structure  
**W F L M 22 15 TR 10x2**

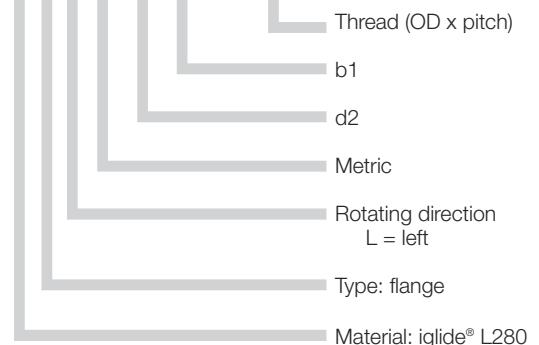

#### Dimensions (mm)

Part No.	Effective surface area (mm <sup>2</sup> )	d1	d2	d3	d4	d5*	b1	b2	Thread d1 x Pitch	Max. static F axial (N)
WFLM2525TR10x2	352	10	25	42	34	5	25	10	TR10x2	1760
WFLM2835TR12x3	576	12	28	48	38	6	35	12	TR12x3	2880
WFLM2835TR14x4	658	14	28	48	38	6	35	12	TR14x4	3290
WFLM2835TR16x4	768	16	28	48	38	6	35	12	TR16x4	3840
WFLM2835TR18x4	878	18	28	48	38	6	35	12	TR18x4	4390
WFLM3244TR20x4	1242	20	32	55	45	7	44	12	TR20x4	6210
WFLM3244TR24x5	1484	24	32	55	45	7	44	12	TR24x5	7420
WFLM3846TR26x5	1696	26	38	62	50	7	46	14	TR26x5	7900*
WFLM3846TR28x5	1840	28	38	62	50	7	46	14	TR28x5	5900*
WFLM3846TR30x6	1948	30	38	62	50	7	46	14	TR30x6	4470*

\*reduced axial load due to flange geometry

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
 CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**


## DryLin® TR Lead Screw Drives High Helix Lead Screws

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

### Stainless steel high helix lead screw

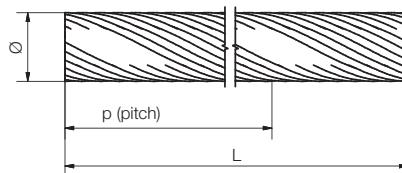

Part number structure

**PTGSG-08 x 10-R ES-1000**

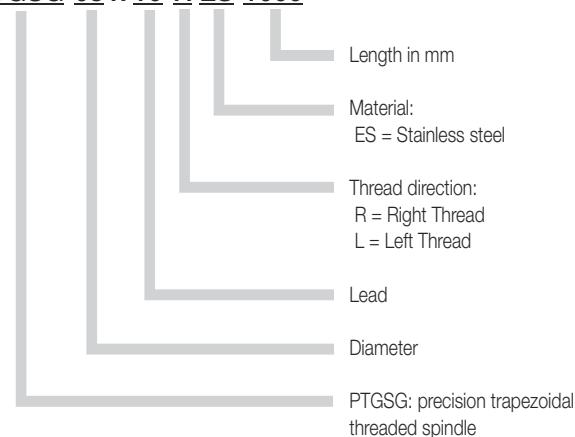

#### Dimensions (mm)


Part No.	Thread	Diameter	Pitch (mm)	Max. Length
PTGSG-08x10-RES-length in mm	SG08x10	8	10	2000
PTGSG-08x15-RES-length in mm	SG08x15	8	15	2000
PTGSG-10x12-RES-length in mm	SG10x12	10	12	2000
PTGSG-10x50-RES-length in mm	SG10x50	10	50	2000
PTGSG-18x100-RES-length in mm	SG18x100	18	100	2000

#### Dimensions (mm)

Part No.	Thread	Diameter	Pitch (mm)	Max. Length
PTGSG-08x10-LES-length in mm	SG08x10	8	10	2000
PTGSG-08x15-LES-length in mm	SG08x15	8	15	2000
PTGSG-10x12-LES-length in mm	SG10x12	10	12	2000
PTGSG-10x50-LES-length in mm	SG10x50	10	50	2000
PTGSG-18x100-LES-length in mm	SG18x100	18	100	2000

**DryLin® TR Lead Screw Drives**  
**High Helix Lead Screw - Sleeve - Right Thread**  
**iglide® J Material**


**igus®**

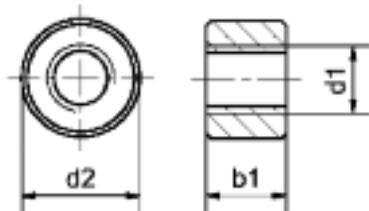

**Dimensions (mm)**

Part No.	d1	d2	b1	Thread d1 x Pitch
JSR1812T8x10	8	18	12	SG8x10
JSR1812T8x15	8	15	12	SG8X15
JSR2220T10X12	10	22	20	SG10x12
JSR2220T10X50	10	22	20	SG10x50
JSR2215T10X12	10	22	15	SG10x12
JSR2215T10X50	10	22	15	SG10x50
JSR3027T18X100	18	30	27	SG18x100
JSR4027T18X100	18	40	27	SG18x100
JSR4036T18x100	18	40	36	SG18x100

**High Helix Lead Screw - Sleeve - Left Thread**  
**iglide® J Material**

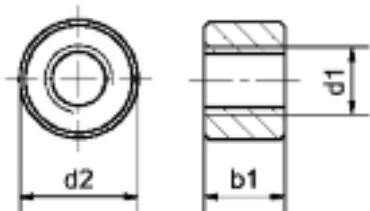

**Dimensions (mm)**

Part No.	d1	d2	b1	Thread d1 x Pitch
JSL1812T8x10	8	18	12	SG8x10
JSL1812T8x15	8	15	12	SG8X15
JSL2220T10X12	10	22	20	SG10x12
JSL2220T10X50	10	22	20	SG10x50
JSL2215T10X12	10	22	15	SG10x12
JSL2215T10X50	10	22	15	SG10x50
JSL3027T18X100	18	30	27	SG18x100
JSL4027T18X100	18	40	27	SG18x100
JSL4036T18x100	18	40	36	SG18x100

**DryLin®  
Lead Screw Drives**

**PDF:** [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
**CAD:** [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
**RoHS info:** [www.igus.com/RoHS](http://www.igus.com/RoHS)

**10**





**igus®**

## DryLin® TR Lead Screw Drives High Helix Lead Screw - Flange - Right Thread iglide® L280 Material

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

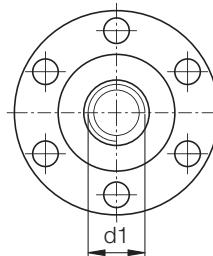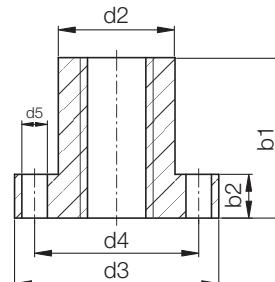

Part number structure

J F R M 25 25 TR 10x2

Thread (OD x pitch)

b1

d2

Metric



Rotating direction  
R = right

Type: Flange

Material: J = iglide® J

### Dimensions (mm)

Part No.	d1	d2	d3	d4	d5	b1	b2	Thread d1 x Pitch
JFRM2020TR8x10	8	20	34	28	4	20	8	SG8x10
JFRM2020TR8x15	8	20	34	28	4	20	8	SG8x15
JFRM2525TR10x12	10	25	42	34	5	25	10	SG10x12
JFRM2525TR10x50	10	25	42	34	5	25	10	SG10x50
JFRM2835TR18x100	18	28	48	38	6	35	12	SG18x100

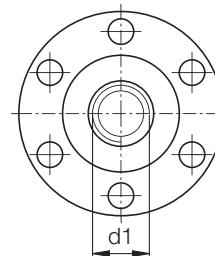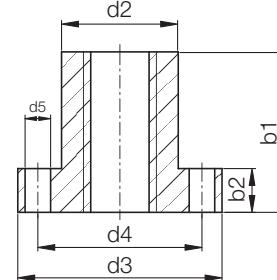

## High Helix Lead Screw - Flange - Left Thread iglide® L280 Material

### Dimensions (mm)



Part No.	d1	d2	d3	d4	d5	b1	b2	Thread d1 x Pitch
JFLM2020TR8x10	8	20	34	28	4	20	8	SG8x10
JFLM2020TR8x15	8	20	34	28	4	20	8	SG8x15
JFLM2525TR10x12	10	25	42	34	5	25	10	SG10x12
JFLM2525TR10x50	10	25	42	34	5	25	10	SG10x50
JFLM2835TR18x100	18	28	48	38	6	35	12	SG18x100

# DryLin® TR Lead Screw Drives

## Zero Backlash Lead Screw - Flange - Right Thread


### iglide® J Material

**igus®**

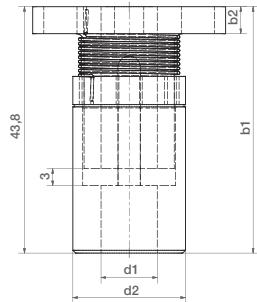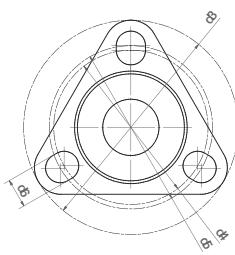

#### Part number structure

J F R M 25 25 TR 10x2

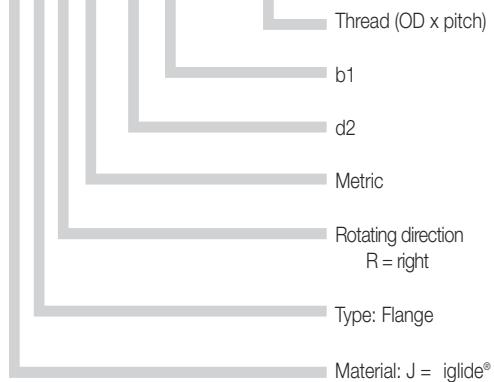

#### Dimensions (mm)

Part No.	d1	d2	d3	d4	d5	b1	b2	Thread d1 x Pitch
JFRMZ1-8x10	8	20	38.1	28.3	5.2	41	4.8	SG8x10
JFRMZ1-8x15	8	20	38.1	28.3	5.2	41	4.8	SG8x15
JFRMZ1-10x12	10	20	38.1	28.3	5.2	41	4.8	SG10x12
JFRMZ1-10x50	10	20	38.1	28.3	5.2	41	4.8	SG10x50

#### Assembly of zero backlash lead screw nuts

- ① Nut
- ② Adjusting ring with torsion spring
- ③ Friction disc
- ④ Counternut



Screw the adjusting ring with the spring ② approximately half-way onto the nut ① and fix the ends of the spring in the corresponding holes.



Continue to screw the adjusting ring onto the nut until the end to tension the torsion spring.



The adjusting ring can now be released. The nut will now assume a preloaded position on the lead screw.

DryLin®  
Lead Screw Drives

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10



**igus®**

## DryLin® TR Lead Screw Drives Lead Screw Nuts


Lead screw nuts are in use in our HTS and SLW linear modules

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>



### Square lead screw nuts

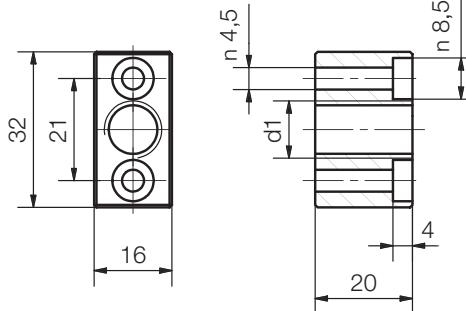

Dimensions (mm)

Part No.	Thread	Rotational Direction	from HTS linear table
HTS12TR10x2	TR10x2	right	HTS-12
HTS12TR10x2L	TR10x2	left	HTS-12
HTS12TR10x3	TR10x3	right	HTS-12
HTS12TR10x3L	TR10x3	left	HTS-12
HTS1210SM10x12	SG10x12	right	HTSS-12
HTS1210LM10x12	SG10x12	left	HTSS-12
HTS1210SM10x50	SG10x50	right	HTSS-12
HTS1210LM10x50	SG10x50	left	HTSS-12


### Lead screw nuts with flange from HTS linear modules



Dimensions (mm)

Part No.	Thread	Rotational Direction
HTS20TR18x4	TR18x4	right
HTS20TR18x4	TR18x4	left
HTS20TR18x8	TR18x8P4	right
HTS20LM18x8	TR18x8P4	left
HTS20SM18x100	SG18x100	right
HTS20LM18x100	SG18x100	left

### Lead screw nuts from SLW linear modules

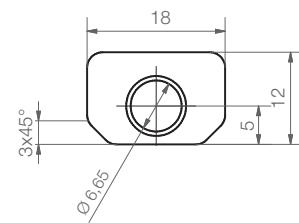

Dimensions (mm)

Part No.	Thread	Rotational Direction
SWZ-063001	M8x1	right
SWZ-063003	M8x1	left
SWZ-063009	TR8x1.5	right
SWZ-063010	TR8x1.5	left
SWZ-063007	SG8x10	right
SWZ-063008	SG8x10	left
SWZ-063004	SG8x15	right


# DryLin® TR Lead Screw Drives

## Lead Screw Nuts - Axial Locks

**igus®**




### Lead screw nuts with axial locks

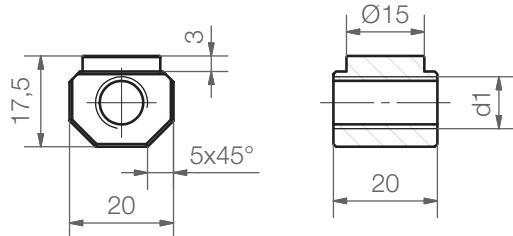


Dimensions (mm)

Part No.	Thread	Rotational Direction	from HTS linear axis
SWZ-W-104003	TR10x2	right	SLW-1040
SWZ-W-104004	TR10x2	left	SLW-1040
SWZ-W-104009	TR10x3	right	SLW-1040
SWZ-W-104015	TR10x3	left	SLW-1040
SWZ-W-104005	SG10x12	right	SLWS-1040
SWZ-W-104005-L	SG10x12	left	SLWS-1040
SWZ-W-104007	SG10x50	right	SLWS-1040
SWZ-W-104010	SG10x50	left	SLWS-1040

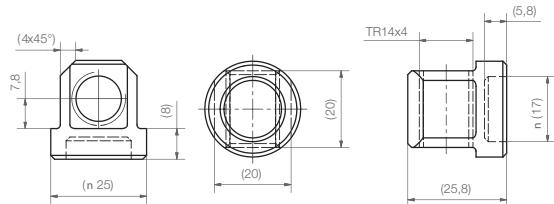

Part No.	Thread	Rotational Direction	from HTS linear axis
SWZ-W-166001	TR14x4	right	SLW-1660
SWZ-W-166003	TR14x4	left	SLW-1660

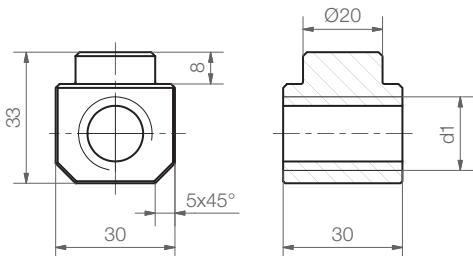

Dimensions (mm)

Part No.	Thread	Rotational Direction	from HTS linear axis
SWZ-W-208003	TR18x4	right	SLW-2080
SWZ-W-208004	TR18x4	left	SLW-2080
SWZ-W-208009	TR18x8P4	right	SLW-2080
SWZ-W-208015	TR18x8P4	left	SLW-2080
SWZ-W-208005	SG18x100	right	SLWS-2080
SWZ-W-208005-L	SG18x100	left	SLWS-2080

10

DryLin® Lead Screw Drives  
PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



**igus®**

## DryLin® TR Lead Screw Drives



### Split lead screw

### iglide® J material

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

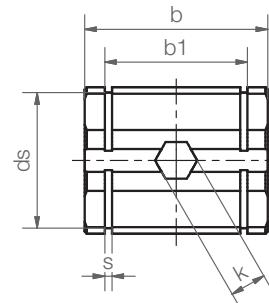

#### Part number structure

J T R M 22 30 TR 10x2

Thread (OD x pitch)

b1

d2

Metric

Rotating direction  
R = right

Type: Trapezoidal

Material: J = iglide® J

#### Dimensions (mm)

Part No.	b	b1	d1	d2	ds	k	r	s
JTRM-2230TR10x2	30	22.6	TR10x2	22	20.5	7	1.5	1.3
JTRM-3240TR20x4	40	31.2	TR20x4	32	29.6	8	2.5	1.6
JTRM-3240TR20x8P4	40	31.2	TR20x8P4	32	29.6	8	2.5	1.6

Part No.	Maximum axial load	
	Static* (N)	Static** (N)
JTRM-2230TR10x2	300	500
JTRM-3240TR20x4	1000	1500
JTRM-3240TR20x8P4	1000	1500

\*Secured in housing by radially inserted nut DIN934

\*\*Secured in housing by circlips DIN 471

#### Combination lead screw nut with housing block



#### Part No.

RGAS-JTRM-20x8P4
RGAS-JTRM-20x4P4
RGAS-JTRM-10x2P4

Also available with housing block

# DryLin® TR Lead Screw Drives

## Lead screw end blocks, fixed and floating

**igus®**



Part number structure

SLS-10x2-LL






LL - Floating side  
FL - Fixed side



Lead screw size

Description

(FL) Fixed Side offers axial fixation of screw, with use of locking collars (not included)

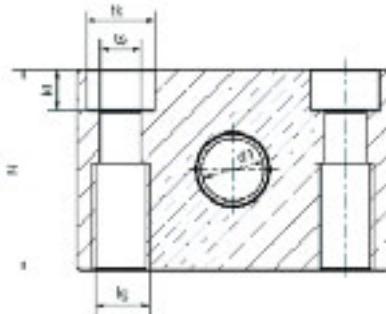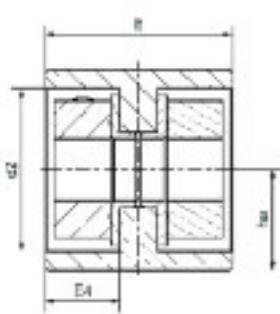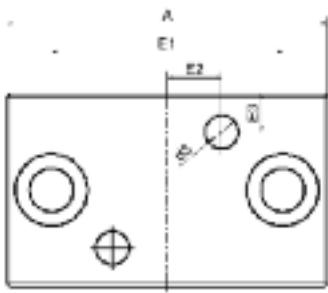

(LL) Floating Side

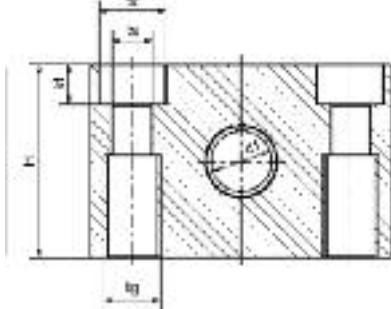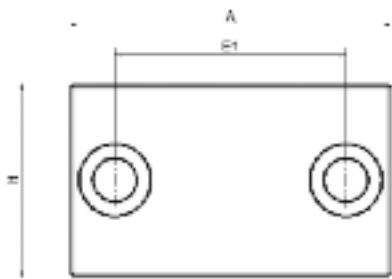

### Technical Data

Part No.	Weight (g)	Maximum static Load Capacity (N)
SLS-10x2-LL	115	–
SLS-10x2-FL	88	700
SLS-18x4-LL	295	–
SLS-18x4-FL	205	1600
SLS-24x5-LL	725	–
SLS-24x5-FL	525	2500

### Dimensions (mm)

Part number	A [mm]	H [mm]	E1 [mm]	E2 [mm]	E3 [mm]	E4 [mm]	lt [mm]	tk [mm]	ts [mm]	tg [mm]	kt [mm]	d1 [mm]	d2 [mm]	d3 [mm]	ha [mm]	Weight [g]
SLS-10x2-LL	50	32	36	–	–	–	30	11	6.6	M8	6.5	10	–	–	16	115
SLS-10x2-FL	50	32	36	8.5	6	12	30	11	6.6	M8	6.5	10	26	5	16	88
SLS-18x4-LL	72	46	54	–	–	–	36	15	9	M10	8.6	12	–	–	23	295
SLS-18x4-FL	72	46	54	13.5	8	15	36	15	9	M10	8.6	18	42	6.6	23	205
SLS-24x5-LL	94	64	70	–	–	–	50	20	13.5	M16	13	14	–	–	32	725
SLS-24x5-FL	94	64	70	17.5	7.5	17	50	20	13.5	M16	13	24	52	8	32	525



**igus®**

## DryLin® TR Lead Screw Drives Quick-release nuts - fast forward

DryLin®  
Lead Screw Drives

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>







- For fast format adjustments
- Self braking design
- Lubrication-free
- Housing: AL anodized, iglide® J lead screw nut
- Robust and reliable
- Only recommended for horizontal applications
- Max. axial loads static: 200 N, dynamic: 50 N

Quick release mechanism: A combination of accurate positioning and quick manual adjustment with trapezoidal lead screw nut. Simply press the square yellow section to release the nut from the thread, and move by hand to desired position.

### Part number structure

**F T R M-FF-10x2**

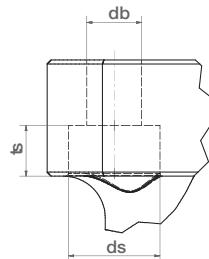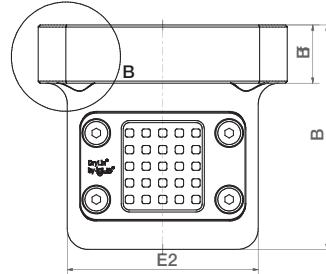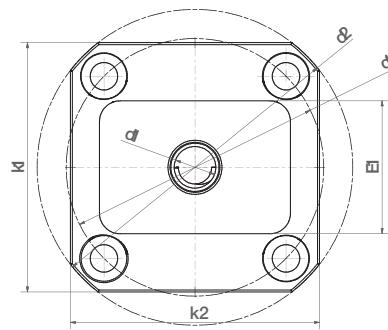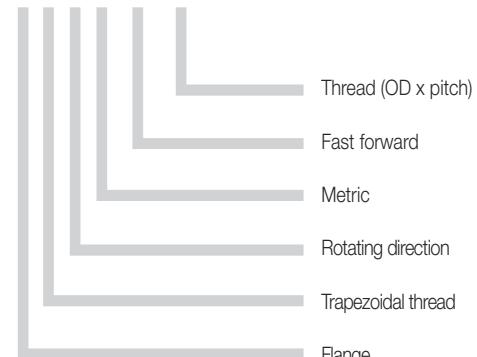


### Dimensions (mm)


Part number	d1	d2	dt	B	Bf	ts	db	ds	k1	k2	E1	E2
FTRM-FF-10x2	TR-10x2	76	62	54	14	6.1	6.6	11	60	60	32	46

(Assembled lead screw system HTS-FF shown for example, see page 30.20)

1.

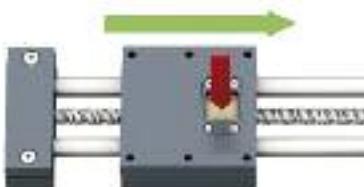

2.

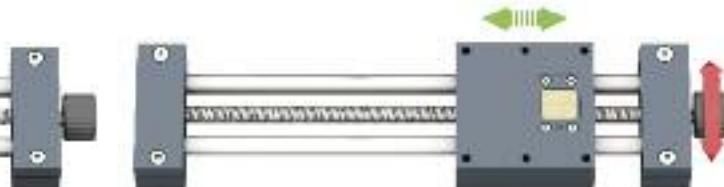

Press > disengage > move manually > click into place > fine-tune



DryLin® W, R, Shafting and  
Slide Tables

The oil-free, self-lubricating qualities of DryLin® linear guide systems are ideal for extreme applications: Saltwater in marine environments, caustic washdown in food processing/packaging equipment and chemicals in biotech/lab machinery to name a few.



DryLin® guides and iglide® plastics are well suited for use on stainless steel shafting, and are especially good in applications requiring 300-Series stainless steels, such as 304 and 316. Since the plastic plain bearings do not have the point-to-point contact on shafting that ball bearings do, they do not require more expensive corrosion-prone case-hardened stainless steels such as 440C.

**Industries and application areas:**



- Food processing
- Packaging
- Marine
- Biotech/lab automation
- Electroplating



Clean oil-free operation around food in this conveyor/baking application is achieved with DryLin®



DryLin® W is accredited to Cleanroom-set points and in use in this blister packaging machine

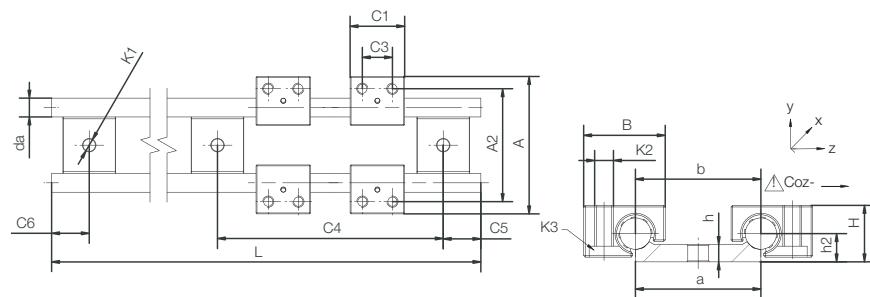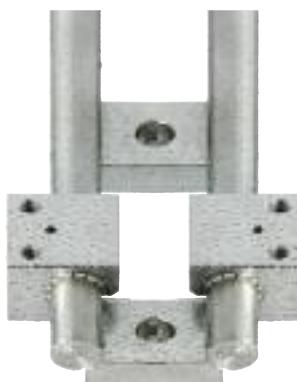

Material for carriage and shaft support      316  
    316L

### DryLin® W guide rail, double, ø 10 mm

Part No.	Suitable bearing (Part No.)	Weight (kg/m)	da h9	L Max. (mm)	a -0.3 (mm)	b (mm)	h (mm)	h2 (mm)
WS-10-40-ES (FG)	WJUM-01-10-ES-FG	1.58	10	3000	40	40	5.5	9

Part No.	C4 (mm)	C5 Min. (mm)	C5 Max. (mm)	C6 Min. (mm)	C6 Max. (mm)	K1 for Screw DIN 912
WS-10-40-ES (FG)	120	20	79.5	20	79.5	M6



### DryLin® W Stainless Carriage


Part No.	Weight (g)	H ±0.07 (mm)	B (mm)	C1 (mm)	C3 (mm)	A (mm)	A2 (mm)	K2 (mm)	K3 Countersunk- head screw M6	Stat. Load Capac. Coy (N)	Coz+ (N)	Coz- (N)
WJUM-01-10-ES (FG)*	57	18	26	29	16	73	60	M6	M5	3800	3800	950

\* alternative with TUMO-01-10 liners for high temperatures available up to 482°F (250°C)


Part number: WTUM-01-10ESFG

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0



# DryLin® Single rail and block bearing 316 Stainless

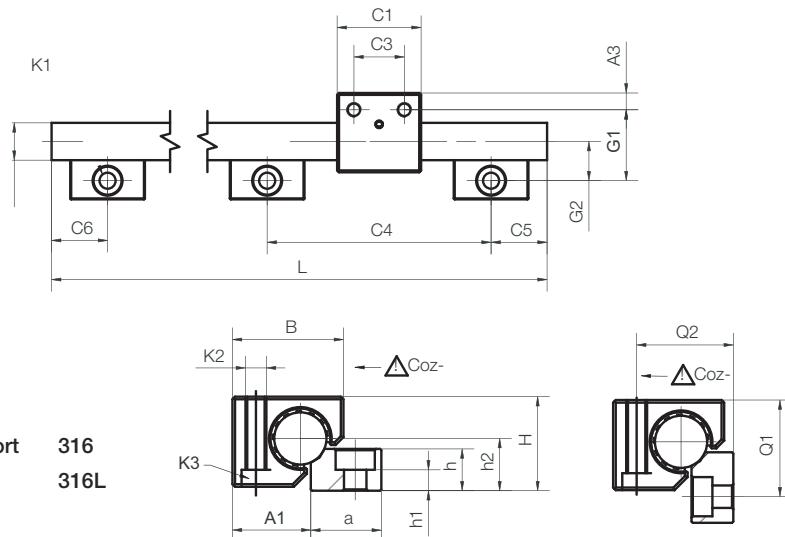
DryLin®  
Stainless SteelTelephone 1-800-521-2747  
Fax 1-401-438-7270Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Material for carriage and shaft support      316  
    316L

## DryLin® W guide rail, single, Ø 20 mm

Part No.	Suitable bearing [Part No.]	Weight [kg/m]	da h9 [mm]	L Max. [mm]	a -0.3 [mm]	h [mm]	h2 [mm]	G2 [mm]
WS-20-ES (FG)	WJUM-01-20-ES-FG	3,37	20	3000	27	16	20	21

Part No.	C4 [mm]	C5 Min. [mm]	C5 Max. [mm]	C6 Min. [mm]	C6 Max. [mm]	K1 for Screw DIN 912	h1 [mm]	Iy [mm <sup>4</sup> ]	Iz [mm <sup>4</sup> ]	Wby [mm <sup>3</sup> ]	Wbz [mm <sup>3</sup> ]
WS-20-ES (FG)	120	20	79.5	20	79.5	M8	8	7854	7854	785	785

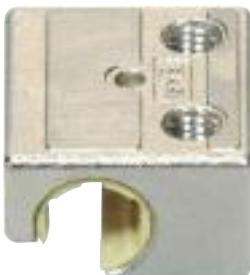

## DryLin® W Stainless Carriages

Part No.	WT (g)	H ± 0,07 (mm)	B (mm)	C1 (mm)	C3 (mm)	G1 (mm)	A3 (mm)	A1 (mm)	K2 (mm)	K3 Countersunk-head screw (mm)	Q1 (mm)	Q2 (mm)	Static load capacity Coy (N)	Coz+ (N)	Coz- (N)
WJUM-01-20-ES (FG)*	280	36	42.5	45	27	38	9	30	M8	M6	37	37	2473 (11000)	2473 (11000)	4270(1900)


\* alternative with TUMO-01-10 liners for high temperatures available up to 482°F (250°C)

Part number: WTUM-01-10ESFG



### Special Properties

- Dimensionally equivalent to standard recirculating ball bearings
- For long-term temperatures up to 194°F (90°C)
- Can use iglide® T500 material liners for long term temperatures up to 482°F (250°C)
- Imperial dimension available upon request

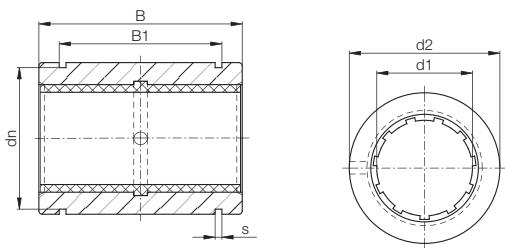

### Dimensions (mm)

Part No.	d1	d2 h7	B h10	B1	s	dn
RJUM-01-12-ES	12	22	32	22.6	1.30	20.5
RJUM-01-16-ES	16	26	36	24.6	1.30	24.2
RJUM-01-20-ES	20	32	45	31.2	1.60	29.6
RJUM-01-25-ES	25	40	58	43.7	1.85	36.5
RJUM-01-30-ES	30	47	68	51.7	1.85	43.5


\* according to igus® testing method ► Page 29.57

### Load Data

Part No.	Shaft Ø (mm)	Tolerance** Bearing Inner Diameter (mm)	F max. Dynamic** P = 5 MPa (N)	F max. Static** P = 35 MPa (N)	Weight (g)
RJUM-01-12-ES	12	+0.030 +0.088	960	6,720	60
RJUM-01-16-ES	16	+0.030 +0.088	1,440	10,080	84
RJUM-01-20-ES	20	+0.030 +0.091	2,250	15,750	147
RJUM-01-25-ES	25	+0.030 +0.091	3,625	25,375	324
RJUM-01-30-ES	30	+0.040 +0.110	5,100	35,700	486

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0





- Materials available
  - (440c) Hard stainless
  - (420c) Hard stainless
  - (304) Soft stainless
  - (316) Soft stainless
- Supported or unsupported shafts available
- Max undersupport rail length - 600 mm
- Symmetric hole pattern C5 = C6



#### Dimensions (mm) – Hardened Stainless (440c/1.4125)

Part No.	d ISO h6	Weight (kg/m)	Max. Length (mm)	Hardness Depth (mm)
EWM-06	06	0.222	3000	0.8
EWM-08	08	0.359	4000	0.9
EWM-10	10	0.617	4000	0.9
EWM-12	12	0.888	6000	1.0
EWM-16	16	1.578	6000	1.2
EWM-20	20	2.466	6000	1.6
EWM-25	25	3.853	6000	1.8
EWM-30	30	5.549	6000	2.0
EWM-40	40	9.865	6000	2.2
EWM-50	50	15.413	6000	2.4

#### Dimensions (mm) – Hardened Stainless (420c/1.4034)


Part No.	d ISO h6	Weight (kg/m)	Max. Length (mm)	Hardness Depth (mm)
EEWM-06	06	0.222	3000	0.8
EEWM-08	08	0.359	4000	0.9
EEWM-10	10	0.617	4000	0.9
EEWM-12	12	0.888	6000	1.0
EEWM-16	16	1.578	6000	1.2
EEWM-20	20	2.466	6000	1.6
EEWM-25	25	3.853	6000	1.8
EEWM-30	30	5.549	6000	2.0
EEWM-40	40	9.865	6000	2.2
EEWM-50	50	15.413	6000	2.4

#### Dimensions (mm) – Soft Stainless (304/1.4301)

Part No.	d ISO h9	Weight (kg/m)	Max. Length (mm)
EWMR-10	10	0.617	4000
EWMR-12	12	0.888	6000
EWMR-16	16	1.578	6000
EWMR-20	20	2.466	6000
EWMR-25	25	3.853	6000
EWMR-30	30	5.549	6000

#### Dimensions (mm) – Soft Stainless (316/1.4571)

Part No.	d ISO h9	Weight (kg/m)	Max. Length (mm)
EWMS-10	10	0.617	4000
EWMS-20	20	2.466	6000

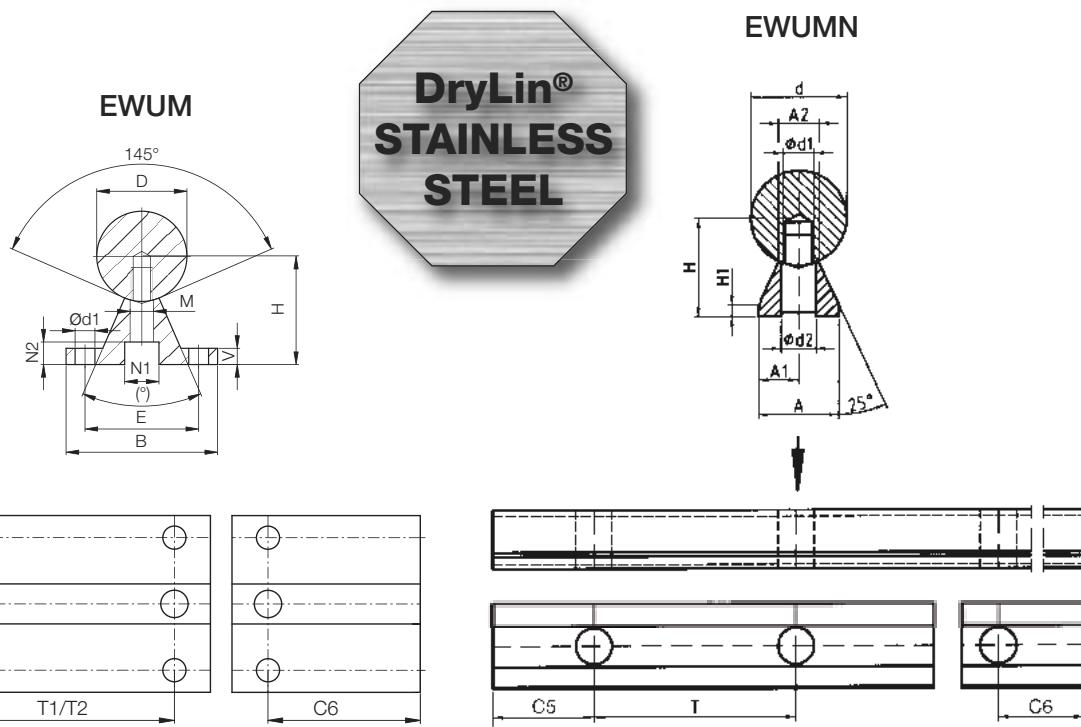

#### Dimensions (mm) – Supported Stainless (440c)

Part No.	D (mm)	B (mm)	H (mm) ±0.02	V (mm)	N1 (mm)	N2 (mm)	d1 (mm)	M (mm)	(°)	E (mm)	T1* (mm) ±0.15	C5/C6 min. max. for T1	T2 (mm)	C5/C6 min. max. for T2 Standard	Weight (kg/m)
	h6														
EWUM-12	12	40	22	5	8.0	5.0	4.5	5.8	50	29	75	20	57	120	20 79 1.75
EWUM-16	16	45	26	5	9.5	6.0	5.5	7.0	50	33	100	20	69	150	20 94 2.64
EWUM-20	20	52	32	6	11.0	6.5	6.6	8.3	50	37	100	20	69	150	20 94 3.97
EWUM-25	25	57	36	6	14.0	8.5	6.6	10.8	50	42	120	20	79	200	20 119 5.65
EWUM-30	30	69	42	7	17.0	10.5	9.0	11.0	50	51	150	20	94	200	20 119 7.93
EWUM-40	40	73	50	8	17.0	10.5	9.0	15.0	50	55	200	20	119	300	20 169 12.88
EWUM-50	50	84	60	9	19.0	12.5	11.0	19.0	46	63	200	20	119	300	20 169 19.60

\* T1 optional, T2 standard


#### Dimensions (mm) – Narrow Supported Stainless (440c)

Part No.	d (mm) h6	H (mm)	H1 (mm) ±0.02	A (mm)	A1 (mm)	A2 (mm) ±0.02	d1	d2 (mm)	T (mm)	C5/C6 min.	C5/C6 max.	Weight (kg/m)
EWUMN-12	12	14.5	3	11	5.5	5.4	M4	4.5	75	20	57	1.62
EWUMN-16	16	18	3	14	7.0	7.0	M5	5.5	75	20	57	2.54
EWUMN-20	20	22	3	17	8.5	8.1	M6	6.6	75	20	57	3.81
EWUMN-25	25	26	3	21	10.5	10.3	M8	9.0	75	20	57	5.62
EWUMN-30	30	30	3	23	11.5	11.0	M10	11.0	100	20	69.5	7.63
EWUMN-40	40	39	4	30	15.0	15.0	M12	13.5	100	20	69.5	13.47
EWUMN-50	50	46	5	35	17.5	19.0	M14	15.5	100	20	69.5	20.31

Narrow supports are not assembled

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0





# DryLin® Stainless Steel Shafts

## Stainless steel intermittent shaft supports

DryLin®  
Stainless SteelTelephone 1-800-521-2747  
Fax 1-401-438-7270Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Shaft support blocks for Ø 20 mm made of 300 Series stainless steel

- Connecting dimensions as standard full length aluminum supports
- High corrosion and chemical resistance
- Possible lengths
  - EWUM (440C) max. 6,000 mm
  - EWUMS (316L) max. 3,000 mm

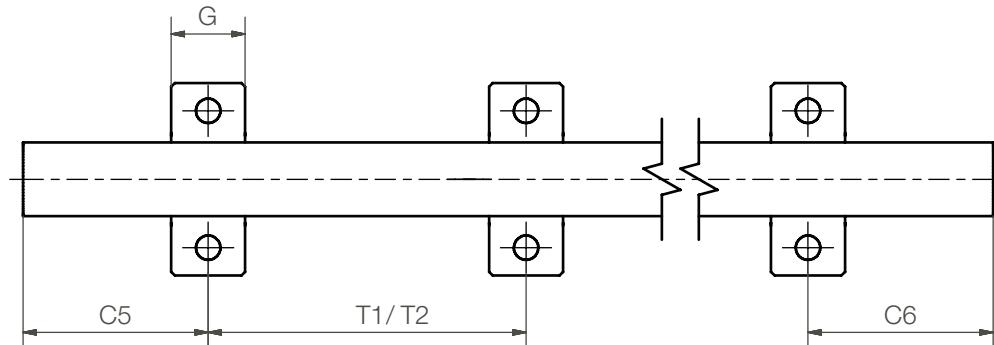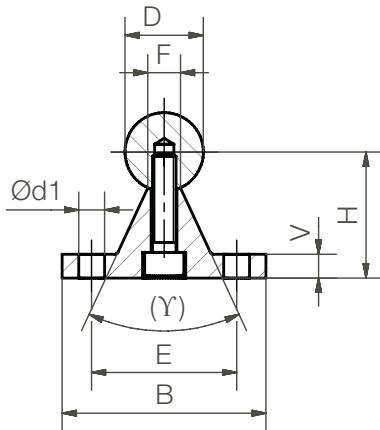



### Dimensions (mm) – Supported Stainless

Part number	Shaft material	D h6	B	H ±0.02	V	d1	E	G	T1	C5/C6 for T1		T2	C5/C6 for T2	
										min.	max.		min.	max.
EWUM-ES-20	440C	20	52	32	6	6.6	37	20	100	20	69	150	20	94
EWUMS-ES-20	316L	20	52	32	6	6.6	37	20	100	20	69	150	20	94



### Special properties

- Stainless steel lead screw assembly with corrosion-resistant steel components
- Choice of bearing material:
  - iglide® J - standard
  - iglide® A180 - FDA
  - iglide® T500 - high temperature up to 482°F (250°C)
- Available accessories

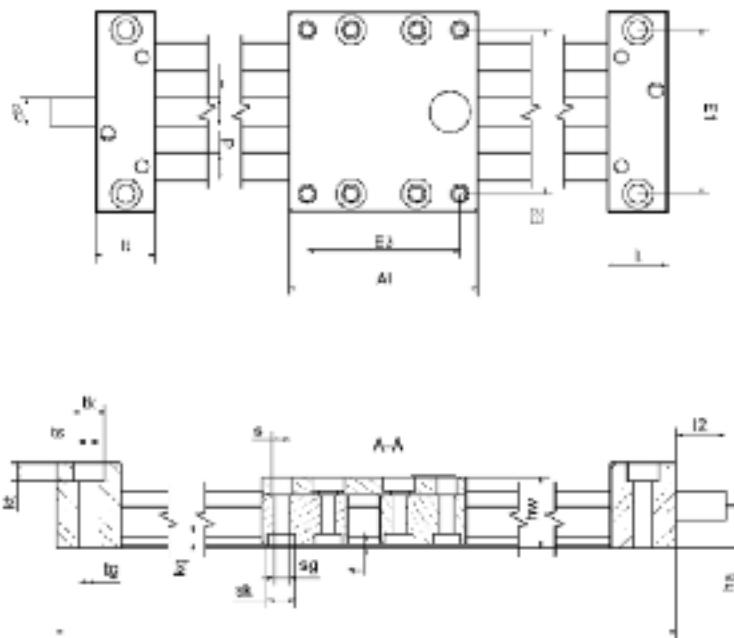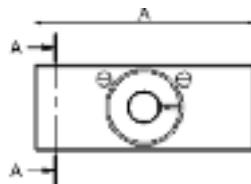

### Dimensions (mm)

Part No.	A	Al**	H	E1	E2	E3	I	hw	f	lt	tk	ts	tg
	-0.3	-0.3		±0.15	±0.15	±0.15				-0.1			
SLW-ES-1040	74	100	29	60	60	87	113	24	1.5	22	11	6.8	M8
SLW-ES-2080	134	150	46	116	116	132	206	44	1.5	28	15	8.0	M10

Part No.	kt	s	sk	sg	kq	d	T	I2	d2	d2	ha
	±0.1								Standard	Optional	
SLW-ES-1040	6.4	6.6	9.5	M6	4.4	10	TR10x2	17	TR10x2*	6h9	14.5
SLW-ES-2080	8.6	9.0	14.0	M8	5.5	20	TR18x4	26	12 h9	-	23.0

\* end of lead screw not machined/journalized

\*\* Carriages also available in 100, 150, 200 and 250 mm lengths


### Length and weight (mm)

Part No.	Maximum stroke length (mm)	Linear travel/rev (mm)	Lead screw diameter (mm)	Shaft weight (kg)	Additional weight (kg/100mm)	Max. static load-bearing capacity	
						axial (N)	radial (N)
SLW-ESJ-1040	750	1.25	10	0.2	0.08	50	200
SLW-ESX-1040	750	2	10	0.7	0.1	700	2800
SLW-ESA180-1040	750	2	10	0.9	0.2	700	2800
SLW-ESJ-2080	1000	4	18	1.5	0.3	1200	4600
SLW-ESA180-2080	1000	5	18	3.0	0.4	1600	6400

1N = .225 lbs

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10  
1



# DryLin® Linear Slide Tables - HTS HTSC-HYD - Hygienic Design


DryLin®  
Stainless Steel



Based on the "hygienic design" idea, this version offers an easily cleaned solution. Screw connectors are designed easily accessible and the gap dimensions accordingly large for easy cleaning. The materials used are plastic and stainless steel.



Telephone 1-800-521-2747  
Fax 1-401-438-7270

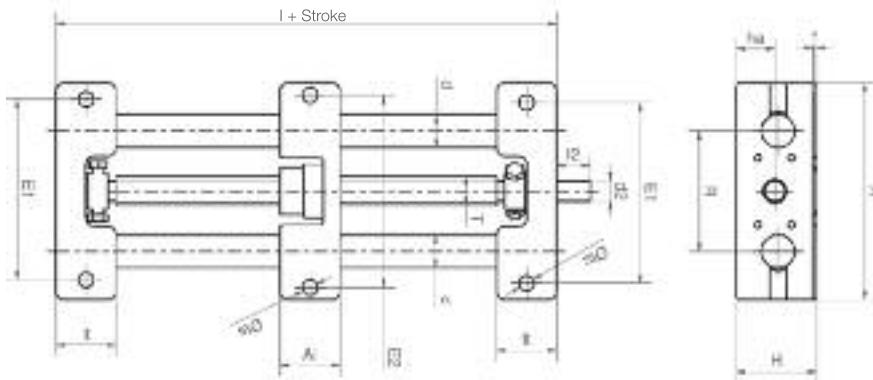



## Dimensions (mm)

Part No.	A -0.3	AI -0.3	H	E1 ±0.15	E2 ±0.15	I	R	f	lt ±0.1	ts	d	T	I2	d2	ha
HTSC-20-EWM-HYD	130	35	48	108	115	108	72	2	36	9.0	20	tr18x4	26	12h9	23



#### Special properties

- For manual adjustments
- Compact
- High torsional stability
- 100% lubrication-free
- Chemical and Corrosion-resistant
- Accessories optional

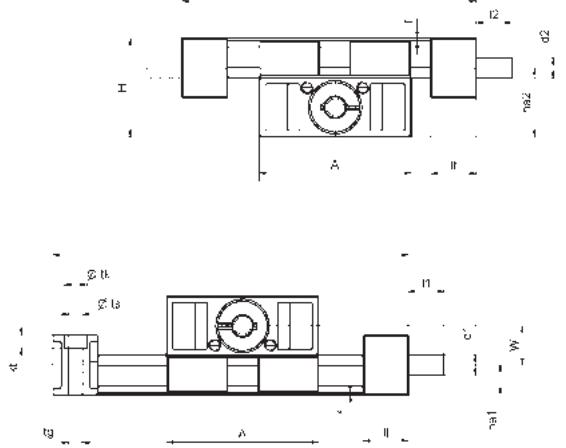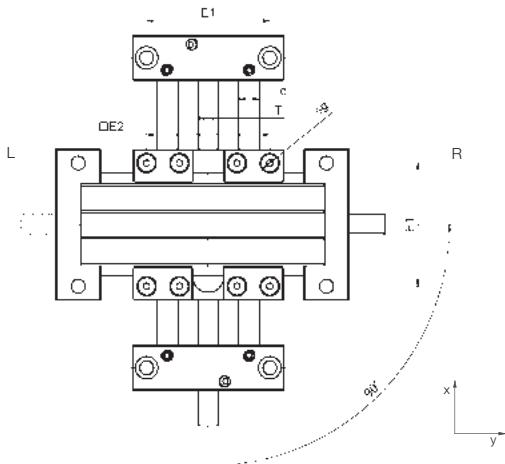

#### Dimensions (mm)

Part No.	A	H	E1	E2	Base Length l <sub>x</sub>	Base Length l <sub>y</sub>	f	l <sub>t</sub>	t <sub>k</sub>	t <sub>s</sub>	t <sub>g</sub>	k <sub>t</sub>
SLW-XY-ESJ-1040	-0.3	48	±0.15	±0.15	118	118	1.5	22	-0.1	6.6	M8	6.4

Part No.	sg	d	T	l <sub>1</sub>	d <sub>1</sub> Standard	d <sub>1</sub> Optional	l <sub>2</sub>	d <sub>2</sub> Standard	d <sub>2</sub> Optional	ha <sub>1</sub>	ha <sub>2</sub>	W
SLW-XY-ESJ-1040	M6	10	TR10x2	17	TR10x2	6h9	17	TR10x2	6h9	14.5	33.5	19

The hand wheel on the y-axis can be ordered installed on the left or the right side.

Order example for left SLW-XY-ESJ-1040-AWM-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

Order example for left SLW-XY-ESJ-1040-AWM-R-200-300 for 200 mm stroke length on the x-axis and 300 mm on the y-axis.

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

10






## DryLin® Stainless Steel

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

DryLin®  
Stainless Steel

igus®

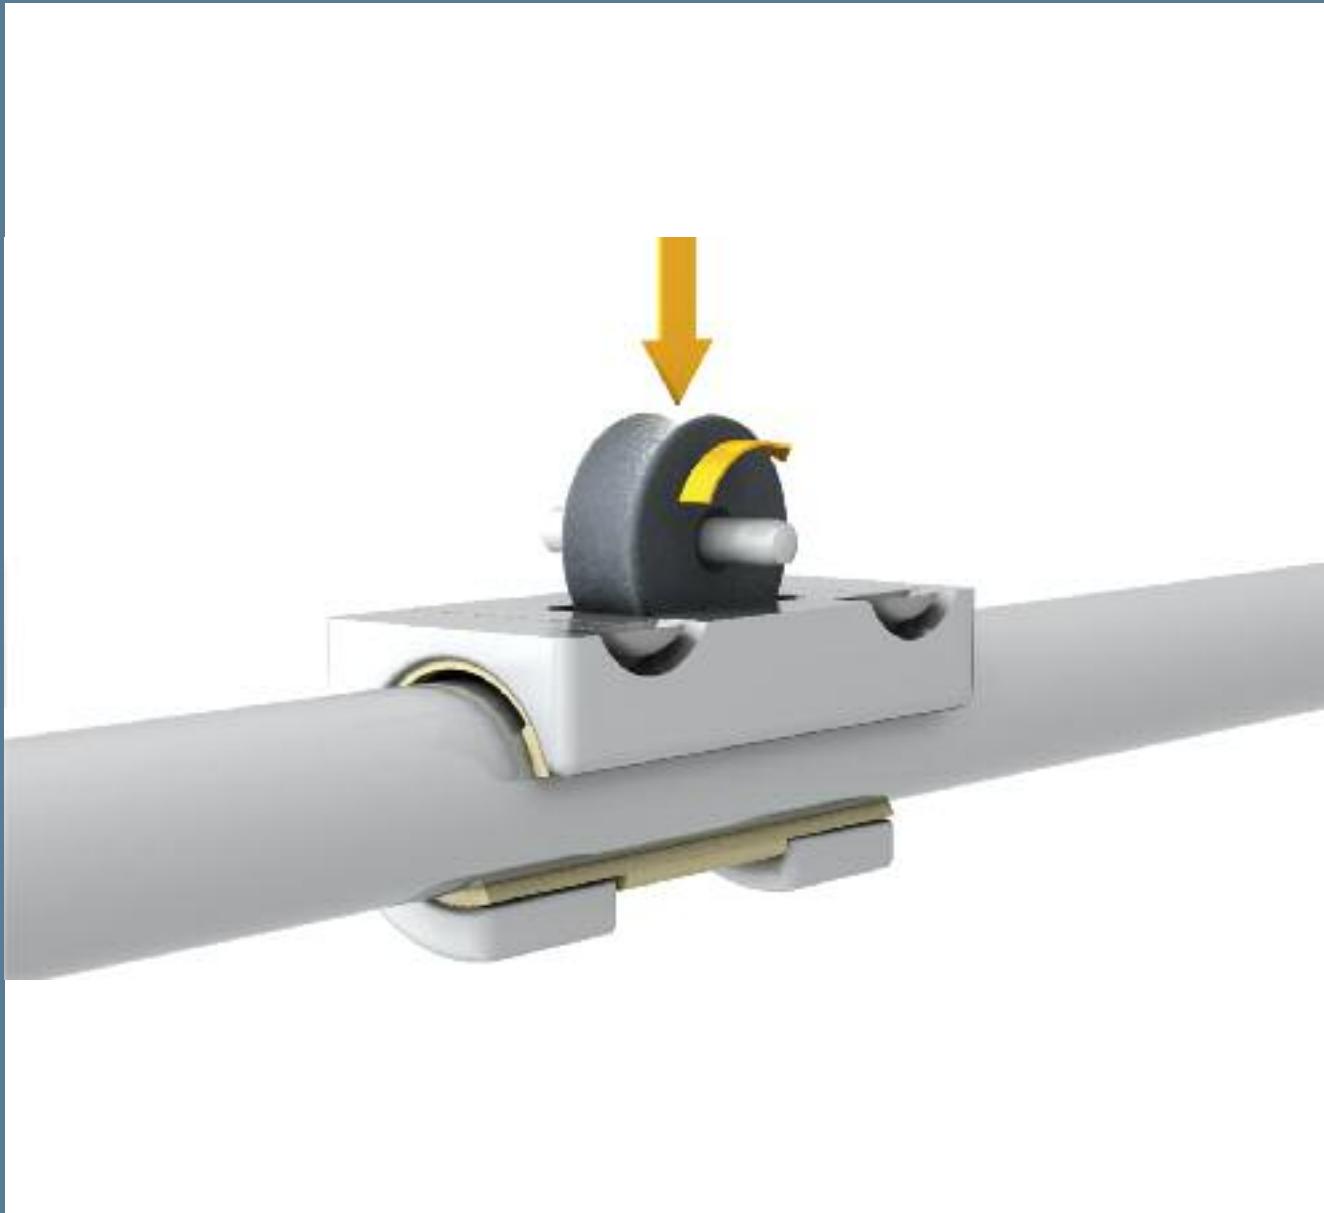

DryLin®  
Specialists

**DryLin® WJRM – Hybrid bearing**

WJRM - Rolling hybrid with reduced friction for hand powered and very low cycle applications.

**DryLin® NT – Telescopic System**

Lubrication-free solid polymer/aluminum guide for maximum extended lengths up to 1,200 mm.

**DryLin® NT - Telescopic Systems with Detent:**

- a) Precision detent with variable pitch (minimum pitch 10 mm)
- b) Detent in end and center positions

**DryLin® WKM – Digital measuring systems**


The DryLin® WKM measuring systems are battery powered. The integrated battery has a life of at least two years. The position value is displayed on a 5-digit LC display, and a magnetic strip is adhered to the guide rail.

**DryLin® WKME – Measuring system with signal line output**


Less space is required for the latest DryLin® WKMEX measuring device. The sensor head is integrated in the carriage (total height 36 mm). There are three sensor types available, two are compatible with a TTL Line Driver. We recommend igus® Energy Chain® series E2 micro or E-Z Chain for guiding the signal cable.

**DryLin® Q – Torque-resistant square guide**

DryLin® Q is compact, resistant to torques, and is ideal for handling small parts. Four liners made of iglide® J run on a hard anodized aluminum square tube. This unit is light weight, compact and 100 % lubrication-free.

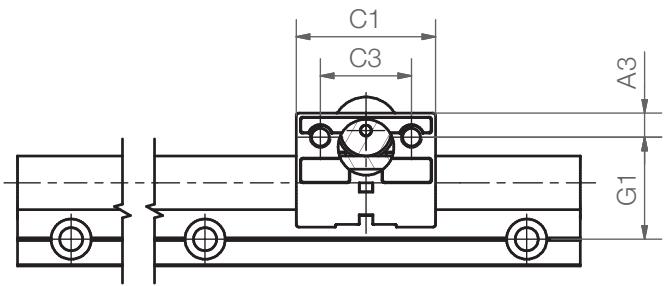

More information available on page 27.20

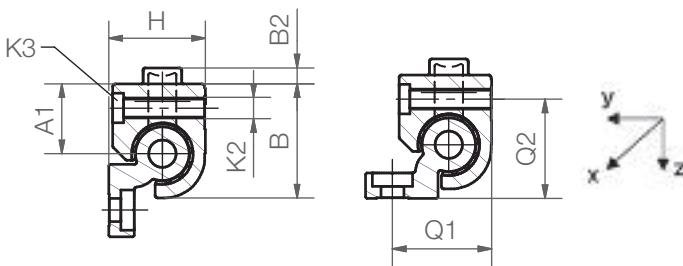

This installation position is not possible  
for combination of WJRM-01-10 with rail  
WS-10/WS-10-40/WS-10-80


### Load Data and Dimensions

Part No.	Friction in +z direction	Weight (g)	B (mm)	B2 (mm)	C1 (mm)	C3 (mm)	G1 (mm)	A3 (mm)	A1 (mm)	K2 (mm)	K3 (N)	Q1 (mm)	Q2 (mm)
WJRM-01-10	<0.1	46	26	2.5	35	22	27	6.5	16.5	M6	M5	-	-
WJRM-01-16	<0.1	131	34.5	5	48	30	33	9	25	M8	M6	32	28
WJRM-01-20	<0.1	232	42.5	6	52	34	38	9	30	M8	M6	37	37


PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





NT-35-“L” – Fully extended

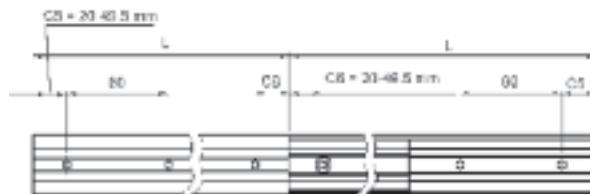

NT-35-“L”-“A” – Partial extension

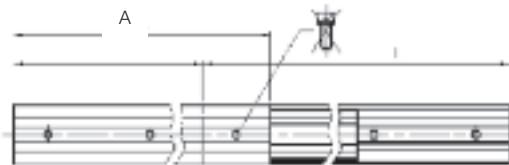

NT-35-“L”-“L+20”– Over extension

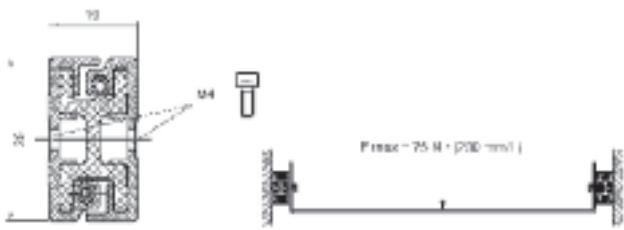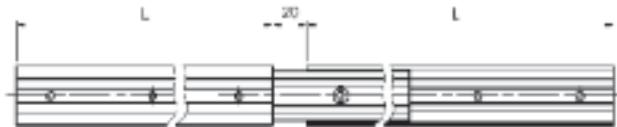


## Dimensions (mm)

Part No.	b (mm)	H (mm)	L min. (mm)	L max. (mm)
NT-35... mm	35	19	100	600


## Special properties

- Solid plastic/aluminum design
- Low weight
- Corrosion-free, ideal for lab/hospital applications
- Maximum extension up to 1200 mm (Total length)


NT -35 -300

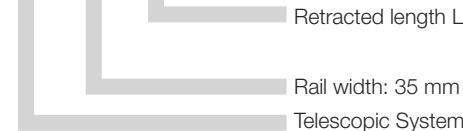

NT -35 -300 -200

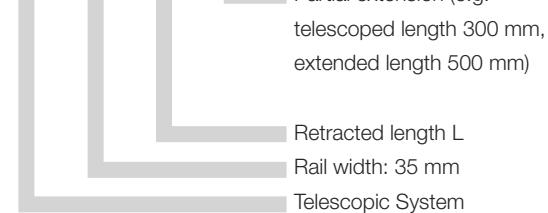

NT -35 -300 20

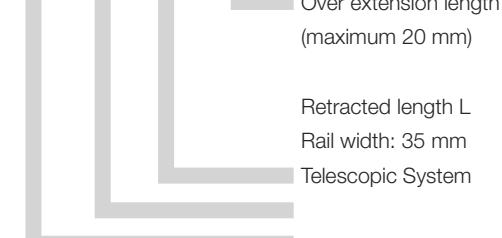

## Recommendation:

$F_{max}$  calculated using this formula allows for an easy manual use. The unit can take higher forces than this, but the required driving force will also be higher.





The proven DryLin® N telescopic system is now available with a locking mechanism.

There are two different versions:

- a) Detent in end and center positions
- b) Precision detent with variable pitch (minimum pitch 10 mm)

- Solid plastic/aluminum design
- Low weight
- Corrosion-free
- Maximum extension up to 1200 mm (Total length)

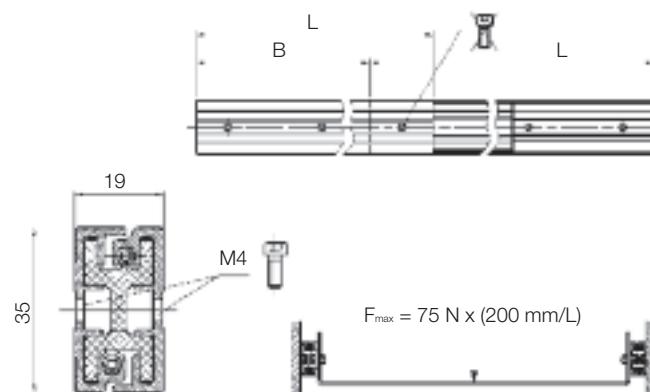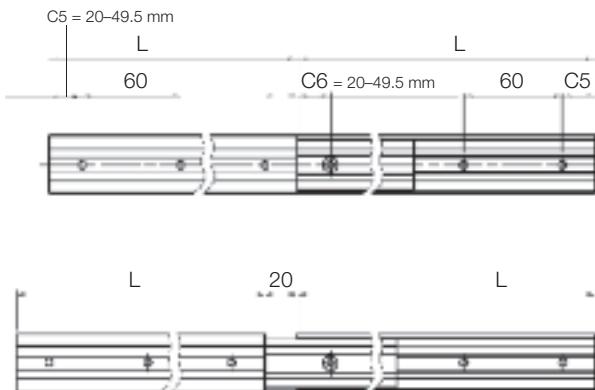

### Dimensions (mm)

Detent in end and center position at full extension

Part No.	B (mm)	H (mm)	L min. (mm)	L max. (mm)
NT-LM-35-... mm	35	19	140	600



DryLin® NT-LM in adjustment of guard




DryLin® NT-LM in guard door adjustment in machine tool

The DryLin® WKM measuring systems are battery powered. The integrated battery guarantees two year operating time. This means a virtually absolute distance measurement is possible. Magnetic tapes fitted as standard. The position value is displayed on a 5-digit LC display.

- Measuring principle: magnetic with magnetic tape (10 · 1.4 mm)
- Resolution: 0.1 mm
- Accuracy:  $\pm(0.1 + 0.01 \cdot \text{measured length (m)})$  mm
- Service life: over 5 years at 100% switch-on time
- Application temperature: +32 to +140°C
- Display: LCD
- Repeat accuracy:  $\pm 1$  Digit
- Absolute and incremental measuring method capability
- Variable zero point
- Carriage can be clamped
- Display optionally right (R) or left (L) of guide carriage
- Max. rail length 4,000 mm  
(Effective measurement max. 3,757 mm)

### Type series WKM-10 and -20

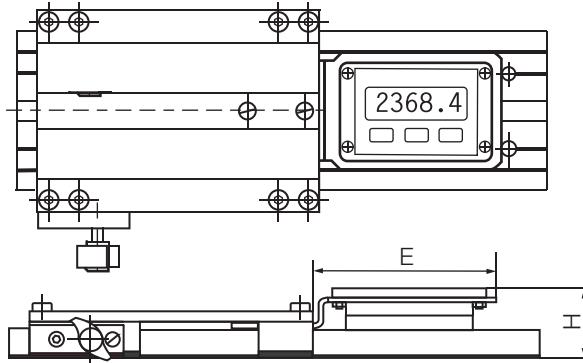


### Dimensions (mm)

Part number	DryLin® linear guide	H	E
WKM-108015-01L	WK-10-80-15-01*	36	93
WKM-108015-01R	WK-10-80-15-01*	36	93
WKM-208015-01L	WK-20-80-15-01*	40	93
WKM-208015-01R	WK-20-80-15-01*	40	93

\*For use on DryLin® W rail WS-10-80 ► Page 27.16

### Type series WKM-11

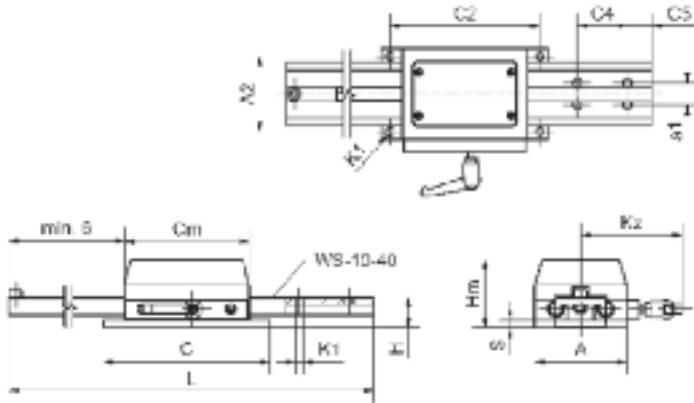

### Dimensions (mm)

Part number	L	C4	C5	a1	C2	A2	K1	C	A	H	S	Cm	Hm	kz
WKM-11-40	2,000	40	20	18	120	80	8.6	133	73	24	8	100	54	82


\*For use on DryLin® W rail WS-10-40 ► Page 27.16

Much less space is required for the latest DryLin® WKMEX measuring device. The sensor head is integrated in the carriage (total height 36 mm). There are three sensor types available, two are compatible with TTL Line Driver. We recommend igus® Energy Chain® series E2 micro or E-Z Chain for guiding the signal cable.

### Type series WKM-10 and -20



- Ready-to-fit measuring device for external signal output
- With 4 edge trigger mode (setting parameters of the display or control, for example, IW4) and +68 °C ambient temperature:  
Resolution:  $\pm(0.025 + 0.02 \cdot L)$  L = measuring length in meters;  
Repeatability:  $\pm 0.025$  mm
- With 1 edge trigger mode (setting parameters of the display or control, for example, IW1) and +68 °C ambient temperature:  
Resolution:  $\pm(0.1 + 0.02 \cdot L)$  L = measuring length in meters;  
Repeatability:  $\pm 0.025$  mm
- Small sensor with integrated evaluation unit
- For use with DryLin® W rail WS-10-80 ► Page 27.16

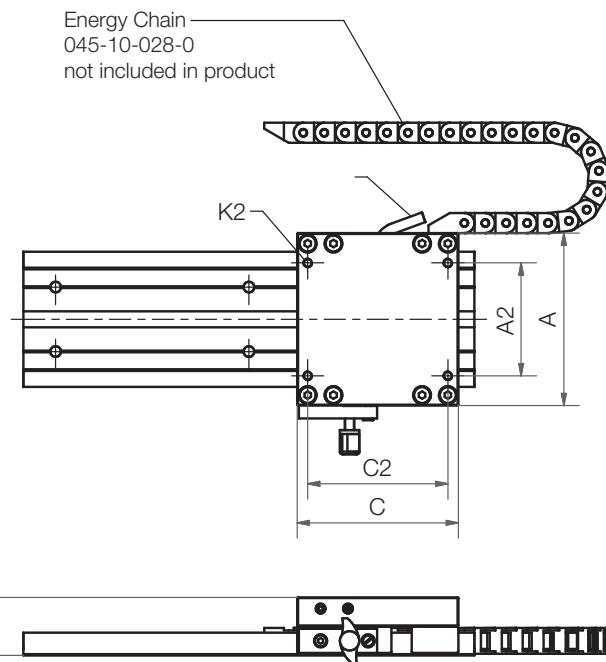

### Dimensions (mm)

Part number	H2	C	C2	A	A2	K2	Resolution
WKMEX-10-80	36	100	87	107	70	M6	0.1



### Versions

Sensor type	Nominal voltage	Output power	Max. length of signal cable
00	10–30 V	10–30 V	30 m
01	10–30 V	TTL Line Driver	50 m
11	5 V	TTL Line Driver	10 m

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.0

## Torque resistant square guide

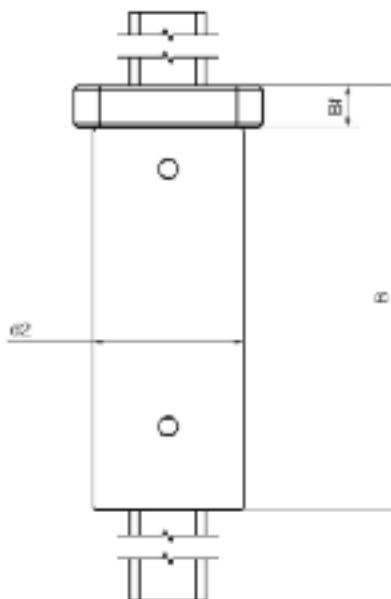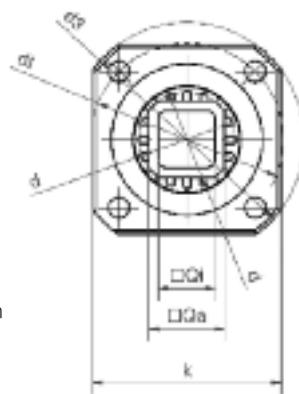

## DryLin® Q rail profile

## Dimensions (mm)

Part number	Weight (kg)	A	H $\pm 0.02$
AWMQ-20	0.55	62	27

## DryLin® Q Housing Bearing


Part number	Weight (kg)	A	H	H1	dQ	Qa	Qi	E1	E2	d	L
QJRMQ-05-20	0.55	62	27	54	25	20	15	48	55	28	85
QJRM-05-20	0.25	62	27	54	25	20	15	48	55	28	40

## DryLin® Q Flange Bearing

Part number	Weight (kg)	k	d2 h7	Bf	d	Qa	Qi	d3 $\pm 0.15$	dt $\pm 0.15$	d	B
QJFMT-02-20	0.24	50	40	11	25	20	15	62	51	28	112
QJFM-02-20	0.14	50	40	11	25	20	15	62	51	28	58

DryLin® Specialists

PDF: [www.igus.com/drylin-pdfs](http://www.igus.com/drylin-pdfs)  
CAD: [www.igus.com/drylin-CAD](http://www.igus.com/drylin-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

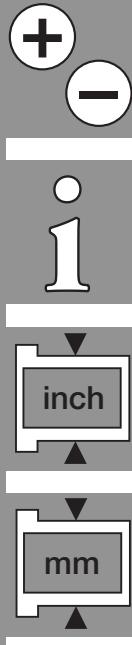

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/drylin-quickspec>

53.10

Telephone 1-800-521-2747  
Fax 1-401-438-7270

DryLin® Specialists

**igus®**



# igubal® Design Guide

# igubal® Selection Guide



## Rod ends

igubal® rod ends are available in a wide variety of different sizes and offered in 2 different series. The standard K series made with igumid G and iglide® L280, and our slightly thinner E series (the E Series and any CL version of a Rod End are offered with a variety of spherical ball materials).

### Section 55



## Clevis Joints

igubal® Clevis Joints are most often used by themselves or in conjunction with our E Series rod ends. There are a variety of different options available.

### Section 56



## Pillow Block

igubal® Pillow Blocks are especially designed to mount with 2-bolts making their installation easy, and the design and material combination allow for high rigidity and high radial load capacity.

### Section 57



## Flange Bearings

igubal® Flange Bearings were designed for shaft support. They are designed to have high rigidity and high radial load capacity. They come in a 2-bolt and 4-bolt option.

### Section 58



## Pressfit Bearings

There are a number of parts that fall under this category. From standard spherical ball in housings to double jointed bearings, pressfit bearings help allow for shaft misalignment.

### Section 59

Temperature	Size Range	Maximum Angle of Pivot	Housing Material	Ball Material
-22°F to +176°F (-30°C to +80°C)  High temp version -40°F to +392°F (-40°C to 200°C)	From 3/16 to 1" to 2mm to 30 mm	14° to 40°	igumid G  <b>HT Material</b> iguton G	<b>Standard:</b> iglide® L280 <b>Other options:</b> iglide® R iglide® J iglide® J4 Metal Sleeve Stainless Steel <b>HT option:</b> iglide® T500
-22°F to +176°F (-30°C to +80°C)	From 3/16 to 3/4" to 4mm to 20 mm	N/A	igumid G	N/A
-22°F to +176°F (-30°C to +80°C)	From 3/16 to 1" to 5mm to 50 mm	17° to 30°	igumid G	<b>Standard:</b> iglide® L280 <b>Other options:</b> iglide® R iglide® J iglide® J4
-22°F to +176°F (-30°C to +80°C)  High temp version -40°F to +392°F (-40°C to 200°C)	From 3/16 to 1" to 4mm to 30 mm	12° to 33°	igumid G  <b>HT Material</b> iguton G	<b>Standard:</b> iglide® L280 <b>Other options:</b> iglide® R iglide® J iglide® J4 <b>HT option:</b> iglide® T500
-40°F to +482°F (-40°C to +250°C)	From 3/16 to 1" to 2mm to 30 mm	5° to 37°	igumid G	<b>Standard:</b> iglide® L280 <b>Other options:</b> iglide® R iglide® J iglide® J4

## igubal® self-aligning maintenance-free plain bearings made of high-performance plastics

igubal® offers a complete line of self-aligning bearings including; spherical bearings, pillow blocks, rod ends, clevis joints and flange bearings to name a few. The igubal® line is easy to install and allows the user to adjust for angular deviations.

With igubal®, it is possible to take advantage of the benefits of high-performance plastics including vibration dampening, ability to operate in water or chemicals, and their resistance to dirt and dust which makes them ideal in applications where a standard greased version will not be suitable.

Compared to its metal counterpart, igubal® is up to 80% lighter in weight and in some cases save on installation space due to smaller profiles. The maintenance-free aspect also helps to keep costs down.

### Advantages of igubal®

- Cost-effective
- Maintenance-free
- Lubrication-free
- Resistant to dust and dirt
- Corrosion-free
- Can be used in liquid media
- Vibration dampening
- Inner race set in housings with very low clearance
- Dirt can become embedded for shaft protection
- 80% lighter than steel

## igubal® Spherical Balls

In the igubal® K series the standard spherical ball is made out of our extremely wear resistant iglide® L280. Spherical balls made out of iglide® L280 material are known for their low coefficient of friction while running dry and extremely low tendency to stick-slip. This is especially important for low loads and very slow movements.

In the igubal® E series or the K series with the CL suffix, the spherical ball may be switched out to offer another alternative depending on application needs. The most popular alternative to iglide® L280 is our iglide® R for its cost advantage and also its low moisture absorption rate for applications where moisture is a concern. iglide® R still maintains a low coefficient of friction. Other specialized alternatives include iglide® J, iglide® J4· iglide® T500 (X) or iglide® UW (meant strictly for underwater applications). See our Materials Section in the front of the catalog for more information on each material

### Advantages:

- Tough, resistant thermoplastic alloy
- Very low coefficients of friction while running dry
- High service life
- Vibration dampening
- Very good abrasion resistance
- Excellent wear resistance
- Maintenance-free
- Very good chemical resistance
- Suitable for rotating, oscillating and linear movements
- Also suitable for soft shafts

## igubal® housing made of igumid G

The housings are made out of igumid G, a highly shock-resistant, long fiber-reinforced plastic. See page x.xx for material data

### Advantages:

- Lightweight
- High mechanical strength
- Shock and impact resistant
- Corrosion-free
- Chemically resistant
- Dimensionally stable



Some models of the igubal® product line



igubal® flange bearings in reflector telescopes at La Palma, Spain, in the adjustment of the individual reflectors



igubal® rod end bearings in the cylinder-controlled steps of an RV




igubal® flange bearings as drive bearings in a conveyor system for bakery products

## Loads

The load capacity of the maintenance-free igubal® bearing elements is very high at normal ambient temperatures. igubal® bearing elements absorb high forces and weigh only a fifth of traditional metal bearing housings. The excellent dampening properties are based on the fact that the plastic material of the two-part bearing can absorb vibrations differently than steel.

However, plastic-specific properties, such as temperature and behavior under long-time stressing, must be taken into consideration when using igubal® bearings. The load capacity should therefore be checked in a performance test, particularly if they are to be used under continuous high loads and at elevated temperatures. See each section for appropriate load data per part type.

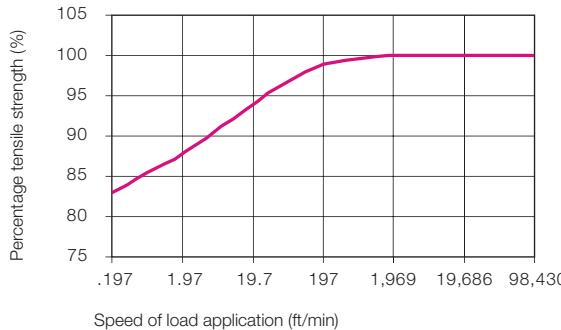

Effect of the speed of load application on the maximum tensile strength of igubal® rod end bearings

## Coefficients of Sliding Friction and Speed

One important advantage of igubal® spherical bearings is that rapid, rotary movements of a mounted shaft take place directly in the spherical portion. In metallic rod ends, rotary motion takes place between the race and the spherical bearing. High speeds can be achieved with igubal® bearings.

igubal® bearings are used in such a way that the angular movements of the spherical bearings takes place at the outer diameter. In contrast, rotations of the shaft are supported directly in the I.D. of the spherical portion. The advantage, therefore, lies in the plastic vs. steel relationship. Plastic produces lower friction and permits high speeds, even when running dry.

## Application Temperatures

igubal® bearing elements can be used in temperatures from -22 to 176°F. The chart shows the effect of temperature on the loading capacity of the igubal® bearing elements.

Application Temperatures	Standard	HT version
Minimum	- 22°F	-40°F
Maximum, long-term	+ 176°F	+392°F
Maximum, short-term	+ 248°F	+464°F

Applications temperatures of igubal® bearing elements



Effect of the temperature on the maximum tensile strength of igubal® rod end bearings

## Chemical Resistance

Both the spherical ball made of iglide® L280 and the housing made of igumid G are resistant to weak lyes, weak acids and fuels, as well as all types of lubricants. You will find a chemicals table starting on Page 1.16. The moisture absorption of igubal® with iglide L280 is approximately 1.3% of weight in standard atmosphere. The saturation limit in water is 6.5%. The moisture absorption of igubal® with iglide® R is approximately .2% of weight in standard atmosphere. The saturation in water is 1.1%. This must be taken into account for these types of applications.

Medium	Resistance
Alcohol	+ to 0
Hydrocarbons, chlorinated	+
Greases, oils without additives	+
Fuels	+
Diluted acids	0 to -
Strong acids	-
Diluted alkaline	+
Strong alkaline	0

+ resistant, 0 conditionally resistant, - not resistant

### Chemical resistance of iglide® L280

All data given concerns the chemical resistance at room temperature (68°F). For a complete list, see page 1.16

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
 CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

## Radiation Resistance

Self-aligning igubal® plain bearings are resistant to radiation up to an intensity of  $3 \times 10^2$  Gy.

## UV Resistance

The corrosion resistance of the igubal® bearings give them special value for outside applications.

igubal® bearing elements are permanently resistant to UV radiation. A small change in color (dark coloration) of the spherical ball due to UV radiation does not effect the mechanical, electrical or thermal properties.

## Areas of Application

igubal® bearing elements can be used without problems even in harsh environments. In moist or wet environments, the bearings are corrosion-resistant, and resistant to weak acids and lyes. The application temperatures range from -22 to 176°F. Resistance to dirt and dust is outstanding.

Seals are not necessary, even in extremely contaminated conditions. This is true for fine dust as well as coarse dirt, which is present in agricultural equipment. The housing is made of an impact-resistant composite material which tolerates high alternating loads.



igubal® rod end bearings in the spring loaded rear axle of a bicycle



igubal® flange bearings in the drive shaft of an outdoor cleaning machine



igubal® rod end bearing and spherical ball in a linear position sensor

## Online tools.



For online calculation visit:  
[www.igus.com](http://www.igus.com) and click on  
the calculator

## Material Table iglide® J, J4, L280, R, igumid G, UW and T500

General Properties	Unit	iglide® J	iglide® J4	iglide® L280	iglide® R
Color		yellow	gray	yellow	red
Max. moisture absorption at 73°F/50% r.h.	% weight	0.3	0.3	1.3	0.2
Max. moisture absorption	% weight	1.3	1.3	6.5	1.1
Mechanical Properties					
Modulus of elasticity	psi	348,000	340,750	507,500	290,000
Tensile strength at 68°F	psi	10,585	10,150	18,125	10,150
Permissible static surface pressure (68°F)	psi	5,075	5,075	8,700	3,335
Shore D-hardness		74	74	77	77
Physical and Thermal Properties					
Max. long-term application temperature	°F	194	194	194	194
Max. short-term application temperature	°F	248	248	356	230
Min. application temperature	°F	-58	-58	-40	-58

General Properties	Unit	igumid G	iglide® UW	iglide® T500
Color		black	black	black
Max. moisture absorption at 73°F/50% r.h.	% weight	1.4	0.2	0.3
Max. moisture absorption	% weight	5.6	0.8	1.1
Mechanical Properties				
Modulus of elasticity	psi	1,131,000	392,300	348,000
Tensile strength at 68°F	psi	34,800	13,000	13,775
Permissible static surface pressure (68°F)	psi	NA	5,800	21,750
Shore D-hardness		81	78	81
Physical and Thermal Properties				
Max. long-term application temperature	°F	248	194	482
Max. short-term application temperature	°F	356	230	590
Min. application temperature	°F	-40	-58	-148

igubal®  
Spherical Bearings

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1.  
+ | -

inch  
mm

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

**igus®**



**igubal® Rod Ends**



**KBRI**  
**KBLI**  
Inner Thread  
• inch

Page 55.6

K Series



**EBRI**  
**EGLI**  
Inner Thread  
• inch

Page 55.7

E Series



**KBRM**  
**KBLM**  
Inner Thread  
• metric  
Also available:  
Metal sleeve

Page 55.8

K Series



**KBRM CL**  
Inner Thread  
• metric

Page 55.10

K Series



**KCRM**  
**KCLM**  
Inner Thread  
• metric

Page 55.11

K Series



**EBRM**  
**EGLM**  
Inner Thread  
• metric

Page 55.12

E Series



**EBRM HT**  
**EGLM HT**  
Inner Thread  
• metric

Page 55.13

E Series



**KARI/KALI**  
Outer Thread  
• inches

Page 55.14

K Series



**KARM**  
**KALM**  
Outer Thread  
• metric  
Also available:  
Metal sleeve

Page 55.15

K Series



**KARM CL**  
Outer Thread  
• metric

Page 55.16

K Series



**EARM**  
**EALM**  
Outer Thread  
• metric

Page 55.17

E Series



**EARM HT**  
**EALM HT**  
Outer Thread  
• metric

Page 55.18

E Series



**PKRM**  
**PKLM**  
Accessory  
Adapter Bolt

Page 55.19

K Series



**WGRM**  
**WGLM**  
Accessory  
Ball & Socket Joint  
Elbow

Page 55.20



**WGRM-LC**  
**WGLM-LC**  
Accessory

Page 55.21



**AGRM**  
**AGLM**  
Accessory  
Ball & Socket Joint  
Axial

Page 55.22



**AGRM-LC**  
**AGLM-LC**  
Accessory

Page 55.22

Typical industries and applications

- Industrial
- Machine building
- Industrial
- Packaging etc.




Bicycles



Textile industry



Packaging industry

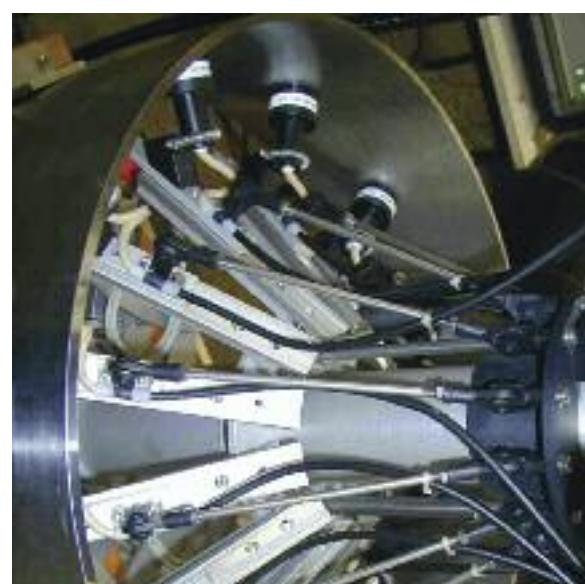

Offshore industry




## Product Range

- Standard Styles:  
Dimensional Series E  
Dimensional Series K
- Type A - with outer threads
- Type B - with inner threads
- For shaft diameters:  
Inch sizes from 3/16 - 1 in.  
Metric sizes from 2 - 30 mm

## Part Number Structure

### Part Number Structure

**K B R I - 10 - MH**

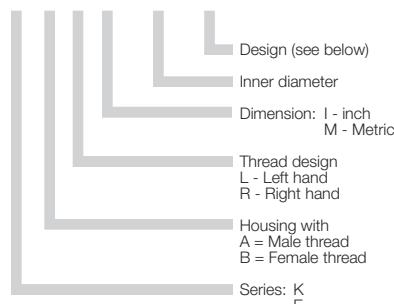

Design codes:  
 CL = 2nd generation - only K series offering ability to change spherical ball material  
 F = fine thread pitch  
 HT = high temperature  
 MH = with metal sleeve  
 J = with spherical ball made from iglide® J  
 J4 = with spherical ball made from iglide® J4  
 R = with spherical ball made from iglide® R  
 X = with spherical ball made from iglide® X  
 EK = with stainless steel ball

The example given is the number for a rod end bearing of the dimensional series K with metric inner-right threading. The inner diameter of the spherical ball is 10 mm. It is a special design with a metal sleeve.

For the most part, the thread diameter of the bolt corresponds to the inner diameter — here it is M10. However, please pay attention to the following tables.

\*The E series bearing is slightly thinner and costs less than its K series counterpart.

## Usage Guidelines



- If a lightweight option is preferred
- In rotating, oscillating and linear movements
- If vibration dampening is desired
- If quiet operation is desired
- If corrosion resistance is required
- If chemical resistance is required
- If high rigidity is needed



- If temperatures are higher than +194°F  
► HT version
- If rotation speeds are above 100 fpm
- If the ball is rotating and not the shaft in the ball
- If extreme tensile loads are present
- If dimensions above 1" or 30mm are necessary

The dimensional series K is available in inch dimensions, as well as a special version containing a stainless steel sleeve in the inner race. This allows a significantly higher torque than for the standard plastic race. Please ask us about quantities, availability and pricing.





## Advantages

- Maintenance-free
- High strength under impact loads
- Very high tensile strength for varying loads
- Compensation for misalignment
- Compensation for edge loads
- Resistant to dirt, dust and lint
- Resistant to corrosion and chemicals
- High vibration dampening capacity
- Suitable for rotating, oscillating and linear movements
- Lightweight
- Dimensional series K and E, dimensions according to standard DIN ISO 12240

## Recommended Shaft Tolerances

Inch	Shaft		Metric	Shaft	
	Min.	Max.		Min.	Max.
3/16	0.1888	0.1900	2mm	1.975	2.000
1/4	0.2485	0.2500	3mm	2.975	3.000
5/16	0.3110	0.3125	5mm	4.970	5.000
3/8	0.3735	0.3750	6mm	5.970	6.000
7/16	0.4358	0.4375	8mm	7.964	8.000
1/2	0.4983	0.5000	10mm	9.964	10.000
5/8	0.6235	0.6250	12mm	11.957	12.000
3/4	0.7479	0.7500	16mm	15.957	16.000
1	0.9980	1.0000	20mm	19.948	20.000

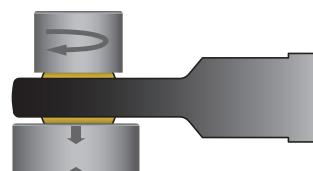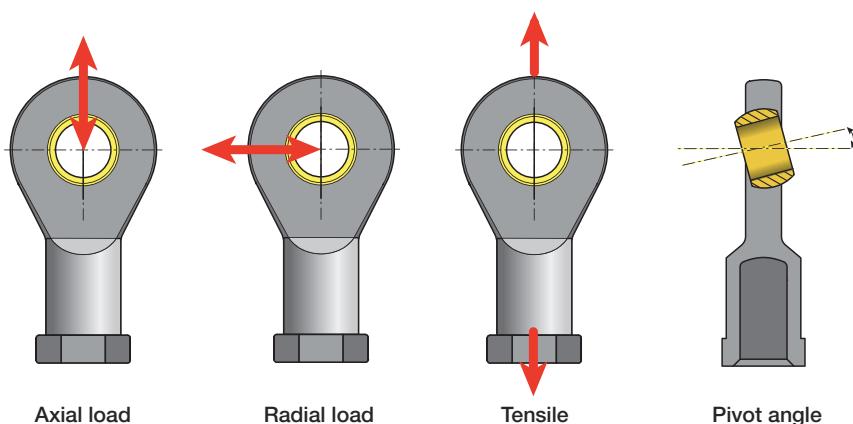


Maximum torque  
through ball



## Loads

igubal® rod end bearings handle high loads at normal room temperatures, have excellent dampening properties and weigh only a fifth of traditional metallic rod end bearings. In applications with high continuous loads and high temperatures, the loading capacity of igubal® rod end bearings should be tested in an experiment that duplicates the application.

See page 28.4 for load diagram.

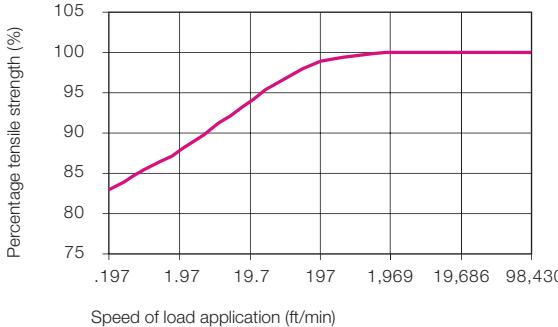

**Effect of the speed of load application on the maximum tensile strength of igubal® rod end bearings**

## Coefficients of Friction and Speed

One important advantage of igubal® spherical bearings is that rapid, rotary movements of a mounted shaft take place directly in the spherical portion. In metallic rod ends, rotary motion takes place between the race and the spherical bearing. High speeds can be achieved with igubal® bearings.

igubal® bearings are used in such a way that the angular movements of the spherical bearings take place at the spherical outer diameter. In contrast, rotations of the shaft are supported directly in the inner diameter of the spherical portion. The advantage, therefore, lies in the plastic vs. steel relationship. Plastic produces lower friction and permits high speeds, even when running dry.

The maintenance-free igubal® bearing system is also suited for linear and oscillating shaft movements.




**Effect of the temperature on the maximum tensile strength of igubal® rod end bearings**

## Tolerances

igubal® rod end bearings can be used at different tolerances depending on the individual application. As a standard program, they are designed with a large amount of bearing clearance, which permits secure operation even at high rotational speeds. The bore of the inner race is produced within a standard tolerance range. Shafts should also meet recommended tolerances. Please contact us with any questions regarding tolerances.

► Tolerance Table, Page 1.14

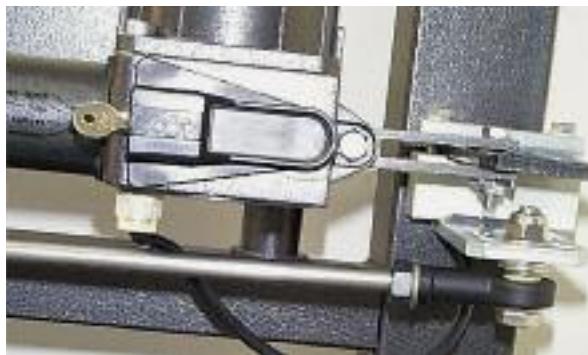




igubal® rod end bearings in the closing mechanism of an outdoor security gate

Thread Name	Pitch (mm)
M 2	0.40
M 3	0.50
M 4	0.70
M 5	0.80
M 6	1.00
M 8	1.25
M 10	1.50
M 10 F	1.25
M 12	1.75
M 12 F	1.25
M 14	2.00
M 16	2.00
M 16 F	1.50
M 18	1.50
M 20	2.50
M 20 M 20	1.50
M 22	1.50
M 24	2.00
M 27	2.00
M 30	2.00

Thread pitches of the igubal® rod end bearings

igubal® Rod Ends

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)






**igus®**

## igubal® Spherical Bearings Rod Ends - inch - KBRI / KBLI

igubal® Rod Ends

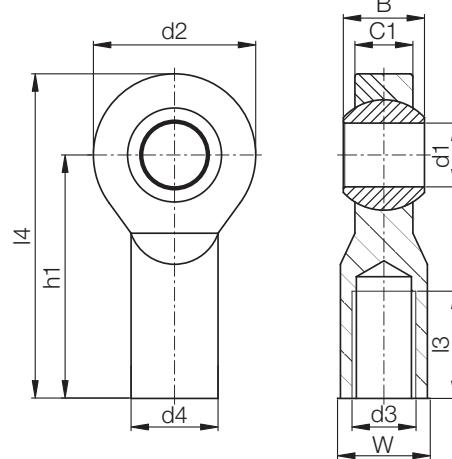

### Material:

Housing - igumid G  
Ball - iglide® L280

See Section 40 for ball material information


### Dimensions (inch)

Part No.	Part No.	d1 (E10)	d2	d3	d4	C1	B	h1	l3	l4	W
Right thread	Left thread										
KBRI-03	KBLI-03	.1900	.625	10-32	.406	.246	.312	1.062	.500	1.374	.312
KBRI-04	KBLI-04	.2500	.750	1/4-28	.469	.272	.365	1.312	.687	1.687	.375
KBRI-05	KBLI-05	.3125	.875	5/16-24	.500	.340	.437	1.375	.687	1.813	.437
KBRI-06	KBLI-06	.3750	1.000	3/8-24	.687	.394	.500	1.625	.812	2.125	.562
KBRI-07	KBLI-07	.4375	1.125	7/16-20	.750	.456	.562	1.812	.937	2.374	.625
KBRI-08	KBLI-08	.5000	1.312	1/2-20	.875	.487	.625	2.125	1.062	2.781	.750
KBRI-10	KBLI-10	.6250	1.500	5/8-18	1.000	.545	.750	2.500	1.375	3.250	.875
KBRI-12	KBLI-12	.7500	1.750	3/4-16	1.125	.676	.875	2.875	1.562	3.750	1.000
KBRI-16	KBLI-16	1.0000	2.750	1-12	1.625	1.000	1.375	4.125	2.125	5.500	1.500

### Load Data

Part No.	Part No.	Maximum static Tensile Strength		Maximum Radial Load		Minimum Thread Depth (inch)	Maximum Torque Thread Strength ft lbs • force	Max. Torque Strength Through Ball ft lbs • force
		Short-term (lbs)	Long-term (lbs)	Short-term (lbs)	Long-term (lbs)			
Right thread	Left thread							
KBRI-03	KBLI-03	203	102	67	34	.350	1.47	2.2
KBRI-04	KBLI-04	248	124	90	45	.480	3.68	2.9
KBRI-05	KBLI-05	383	192	112	56	.480	4.42	7.3
KBRI-06	KBLI-06	450	225	225	112	.568	5.16	11.6
KBRI-07	KBLI-07	518	259	270	135	.655	13.27	18.4
KBRI-08	KBLI-08	585	293	337	169	.743	16.96	25.8
KBRI-10	KBLI-10	1103	551	382	191	.962	22.12	36.8
KBRI-12	KBLI-12	1260	630	517	259	1.093	29.50	51.6
KBRI-16	KBLI-16	1349	674	584	293	1.488	33.92	62.6

Right thread	Left thread	Maximum Angle of Pivot	Weight (g)
KBRI-03	KBLI-03	25°	3.3
KBRI-04	KBLI-04	25°	5.1
KBRI-05	KBLI-05	25°	7.1
KBRI-06	KBLI-06	22°	12.6
KBRI-07	KBLI-07	22°	16.1
KBRI-08	KBLI-08	22°	26.5
KBRI-10	KBLI-10	22°	38.7
KBRI-12	KBLI-12	22°	54.4
KBRI-16	KBLI-16	20°	197.5

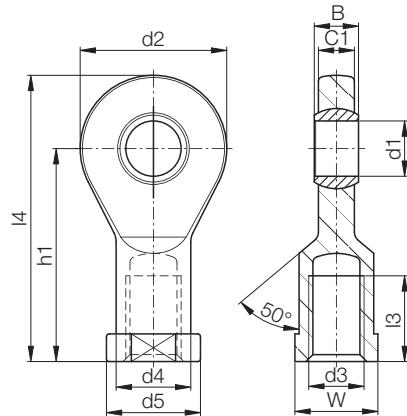

**Material:**

Housing - igumid G

Ball - iglide® L280

Also available:

iglide® R, iglide® J and iglide® J4

**See Section 40 for ball material information**

**Dimensions (inch)**

Part No.	Part No.	d1 (E10)	d2	d3	d4	d5	C1	B	h1	I3	I4	W	Max. Angle of Pivot
EBRI-03	EBLI-03	0.1900	0.748	10-32	0.3543	0.4331	0.1732	0.1900	1.1811	0.4724	1.5551	0.35	30°
EBRI-04	EBLI-04	0.2500	0.827	1/4-28	0.4331	0.5118	0.1732	0.2500	1.1811	0.4724	1.5945	0.43	25°
EBRI-05	EBLI-05	0.3125	0.945	5/16-24	0.5118	0.6299	0.2362	0.3125	1.4173	0.6299	1.8898	0.55	22°
EBRI-06	EBLI-06	0.3750	1.142	3/8-24	0.5906	0.7480	0.2756	0.3750	1.6929	0.7087	2.2638	0.67	22°
EBRI-07	EBLI-07	0.4375	1.339	7/16-20	0.7087	0.8661	0.3150	0.4063	1.9685	0.7874	2.6378	0.75	18°
EBRI-08	EBLI-08	0.5000	1.339	1/2-20	0.7087	0.8661	0.3150	0.4063	1.9685	0.7874	2.6378	0.75	18°
EBRI-10	EBLI-10	0.6250	1.693	5/8-18	0.8270	1.0230	0.4134	0.5000	2.5394	1.0433	3.3858	0.87	16°
EBRI-12	EBLI-12	0.7500	2.087	3/4-16	1.0630	1.3386	0.5118	0.6250	3.0315	1.2205	4.0748	1.18	14°

**Load Data**

Part No.	Part No.	Max. static Tensile Strength		Max. Radial Load		Min. Thread Depth (inch)	Max. Torque Strength Outer thread (ft•lbs)	Max. Torque Strength Through Ball (ft•lbs)	Weight (g)
		Short-term	Long-term	Short-term	Long-term				
		(lbs)	(lbs)	(lbs)	(lbs)				
EBRI-03	EBLI-03	292	146	34	17	.315	1.48	1.5	3.1
EBRI-04	EBLI-04	337	168	45	22	.315	3.68	1.8	3.8
EBRI-05	EBLI-05	449	224	101	51	.433	4.42	5.2	6.9
EBRI-06	EBLI-06	517	258	112	56	.512	5.17	10.3	11.5
EBRI-07	EBLI-07	741	370	124	62	.551	13.28	18.4	17.6
EBRI-08	EBLI-08	741	370	124	62	.551	16.96	18.4	18.1
EBRI-10	EBLI-10	1124	539	191	96	.709	22.00	22.1	31.9
EBRI-12	EBLI-12	1618	809	405	202	.866	30.00	29.5	61.5

For another spherical bearing material please add J, R or J4 to the part number; e.g. EBRI-08R

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





**igus®**

## igubal® Spherical Bearings Rod Ends - mm - KBRM / KBLM

igubal® Rod Ends


Telephone 1-800-521-2747  
1-401-438-7270  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



Standard Design

Design with Metal  
Sleeve (MH)

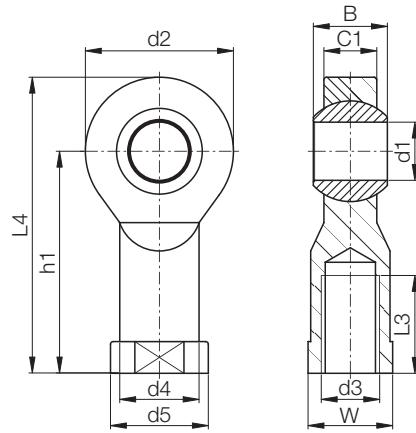

Dimensions (mm)

Right thread	Left thread	E10	d1	d2	d3	d4	d5	C1	B without MH	B with MH ±0.2	h1	L3	L4	W
KBRM-02	KBLM-02	2	9	M02		4.0	4.6	3.0	4	4.1	12.5	6	17	SW04
KBRM-03	KBLM-03	3	13	M03		6.5	8.0	4.5	6	6.1	18.5	8	25	SW07
KBRM-05 M4	KBLM-05 M4	5	18	M04		9.0	12.0	6.0	8	8.1	27	10	36	SW09
KBRM-05	KBLM-05	5	18	M05		9.0	12.0	6.0	8	8.1	27	10	36	SW09
KBRM-06	KBLM-06	6	20	M06		10.0	13.0	7.0	9	9.2	30	12	40	SW11
KBRM-08	KBLM-08	8	24	M08		13.0	16.0	9.0	12	12.2	36	16	48	SW14
KBRM-10	KBLM-10	10	30	M10		15.0	19.0	10.5	14	14.2	43	20	58	SW17
KBRM-10 F	KBLM-10 F	10	30	M10x1.25		15.0	19.0	10.5	14	14.2	43	20	58	SW17
KBRM-12	KBLM-12	12	34	M12		18.0	22.0	12.0	16	16.2	50	22	67	SW19
KBRM-12 F	KBLM-12 F	12	34	M12x1.25		18.0	22.0	12.0	16	16.2	50	22	67	SW19
KBRM-14	KBLM-14	14	38	M14		20.0	25.0	13.5	19	19.2	57	25	76	SW22
KBRM-16	KBLM-16	16	42	M16		22.0	27.0	15.0	21	21.2	64	28	85	SW22
KBRM-16 F	KBLM-16 F	16	42	M16x1.5		22.0	27.0	15.0	21	21.2	64	28	85	SW22
KBRM-18	KBLM-18	18	46	M18x1.5		25.0	31.0	16.5	23	23.2	71	32	94	SW27
KBRM-20	KBLM-20	20	50	M20x2.5		28.0	34.0	18.0	25	25.3	77	33	102	SW30
KBRM-20 M20	KBLM-20 M20	20	50	M20x1.5		28.0	34.0	18.0	25	25.3	77	33	102	SW30
KBRM-22	KBLM-22	22	56	M22x1.5		30.0	37.0	20.0	28	-	84	37	112	SW32
KBRM-25	KBLM-25	25	60	M24x2.0		32.0	41.0	22.0	31	-	94	42	124	SW36
KBRM-30	KBLM-30	30	70	M30x2.0		37.0	50.0	25.0	37	-	110	51	145	SW41

Rod end bearings can be ordered in metric dimensions with metal sleeve with the addition of MH after the part numbers listed here  
Example: KBRM-10 MH

### Material:

Housing - igumid G  
Ball - iglide® L280, with metal sleeve

See Section 40 for ball material information




## Load Data


Part No.	Part No.	Max. static Tensile Strength		Max. Radial Load		Min. Thread Depth (mm)	Max. Torque Strength Inner thread (ft•lbs)	Max. Torque Strength	
		Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)			Standard (ft•lbs)	MH (ft•lbs)
KBRM-02	KBLM-02	134	67	13	6	4	.22	.74	1.5
KBRM-03	KBLM-03	179	89	22	11	5	.37	1.5	3.0
KBRM-05 M4	KBLM-05 M4	224	112	56	28	7	.55	3.7	8.9
KBRM-05	KBLM-05	224	112	56	28	7	.74	3.7	8.9
KBRM-06	KBLM-06	314	157	89	44	8	1.10	7.4	11.1
KBRM-08	KBLM-08	472	236	157	78	11	7.4	8.9	29.5
KBRM-10	KBLM-10	696	348	179	89	13	11.1	14.8	36.9
KBRM-10 F	KBLM-10 F	696	348	179	89	13	4.4	14.8	36.9
KBRM-12	KBLM-12	809	404	202	101	15	14.8	22.1	51.6
KBRM-12 F	KBLM-12 F	809	404	202	101	15	11.1	22.1	51.6
KBRM-14	KBLM-14	899	449	224	112	17	18.4	25.8	55.3
KBRM-16	KBLM-16	944	472	292	146	19	22.1	29.5	81.1
KBRM-16 F	KBLM-16 F	944	472	292	146	19	20.3	29.5	81.1
KBRM-18	KBLM-18	1034	517	359	179	21	33.2	33.2	110.6
KBRM-20	KBLM-20	1213	606	472	236	22	59.0	40.6	147.5
KBRM-20 M20	KBLM-20 M20	1213	606	472	236	22	44.3	40.6	147.5
KBRM-22	KBLM-22	1573	786	494	247	25	55.3	44.3	166.0
KBRM-25	KBLM-25	1910	955	517	258	28	88.5	44.3	191.8
KBRM-30	KBLM-30	2360	1180	562	281	34	99.5	44.3	221.3

Part No.	Part No.	Maximum Angle of Pivot	Weight (g)
Right thread	Left thread		
KBRM-02	KBLM-02	30°	0.4
KBRM-03	KBLM-03	30°	2.7
KBRM-05 M4	KBLM-05 M4	30°	3.5
KBRM-05	KBLM-05	30°	3.4
KBRM-06	KBLM-06	29°	4.7
KBRM-08	KBLM-08	25°	8.6
KBRM-10	KBLM-10	25°	14.6
KBRM-10 F	KBLM-10 F	25°	14.6
KBRM-12	KBLM-12	25°	22.0
KBRM-12 F	KBLM-12 F	25°	22.0
KBRM-14	KBLM-14	23°	30.9
KBRM-16	KBLM-16	23°	39.6
KBRM-16 F	KBLM-16 F	23°	39.6
KBRM-18	KBLM-18	23°	55.0
KBRM-20	KBLM-20	23°	73.5
KBRM-20 M20	KBLM-20 M20	23°	73.5
KBRM-22	KBLM-22	22°	94.8
KBRM-25	KBLM-25	22°	119.8
KBRM-30	KBLM-30	22°	177.0

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1







**igus®**

## igubal® Spherical Bearings Rod Ends - mm - KBRM CL

igubal® Rod Ends

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

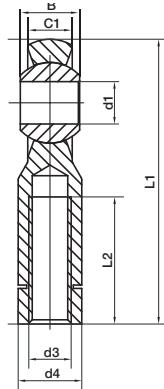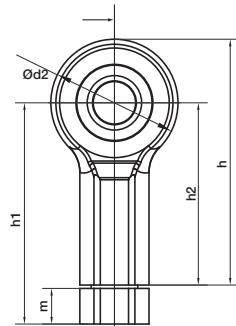

### Dimensions (mm)

Part No.	d1 (E10)	d2	d3	d4	B	C1	h	h1	h2	L2	L1	Max. pivot angle
KBRM-06 CL	6	20	M06	SW10	9	7	40	5,7	30	20	46.5	40°
KBRM-08 CL	8	24	M08	SW13	12	9	48	7,5	36	25	56.3	35°
KBRM-10 CL	10	30	M10	SW15	14	10.5	58	52.2	43	30	67.2	35°

► Tolerance Table, Page 1.14

### Load Data

Part No.	Maximum static tensile strength		Maximum radial load		Minimum thread depth (mm)	Max. torque strength outer thread (ft•lbs)	Max. torque through Ball		Weight (g)
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)			standard (ft•lbs)	MH (ft•lbs)	
KBRM-06 CL	315	158	90	45	8	1.106	7.376	11.060	4.5
KBRM-08 CL	473	236	158	79	11	7.376	8.851	29.500	8.6
KBRM-10 CL	698	349	180	90	13	11.060	14.750	36.880	14.1

For rod end bearings with metal sleeve please add **MH** to the part number, e.g. KBRM-10 CL **MH**.

For another spherical bearing material please add **J**, **J4**, or **R** to the part number, e.g. KBRM-10 CL **J**.

### Material:

Housing - igumid G

Ball - iglide® L280

Also available:

iglide® J, iglide® J4, iglide® R,  
with metal sleeve

**See Section 40 for ball  
material information**



Simple assembly due to the  
hexagonal body and the  
integrated lock nut.



### Special properties

- Available with metal sleeve for higher torque strength

### Material:


Housing - igumid G

Ball - iglide® L280

Also available:

iglide® J, iglide® J4, iglide® R,  
with metal sleeve

**See Section 60 for ball  
material information**

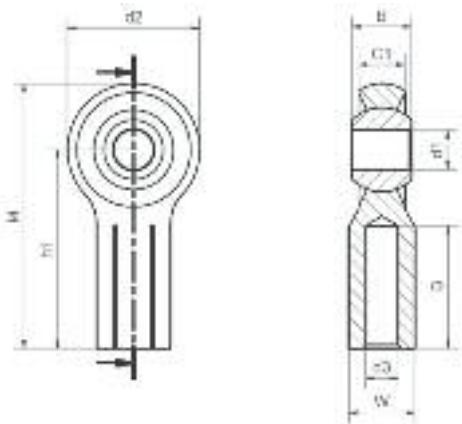

### Dimensions (mm)

Part No.	Part No.	d1	d2	d3	W	B	C1	h1	L3	L4	Max. pivot angle
Right thread	Left thread (E10)										
KCRM-06	KCLM-06	6	20	M06	SW10	9	7	30	13.5	40	40°
KCRM-08	KCLM-08	8	24	M08	SW13	12	9	36	17	48	35°
KCRM-10	KCLM-10	10	30	M10	SW15	14	10,5	43	22	58	35°

► Tolerance Table, Page 1.14

### Load Data

Part No.	Part No.	Maximum static tensile strength		Maximum Static radial load		Max. torque strength Inner thread	Max. torque through Ball		Weight (g)
		Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)		Standard (ft•lbs)	MH (ft•lbs)	
Right thread	Left thread								
KCRM-06	KCLM-06	315	156	67	34	.55	7.376	11.060	4.2
KCRM-08	KCLM-08	472	236	112	56	1.48	8.851	29.500	7.6
KBRM-10	KCLM-10	697	337	180	90	2.2	14.750	36.880	12.8

For rod end bearings with metal sleeve please add **MH** to the part number, e.g. KCRM-10 **MH**.

For another spherical bearing material please add **J**, **J4**, or **R** to the part number, e.g. KBRM-10 CL **J**.

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1






**igus®**

## igubal® Spherical Bearings Rod Ends - mm - EBRM / EBLM

igubal® Rod Ends

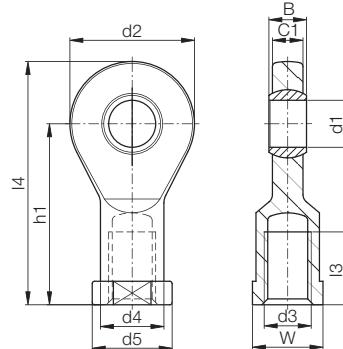

Dimensions (mm)

### Material:

Housing - igumid G

Ball - iglide® L280

Also available :

iglide® R, iglide® J and iglide® J4

See Section 40 for ball material information

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

Part No.	Part No.	d1	d2	d3	d4	d5	C1	B	h1	I3	I4	W	Max. Angle of Pivot
Right thread	Left thread	(E10)											
EBRM-04	EBLM-04	4	15	M04	8.0	9.2	3.5	5	22.5	9.5	30.0	SW08	33°
EBRM-05	EBLM-05	5	19	M05	9.0	11	4.4	6	30	12	39.5	SW09	33°
EBRM-06	EBLM-06	6	21	M06	11.0	13	4.4	6	30	12	40.5	SW11	27°
EBRM-08	EBLM-08	8	24	M08	13.0	16	6.0	8	36	16	48.0	SW14	24°
EBRM-10	EBLM-10	10	29	M10	15.0	19	7.0	9	43	18	57.5	SW17	24°
EBRM-10 F	EBLM-10 F	10	29	M10x1.25	15.0	19	7.0	9	43	18	57.5	SW17	24°
EBRM-12	EBLM-12	12	34	M12	18.0	22	8.0	10	50	20	67.0	SW19	21°
EBRM-12 F	EBLM-12 F	12	34	M12x1.25	18.0	22	8.0	10	50	20	67.0	SW19	21°
EBRM-15	EBLM-15	15	40	M14	21.0	26	10.0	12	61	26	81.0	SW22	21°
EBRM-16	EBLM-16	16	43	M16x1.5	-	-	10.5	13	64.5	26.5	86.0	SW22	21°
EBRM-16 F	EBLM-16 F	16	46	M20x1.5	-	-	10.5	13	64.5	26.5	86.0	SW22	21°
EBRM-17	EBLM-17	17	46	M16	24.0	30	11.0	14	67	27	90.0	SW27	21°
EBRM-17 F	EBLM-17 F	17	46	M16x1.5	24.0	30	11.0	14	67	27	90.0	SW27	18°
EBRM-20	EBLM-20	20	53	M20x1.5	27.0	34	13.0	16	77	31	103.5	SW30	16°
EBRM-20 M20	EBLM-20 M20	20	53	M20x2.5	27.0	34	13.0	16	77	31	103.5	SW30	16°
EBRM-25	EBLM-25	25	64	M24x2.0	34.0	41	17.0	20	94	38	126.5	SW36	16°
EBRM-30	EBLM-30	30	73	M30x2.0	41.0	48	19.0	22	110	47	146.5	SW41	13°

► Tolerance Table, Page 1.14

### Load Data

Part No.	Part No.	Max. static		Max.		Min. Thread Depth (mm)	Max. Torque Strength Inner thread (ft•lbs)	Max. Torque Strength Through Ball (ft•lbs)	Weight (g)
		Tensile Strength	Radial Load	Short term (lbs)	Long term (lbs)				
Right thread	Left thread	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Thread Depth (mm)	Inner thread (ft•lbs)	Through Ball (ft•lbs)	(g)
EBRM-04	EBLM-04	180	90	22	11	7	.3	1.5	1.8
EBRM-05	EBLM-05	292	146	34	17	8	.4	1.5	3.2
EBRM-06	EBLM-06	337	168	45	22	8	1.1	1.8	4.0
EBRM-08	EBLM-08	449	224	101	51	11	3.7	5.2	6.9
EBRM-10	EBLM-10	517	258	112	56	13	11.1	10.3	11.2
EBRM-10 F	EBLM-10 F	517	258	112	56	13	4.4	10.3	11.2
EBRM-12	EBLM-12	741	370	124	62	14	14.8	18.4	17.1
EBRM-12 F	EBLM-12 F	741	370	124	62	14	11.1	18.4	17.1
EBRM-15	EBLM-15	1079	539	180	90	18	18.4	22.1	28.9
EBRM-16	EBLM-16	1124	562	191	95	18	14.8	23.6	32.6
EBRM-16 F	EBLM-16 F	1124	562	191	95	18	11.1	23.6	32.6
EBRM-17	EBLM-17	1191	595	247	124	19	22.1	25.8	42.4
EBRM-17 F	EBLM-17 F	1191	595	247	124	19	20.3	25.8	42.4
EBRM-20	EBLM-20	1618	809	405	202	22	44.3	29.5	65.8
EBRM-20 M20	EBLM-20 M20	1618	809	405	202	22	59.0	29.5	65.8
EBRM-25	EBLM-25	2248	1124	584	292	27	84.8	40.6	125.9
EBRM-30	EBLM-30	2360	1180	674	337	33	95.9	51.6	184.1

For another spherical bearing material please add **J**, **J4**, or **R** to the part number, e.g. EBRM-10 CL J.

# igubal® Spherical Bearings Rod Ends - mm - EBRM HT / EBLM HT

The EBRMHT / EBLM HT version is for those applications with higher temperature requirements



## Special properties


- For temperatures up to 392 °F
- Dimensional series K according to standard DIN ISO 12240

## Material:

Housing - iguton G

Ball - iglide® T500

**See Section 40 for ball material information**

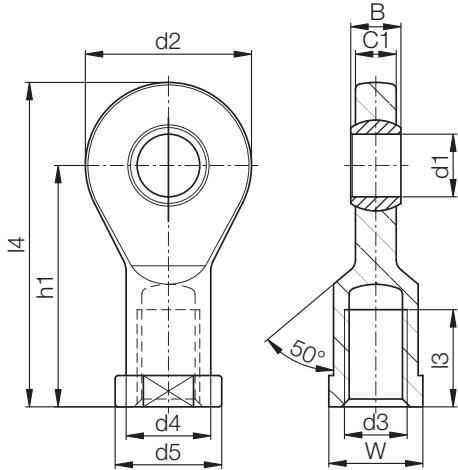

## Dimensions (mm)

Part No.	Part No.	d1 (E10)	d2	d3	d4	d5	C1	B	h1	I3	I4	W	Max. angle of pivot	Weight
Right thread	Left thread													
EBRM-05 HT	EBLM-05 HT	5	19	M05	9.0	11	4.4	6	30	12	39.5	SW09	33°	3.8
EBRM-06 HT	EBLM-06 HT	6	21	M06	11.0	13	4.4	6	30	12	40.5	SW11	27°	5.0
EBRM-08 HT	EBLM-08 HT	8	24	M08	13.0	16	6.0	8	36	16	48.0	SW14	24°	8.5
EBRM-10 HT	EBLM-10 HT	10	29	M10	15.0	19	7.0	9	43	18	57.5	SW17	24°	13.7
EBRM-12 HT	EBLM-12 HT	12	34	M12	18.0	22	8.0	10	50	20	67.0	SW19	21°	21.4

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

1  
+  
I  
○

inch  
mm




**igus®**

## igubal® Spherical Bearings Rod Ends - inch - KARI / KALI

igubal® Rod Ends

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

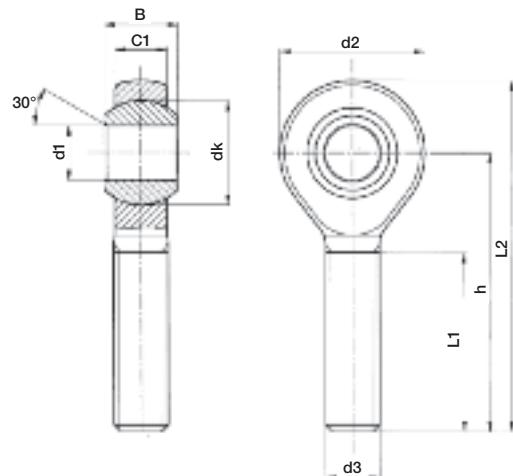

Dimensions (inch)

Part No. Right thread	Part No. Left thread	d1 (E10)	d2	d3	C1	B	h	L1	L2	Max. Pivot angle	Weight (g)
KARI-03	KALI-03	.1900	.625	10-32	.234	.312	1.250	.750	1.563	25°	2.1
KARI-04	KALI-04	.2500	.750	1/4-28	.250	.365	1.562	1.000	1.937	25°	3.5
KARI-05	KALI-05	.3125	.875	5/16-24	.312	.437	1.875	1.250	2.313	25°	6.0
KARI-06	KALI-06	.3750	1.000	3/8-24	.359	.500	1.938	1.250	2.438	22°	8.8
KARI-07	KALI-07	.4375	1.125	7/16-20	.406	.562	2.125	1.375	2.688	22°	12.4
KARI-08	KALI-08	.5000	1.312	1/2-20	.453	.625	2.428	1.500	3.094	22°	18.5
KARI-10	KALI-10	.6250	1.500	5/8-18	.484	.750	2.625	1.625	3.375	22°	27.6
KARI-12	KALI-12	.7500	1.750	3/4-16	.593	.875	2.875	1.750	3.750	22°	42.8

► Tolerance Table, Page 1.14

### Load Data

Part No. Right thread	Part No. Left thread	Maximum static Tensile Strength		Maximum Radial Load		Minimum Thread Depth (inch)	Maximum torque Strength Outer thread (ft•lbs)	Maximum Torque through ball (ft•lbs)
		Short-term (lbs)	Long-term (lbs)	Short-term (lbs)	Long-term (lbs)			
KARI-03	KALI-03	87	45	15	7	.525	.36	.37
KARI-04	KALI-04	202	101	22	11	.700	.73	.74
KARI-05	KALI-05	247	123	33	16	.875	1.47	1.48
KARI-06	KALI-06	337	168	78	39	.875	2.21	2.21
KARI-07	KALI-07	449	224	89	45	.962	4.42	4.43
KARI-08	KALI-08	562	281	101	50	1.050	6.63	6.64
KARI-10	KALI-10	786	393	134	67	1.137	8.85	8.85
KARI-12	KALI-12	876	438	224	112	1.226	18.43	18.44

### Material:

Housing - igumid G

Ball - iglide® L280

See Section 40 for ball  
material information

# igubal® Spherical Bearings

## Rod Ends - mm - KARM / KALM

igus®




## Standard Design



## Design with Metal Sleeve (MH)

Rod end bearings can be ordered in metric dimensions with metal sleeve with the addition of MH after the part numbers listed here, i.e. for example: KARM-10 MH  
Available for delivery

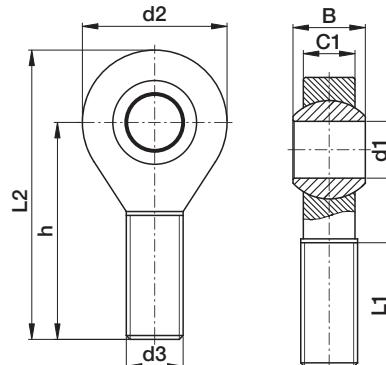

### Dimensions (mm)

Part No.	Part No.	d1	d2	d3	C1	B	h	L1	L2	Max. Pivot angle	Min. Thread Depth (mm)
Right thread	Left thread	(E10)									
KARM-05	KALM-05	5	18	M05	6.0	8.0	33	19	42	30°	13
KARM-06	KALM-06	6	20	M06	7.0	9.0	36	21	46	29°	15
KARM-08	KALM-08	8	24	M08	9.0	12.0	42	25	55	25°	18
KARM-10	KALM-10	10	30	M10	10.5	14.0	48	28	63	25°	20
KARM-10 F	KALM-10 F	10	30	M10 x 1.25	10.5	14.0	48	28	63	25°	20
KARM-12	KALM-12	12	34	M12	12.0	16.0	54	32	71	25°	22
KARM-12 F	KALM-12 F	12	34	M12 x 1.25	12.0	16.0	54	32	71	25°	22
KARM-14	KALM-14	14	38	M14	13.5	19.0	61	36	79	25°	25
KARM-16	KALM-16	16	42	M16	15.0	21.0	66	37	88	23°	26
KARM-16 F	KALM-16 F	16	42	M16 x 1.5	15.0	21.0	66	37	88	23°	26
KARM-18	KALM-18	18	46	M18 x 1.5	16.5	23.0	72	41	96	23°	29
KARM-20	KALM-20	20	50	M20 x 2.5	18.0	25.0	78	45	104	23°	32
KARM-20 M20	KALM-20 M20	20	50	M20 x 1.5	18.0	25.0	78	45	104	23°	32
KARM-22	KALM-22	22	56	M22 x 1.5	20.0	28.0	84	48	112	22°	34
KARM-25	KALM-25	25	60	M24 x 2.0	22.0	31.0	94	55	125	22°	39
KARM-30	KALM-30	30	70	M30 x 2.0	25.0	37.0	110	66	147	22°	46

► Tolerance Table, Page 1.14

## Load Data

Part No.	Part No.	Max. Static Tensile Strength		Max. Radial Load		Max. Torque Strength	Max. Torque Strength		Shaft	
		Short-term	Long-term	Short-term	Long-term		Inner threading	Standard	MH	Min.
Right thread	Left thread	(lbs)	(lbs)	(lbs)	(lbs)	(ft•lbs)	(ft•lbs)	(ft•lbs)		
KARM-05	KALM-05	180	90	18	9	.3	3.7	8.8	4.970	5.000
KARM-06	KALM-06	225	112	22	11	.4	7.4	11.1	5.970	6.000
KARM-08	KALM-08	382	191	45	22	1.5	8.9	29.5	7.964	8.000
KARM-10	KALM-10	562	281	67	33	3.7	14.8	36.9	9.964	10.000
KARM-10 F	KALM-10 F	562	281	67	33	2.2	14.8	36.9	9.964	10.000
KARM-12	KALM-12	607	303	89	45	4.4	22.1	51.6	11.957	12.000
KARM-12 F	KALM-12 F	607	303	89	45	4.4	22.1	51.6	11.957	12.000
KARM-14	KALM-14	764	382	157	78	8.9	25.8	55.3	13.957	14.000
KARM-16	KALM-16	876	438	179	89	12.5	29.5	81.1	15.957	16.000
KARM-16 F	KALM-16 F	876	438	179	89	12.5	29.5	81.1	15.957	16.000
KARM-18	KALM-18	944	472	224	112	14.8	33.2	110.6	17.957	18.000
KARM-20	KALM-20	1348	674	292	146	18.4	40.6	147.5	19.948	20.000
KARM-20 M20	KALM-20 M20	1348	674	292	146	18.4	40.6	147.5	19.948	20.000
KARM-22	KALM-22	1618	809	337	168	18.4	44.3	166.0	21.948	22.000
KARM-25	KALM-25	1686	843	427	213	33.2	47.9	191.8	24.948	25.000
KARM-30	KALM-30	1978	989	517	258	62.7	51.6	221.3	29.948	30.000

For rod end bearings with metal sleeve please add **MH** to the part number, e.g. KARM-10 **MH**.

55.15

iauhall® Bod Ends

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1

inch

mn

**Special properties**

- Available with metal sleeve for higher torque strength
- Left-hand thread version KALM in preparation

**Material:**


Housing - igumid G

Ball - iglide® L280

Also available :

iglide® R, iglide® J and iglide® J4

or with metal sleeve

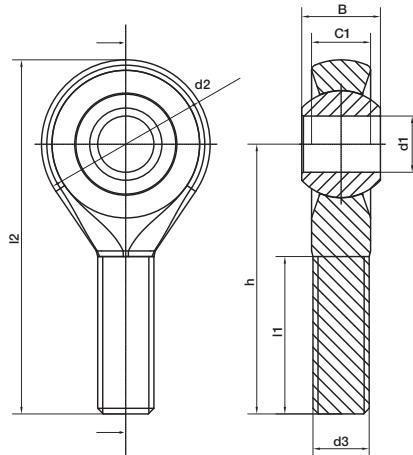**See Section 40 for ball material information****Dimensions (mm)**

Part No.	d1 (E10)	d2	d3	C1	B	h	l1	l2	Max. pivot angle	Weight (g)
KARM-06 CL	6	20	M06	7.0	9.0	36	21	46	40°	3.5
KARM-08 CL	8	24	M08	9.0	12.0	42	25	55	35°	6.2
KARM-10 CL	10	30	M10	10.5	14.0	48	28	63	35°	11.2
KARM-12 CL	12	34	M12	12.0	16.0	54	32	71	35°	15.6

► Tolerance Table, Page 1.14


**Load Data**

Part No.	Maximum static tensile strength		Maximum radial load		Minimum thread depth (mm)	Max. torque strength Outer thread (ft•lbs)	Max. torque through Ball	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)			Standard (ft•lbs)	MH (ft•lbs)
KARM-06 CL	225	113	22	11	15	.37	7.37	11.06
KARM-08 CL	382	191	45	22	18	1.48	8.85	29.50
KARM-10 CL	562	281	68	34	20	3.69	14.75	36.88
KARM-12 CL	607	304	90	45	22	4.43	22.13	51.63

For rod end bearings with metal sleeve please add **MH** to the part number, e.g. KABM-10 CL **MH**.For another spherical bearing material please add **J**, or **R** to the part number, e.g. KARM-10 CL **J**.

# igubal® Spherical Bearings Rod Ends - mm - EARM / EALM

**igus®**

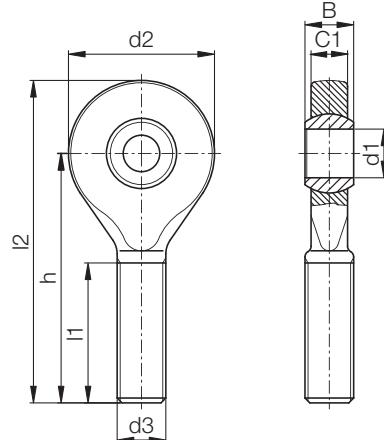

Dimensions (mm)

## Material:

Housing - igumid G

Ball - iglide® L280

Also available :

iglide® R, iglide® J and iglide® J4

See Section 40 for ball material information

igubal® Rod Ends

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

Part No. Right thread	Part No. Left thread	d1 (E10)	d2	d3	C1	B	h	l1	l2	Max. Pivot angle	Weight (g)
EARM-05	EALM-05	5	19	M05	4.4	6	36	20	45.5	38°	2.2
EARM-06	EALM-06	6	21	M06	4.4	6	36	20	46.5	27°	2.7
EARM-08	EALM-08	8	24	M08	6.0	8	41	24	53.0	24°	5.1
EARM-10	EALM-10	10	29	M10	7.0	9	47.5	27	62.0	24°	8.4
EARM-10 F	EALM-10 F	10	29	M10 x 1.25	7.0	9	47.5	27	62.0	24°	8.4
EARM-12	EALM-12	12	34	M12	8.0	10	54	29	71.0	21°	14.3
EARM-12 F	EALM-12 F	12	34	M12 x 1.25	8.0	10	54	29	71.0	21°	14.3
EARM-15	EALM-15	15	40	M14	10.0	12	63	34	83.0	21°	21.1
EARM-17	EALM-17	17	46	M16	11.0	14	69	37	92.0	18°	30.2
EARM-17 F	EALM-17 F	17	46	M16 x 1.5	11.0	14	69	37	92.0	18°	30.2
EARM-20	EALM-20	20	53	M20 x 1.5	13.0	16	80	43	106.5	16°	57.3
EARM-20 M20	EALM-20 M20	20	53	M20 x 2.5	13.0	16	80	43	106.5	16°	57.3
EARM-25	EALM-25	25	64	M24 x 2.0	17.0	20	97	53	129.0	16°	94.8
EARM-30	EALM-30	30	73	M30 x 2.0	19.0	22	113	65	149.5	13°	156.4

► Tolerance Table, Page 1.14

## Load Data

Part No. Right thread	Part No. Left thread	Max. static Tensile Strength		Max. Radial Load		Min. Thread Depth (mm)	Max. Torque Strength Outer thread (ft•lbs)	Max. Torque through Ball (ft•lbs)
		Short-term (lbs)	Long-term (lbs)	Short-term (lbs)	Long-term (lbs)			
EARM-05	EALM-05	123	61	11	5	14	.3	1.5
EARM-06	EALM-06	191	95	18	9	14	.4	1.8
EARM-08	EALM-08	359	179	33	16	17	1.5	5.2
EARM-10	EALM-10	584	292	56	28	19	3.7	10.3
EARM-10 F	EALM-10 F	584	292	56	28	19	2.2	10.3
EARM-12	EALM-12	674	337	67	33	20	4.4	18.4
EARM-12 F	EALM-12 F	674	337	67	33	20	4.4	18.4
EARM-15	EALM-15	1011	505	89	45	24	9.2	22.1
EARM-17	EALM-17	1124	562	112	56	26	12.9	25.8
EARM-17 F	EALM-17 F	1124	562	112	56	26	15.5	25.8
EARM-20	EALM-20	1461	730	134	67	30	22.1	29.5
EARM-20 M20	EALM-20 M20	1461	730	134	67	30	18.4	29.5
EARM-25	EALM-25	1910	955	179	89	37	33.2	40.6
EARM-30	EALM-30	2248	1124	224	112	46	62.7	51.6

For another spherical bearing material please add **J**, or **R** to the part number, e.g. EARM-10 **J**.



**igus®**

## igubal® Spherical Bearings Rod Ends - mm - EARM HT / EALM HT

The EARM HT / EALM HT version is for those applications with higher temperature requirements

igubal® Rod Ends

Telephone 1-800-521-2747  
Fax 1-401-438-7270




### Special properties

- For temperatures up to 392 °F

### Material:

Housing - iguton G  
Ball - iglide® T500

See Section 40 for ball material information

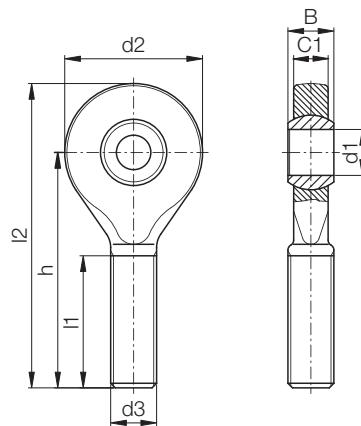

### Dimensions (mm)

Part No. Right thread	Part No. Left thread	d1 (E10)	d2	d3	C1	B	h	l1	l2	Max. pivot angle	Weight (g)
EARM-05 HT	EALM-05 HT	5	19	M05	4.4	6	36	20	45.5	33°	2.8
EARM-06 HT	EALM-06 HT	6	21	M06	4.4	6	36	20	46.5	27°	3.4
EARM-08 HT	EALM-08 HT	8	24	M08	6.0	8	41	24	53.0	24°	6.1
EARM-10 HT	EALM-10 HT	10	29	M10	7.0	9	47.5	27	62.0	24°	10.2
EARM-12 HT	EALM-12 HT	12	34	M12	8.0	10	54	29	71.0	21°	15.7

► Tolerance Table, Page 1.14

# igubal® Spherical Bearings

## Rod End Accessories



### Adjusting Bolt - mm - PKRM / PKLM



#### Special properties

- Combined with rod end bearings of the dimensional series K
- Available in left and right threads

Material: igumid G

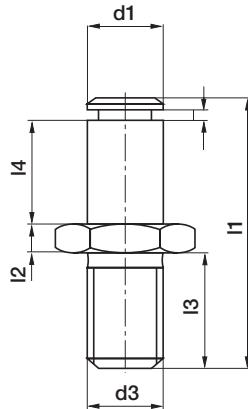

#### Dimensions (mm)

Part No.	Part No.	d1 h11 (mm)	d3 Connection thread	l1 Total Length (mm)	l2 Nut Width (mm)	l3 Thread Length (mm)	l4 Length Adjusting Bolt (mm)	SW Width across Flats	Weight (g)
Right thread	Left thread								
PKRM-05	PKLM-05	5	M05	25.0	2.7	11.3	8.5	SW 8	0.7
PKRM-06	PKLM-06	6	M06	28.0	3.2	12.8	9.5	SW 10	1.2
PKRM-08	PKLM-08	8	M08	32.0	4.0	12.5	12.5	SW 13	2.6
PKRM-10	PKLM-10	10	M10	37.5	5.0	14.5	14.5	SW 16	4.0
PKRM-12	PKLM-12	12	M12	42.0	6.0	15.5	16.5	SW 18	7.5
PKRM-14	PKLM-14	14	M14	47.0	7.0	15.5	19.5	SW 21	11.4
PKRM-16	PKLM-16	16	M16	52.0	8.0	16.5	22.0	SW 24	16.9
PKRM-18	PKLM-18	18	M18 x 1.5	59.0	9.0	20.5	24.0	SW 27	16.9
PKRM-20	PKLM-20	20	M20 x 1.5	67.0	10.0	25.0	26.0	SW 30	34.4

► Tolerance Table, Page 1.14

#### Load Data


Part No.	Part No.	Max. Static Tensile Strength		Max. Static Radial Load	
		Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)
Right thread	Left thread				
PKRM-05	PKLM-05	22	11	45	22
PKRM-06	PKLM-06	33	17	56	28
PKRM-08	PKLM-08	56	28	90	45
PKRM-10	PKLM-10	112	56	135	67
PKRM-12	PKLM-12	157	79	202	101
PKRM-14	PKLM-14	179	90	247	124
PKRM-16	PKLM-16	202	101	314	157
PKRM-18	PKLM-18	179	90	382	191
PKRM-20	PKLM-20	112	56	494	247

Available for delivery

Imperial sizes available. Minimum quantities may be required.

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.



inch



mm






**igus®**

# igubal® Spherical Bearings Rod End Accessories WGRM / WGLM Ball & Socket Joint - Elbow

igubal® Rod Ends

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

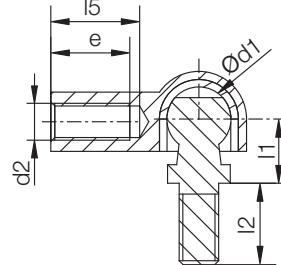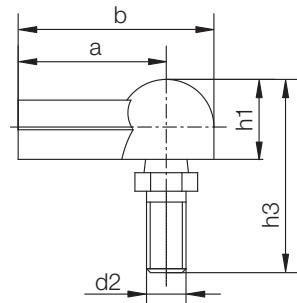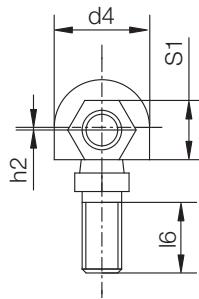

## Special properties

- Connection for rotating and oscillating movement
- Easy and fast mounting

## Material:

Housing - igumid G  
Cap - iglide® L280

## Dimensions (mm)

Part No.	Part No.	d1	d2	d4	l1	l2	l5	l6 min.	h1	h2	h3	a	b	e	S1	max. pivot angle
Right thread	Left thread	±0.1		±0.5	±0.2	±0.3										
WGRM-05	WGLM-05	8.0	M5	12.8	9.0	10.2	14.0	8.2	10.8	0.65	25.6	22.0	28.4	11.0	SW 8	25°
WGRM-06	WGLM-06	10.0	M6	14.8	11.0	12.5	16.0	10.5	12.3	0.70	30.9	25.0	32.4	13.0	SW 9	25°
WGRM-08	WGLM-08	13.0	M8	19.3	13.0	16.5	18.0	13.5	16.2	1.15	38.8	30.0	39.7	16.0	SW 12	25°
WGRM-10	WGLM-10	16.0	M10	24.0	16.0	20.0	20.0	16.0	20.0	1.15	47.0	35.0	47.0	18.0	SW 14	25°

\*MS = metal stud; example: WGRM-05 MS

## Load data

Part No.	Part No.	max. axial tensile force ball stud axis		max. axial compressive force ball stud axis		max. axial tensile force housing axis		Max. axial tensile force in housing axis with metal ball stud		Weight (g)
		Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	
Right thread	Left thread									
WGRM-05	WGLM-05	7	3	45	22	22	11	135	67	2.6
WGRM-06	WGLM-06	8	4	67	34	31	16	180	90	4.0
WGRM-08	WGLM-08	56	28	112	56	45	22	337	169	8.2
WGRM-10	WGLM-10	56	28	202	101	90	45	427	214	13.8

**igubal® Spherical Bearings**  
**Rod End Accessories WGRM LC / WGLM LC**  
**Low Cost Ball & Socket Joint - Elbow**


**igus®**



**Special properties**

- LC (low cost) version is a two piece assembly with a metal pin

**Material:**  
Housing - igumid G

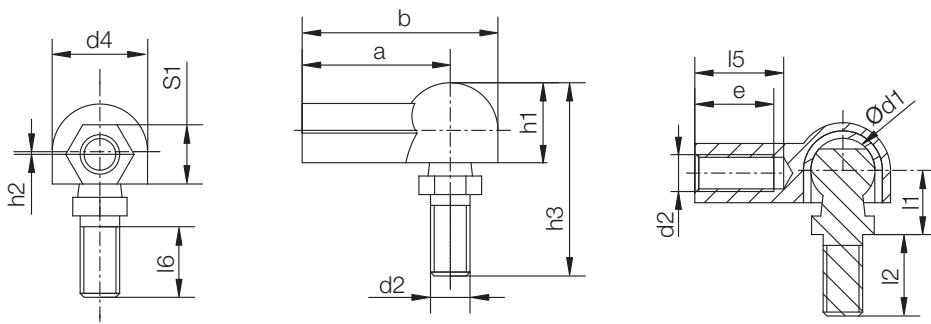

**Dimensions (mm)**

Part No.	Part No.	d1	d2	d4	l1	l2	l5	l6	h1	h2	h3	a	b	e	S1	max. pivot angle
Right thread	Left thread	±0.1		±0.5	±0.2	±0.3		min.	±0.4	±0.5	±0.5	±0.3	±0.5	±0.5		
WGRM-05 LC	WGLM-05 LC	8.0	M5	12.8	9.0	10.2	14.0	8.2	10.8	0.65	25.6	22.0	28.4	11.0	SW 8	25°
WGRM-06 LC	WGLM-06 LC	10.0	M6	14.8	11.0	12.5	16.0	10.5	12.3	0.70	30.9	25.0	32.4	13.0	SW 9	25°
WGRM-08 LC	WGLM-08 LC	13.0	M8	19.3	13.0	16.5	18.0	13.5	16.2	1.15	38.8	30.0	39.7	16.0	SW 12	25°
WGRM-10 LC	WGLM-10 LC	16.0	M10	24.0	16.0	20.0	20.0	16.0	20.0	1.15	47.0	35.0	47.0	18.0	SW 14	25°

\*\*\* MS = metal ball stud   For example: WGRM-05 LC MS

**Load data**

Part No.	Part No.	max. axial tensile force ball stud axis		max. axial compressive force ball stud axis		max. axial tensile force housing axis		Max. axial tensile force in housing axis with metal ball stud		Weight (g)
		Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	
Right thread	Left thread									
WGRM-05 LC	WGLM-05 LC	7	3	45	22	22	11	135	67	2.6
WGRM-06 LC	WGLM-06 LC	8	4	67	34	31	16	180	90	4.0
WGRM-08 LC	WGLM-08 LC	56	28	112	56	45	22	337	169	8.2
WGRM-10 LC	WGLM-10 LC	56	28	202	101	90	45	427	214	13.8

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch



mm



**igus®**


# igubal® Spherical Bearings Rod Ends Accessories AGRM / AGLM - AGRM LC / AGLM LC

igubal® Rod Ends



## Special properties

- For all mechanical combinations
- Very easy assembling by hand
- Proportion from cohesion to assembling force ca. 10:1

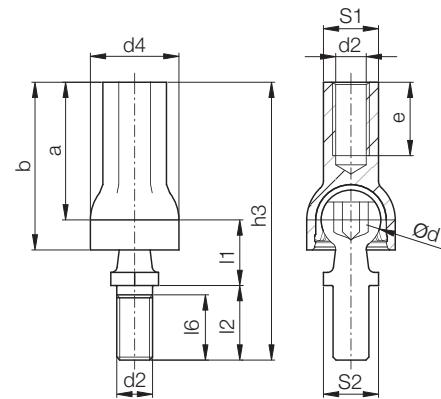

## Material:

Housing - igumid G  
Cap - iglide® L280

## Dimensions (mm)

Part No.	Left thread	d1	d2	d4	l1	l2	l6	h3	a	b	e	S1	S2	pivot angle
Right thread		±0.1		±0.5	±0.2	±0.3		±0.3	±0.5	min.				Recom. max.
AGRM-08	AGLM-08	13.0	M8	19.3	13.0	16.5	13.5	59.0	29.5	36.5	16.0	SW12	SW11	18° 25°


## Load data

Part No.	Left thread	max. static axial tensile strength		max. static axial compressive strength		max. assembling force	Weight
		short term	long term	short term	long term		
Right thread	Left thread	(lbs)	(lbs)	(lbs)	(lbs)	(lbs)	(g)
AGRM-08	AGLM-08	56	28	225	112	25	7.8



## Special properties

- For all mechanical combinations
- Very easy assembling by hand
- Proportion from cohesion to assembling force ca. 10:1

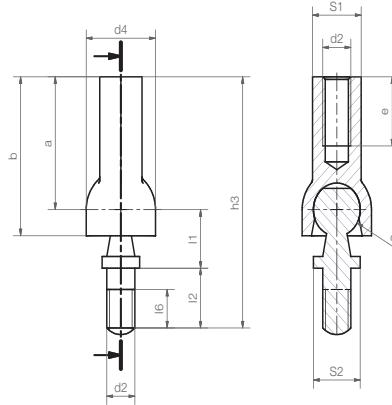

## Material:

Housing - igumid G

## Dimensions (mm)

Part No.	Left thread	d1	d2	d4	l1	l2	l6	h3	a	b	e	S1	S2	pivot angle
Right thread		±0.1		±0.5	±0.2	±0.3		±0.3	±0.5	min.				Recom. max.
AGRM-08 LC	AGLM-08 LC	10.0	M6	14.8	11.0	11.3	7.3	47.3	25.0	29.9	13.0	SW9	10.0	18° 25°

## Load data

Part No.	Left thread	max. static axial tensile strength		max. static axial compressive strength		Weight
		short term	long term	short term	long term	
Right thread	Left thread	(lbs)	(lbs)	(lbs)	(lbs)	(g)
AGRM-08 LC	AGLM-08 LC	22	11	450	225	10.8

**igus®**



**igubal®**  
**Clevis Joint**



## Available Components



E Series

### Clevis Joint

- Available in left- or right-hand thread
- High tensile strength
- Vibration dampening

## Available Styles

GERI/GELI - inch  
Page 56.5

GERM/GELM - metric  
Page 56.6



E Series

### Clevis Joint with Clevis Pin and Clevis Clip

- Available in left- or right-hand thread
- Can be used in combination with Series E rod ends

GERIK/GELIK - inch  
Page 56.7

GERMK/GELMK - metric  
Page 56.8



E Series

### Clevis Joint with Clevis Pin, Circlip and Rod End

- Available in left- or right-hand thread
- Universal corrosion resistance

GERMKE/GELMKE - metric  
Page 56.9



E Series

### Clevis Joint with Spring Loaded Pin

- Available in left- or right-hand thread
- Easy assembly in hard to reach locations

GERMF/GELMF - metric  
Page 56.10



### Clevis Joint with Spring Loaded Pin and Rod End

- Available in left- or right-hand thread
- Lightweight

GERMFE/GELMFE - metric  
Page 56.11



K Series

### Spring Loaded Pin (as separate part) Clevis Pin (as separate part)

### Clevis Clip (as separate part)

- Easy to assemble
- Lightweight

GEFM - Spring loaded pin - metric  
Page 56.9

GBM - Clevis pin - metric

GSR - Clevis Clip - metric

Page 56.12



**Typical industries and applications**

- Food industry
- Heavy duty
- Packaging
- Automotive
- Disposal Engineering
- Automation, etc.



Both the housing material and the universal ball joint are made of materials that are safe in food environments



Packaging industry



A low-cost alternative to stainless steel: igubal® clevis joints combinations made of plastic



Pneumatic cylinder




## Product Range

- Female threads
- Left hand and right hand threads
- Diameters from 4–20 mm
- With bold and clip or spring loaded pin
- Combination with dimensional Series E

## Part Number Structure

### Part Number Structure

**G E R M K E -12 F**

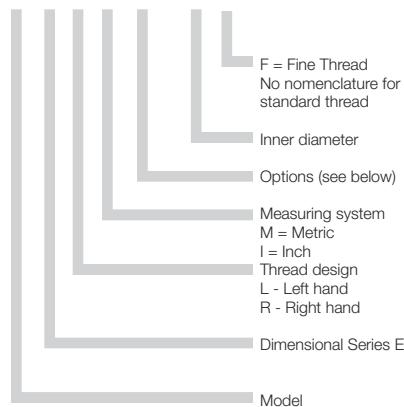

### Options:

- K = with clevis pin and clip
- KE = with clevis pin, clip and rod end bearing
- F = with spring-loaded clasp pin
- FE = with spring-loaded clasp pin and rod end bearing



## Advantages

- Maintenance-free, dry running
- Self-lubricating
- High strength under impact loads
- Compensation for misalignment
- Compensation for edge loads
- Chemically resistant
- Vibration damping
- Suitable for rotating, oscillating and linear movements
- High radial loads
- Can be used in liquid media
- Space-saving design
- Easy to install
- Predictable lifetime
- Maintenance-free, lubrication-free

## General information

igubal® clevis joints are made of igumid G according to DIN 71752. The clevis joints are available in a variety of configurations. igubal® clevis joints can be used in difficult circumstances without any problems. The clevis joints are corrosion resistant in moist or wet environments and the sliding bearings are resistant to weak acids and alkalis. The operating temperatures range from -22°F to +176°F. igubal® clevis joints are made out of a high-wear resistant material which requires no lubrication.

## Loads

The load-bearing capacity of the maintenance-free, polymer clevis joints is very high at normal ambient temperatures. They absorb high forces, possess very good vibration dampening properties and yet weigh only a fifth of conventional metallic bearing housings. However, plastic specific properties, such as dependence on temperature and behavior under long term stressing, must be taken into consideration when using the clevis joints. The load-bearing capacity of the clevis joints in individual cases should therefore be checked in a practical test, particularly if they are to be used under continuously high loads and at elevated temperatures.

## Chemical Resistance

igubal® clevis joints are resistant to weak alkalis and weak acids, as well as to fuels and all types of lubricants. Please contact us if you have any questions about the resistance of our igubal® bearings.


## Usage Guidelines




- If high rigidity is required
- If corrosion resistance is required
- In applications where lubrication could present an issue
- If simple assembly is necessary
- If a lightweight option is preferred



- If temperatures are higher than 248°F
- If dimensions above 1" or 30 mm are necessary

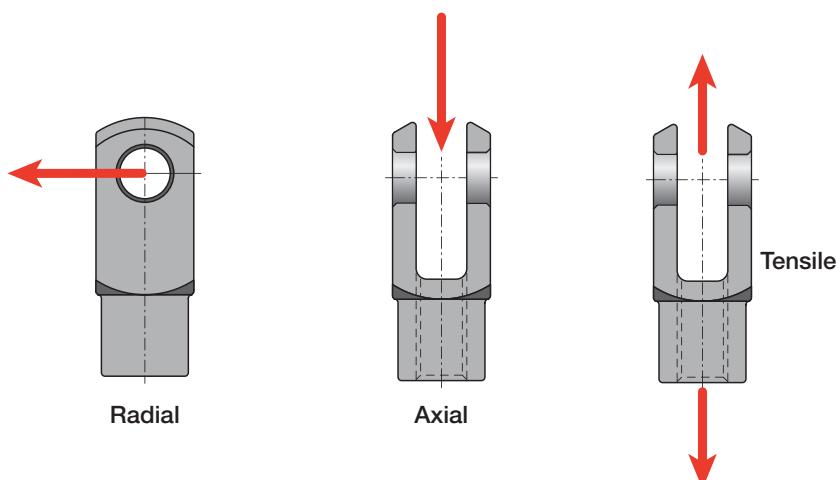

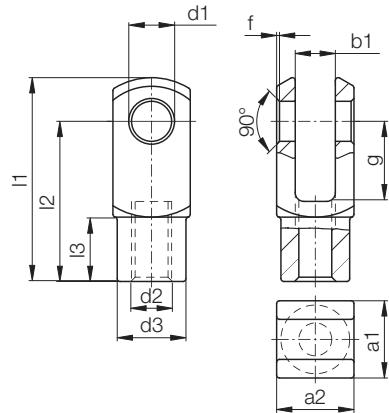

**Material:**  
igumid G

### Dimensions (inch)

Right (Left) Thread	d1 H9	g h11	a1	a2 +0.3 -0.16	b1	d2 Thread- Tolerance 6H	d3 +0.3 -0.3	f .02	l1 +0.5	l2 +0.3	l3 +0.2
GER(L)I-03	0.1875	0.394	0.394	0.394	0.197	10-32	0.354	.02	1.024	0.787	0.295
GER(L)I-04	0.2500	0.472	0.472	0.472	0.236	1/4-28	0.394	.02	1.205	0.945	0.354
GER(L)I-05	0.3125	0.630	0.630	0.630	0.315	5/16-24	0.551	.02	1.638	1.260	0.472
GER(L)I-06	0.3750	0.787	0.787	0.787	0.394	3/8-24	0.709	.02	2.020	1.575	0.591
GER(L)I-07	0.4375	0.945	0.945	0.945	0.472	7/16-20	0.787	.02	2.413	1.890	0.709
GER(L)I-08	0.5000	1.102	1.063	1.063	0.551	1/2-20	0.945	.02	2.807	2.205	0.886

### Load Data

Right (Left) Thread	Max. Static Axial Tensile Strength GERI		Weight (g)
	Short-term (lbs)	Long-term (lbs)	
GER(L)I-03	225	112	1.6
GER(L)I-04	270	135	2.9
GER(L)I-05	607	303	6.1
GER(L)I-06	1056	528	13.0
GER(L)I-07	1281	640	16.5
GER(L)I-08	719	360	20.8

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)




igubal® Clevis Joint

1  
+/-

inch

mm

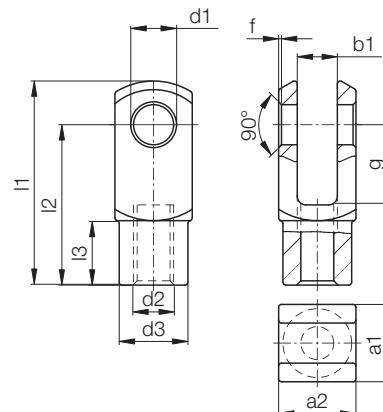

**Material:**  
igumid G

#### Dimensions (mm)

Right (Left) Thread	d1 H9	g h11	a1	a2 +0.3 -0.16	b1	d2 Thread- Tolerance 6H	d3 +0.3 -0.3	f +0.3 -0.3	l1 +0.5 -0.5	l2 +0.3 -0.3	l3 +0.2 -0.
GER(L)M-04	4	8	8	8	4	M4	8.0	0.5	21.0	20	6.0
GER(L)M-05 DIN M4	5	10	10	10	5	M04	9	0.5	25.5	20	7.5
GER(L)M-05 DIN M5	5	10	10	10	5	M04	9	0.5	25.5	20	7.5
GER(L)M-05	5	12	12	12	6	M05	10.0	0.5	30.6	24.0	9.0
GER(L)M-06	6	12	12	12	6	M06	10.0	0.5	30.6	24.0	9.0
GER(L)M-08	8	16	16	16	8	M08	14.0	0.5	41.6	32.0	12.0
GER(L)M-10	10	20	20	20	10	M10	18.0	0.5	52.0	40.0	15.0
GER(L)M-10 F	10	20	20	20	10	M10x1.25	18.0	0.5	51.3	40.0	15.0
GER(L)M-12	12	24	24	24	12	M12	20.0	0.5	61.3	48.0	18.0
GER(L)M-12 F	12	24	24	24	12	M12x1.25	20.0	0.5	61.3	48.0	18.0
GER(L)M-14	14	28	27	27	14	M14	24.0	0.5	71.3	56.0	22.5
GER(L)M-15	15	28	27	27	14	M14	24.0	0.5	71.3	56.0	22.5
GER(L)M-16	16	32	32	32	16	M16	26.0	1.0	81.9	64.0	24.0
GER(L)M-16 F	16	32	32	32	16	M16x1.5	26.0	1.0	81.9	64.0	24.0
GER(L)M-20	20	40	40	40	20	M20x1.5	34.0	1.0	105.0	80.0	30.0
GER(L)M-20	20	40	40	40	20	M20x2.5	34.0	1.0	105.0	80.0	30.0

Imperial sizes available. Minimum quantities may be required.


► Tolerance Table, Page 1.14

#### Load Data

Right (Left) Thread	Max. Static Tensile Strength GERM		Weight
	Short-term (lbs)	Long-term (lbs)	(g)
GER(L)M-04	179	90	0.9
GER(L)M-05 DIN M4	225	112	1.5
GER(L)M-05 DIN M5	225	112	1.5
GER(L)M-05	270	135	1.5
GER(L)M-06	314	157	2.5
GER(L)M-08	607	303	6.3
GER(L)M-10	1056	528	13.2
GER(L)M-10 F	1056	528	13.2
GER(L)M-12	1281	640	20.2
GER(L)M-12 F	1281	640	20.2
GER(L)M-14	1483	741	29.9
GER(L)M-15	719	360	30.0
GER(L)M-16	1686	843	49.9
GER(L)M-16 F	1686	843	49.9
GER(L)M-20	2136	1068	105.0
GER(L)M-20	2136	1068	105.0

**igubal® Spherical Bearings**  
**Clevis Joint with Pin, Clip and rod end -**  
**GERIK / GELIK- inch**

**igus®**

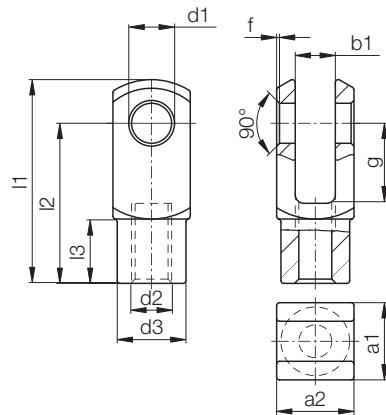

**Material:**  
igumid G

**Dimensions (inch)**


Right (Left) Thread	d1 H9	g h11	a1	a2 +0.3 -0.16	b1	d2 Thread- Tolerance 6H	d3 +0.3 -0.3	f +0.3 -0.3	l1 +0.5 -0.5	l2 +0.3 -0.3	l3 +0.2 -0.2
GER(L)IK-03	0.1875	0.394	0.394	0.394	0.197	10-32	0.354	.02	1.024	0.787	0.295
GER(L)IK-04	0.2500	0.472	0.472	0.472	0.236	1/4-28	0.394	.02	1.205	0.945	0.354
GER(L)IK-05	0.3125	0.630	0.630	0.630	0.315	5/16-24	0.551	.02	1.638	1.260	0.472
GER(L)IK-06	0.3750	0.787	0.787	0.787	0.394	3/8-24	0.709	.02	2.020	1.575	0.591
GER(L)IK-07	0.4375	0.945	0.945	0.945	0.472	7/16-20	0.787	.02	2.413	1.890	0.709
GER(L)IK-08	0.5000	1.102	1.063	1.063	0.551	1/2-20	0.945	.02	2.807	2.205	0.886

**Load Data**

Right (Left) Thread	Max. Static Tensile Strength GER(L)IK		Weight (g)	
	Short-term (lbs)			
	Long-term (lbs)			
GER(L)IK-03	180	90	2.0	
GER(L)IK-04	202	101	3.5	
GER(L)IK-05	472	236	7.7	
GER(L)IK-06	674	404	16.0	
GER(L)IK-07	787	393	21.4	
GER(L)IK-08	629	315	26.3	

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

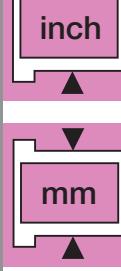




**igus®**

# igubal® Spherical Bearings Clevis Joint with Pin and Clip GERMK/GELMK - mm

igubal® Clevis Joint

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

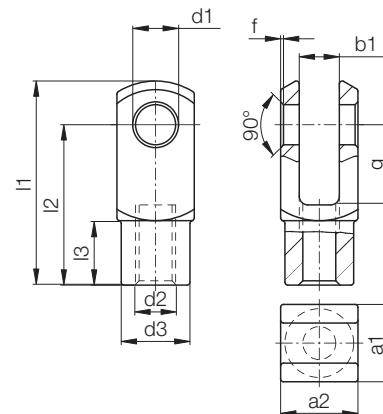

**Material:**  
igumid G

## Dimensions (mm)

Right (Left) Thread	d1 H9	g h11	a1	a2 +0.3 -0.16	b1	d2 Thread- Tolerance 6H	d3 +0.3 -0.3	f +0.3 -0.3	l1 +0.5 -0.5	l2 +0.3 -0.3	l3 +0.2 -0.
GER(L)MK-04	4	8	8	8	4	M4	8.0	0.5	21.0	20	7.5
GER(L)MK-05 DIN M4	5	10	10	10	5	M04	9	0.5	25.5	20	7.5
GER(L)MK-05 DIN M5	5	10	10	10	5	M04	9	0.5	25.5	20	7.5
GER(L)MK-05	5	12	12	12	6	M05	10.0	0.5	30.6	24.0	9.0
GER(L)MK-06	6	12	12	12	6	M06	10.0	0.5	30.6	24.0	9.0
GER(L)MK-08	8	16	16	16	8	M08	14.0	0.5	41.6	32.0	12.0
GER(L)MK-10	10	20	20	20	10	M10	18.0	0.5	51.3	40.0	15.0
GER(L)MK-10 F	10	20	20	20	10	M10x1.25	18.0	0.5	51.3	40.0	15.0
GER(L)MK-12	12	24	24	24	12	M12	20.0	0.5	61.3	48.0	18.0
GER(L)MK-12 F	12	24	24	24	12	M12x1.25	20.0	0.5	61.3	48.0	18.0
GER(L)MK-14	14	28	27	27	14	M14	24.0	0.5	71.3	56.0	22.5
GER(L)MK-15	15	28	27	27	14	M14	24.0	0.5	71.3	56.0	22.5
GER(L)MK-16	16	32	32	32	16	M16	26.0	1.0	81.9	64.0	24.0
GER(L)MK-16 F	16	32	32	32	16	M16x1.5	26.0	1.0	81.9	64.0	24.0
GER(L)MK-20	20	40	40	40	20	M20x1.5	34.0	1.0	105.0	80.0	30.0
GER(L)MK-20 M20	20	40	40	40	20	M20x2.5	34.0	1.0	105.0	80.0	30.0

► Tolerance Table, Page 1.14

## Load Data

Right (Left) Thread	Max. Static Axial Tensile Strength GER(L)MK		Max. Static Radial Load		Weight (g)
	Short-term (lbs)	Long-term (lbs)	Short-term (lbs)	Long-term (lbs)	
GER(L)MK-04	112	56	56	28	1.3
GER(L)MK-05 DIN M4	180	90	56	28	2.1
GER(L)MK-05 DIN M5	180	90	56	28	2.1
GER(L)MK-05	202	101	56	28	3.3
GER(L)MK-06	292	146	67	33	3.3
GER(L)MK-08	472	236	146	73	7.9
GER(L)MK-10	674	337	180	90	16.4
GER(L)MK-10 F	674	337	180	90	16.4
GER(L)MK-12	787	393	202	101	25.3
GER(L)MK-12 F	787	393	202	101	25.3
GER(L)MK-14	1371	685	224	112	31.2
GER(L)MK-15	629	315	224	112	38.9
GER(L)MK-16	1573	786	270	135	60.8
GER(L)MK-16 F	1573	786	270	135	60.8
GER(L)MK-20	2023	1012	674	337	125.2
GER(L)MK-20 M20	2023	1012	674	337	125.2


**igubal® Spherical Bearings**  
**Clevis Joint with Pin, Clip and rod end -**  
**GERMKE / GELMKE- mm**



**Load Data**

Right-Thread	Left-Thread	Max. Static Tensile Strength		Max. Static Radial Load		Weight (g)
		Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)	
GERMKE-05 M5	GELMKE-05 M5	202	101	34	17	6.4
GERMKE-06	GELMKE-06	292	146	45	22	7.3
GERMKE-08	GELMKE-08	450	225	101	51	14.6
GERMKE-10	GELMKE-10	517	259	112	56	27.1
GERMKE-10 F	GELMKE-10 F	517	259	112	56	27.1
GERMKE-12	GELMKE-12	742	371	124	62	42.7
GERMKE-12 F	GELMKE-12 F	742	371	124	62	42.7
GERMKE-15	GERMKE-15	630	315	180	90	68.4
GERMKE-16	GERMKE-16	1124	562	191	96	86.9
GERMKE-16 F	GERMKE-16 F	1124	562	191	96	86.9
GERMKE-17	GERMKE-17	809	405	247	124	98.3
GERMKE-17 F	GERMKE-17 F	809	405	247	124	98.3
GERMKE-20	GERMKE-20	1619	809	405	202	175.2
GERMKE-20 F	GERMKE-20 F	1619	809	405	202	175.2

**igubal® Spring Loaded Pins - mm - GEFM**

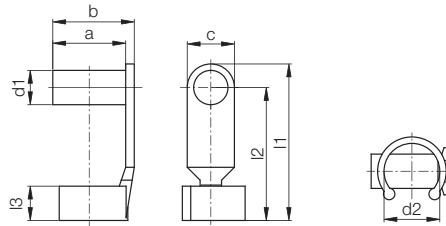

**Material:**  
igumid G

**Dimensions (mm)**

Part Number	d1 h11	d2	a	b	c	l1 ±0.5	l2	l3	Weight (g)
GEFM-04	4	8	9.5	10.5	8	19	15	4.5	0.5
GEFM-05 DIN	5	9	12	13.5	8	23	19	5.5	0.8
GEFM-05 DIN M5 LS	5	9	12	13.5	8	23	19	5.5	1.0
GEFM-05	5	10	14	15.5	8	27	23	6.5	1.1
GEFM-06 LS	6	10	14	15.5	8	39	35	6.5	1.0
GEFM-06	6	10	14	15.5	8	27	23	6.5	1.2
GEFM-08	8	14	19	21.0	11	35.5	30	8.0	2.8
GEFM-10	10	18	23	25.5	14	45	38	10.0	5.0
GEFM-12	12	20	28	31.0	16	53	45	12.0	8.3
GEFM-16	16	26	36	40.0	22	73	62	16.0	18.3

Imperial sizes available. Minimum quantities may be required.


► Tolerance Table, Page 1.14

56.9




igubal® Clevis Joint

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.



inch



mm



**igus®**

**igubal® Spherical Bearings  
Clevis Joint with Spring Loaded Pin  
GERMF/GELMF - mm**

igubal® Clevis Joint

Telephone 1-800-521-2747  
1-401-438-7270  
  
Fax

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



**Material:**  
igumid G

**Load Data**

Right-Thread	Left-Thread	Max. Static Tensile Strength		Max. Static Radial Load		Weight (g)
		Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)	
GERMF-04 M3.5	GELMF-04 M3.5	112	56	56	28	1.3
GERMF-04	GELMF-04	112	56	56	28	1.3
GERMF-05 DIN M4	GELMF-05 DIN M4	180	90	56	28	2.3
GERMF-05 DIN M5	GELMF-05 DIN M5	180	90	56	28	2.3
GERMF-05 DIN M5 LS	GELMF-05 DIN M5 LS	180	90	56	28	2.3
GERMF-05	GELMF-05	202	101	56	28	3.8
GERMF-06	GELMF-06	292	146	67	34	3.9
GERMF-06 LS	GELMF-06 LS	292	146	29	15	3.9
GERMF-08	GELMF-08	472	236	146	73	9.1
GERMF-10	GELMF-10	674	337	180	90	18.2
GERMF-10 F	GELMF-10 F	674	337	180	90	18.2
GERMF-12	GELMF-12	787	393	202	101	28.6
GERMF-12 F	GELMF-12 F	787	393	202	101	28.6
GERMF-16	GELMF-16	1574	787	270	135	61.8
GERMF-16 F	GELMF-16 F	1574	787	270	135	61.8



**Material:**

Housing - igumid G  
 Ball - iglide® L280

**Load Data**

Right-Thread	Left-Thread	Max. Static Tensile Strength		Max. Static Radial Load		Weight (g)
		Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)	
GERMFE-05	GELMFE-05	202	101	34	17	7.0
GERMFE-06	GELMFE-06	292	146	45	22	7.9
GERMFE-08	GELMFE-08	450	225	101	51	15.9
GERMFE-10	GELMFE-10	517	259	112	56	29.2
GERMFE-10 F	GELMFE-10 F	517	259	112	56	29.2
GERMFE-12	GELMFE-12	742	371	124	62	46.0
GERMFE-12 F	GELMFE-12 F	742	371	124	62	46.0
GERMFE-16	GELMFE-16	1124	562	191	96	94.4
GERMFE-16 F	GELMFE-16 F	1124	562	191	96	94.4

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
 CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+  
1.  
inch

mm



**igus®**

## igubal® Spherical Bearings Clevis Pin GBI/GBM - inch/mm

igubal® Clevis Joint


Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



### Material:

Housing - igumid G

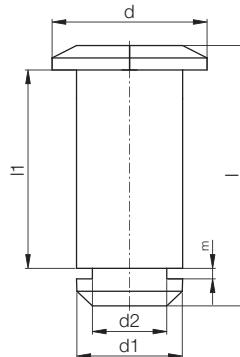

### Dimensions (mm)

Part Number Pin	d1	d2	d	l	l1	m	Clip	Weight
GBM-04	4	3.2	7	12.50	8	1.05	GSR-04	0.3
GBM-05	5	4.0	8	16.50	12	1.15	GSR-06	0.5
GBM-05 DIN	5	4.0	8	14.50	10	1.15	GSR-06	0.5
GBM-06	6	4.0	9	16.50	12	1.15	GSR-06	0.7
GBM-08	8	5.0	12	21.50	16	1.15	GSR-08	1.5
GBM-10	10	7.0	15	27.00	20	1.35	GSR-10	3.0
GBM-12	12	9.0	18	31.50	24	1.50	GSR-12	4.8
GBM-14	14	12.0	22	36.00	27	1.70	GSR-16	5.7
GBM-15	15	12.0	23	36.00	27	1.70	GSR-16	8.3
GBM-16	16	12.0	24	42.00	32	1.70	GSR-16	10.4
GBM-17	17	12.0	25	42.00	32	1.70	GSR-16	12.3
GBM-20	20	15.0	30	51.00	40	2.00	GSR-20	19.2

### Dimensions (inch)



Part Number Pin	d1	d2	d	l	l1	m	Clip	Weight
GBI-03	.1875	.1260	.3125	.55	.3975	.0472	GSR-04	0.4
GBI-04	.2500	.1969	.3750	.65	.4764	.0512	GSR-08	0.5
GBI-05	.3125	.1969	.4375	.85	.6339	.0512	GSR-08	1.5
GBI-06	.3750	.2756	.5000	1.05	.7953	.0591	GSR-10	2.8
GBI-07	.4375	.3543	.6250	1.25	.9528	.0669	GSR-12	4.6
GBI-08	.5000	.3543	.7500	1.40	1.0709	.0669	GSR-12	5.2

## igubal® Clevis Clip GSR - mm



### Material:

Housing - igumid G

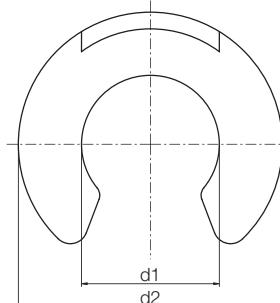


### Dimensions (mm)

Part Number	d1	d2	b	Weight
GSR-04	3.20	7.0	1.00	0.05
GSR-06	4.00	9.0	1.10	0.06
GSR-08	5.00	11.0	1.10	0.12
GSR-10	7.00	14.0	1.30	0.16
GSR-12	9.00	18.5	1.40	0.31
GSR-16	12.00	23.0	1.60	0.58
GSR-20	15.00	28.0	1.90	0.96



PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

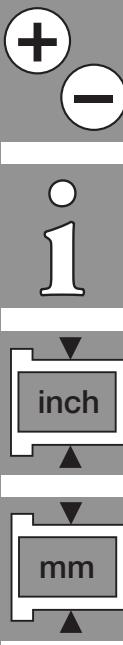



**igus®**

## igubal® Spherical Bearings Clevis Joint

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

igubal® Clevis Joint

**igus®**



# igubal® Pillow Block



## Available Materials &amp; Features



K Series

**Spherical Ball: iglide® L280**  
**Housing: igumid G**

- High strength under impact loads
- High vibration dampening

## Available Styles

KSTI - inch  
Page 57.6

KSTM - metric  
Page 57.7



E Series

**Spherical Ball: iglide® L280**  
**Housing: igumid G**

- High radial loads
- Can be used in liquid

ESTM - metric  
Page 57.8



E Series

**Adapter for Series E Pillow Blocks**

- Same depth gauge as metal pillow blocks
- Space-saving

AD-01-ESTM - metric  
Page 57.9



E Series

**Split Pillow Block/Ball**  
**Spherical Ball: iglide® J**  
**Housing: RN33**

- Ideal for outdoor use
- low moisture absorption

ESTM-GT - metric  
Page 57.10



E Series

**Spherical Ball: iglide® J**  
**Housing: igumid G**

- Lightweight
- Space-saving

ESTM-SL - metric  
Page 57.11



K Series

**Spherical Ball: iglide® J**  
**Housing: RN33**

- High rigidity
- Easy assembly and disassembly

KSTM-GT - metric  
Page 57.12



**Typical industries and applications**

- Industrial
- Machine building
- Packaging etc.



Stone processing



Solar industry



Paper industry



Packaging industry



## Product Range


- Closed and split design
- Inner diameters
- Inch sizes from: 3/16 to 1 in.
- Metric sizes from: 5 to 50 mm



## Part Number Structure

### Part Number Structure

**K ST I - 08**

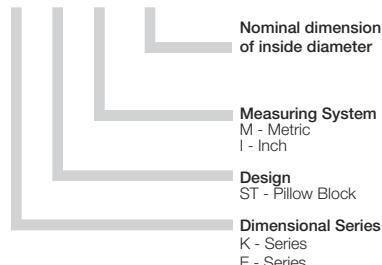

## Application Temperatures

Minimum	-22°F
Maximum long-term	+176°F
Maximum short-term	+248°F

## Usage Guidelines



- If chemical resistance is required
- When shaft misalignment needs to be resolved
- When easy assembly is requested (see split version)
- When dirt/dust resistant bearings are necessary
- In applications where lubrication could present an issue



- If temperatures are higher than 176°F
- If an integrated fixing collar is required
- If dimensions above 1.97" are necessary
- If rotation speeds higher than 9.84 fpm are required

## igubal® Pillow Block Bearing

### General Information

The igubal® pillow block bearings consist of a housing with a bearing insert. igubal® pillow block bearings are especially easy to install, able to compensate for misalignment and prevent edge loads.

## Advantages

- Maintenance-free, dry running
- High rigidity
- High strength under impact loads
- Compensation for misalignment
- Compensation for edge loads
- Corrosion-free
- Chemically resistant
- Vibration damping
- Suitable for rotating, oscillating and linear movements
- Lightweight
- High radial loads
- Can be used in liquid media
- Space-saving design
- Easy to install
- Predictable lifetime
- Maintenance-free, lubrication-free

## Application Use

The ability to pivot allows igubal® pillow block bearings to compensate for misalignment and possible shaft deflection. Applications where these effects cannot be prevented are suited for igubal pillow block bearings.

## Tolerances

Maintenance-free igubal® pillow block bearings are designed with inside diameter tolerance of E10. The shaft should be made to tolerance class h6 to h9. These recommended tolerances allow for changes in the bearing due to temperature and moisture absorption. See tolerance table page 1.14.


## Mounting

igubal® pillow block bearings are designed for mounting with 2 bolts. Precision mounting of the bearing is not necessary, since the spherical ball compensates for misalignment.

## Product Range

igubal® pillow block bearings are available in the standard dimensions for shafts of 3/16" to 1" or 5 to 50 mm.

## Pivot angle

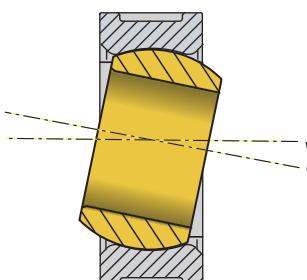


Visit [www.igus.com](http://www.igus.com)  
to use our online  
expert system




## Load

The load capacity of the maintenance-free igubal® bearing elements is very high at normal ambient temperatures. igubal® bearings absorb high forces and weigh only one fifth of traditional, metal bearing housings. The excellent dampening properties are based on the fact that the polymer material of the two part bearing can absorb vibrations differently than steel.


However, plastic specific properties, such as dependence on temperature and behavior under long-term stress, must be taken into consideration when using igubal® bearings. The load capacity of the pillow block should therefore be checked in a practical test, particularly if it will be used under continuous high loads and at elevated temperatures.

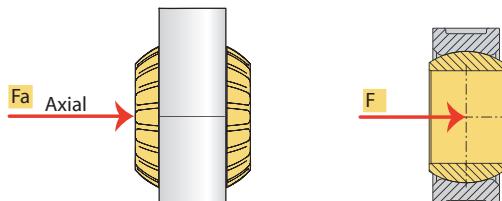


Axial Strength

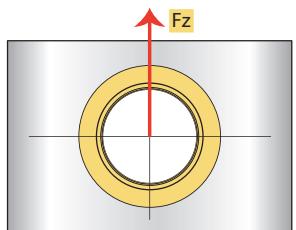

Radial tensile strength  
(upward)

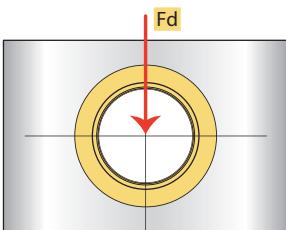


Radial compressive strength  
(downward)

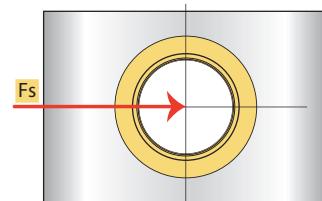

Lateral strength  
(radial)

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

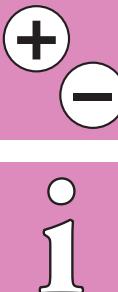





**igus®**

# igubal® Pillow Block Bearing KSTI - Inch

KSTI - Inch

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

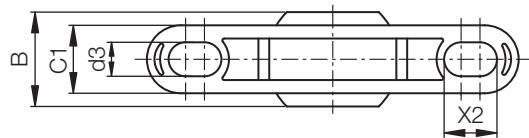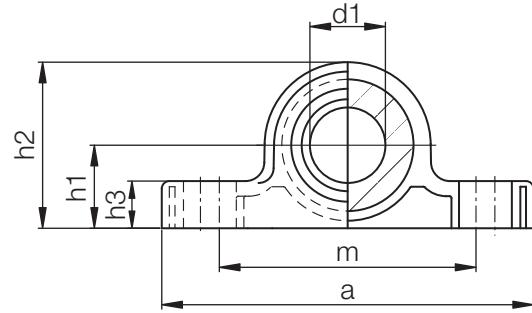

## Dimensions (inch)

Part Number	d1 E10	B	C1	h1	h2	h3	a	m	d3	X2	Max. Angle of Pivot
KSTI-03	.1900	.312	.234	.290	.566	.165	1.4000	1.000	.137	.200	25°
KSTI-04	.2500	.375	.250	.390	.705	.205	1.7500	1.250	.137	.250	25°
KSTI-05	.3125	.437	.312	.430	.824	.236	1.9500	1.350	.150	.280	25°
KSTI-06	.3750	.500	.359	.550	1.022	.376	2.4000	1.800	.180	.300	22°
KSTI-07	.4375	.562	.406	.570	1.082	.315	2.5000	1.850	.205	.330	22°
KSTI-08	.5000	.625	.453	.600	1.191	.354	2.8000	2.000	.205	.380	22°
KSTI-10	.6250	.750	.484	.700	1.409	.413	3.3500	2.300	.205	.470	22°
KSTI-12	.7500	.875	.593	.860	1.687	.472	3.7500	2.700	.270	.530	22°
KSTI-16	1.0000	1.375	1.005	1.100	2.163	.630	5.0000	3.500	.520	.680	20°



► Tolerance Table, Page 1.14

## Load Data

Part Number	Maximum Static Tensile Strength		Maximum Static Axial Compressive Strength (lbs)	Maximum Torque for Longitudinal holes (ft lbs)	Weight (g)
	Short-term (lbs)	Long-term (lbs)			
KSTI-03	124	62	68	0.4	1.7
KSTI-04	135	67	68	0.4	2.8
KSTI-05	180	90	90	0.6	4.5
KSTI-06	225	112	112	1.0	7.5
KSTI-07	247	124	135	1.8	9.7
KSTI-08	270	135	135	1.8	13.5
KSTI-10	472	236	180	1.8	21.5
KSTI-12	697	348	270	3.3	33.4
KSTI-16	1214	607	360	7.7	85.8

# igubal® Pillow Block Bearing KSTM - MM

**igus®**

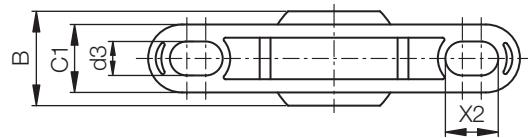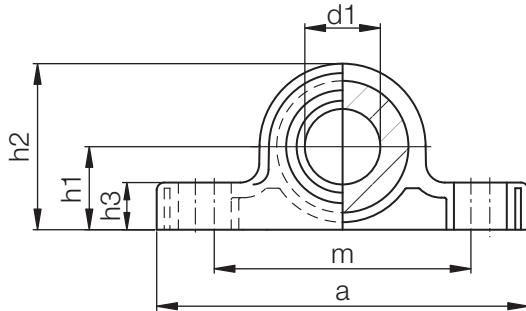

## Dimensions (mm)

Part Number	d1 E10	B	C1	h1	h2	h3	a	m	d3	X2	Max. Angle of Pivot
KSTM-05	5	8	6.0	7	14	4	34	25	3.3	5	30°
KSTM-06	6	9	7.0	10	18	5.5	43	33	4.5	6	29°
KSTM-08	8	12	9.0	10	20	6	47	33	4.5	7	25°
KSTM-10	10	14	10.5	14	26	7.5	62	46	5.5	8	25°
KSTM-12	12	16	12.0	14	28	8.5	65	46	5.5	9	25°
KSTM-14	14	19	13.5	18	34	9.5	82	60	6.6	11	23°
KSTM-16	16	21	15.0	18	36	10.5	86	60	6.6	12	23°
KSTM-18	18	23	16.5	22	42	11.5	93	68	9.0	13	23°
KSTM-20	20	25	18.0	22	44	13	98	68	9.0	14	23°
KSTM-22	22	28	20.0	24	48	14	108	74	9.0	16	22°
KSTM-25	25	31	22.0	27	54	16	124	86	9.0	17	22°
KSTM-30	30	37	25.0	32	64	17	139	96	11.0	20	22°

► Tolerance Table, Page 1.14

## Load Data




Part Number	Maximum Static Tensile Strength		Maximum Static Axial Compressive Strength (lbs)	Maximum Torque for Longitudinal holes (ft lbs)	Weight (g)
	Short-term (lbs)	Long-term (lbs)			
KSTM-05	157	78	67	0.4	1.7
KSTM-06	247	123	67	1.0	2.9
KSTM-08	292	146	89	1.0	4.6
KSTM-10	337	168	112	1.8	8.6
KSTM-12	494	247	134	1.8	11.8
KSTM-14	539	269	134	3.3	18.4
KSTM-16	674	337	224	3.3	23.7
KSTM-18	786	393	269	7.7	32.2
KSTM-20	1056	528	292	7.7	40.0
KSTM-22	1371	685	314	7.7	54.0
KSTM-25	1483	741	359	7.7	75.3
KSTM-30	1820	910	472	15.9	116.8

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
 CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



inch

mm

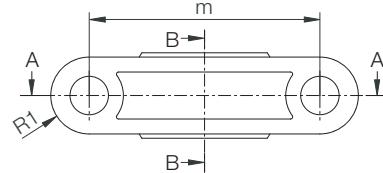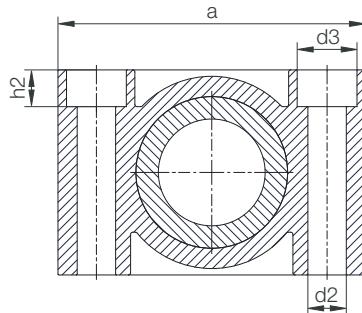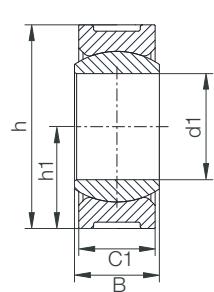**Material:**Housing - igumid G  
Ball - iglide® L280**Dimensions (mm)**


Part No.	d1 (E10)	d2	d3	h	h1	h2	a	m	C1	B	R1	Max. Angle of Pivot
ESTM-08	8.0	4.5	–	19	9.5	–	31.0	22.0	9.0	8.0	4.5	22°
ESTM-10	10.0	5.5	–	22	11	–	36.0	26.0	10.0	9.0	5.0	22°
ESTM-12	12.0	5.5	–	26	13	–	38.0	28.0	10.0	10.0	5.0	22°
ESTM-16	16.0	6.6	10.6	34	17	6.4	50.0	37.0	13.0	13.0	6.5	22°
ESTM-20	20.0	9.0	14.0	40	20	8.6	62.0	46.0	16.0	16.0	8.0	22°
ESTM-25	25.0	9.0	14.0	48	24	8.6	72.0	54.0	18.0	20.0	9.0	20°
ESTM-30	30.0	11.0	17.0	56	28	10.6	86.0	64.0	22.0	22.0	11.0	20°

► Tolerance Table, Page 1.14

**Load Data**

Part No.	Max. radial tensile strength		Max. radial compressive strength		Maximum axial strength		Maximum torque bolt holes (ft lbs)	Weight (g)
	Short term	Long term	Short term	Long term	Short term	Long term		
	(lbs)	(lbs)	(lbs)	(lbs)	(lbs)	(lbs)		
ESTM-08	560	280	965	480	135	65	.95	5.0
ESTM-10	765	380	1190	595	155	80	1.84	7.1
ESTM-12	1010	505	1460	730	165	85	1.84	9.0
ESTM-16	1505	750	1910	955	250	125	3.30	17.5
ESTM-20	1910	955	2470	1290	315	155	3.30	27.4
ESTM-25	3035	1515	4150	2080	515	255	7.75	50.8
ESTM-30*	2250	1125	3710	1855	560	280	7.75	79.7

\* Due to the different manufacturing method, the load values of the ESTM-30 are lower than ESTM-25

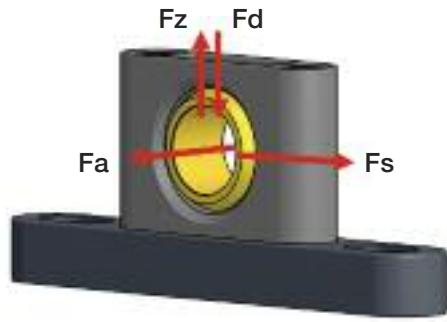


### Special properties

- Same dimensions as metallic pillow blocks
- Lightweight
- For E Series pillow blocks
- Corrosion- and chemical-resistant
- Space-saving

### Material:

Housing - igumid G  
Ball - iglide® L280

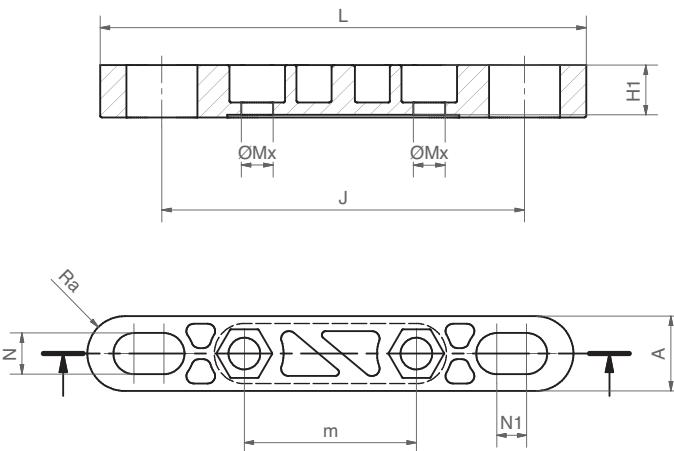

### Dimensions [mm]

Part No.	for ESTM-	d1	L	A	Ra	J	H1	N	N1	m	Mx
AD-ESTM-20*	ESTM-20	20	130	20	10	97	14	11	8	46	M8
AD-ESTM-25**	ESTM-25	25	130	20	10	102	12.5	11	9	54	M8
AD-ESTM-30**	ESTM-30	30	158	25	12.5	118	14.9	14	10	64	M10

\* Material: plastic

\*\* Material: aluminum

### Load data

Part No.	Max. radial tensile strength		Max. radial compressive strength		Maximum axial strength		Maximum lateral strength		Weight (g)
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	
AD-ESTM-20*	540	270	2,250	1,125	675	335	270	135	29.8
AD-ESTM-25**	540	270	2,250	1,125	675	335	270	135	74
AD-ESTM-30**	540	270	2,250	1,125	675	335	270	135	124

\* Material: plastic

\*\* Material: aluminum

AD-ESTM - MM

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

inch  
mm



**igus®**

## igubal® Pillow Block Bearing ESTM-GT, MM

ESTM-GT - MM




Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



### Special properties

- Save time during assembly and disassembly of shafts, no more threading
- Low installation space and low weight
- High rigidity and fatigue strength
- Adapter available, ► **Page 57.9**

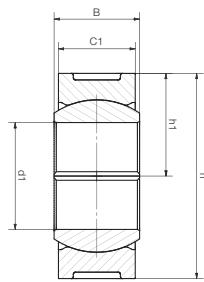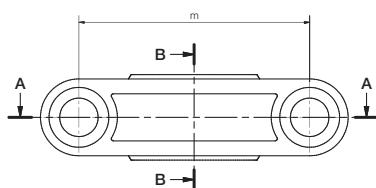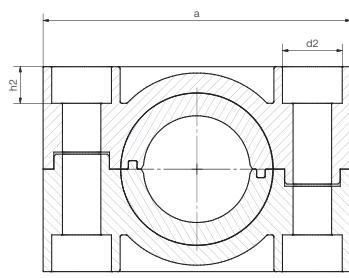

### Dimensions [mm]

Part No.	d1 (E10)	d2	h	h1	h2	a	m	C1	B	R1	Max. pivot Angle
ESTM-GT16-GT	16.0	6.6	34.0	17.0	6.4	50.0	37.0	13.0	13.0	6.5	22°
ESTM-GT20-GT	20.0	9.0	40.0	20.0	8.6	62.0	46.0	16.0	16.0	8.0	22°
ESTM-GT25-GT	25.0	9.0	48.0	24.0	8.6	72.0	54.0	18.0	20.0	9.0	22°
ESTM-GT30-GT	30.0	11.0	56.0	28.0	10.6	86.0	64.0	22.0	22.0	11.0	22°

► Tolerance Table, Page 1.14

### Load Data (mm)

Part No.	Max. static tensile strength		Max. static axial compressive strength		Weight (g)
	Short term	Long term	Short term	Long term	
	(lbs)	(lbs)	(lbs)	(lbs)	
ESTM-GT16-GT	562	281	900	450	18
ESTM-GT20-GT	787	393	1349	674	28
ESTM-GT25-GT	1124	562	1575	787	52
ESTM-GT30-GT	1237	618	2250	1124	84






### Special properties

- Space-saving
- Lightweight
- Maintenance- and lubricant-free
- Predictable lifetime

### Material:

Housing - igumid G  
Ball - iglide® J standard

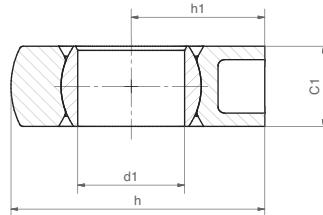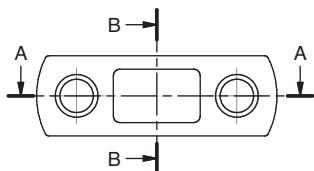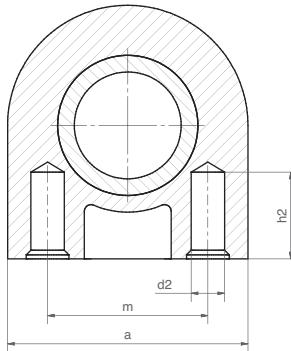

### Dimensions (mm)

Part No.	d1 (H10)	d2	h	h1	h2	a	m	C1	Max. Pivot Angle	Weight (g)
ESTM-05-SL	5.0	2.5	18.0	10.0	6.5	16.0	10.0	6.0	17°	1.6
ESTM-06-SL	6.0	2.5	18.0	10.0	6.5	16.0	10.0	6.0	17°	1.7
ESTM-08-SL	8.0	2.5	19.0	10.0	6.5	18.0	12.0	6.0	17°	1.7
ESTM-10-SL	10.0	2.5	20.0	10.0	6.5	20.0	14.0	6.0	17°	1.9

► Tolerance Table, Page 1.14

### Load Data (mm)

Part No.	Max. radial tensile strength		Max. radial compressive strength		Maximum lateral strength		Maximum axial strength	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)
ESTM-05-SL	337	169	315	157	202	101	34	17
ESTM-06-SL	337	169	315	157	202	101	34	17
ESTM-08-SL	360	180	315	157	214	107	22	11
ESTM-10-SL	360	180	315	157	214	107	22	11

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.



Familiar characteristics such as self-adjustment and zero-maintenance are now available with dimensions of 35, 40, 45 and 50 mm.





### Special Properties

- Installation is easy and does not require shaft removal
- Maintenance-free, dry running
- For high static loads
- Space-saving
- Low weight
- High rigidity
- Predictable lifetime

### Material:

Housing - RN33  
 Ball - iglide® J

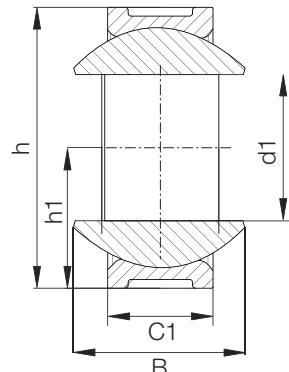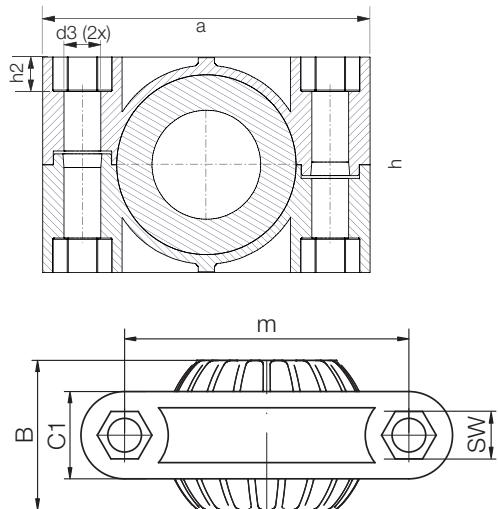

### Dimensions (mm)

Part No.	d1 (E10)	d3	h	h1	h2	SW	a	m	C1	B	Max. Pivot Angle
KSTM-GT35*	35.0	13.5	79.0	39.5	12.6	19.0	120.5	91.0	29.5	48.5	24°
KSTM-GT40	40.0	13.5	79.0	39.5	12.6	19.0	120.5	91.0	29.5	48.5	24°
KSTM-GT40 GT**	40.0	13.5	79.0	39.5	12.6	19.0	120.5	91.0	29.5	48.5	24°
KSTM-GT45*	45.0	13.5	100.0	50.0	12.6	19.0	149.0	114.0	35.0	60.0	24°
KSTM-GT50	50.0	13.5	100.0	50.0	12.6	19.0	149.0	114.0	35.0	60.0	24°
KSTM-GT50 GT**	50.0	13.5	100.0	50.0	12.6	19.0	149.0	114.0	35.0	60.0	24°

► Tolerance Table, Page 1.14

### Load data

Part No.	Max. radial tensile strength				Max. axial tensile strength		Max. torque		Weight (g)	
	Short term		Long term		Short term		Long term			
	(lbs)	(lbs)	(lbs)	(lbs)	(ft lbs)	(ft lbs)	(ft lbs)	(ft lbs)		
KSTM-GT35*	2,473	1,236	562	281	14.8	11.1	14.8	11.1	250.3	
KSTM-GT40	2,473	1,236	562	281	14.8	11.1	14.8	11.1	235.0	
KSTM-GT40 GT**	2,473	1,236	562	281	14.8	11.1	14.8	11.1	235.0	
KSTM-GT45*	3,372	1,686	674	337	14.8	14.8	14.8	14.8	405.2	
KSTM-GT50	3,372	1,686	674	337	14.8	14.8	14.8	14.8	389.2	
KSTM-GT50 GT**	3,372	1,686	674	337	14.8	14.8	14.8	14.8	389.2	


\*Inside diameter achieved with plain iglide® J bearing pressed into ID of spherical ball

\*\*Spherical balls are also available with split design



igubal® Pillow Block

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

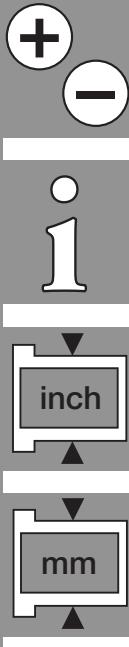



igus®

## igubal® Pillow Block Bearing

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

igubal® Pillow Block

igus®



igubal® Flange



### Available Materials & Features



E Series

**Spherical Ball:** iglide® L280 (standard)  
(other options available)

**Housing:** igumid G

### Available Styles

EFOI - inch  
Page 58.5

EFOM - metric  
Page 58.6



E Series

**Spherical Ball:** iglide® L280 (standard)  
(other options available)

**Housing:** igumid G

EFSI - inch  
Page 58.7

EFSM - metric  
Page 58.8



K Series

**Spherical Ball:** iglide® J  
**Housing:** RN33

KFSM-GT - metric  
Page 58.9



E Series

**Spherical Ball:** iglide® T500  
**Housing:** iguton G

- High temperature option

EFOM-HT - metric  
Page 58.10



E Series

**Spherical Ball:** iglide® T500  
**Housing:** iguton G

- High temperature option

EFSM-HT - metric  
Page 58.11



Typical industries and applications

- Industrial
- Automation
- Agricultural machines
- Machine building
- Food industry, etc.



Conveyor technique



Solar industry



Rotary sorter



Food industry



## Product Range


- Flange bearing with 2 and 4 holes
- Dimensional series E
- Diameters from 4 to 50 mm
- Inner diameters:  
Inch sizes from 3/8 - 1 in.  
Metric sizes from 5 - 50 mm)



## Part Number Structure

### Part Number Structure

**E F O I - 10 - R**

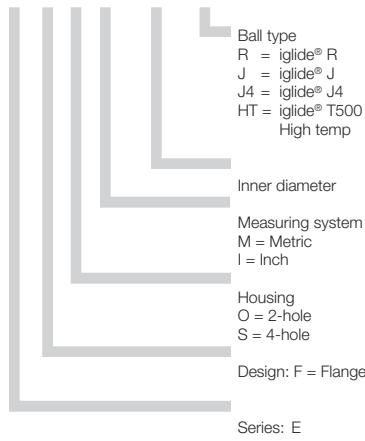

The example shows an inch sized 2-hole flange bearing of the dimensional Series E with a spherical ball inner diameter of 10 mm.

## Temperature Range

	Minimum	Maximum
Standard	-22°F	+176°F
High Temp	-40°F	+392°F



- If chemical resistance is required
- If dirt/dust resistant bearings are necessary
- When shaft misalignment needs to be resolved
- In applications where lubrication could present an issue



- If temperatures are higher than +194°F  
➤ HT version
- If an integrated fixing collar is required
- If dimensions above 1" or 50 mm are necessary
- If rotation speeds higher than 100 fpm are required

## General Properties


igubal® Flange bearings have been developed for the support of shaft ends or for shafts lead-through. Like all igubal® products, these bearings consist of an igumid G housing and an iglide® L280 spherical ball (with other options available). igubal® Flange bearings are made to the dimensional series E and are offered with two or four mounting holes.

## Areas of Application


Since igubal® flange bearings are made for maintenance-free use, they are especially suited for applications in which access to the bearing is limited, in moist or wet environments or cleanroom environments. Thus, igubal® flange bearings are also found in electric toothbrushes, awnings, conveyor technology, bakery machines and agriculture to name a few.

## Installation


igubal® flange bearings are designed for mounting with 2 or 4 bolts, depending on the design. The 2-hole types are provided with elongated holes, which allow a problem-free adjustment. An exact positioning of the bearing housing is not necessary, since the spherical ball compensates for misalignment.

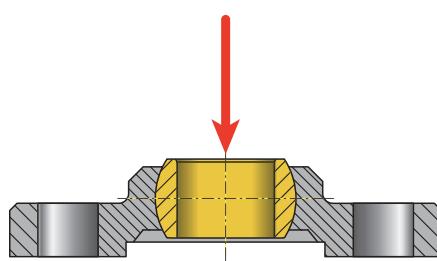

Static axial load

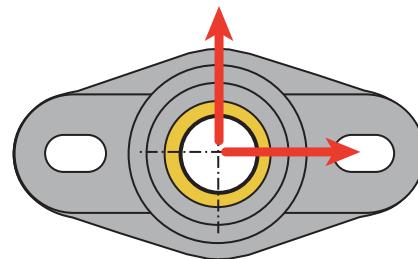

Static radial load

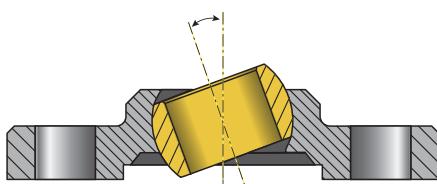

Pivot Angle



# igubal® Spherical Bearings

## Flange Bearing, 2 Hole - inch - EFOI

**igus®**



Flange bearing with  
2 mounting holes

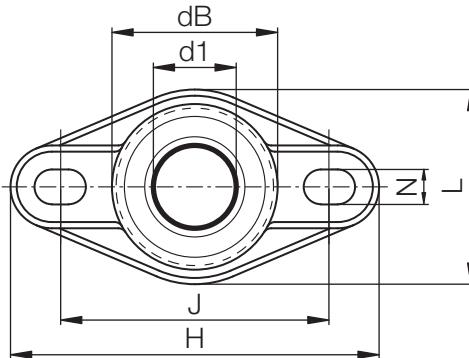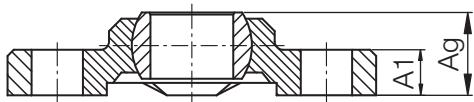

### Dimensions (inch)

Part Number	d1 (E10)	dB	H	L	J Hole Pitch	A1 Height of Housing	Ag Total Height	N Bore Diameter d x 1
EFOI-03	0.1900	0.551	1.331	0.630	0.945	0.177	0.312	0.126 x 0.197
EFOI-04	0.2500	0.551	1.331	0.630	0.945	0.177	0.342	0.126 x 0.197
EFOI-05	0.3125	0.709	1.740	0.866	1.220	0.217	0.412	0.169 x 0.256
EFOI-06	0.3750	0.866	2.047	1.024	1.417	0.256	0.483	0.210 x 0.315
EFOI-07	0.4375	0.984	2.232	1.220	1.614	0.276	0.518	0.210 x 0.315
EFOI-08	0.5000	0.984	2.232	1.220	1.614	0.276	0.518	0.210 x 0.315
EFOI-10	0.6250	1.260	2.858	1.496	2.087	0.394	0.683	0.212 x 0.315
EFOI-12	0.7500	1.575	3.504	1.850	2.559	0.433	0.785	0.331 x 0.492
EFOI-16	1.0000	1.909	3.976	2.303	2.953	0.551	0.966	0.331 x 0.492


► Tolerance Table, Page 1.14

### Load Data

Part Number	Maximum Static Axial Load		Maximum Static Radial Load		Maximum Static Torque Holes (ft•lbs)	Maximum Pivot angle	Weight (g)
	Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)			
EFOI-03	56	28	168	84	0.44	33°	2.3
EFOI-04	56	28	180	90	0.96	27°	2.0
EFOI-05	156	78	248	124	1.84	24°	4.0
EFOI-06	192	96	450	225	1.84	24°	6.5
EFOI-07	248	124	494	247	1.84	21°	7.5
EFOI-08	248	124	494	247	3.32	21°	12.0
EFOI-10	314	157	630	315	3.32	24°	17.2
EFOI-12	404	202	1236	618	3.32	17°	33.7
EFOI-16	674	337	1348	674	7.74	14°	59.0

For another spherical bearing material please add J, R or J4 to the part number; e.g. EFOI-08R

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1  
inch



mm



**igus®**

# igubal® Spherical Bearings

## Flange Bearing, 2 Hole - mm - EFOM


igubal® Flange

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



Flange bearing with  
2 mounting holes




### Dimensions (mm)

Part Number	d1 (E10)	dB	H	L	J Hole Pitch	A1 Height of Housing	Ag Total Height	N Bore Diameter d x 1
EFOM-05	5	14.0	33.8	16.0	24.0	4.5	8.5	3.2 x 5.0
EFOM-06	6	14.0	33.8	16.0	24.0	4.5	8.5	3.2 x 5.5
EFOM-08	8	18.0	44.2	22.0	31.0	5.5	10.5	4.3 x 6.5
EFOM-10	10	22.0	52.0	26.0	36.0	6.5	12.0	5.3 x 8.0
EFOM-12	12	25.0	56.7	31.0	41.0	7.0	13.0	5.3 x 8.0
EFOM-15	15	30.0	68.6	36.0	50.0	8.5	15.5	6.4 x 10.0
EFOM-16	16	32.0	72.6	38.0	53.0	10.0	17.5	6.4 x 10.1
EFOM-17	17	35.0	74.6	41.0	55.0	10.0	18.0	6.4 x 10.2
EFOM-20	20	40.0	89.0	47.0	65.0	11.0	20.0	8.4 x 12.5
EFOM-25	25	48.5	101.0	58.5	75.0	14.0	25.0	8.4 x 12.6
EFOM-30	30	55.0	118.0	65.0	87.5	15.0	26.0	10.5 x 16.0

► Tolerance Table, Page 1.14

### Load Data

Part Number	Maximum Static Axial Load		Maximum Static Radial Load		Maximum Static Torque Holes (ft•lbs)	Maximum Pivot angle	Weight (g)
	Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)			
EFOM-04	90	45	168	84	0.44	28°	1.9
EFOM-05	90	45	168	84	0.44	29°	2.3
EFOM-06	112	56	180	90	0.44	25°	1.8
EFOM-08	158	78	247	124	0.96	25°	4.1
EFOM-10	191	96	450	225	1.84	25°	6.8
EFOM-12	247	124	495	247	1.84	21°	8.9
EFOM-15	292	146	540	270	3.32	20°	15.0
EFOM-16	315	158	629	315	3.32	27°	17.7
EFOM-17	405	202	719	360	3.32	21°	24.9
EFOM-20	405	202	1236	618	7.74	19°	32.8
EFOM-25	674	337	1348	674	7.74	15°	58.5
EFOM-30	687	393	1461	730	15.86	14°	78.9

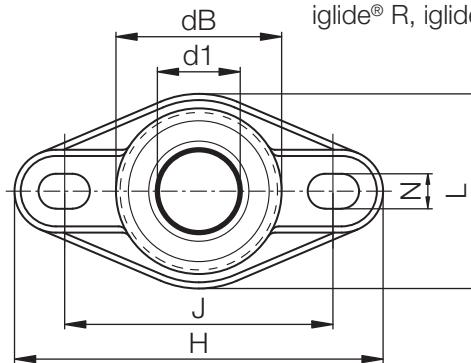

### Material:

Housing - igumid G

Ball - iglide® L280

Also available :

iglide® R, iglide® J and iglide® J4

For another spherical bearing material please add J, R or J4 to the part number; e.g. EFOM-16R


# igubal® Spherical Bearings

## Flange Bearing, 4 Hole - Inch - EFSI

**igus®**



Flange bearing with  
4 mounting holes

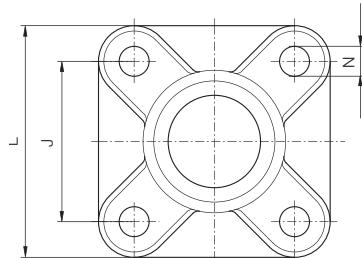


### Material:

Housing - igumid G

Ball - iglide® L280

Also available :

iglide® R, iglide® J and iglide® J4

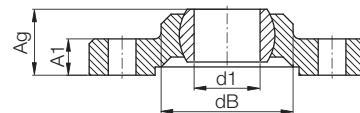

### Dimensions (inch)

Part Number	d1 (E10)	dB	L	J Hole Pitch 0.004	A1 Height of Housing	Ag Total Height	N Bore Diameter d x 1
EFSI-03	.1900	.551	.984	.669	.177	.311	.126
EFSI-04	.2500	.551	.984	.669	.177	.343	.126
EFSI-05	.3125	.709	1.299	.866	.217	.413	.169
EFSI-06	.3750	.866	1.496	1.024	.256	.484	.209
EFSI-07	.4375	.984	1.575	1.102	.276	.520	.209
EFSI-08	.5000	.984	1.575	1.102	.276	.520	.209
EFSI-10	.6250	1.260	2.047	1.417	.354	.654	.252
EFSI-12	.7500	1.575	2.559	1.772	.433	.787	.331
EFSI-16	1.000	1.909	2.913	2.047	.551	.965	.331

► Tolerance Table, Page 1.14

### Load Data

Part Number	Maximum Static Axial Load		Maximum Static Radial Load		Maximum Static Torque Holes (ft•lbs)	Maximum Pivot angle EFOI	Weight (g)
	Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)			
EFSI-03	50	25	224	112	0.44	33°	2.3
EFSI-04	56	28	224	112	0.96	27°	2.0
EFSI-05	90	45	314	157	1.84	24°	4.0
EFSI-06	112	56	448	224	1.84	24°	6.5
EFSI-07	134	67	562	281	1.84	21°	7.5
EFSI-08	134	67	562	281	3.32	21°	12.0
EFSI-10	282	141	720	360	3.32	24°	17.2
EFSI-12	428	214	900	450	3.32	17°	31.5
EFSI-16	584	292	1258	629	7.74	14°	77.0

For another spherical bearing material please add J, R or J4 to the part number; e.g. EFSI-08R

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

I

1.

inch

mm



**igus®**


# igubal® Spherical Bearings

## Flange Bearing, 4 Hole - mm - EFSM

igubal® Flange



Flange bearing with  
4 mounting holes

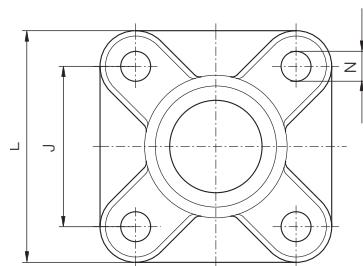


### Material:

Housing - igumid G

Ball - iglide® L280

Also available :

iglide® R, iglide® J and iglide® J4

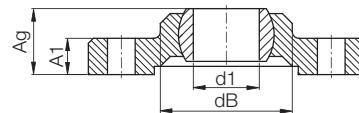

### Dimensions (mm)

Part Number	d1 (E10)	dB	L	J Hole Pitch ±0.1mm	A1 Height of Housing	Ag Total Height	N Bore Diameter d x l
EFSM-04	4	14.0	25.0	17.0	4.5	8.5	3.2
EFSM-05	5	14.0	25.0	17.0	4.5	8.5	3.2
EFSM-06	6	14.0	25.0	17.0	4.5	8.5	3.2
EFSM-08	8	18.0	33.0	22.0	5.5	10.5	4.3
EFSM-10	10	22.0	38.0	26.0	6.5	12.0	5.3
EFSM-12	12	25.0	40.0	28.0	7.0	13.0	5.3
EFSM-15	15	30.0	49.0	34.0	8.5	15.5	6.4
EFSM-16	16	32.5	52.0	36.0	9.0	16.5	6.4
EFSM-17	17	35.0	54.0	38.0	10.0	18.0	6.4
EFSM-20	20	40.0	65.0	45.0	11.0	20.0	8.4
EFSM-25	25	48.5	74.0	52.0	14.0	25.0	8.4
EFSM-30	30	55.0	85.0	60.0	15.0	26.0	10.5

► Tolerance Table, Page 1.14


### Load Data

Part Number	Maximum Static Axial Load		Maximum Static Radial Load		Maximum Static Torque Holes (ft•lbs)	Maximum Pivot Angle	Weight (g)
	Short Term (lbs)	Long Term (lbs)	Short Term (lbs)	Long Term (lbs)			
EFSM-04	45	22	225	112	0.44	27°	2.0
EFSM-05	67	34	225	12	0.44	24°	4.0
EFSM-06	67	34	225	112	0.44	24°	6.5
EFSM-08	101	51	315	158	0.96	21°	12.0
EFSM-10	158	78	450	225	1.84	24°	17.2
EFSM-12	191	96	562	281	1.84	17°	31.5
EFSM-15	247	124	674	337	3.32	20°	20.2
EFSM-16	304	152	719	360	3.32	14°	59.0
EFSM-17	360	180	764	382	3.32	21°	27.9
EFSM-20	450	225	900	450	7.74	19°	45.0
EFSM-25	540	270	1259	629	7.74	15°	76.0
EFSM-30	629	315	1348	674	15.86	14°	100.7

For another spherical bearing material please add J, R or J4 to the part number; e.g. EFSM-12R



**Material:**  
Housing - RN33  
Ball - iglide® J

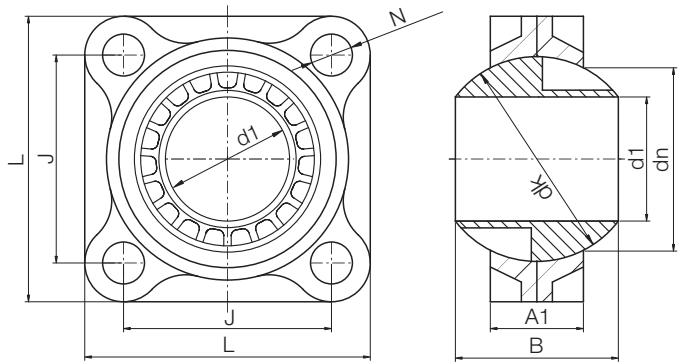

### Dimensions (mm)

Part No.	d1 (E10)	dn	d3	dk	A1	A2	B	J	L	N	Max. pivot angle
KFSM-GT35	35.0	59.0	26.0	66.0	30.0	45.0	48.5	66.0	92.0	13.5	24°
KFSM-GT40	40.0	59.0	26.0	66.0	30.0	45.0	48.5	66.0	92.0	13.5	24°
KFSM-GT45	45.0	72.0	26.0	82.0	40.0	60.0	60.0	78.0	104.0	13.5	24°
KFSM-GT50	50.0	72.0	26.0	82.0	40.0	60.0	60.0	78.0	104.0	13.5	24°

► Tolerance Table, Page 1.14

### Load Data

Part No.	Maximum static Radial Load		Maximum static Axial Load		Weight (g)
	short term (lbs)	long term (lbs)	short term (lbs)	long term (lbs)	
KFSM-GT35	1125	562	1012	505	183.5
KFSM-GT40	1125	562	1012	505	161.6
KFSM-GT45	1348	674	1125	562	294.6
KFSM-GT50	1348	674	1125	562	260.1

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.



inch



mm



igus®

## igubal® Spherical Bearings Flange Bearing - mm - EFOM HT

igubal® Flange

Telephone 1-800-521-2747  
Fax 1-401-438-7270





Flange bearing with  
2 mounting holes

### Special Properties

- Temperatures to 392°F
- iglide® T500 highly wear resistant spherical ball

### Material:

Housing - iguton G  
Ball - iglide® T500

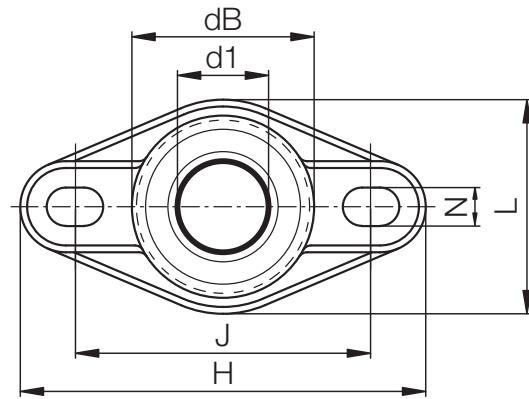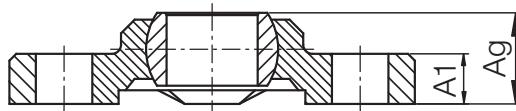

### Dimensions (mm)

Part Number	d1 (E10)	dB	H	L	J	Hole Pitch	Height of Housing	Ag Total Height	N	Bore Diameter d x 1	Maximum Pivot Angle	Weight (g)
EFOM-05-HT	5	14.0	33.8	16.0	24.0	4.5	8.5	8.5	3.2 x 5.0	29°	2.5	
EFOM-06 HT	6	14.0	33.8	16.0	24.0	4.5	8.5	8.5	3.2 x 5.5	27°	2.3	
EFOM-08 HT	8	18.0	44.2	22.0	31.0	5.5	10.5	10.5	4.3 x 6.5	24°	5.0	
EFOM-10 HT	10	22.0	52.0	26.0	36.0	6.5	12.0	12.0	5.3 x 8.0	24°	8.3	
EFOM-12 HT	12	25.0	56.7	31.0	41.0	7.0	13.0	13.0	5.3 x 8.0	21°	10.7	

► Tolerance Table, Page 1.14





Flange bearing with  
2 mounting holes

### Special Properties

- Temperatures to 392°F
- iglide® T500 highly wear resistant spherical ball

### Material:

Housing - iguton G  
Ball - iglide® T500

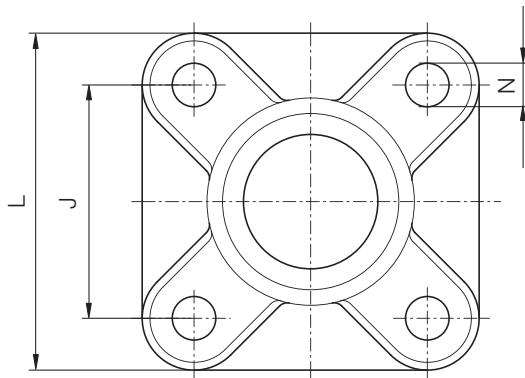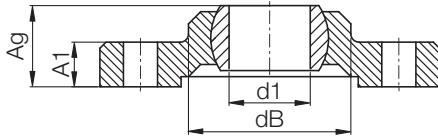

### Dimensions (mm)

Part Number	d1 (E10)	dB	L	J Hole Pitch ±0.1	A1 Height of Housing	Ag Total Height	N Bore Diameter d x 1	Maximum Pivot Angle	Weight (g)
EFSM-05-HT	5	14.0	25.0	17.0	4.5	8.5	3.2	29°	3.5
EFSM-06 HT	6	14.0	25.0	17.0	4.5	8.5	3.2	25°	3.3
EFSM-08 HT	8	18.0	33.0	22.0	5.5	10.5	4.3	25°	7.1
EFSM-10 HT	10	22.0	38.0	26.0	6.5	12.0	5.3	25°	11.2
EFSM-12 HT	12	25.0	40.0	28.0	7.0	13.0	5.3	21°	13.3

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+ I 1.0 inch

mm



**igus®**

## igubal® Spherical Bearings Flange Bearing

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

igubal® Flange

**igus®**



**igubal® Pressfit, Clip,  
Double Joint & Thrust**



**KGLI** - inch  
Page 59.5

K Series



**EGFM-T** - metric  
Page 59.13

E Series

---



**EGLM** - metric  
Page 59.7



**ECLM-HD** - metric  
Page 59.14

---



**KGLI-SL** - inch  
Page 59.8

**KGLM-SL** - inch  
Page 59.9

---



**EGZM** - metric  
Page 59.15

---



**KGLM-LC** - metric  
Page 59.10



**KDGM** - metric  
Page 59.16

---



**ECLM** - metric  
Page 59.12



**WDGM** - metric  
Page 59.17

---



**Typical industries and applications**

- Food industry
- Railway technology
- Automotive
- Industrial, etc.

Ease of installation makes diverse applications possible for igubal® spherical bearings. They can be used anywhere. The self-aligning feature offers design advantages and helps to simplify assembly.



**Food industry**



**Carriage in a crane system**



**Automotive industry**



**Hose skiving**



## Product Range


- Standard Styles:  
Dimensional Series E  
Dimensional Series K
- Pitch 25-200 mm
- For shaft diameters:  
Inch sizes from 3/16 - 1 in.  
Metric sizes from 2 - 30 mm



## Part Number Structure

### Part Number Structure

**K GL M - 08 - 02**

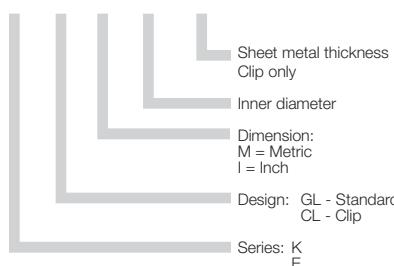

## Usage Guidelines



- If chemical resistance is required
- When shaft misalignment needs to be resolved
- If easy assembly is requested
- If dirt/dust resistant bearings are necessary
- In applications where lubrication could present an issue
- When high axial and radial loads exist
- When reduction of installation space is important
- If a cost-effective option is requested



- If temperatures are higher than +194°F
- If rotation speeds are above 100 fpm
- If dimensions above 1" or 30mm are necessary

## igubal® Pivoting Bearings

The use of pivoting bearings is usually associated with heavier traditional metal bearings, difficult installation, and high costs. Most of the time, maintenance is still necessary over the long term, and the bearings are only corrosion-resistant in special designs. Often roller bearings or plain bearings malfunction prematurely due to high edge loads, or bearings must be readjusted, reamed, or retrofitted in order to compensate for misalignment.

igubal® pivoting bearings put an end to all of these disadvantages and open up many new possibilities for your engineering design.

## Area of Application

Ease of installation makes diverse applications possible for igubal® pivoting bearings. They can be used anywhere the self-adjusting feature offers design advantages or helps to simplify assembly.

## Tolerances

Maintenance-free igubal® pivoting bearings are meant to be oversize before being pressfit. After proper installation into a recommended housing bore, the inner diameter adjusts to meet our specified tolerances. Please adhere to the catalog specifications for housing bore and recommended shaft sizes. This will help to ensure optimal performance of iglide plain bearings. Please contact an iglide® technical expert for support.


► Tolerance Table, Page 1.14

## Installation


igubal® pivoting bearings are pressfit into a recommended housing bore and axially secured. An exact orientation of the bearing housing is not necessary, since the pivoting bearing compensates for misalignment.

## Dimensions


igubal® spherical bearings are manufactured according to DIN ISO 12240 dimensional series K and E. The product range provides dimensions from 0.19 to 1.0" and 2 to 30mm. Please contact us if you need other dimensions.

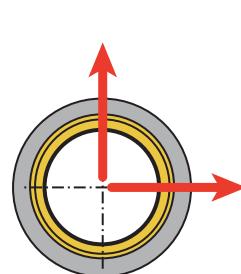


Compressive Strength  
Radial

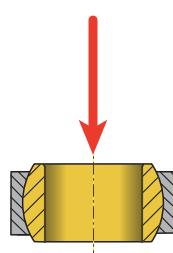

Compressive Strength  
Axial



Pivot Angle

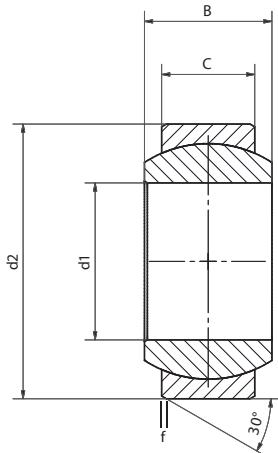

**Material:**  
Housing - igumid G  
Ball - iglide® L280

### Dimensions (inch)

Part No.	d1 (E10)	d2 Inch	B Inch	C Inch	f Inch	Max. pivot angle	Weight (g)
KGLI-03	.1900	.5625	.312	.218	0.3	34°	1.2
KGLI-04	.2500	.6562	.375	.250	0.3	30°	1.7
KGLI-05	.3125	.7500	.437	.281	0.3	29°	2.6
KGLI-06	.3750	.8125	.500	.312	0.5	25°	3.3
KGLI-07	.4375	.9375	.562	.343	0.5	25°	4.9
KGLI-08	.5000	1.0625	.625	.390	0.5	25°	7.1
KGLI-10	.6250	1.1875	.750	.500	0.5	23°	10.2
KGLI-12	.7500	1.4375	.875	.593	0.5	23°	17.5
KGLI-16	1.0000	2.1250	1.375	1.005	0.5	23°	62.0

### Technical Data


Part No.	Maximum Static Compressive Strength		Maximum Torque for the assembly	Housing Bore		Shaft Size	
	radial (lbs)	axial (lbs)		(ft lbs)	Min	Max.	Min.
KGLI-03	225	34		3.69	.5625	.5630	.1888
KGLI-04	337	56		7.37	.6562	.6568	.2485
KGLI-05	450	79		8.85	.7500	.7509	.3110
KGLI-06	629	90		14.75	.8125	.8134	.3735
KGLI-07	843	101		22.13	.9375	.9382	.4358
KGLI-08	955	112		25.82	1.0625	1.0632	.4983
KGLI-10	1191	169		29.50	1.1875	1.1882	.6233
KGLI-12	1911	191		40.57	1.4375	1.4383	.7479
KGLI-16	3057	562		47.94	2.1250	2.1258	.9988
							1.0000

► Tolerance Table, Page 1.14

For housing bores (H7)

For shaft sizes (h7)


PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1



inch




mm



**igus®**

# igubal® Spherical Bearings Pressfit Spherical Bearings KGML - mm

igubal®  
Pivoting Bearings

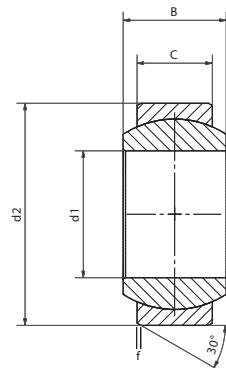

Dimensions (mm)

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

**Material:**  
Housing - igumid G  
Ball - iglide® L280

Part No.	d1 (E10) (mm)	d2 (mm)	B (mm)	C (mm)	f (mm)	Max. pivot angle	Weight (g)
KGLM-02	2	8	4	3.0	0.8	32°	0.1
KGLM-03	3	10	6	4.5	0.8	32°	0.5
KGLM-05	5	13	8	6.0	0.8	30°	1.0
KGLM-06	6	16	9	6.5	0.8	29°	1.6
KGLM-08	8	19	12	9.0	0.8	25°	2.9
KGLM-10	10	22	14	10.5	0.8	25°	4.4
KGLM-12	12	26	16	12.0	0.8	25°	7.0
KGLM-14	14	28	19	13.5	0.8	23°	9.1
KGLM-16	16	32	21	15.0	0.8	23°	12.8
KGLM-18	18	35	23	16.5	0.8	23°	16.6
KGLM-20	20	40	25	18.0	0.8	23°	24.4
KGLM-22	22	42	28	20.0	0.8	22°	28.5
KGLM-25	25	47	31	22.0	0.8	22°	39.3
KGLM-30	30	55	37	25.0	1.0	22°	62.6

## Load Data

Part No.	Maximum Static Compressive Strength		Maximum Torque through the ball	Housing Bore		Shaft Size		
	radial (lbs)	axial (lbs)		(ft lbs)	Min.	Max.	Min.	Max.
KGLM-02	67	13		0.7	8.0000	8.0150	1.9900	2.0000
KGLM-03	119	34		2.2	10.0000	10.0150	2.9900	3.0000
KGLM-05	281	56		3.7	13.0000	13.0180	4.9800	5.0000
KGLM-06	393	90		7.4	16.0000	16.0180	5.9800	6.0000
KGLM-08	528	180		8.9	19.0000	19.0210	7.9850	8.0000
KGLM-10	798	202		14.8	22.0000	22.0210	9.9850	10.0000
KGLM-12	944	214		22.1	26.0000	26.0210	11.9820	12.0000
KGLM-14	1281	270		25.8	28.0000	28.0250	13.9820	14.0000
KGLM-16	1686	292		29.5	32.0000	32.0250	15.9820	16.0000
KGLM-18	1910	315		33.2	35.0000	35.0250	17.9820	18.0000
KGLM-20	2203	427		40.6	40.0000	40.0250	19.9790	20.0000
KGLM-22	2630	584		44.3	42.0000	42.0250	21.9790	22.0000
KGLM-25	3057	674		47.9	47.0000	47.0250	24.9790	25.0000
KGLM-30	4496	731		51.6	55.0000	55.0300	29.9790	30.0000


► Tolerance Table, Page 1.14

For housing bores (H7)

For shaft sizes (h7)



Dimensions (mm)

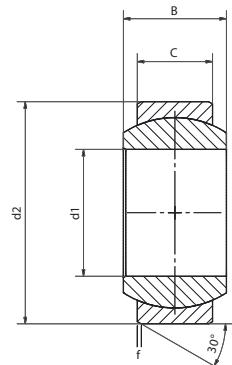

**Material:**  
Housing - igumid G  
Ball - iglide® L280

Part No.	d1 (E10) (mm)	d2 (mm)	B (mm)	C (mm)	f (mm)	Max. pivot angle	Weight (g)
EGLM-04	4	12	5	3.0	0.5	37°	0.4
EGLM-05	5	14	6	4.0	0.5	33°	0.8
EGLM-06	6	14	6	4.0	0.5	27°	0.9
EGLM-08	8	16	8	5.0	0.5	24°	1.2
EGLM-10	10	19	9	6.0	0.5	24°	1.9
EGLM-12	12	22	10	7.0	0.5	21°	2.8
EGLM-15	15	26	12	9.0	0.5	21°	6.9
EGLM-16	16	28	13	9.5	0.5	21°	9.0
EGLM-17	17	30	14	10.0	1.0	21°	10.6
EGLM-20	20	35	16	12.0	1.0	18°	16.3
EGLM-25	25	42	20	16.0	1.0	16°	29.0
EGLM-30	30	47	22	18.0	1.0	13°	37.4

## Load Data

Part No.	Maximum Static Compressive Strength		Maximum Torque through the ball	Housing Bore		Shaft Size	
	radial (lbs)	axial* (lbs)		(ft lbs)	Min	Max.	Min.
EGLM-04	135	11		1.5	12.0000	12.0180	3.9800
EGLM-05	213	22		1.5	14.0000	14.0180	4.9800
EGLM-06	236	28		1.8	14.0000	14.0180	5.9800
EGLM-08	303	39		5.2	16.0000	16.0180	7.9850
EGLM-10	449	67		10.3	19.0000	19.0210	9.9850
EGLM-12	505	101		18.4	22.0000	22.0210	11.9820
EGLM-15	775	112		22.1	26.0000	26.0210	14.9820
EGLM-16	876	135		23.6	28.0000	28.0210	15.9820
EGLM-17	921	157		25.8	30.0000	30.0250	16.9820
EGLM-20	1202	269		29.5	35.0000	35.0250	19.9790
EGLM-25	1843	393		40.6	42.0000	42.0250	24.9790
EGLM-30	2472	562		51.6	47.0000	47.0250	29.9790


\*Maximum static axial load is determined in a remote location hole.

► Tolerance Table, Page 1.14

For housing bores (H7)

For shaft sizes (h7)

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





**igus®**

# igubal® Spherical Bearings Pressfit Bearings KGLI SL, Slimline - inch

igubal®  
Pivoting Bearings

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>





## Special Properties

- 50% thinner than standard KGLM

## Material:

Housing - igumid G  
Ball - iglide® R

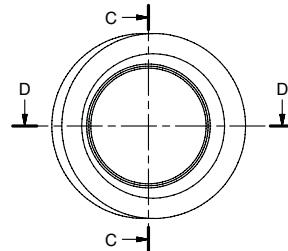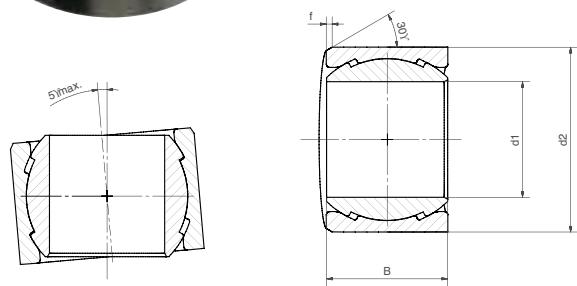

## Dimensions (inch)

Part Number	d1 (E10)	d2	B	f	Max. pivot angle	Weight (g)
KGLI-03 SL	.1900	.3750	.1875	.0200	5°	0.69
KGLI-04 SL	.2500	.5000	.2500	.0200	5°	0.75
KGLI-05 SL	.3125	.5000	.3125	.0200	5°	1.0
KGLI-06 SL	.3750	.6250	.3750	.0200	5°	1.3
KGLI-08 SL	.5000	.8125	.5000	.2000	5°	2.5

## Load Data

Part Number	Max. radial compressive strength		Max. axial compressive strength		Housing Bore		Shaft Size	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Min.	Max.	Min.	Max.
KGLI-03 SL	225	112	34	17	.3750	.3756	.1888	.1900
KGLI-04 SL	337	168	56	28	.5000	.5007	.2485	.2500
KGLI-05 SL	450	225	79	39	.5000	.5007	.3110	.3125
KGLI-06 SL	630	315	112	56	.6250	.6257	.3735	.3750
KGLI-08 SL	955	478	135	67	.8125	.8133	.4983	.5000





### Special Properties

- 50% thinner than standard KGLM

### Material:

Housing - igumid G  
 Ball - iglide® L280

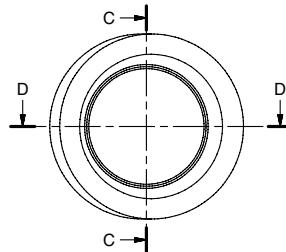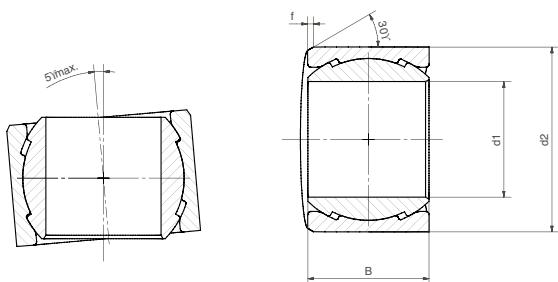


### Dimensions (mm)

Part Number	d1 (E10) (mm)	d2 (mm)	B (mm)	f (mm)	Max. Pivot Angle	Weight (g)
KGLM-08 SL	8	14	9.0	0.5	5°	1.1
KGLM-10 SL	10	16	10.5	0.5	5°	1.5
KGLM-12 SL	12	18	12.0	0.5	5°	2.0
KGLM-16 SL	16	22	15.0	0.5	5°	3.1

### Load Data

Part Number	Max. radial compressive strength		Max. axial compressive strength		Housing Bore		Shaft Size	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Min.	Max.	Min.	Max.
KGLM-08 SL	607	304	101	51	14.0000	14.0180	7.9850	8.0000
KGLM-10 SL	899	450	169	84	16.0000	16.0180	9.9850	10.0000
KGLM-12 SL	1012	506	169	84	18.0000	18.0180	11.9820	12.0000
KGLM-16 SL	1461	731	112	56	22.0000	22.0210	15.9820	16.0000





**igus®**

# igubal® Spherical Bearings Pressfit Bearings KGML LC, Split Housing - mm

igubal®  
Pivoting Bearings



Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



## Special Properties

- Easy to install
- Split housing

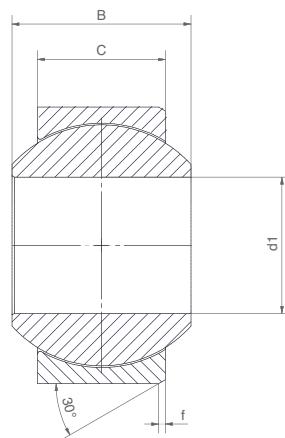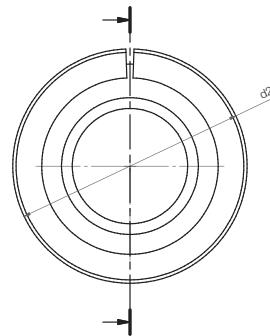

## Dimensions (mm)

Part Number	d1 (E10) (mm)	d2 (mm)	B (mm)	C (mm)	f (mm)	Max. pivot angle	Weight (g)
KGLM-10 LC	10	22.0	14	10.5	0.8	25°	4.3
KGLM-12 LC	12	26.0	16	12	0.8	25°	6.9
KGLM-16 LC	16	32.0	21	15	0.8	23°	12.7
KGLM-20 LC	20	40.0	25	18	0.8	23°	23.6
KGLM-25 LC	25	47.0	31	22	0.8	22°	38.9
KGLM-30 LC	30	55.0	37	25	1.0	22°	61.0

## Load Data

Part Number	Max. radial compressive strength		Max. axial compressive strength	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)
KGLM-10 LC	899	450	315	157
KGLM-12 LC	1214	607	337	169
KGLM-16 LC	1798	899	674	337
KGLM-20 LC	2248	1124	1124	562
KGLM-25 LC	3057	1529	1686	843
KGLM-30 LC	4496	2248	2023	1012

## Material:

Housing - igumid G  
Ball - iglide® L280

Also available: iglide® R, iglide® J,  
iglide® J4

# igubal® Spherical Bearings

## Pressfit Bearings

### KGLM H, Split Housing - mm

**igus®**





#### Special Properties

- Quiet operation
- Low tolerances
- Easy to install
- Meant for joystick applications
- Compensation of misalignment error, precise run

#### Material:

Housing - igumid G  
Ball - iglide® L250

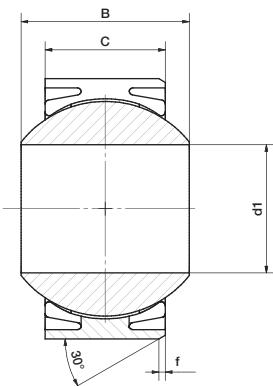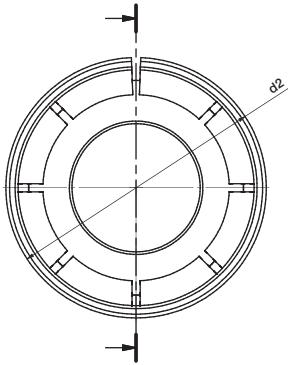

#### Dimensions (mm)

Part Number	d1 (E10) (mm)	d2 (mm)	B (mm)	C (mm)	f (mm)	Max. pivot angle	Weight (g)
KGLM-16 H	16	32.0	21	15	0.8	22°	12.2

#### Load Data

Part Number	Max. radial compressive strength		Max. axial compressive strength	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)
KGLM-16 H	900	450	67	34

igubal®  
Pivoting Bearings

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.

inch

mm




**igus®**

## igubal® Spherical Bearings Self-aligning Clip Bearings - mm - ECLM

igubal®  
Pivoting Bearings

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

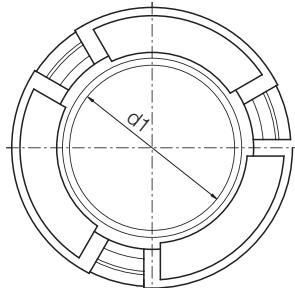


### Special Properties

- Extremely easy installation - just clip into sheet metal
- No additional axial retainer required
- Extremely low installation space
- Maintenance-free iglide® spherical balls

### Material:

Housing - igumid G  
Ball - iglide® J

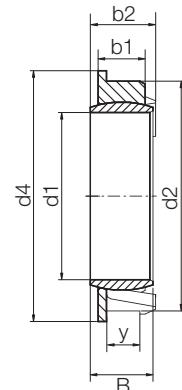

### Dimensions (mm)



Part Number	d1 (E10)	B (mm)	d2 ±0.2 (mm)	d4 (mm)	y (mm)	b1 ±0.2 (mm)	b2 (mm)	Max. Pivot angle (mm)
ECLM-05-02	5	9	12	13	2.0	3.9	6.0	25°
ECLM-06-02	6	9	12	13	2.0	3.9	6.0	18°
ECLM-08-02	8	10.5	14	15	2.0	3.9	6.0	16°
ECLM-10-03	10	12.4	16	17	3.0	4.5	6.7	12°
ECLM-12-03	12	14.2	18	19	3.0	4.5	6.7	12°
ECLM-16-03	16	18.2	22	24	3.0	4.5	6.7	12°

### Load Data

Part Number	Max. radial compressive strength		Max. axial compressive strength		Weight (g)
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	
ECLM-05-02	157	79	6	3	0.5
ECLM-06-02	157	79	6	3	0.5
ECLM-08-02	225	112	6	3	0.5
ECLM-10-03	315	157	7	2	0.8
ECLM-12-03	405	202	8	2	0.8
ECLM-16-03	629	315	10	5	1.1

# igubal® Spherical Bearings Self-aligning Clip Bearings EGFM T, Heavy Duty - mm

**igus®**

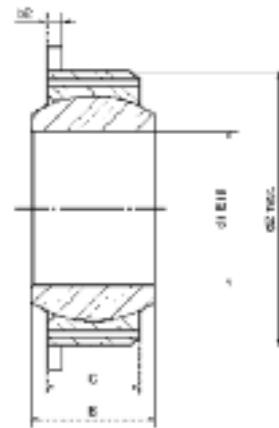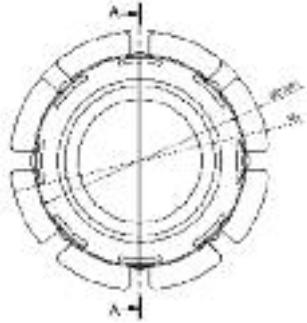

## Special Properties

- Maintenance-free, dry-running
- Easy to fit
- Can compensate for a housing tolerance of  $\pm 0.2$  mm

## Material:

Housing - igumid G  
Ball - iglide® L280  
Also available: iglide® R,  
iglide® J, iglide® J4

## Dimensions (mm)


Part Number	d1 (E10) (mm)	min. (mm)	d2 max. (mm)	d3 (mm)	C (mm)	B (mm)	b2 (mm)	Max. pivot angle	Weight (g)
EGFM-08 T SL*	8 (H10)	15.8	16.5	18	5.0	6	1.1	11°	0.9
EGFM-10 T	10	20.8	21.6	26	6.0	9	1.0	24°	2.4
EGFM-12 T	12	22.8	23.6	28	7.0	10	1.0	21°	3.0
EGFM-16 T	16	29.8	30.6	35	9.5	13	1.5	21°	6.6
EGFM-20 T	20	34.8	35.6	42	12.0	16	2.0	18°	11.1
EGFM-25 T	25	41.8	42.6	50	16.0	20	2.0	16°	19.0
EGFM-30 T	30	46.8	47.6	55	18.0	22	2.0	13°	24.0

## Load data


Part Number	Max. radial compressive strength		Max. axial compressive strength		Housing	
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	Min.	Max.
EGFM-08 T SL*	250	124	34	17	15.8	16.2
EGFM-10 T	427	214	50	25	20.8	21.2
EGFM-12 T	560	280	61	30	22.8	23.2
EGFM-16 T	1350	675	135	67	29.8	30.2
EGFM-20 T	2020	1012	180	90	34.8	35.2
EGFM-25 T	3147	1574	630	315	41.8	42.2
EGFM-30 T	3822	1910	675	337	46.8	47.2

\*Spherical ball made from iglide® J

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





**igus®**

# igubal® Spherical Bearings Self-aligning Clip Bearings - mm - ECLM HD Heavy Duty

igubal®  
Pivoting Bearings

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>




## Special Properties

- High axial and radial loads
- Easily clips into sheet metal
- No additional axial fastening necessary
- Extremely compact design and installation
- Adjustment of axial and radial clearance by pre-loading
- Maintenance-free iglide® spherical balls
- For sheet thickness 5 mm

## Material:

Housing - igumid G  
Ball - iglide® L280  
Also available: iglide® R,  
iglide® J, iglide® J4

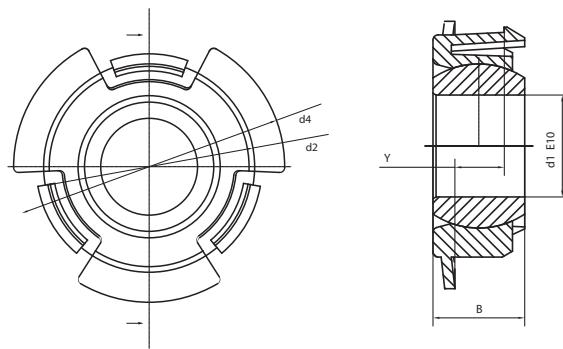

## Dimensions [mm]

Part No.	d1 (E10) (mm)	B (mm)	d2 $\pm 0.15$ (mm)	d4 (mm)	Y $\pm 0.1$ (mm)	Max. pivot angle
ECLM-08-04-HD	8	8	18.2	25	3.9	28°
ECLM-10-05 HD	10.0	9.0	22.0	28	5.0	24°

## Load Data

Part Number	Max. radial compressive strength		Max. axial compressive strength		Weight (g)
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	
ECLM-08-04-HD					2.0
ECLM-10-05 HD	560	280	34	17	3.1

# igubal® Spherical Bearings

## Pivoting Bearings - mm - EGZM

### Double Joint

**igus®**




#### Special Properties

- Mechanical joining link between 2 components
- Special lengths often possible, please contact igus®

#### Material:

Housing - igumid G  
Ball - iglide® L280  
Also available: iglide® R, iglide® J, iglide® J4

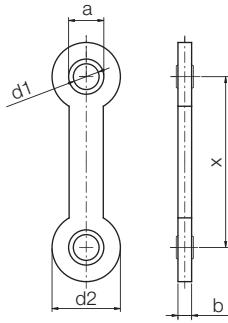

#### Part Number Structure

For igubal® Double Joint Bearings

**E GZ M - 05 - 50**



#### Dimensions [mm] and Load Data

Part No.	d1 (E10) (mm)	d2 (mm)	x (mm)	b (mm)	a (mm)	Maximum radial static tensile strength		Maximum axial static tensile strength		Weight (g)
						Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)	
EGZM-04-25	04	20	25	4	10	247	124	292	146	3.5
EGZM-04-50	04	20	50	4	10	247	124	169	84	4.8
EGZM-04-75	04	20	75	4	10	247	124	112	56	6.1
EGZM-05-25	05	20	25	4	10	247	124	292	146	2.2
EGZM-05-50	05	20	50	4	10	247	124	169	84	4.9
EGZM-05-75	05	20	75	4	10	247	124	112	56	6.3
EGZM-06-25	06	20	25	4	10	247	124	292	146	3.4
EGZM-06-50	06	20	50	4	10	247	124	169	84	4.8
EGZM-06-75	06	20	75	4	10	247	124	112	56	3.4
EGZM-08-60	08	30	60	7	15	674	337	787	393	15.2
EGZM-08-100	08	30	100	7	15	674	337	427	214	19.5
EGZM-10-60	10	30	60	7	15	562	281	787	393	15.3
EGZM-10-85	10	30	85	7	15	562	281	517	259	18.1
EGZM-10-100	10	30	100	7	15	562	281	427	214	19.4
EGZM-12-60	12	30	60	7	15	450	225	787	393	14.7
EGZM-12-100	12	30	100	7	15	450	225	427	214	18.8

► Tolerance Table, Page 1.14

igubal®  
Pivoting Bearings

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1.

inch

mm




**igus®**

# igubal® Spherical Bearings Pivoting Bearings - mm - KDGM Variable Double Joint

igubal®  
Pivoting Bearings

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

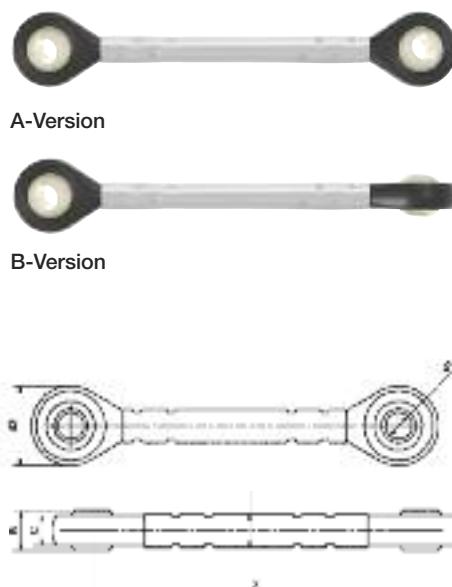

## Special Properties

- Individual center dimensions
- Individual alignment of the bearing position


## Material:

Housing - igumid G  
Ball - iglide® L280, iglide® R,  
iglide® J, iglide® J4, EK

## Part Number Structure

For igubal® Double Joint Bearings

**K DG M - 06 - 75 - A - SR - J**

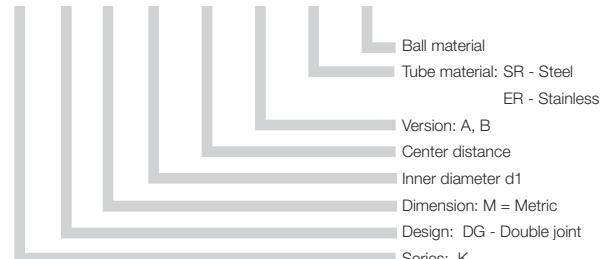

## Dimensions (mm)

Part No.	d1 (E10) (mm)	d2 (mm)	d3 (mm)	X (min.) (mm)	B (mm)	C (mm)	Max. pivot angle
KDGM-06-XX-X	6.0	20.0	6.0	50.0	9.0	7.0	40°
KDGM-08-XX-X	8.0	24.0	8.0	65.0	12.0	9.0	35°
KDGM-10-XX-X	10.0	30.0	10.0	80.0	14.0	10.5	35°
KDGM-12-XX-X	12.0	34.0	12.0	90.0	16.0	12.0	35°


Please complete the Part No. with the desired center distance in mm and the alignment of the bearing position.  
Order example: KDGM-05-100-A, center distance 100 mm, ball in the same alignment.

# igubal® Spherical Bearings

## Pivoting Bearings - mm - WDGM

### Variable Double Joint with Socket Cup

**igus®**

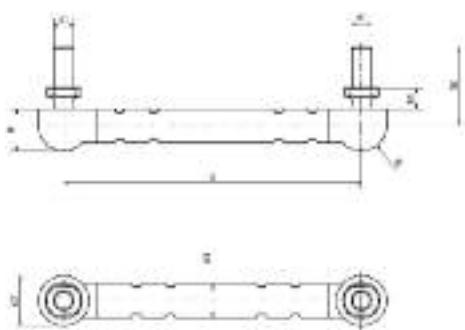

#### Dimensions (mm)

Part No.	d1 (mm)	d2 (mm)	d3 (mm)	X (min.) (mm)	B (mm)	h1 (mm)	h2 (mm)	Max. pivot angle
WDGM-05-XX-X	M5	12.8	8.0	45.0	10.8	4.6	19.2	23°
WDGM-06-XX-X	M6	14.8	10.0	50.0	12.3	6.1	23.5	25°
WDGM-08-XX-X	M8	19.3	12.0	60.0	16.2	5.9	29.5	24°
WDGM-10-XX-X	M10	24.0	14.0	70.0	20.0	7.9	36.0	25°

Please complete the Part No. with the desired center distance in mm and the alignment of the bearing position.

Order example: WDGM-05-100-A, center distance 100 mm, ball stud in the same alignment.

#### Special Properties

- Individual center dimensions
- Individual alignment of the bearing position


#### Material:

Housing - igumid G  
Ball stud - igumid G, steel



#### Part Number Structure

For igubal® Double Joint Bearings

W DG M - 05 - A - SR - SZ

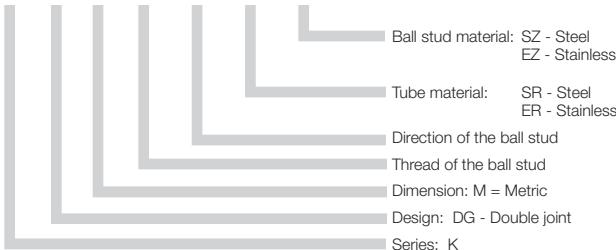

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
 CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
 RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





**igus®**

# igubal® Spherical Bearings Pivoting Bearings - mm - EGXM Double Joint

igubal®  
Pivoting Bearings

Telephone 1-800-521-2747  
Fax 1-401-438-7270


Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>



## Special Properties

- Double joint 90° turned
- Easy assembling
- Custom designed with and without ball stud
- Maintenance-free cap made out of iglide® L280

More sizes upon request

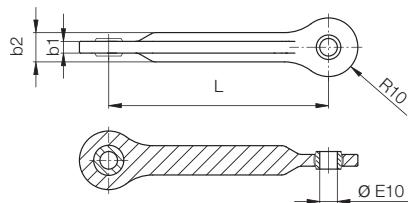

## Load Data and Dimensions (mm)

Part No.	Maximum permitted tensile force		Maximum permitted compressive force		Ø Spherical ball d	Center distance L	Head thickness b1	Housing size b2
	Short term (lbs)	Long term (lbs)	Short term (lbs)	Long term (lbs)				
EGXM-06-75	247	124	360	180	6	75	4	10

More combinations Available:

EGXM-06-75 ZM (with metal ball stud)

EGXM-06-75 ZK (with stainless steel ball)

EGXM-06-75 EK (with plastic ball stud)


## Material:

Housing - igumid G  
Ball - iglide® L280, iglide® R, iglide® J

## Part Number Structure

For igubal® Double Joint Bearings

**E GX M - 06 - 75**

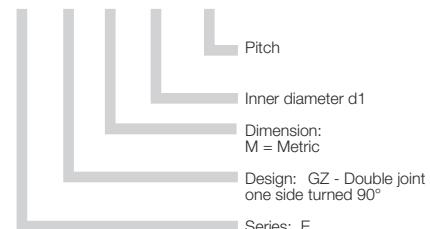

# igubal® Spherical Bearings


## Spherical Thrust Bearing

### SAM - mm


**igus®**



#### Spherical Washer

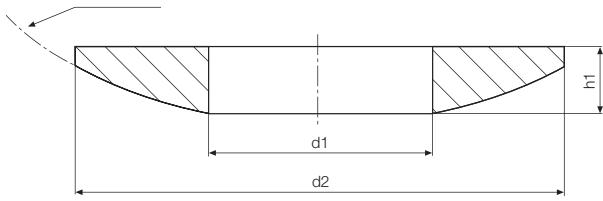

#### Housing

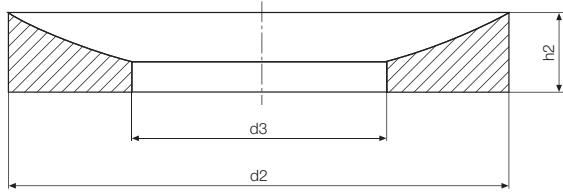

#### Dimensions (mm)

Part No.	d1 Spherical Washer DIN 7168	d3 Housing DIN 7168	d2	h1 Housing	h2 Spherical Washer	H Total Height	R1 Radius	Compensation angle
<b>SAM-05</b>	5.2	7.0	15.0	3.0	3.5	4.7	15.0	3°
<b>SAM-06</b>	6.2	7.5	16.0	3.0	4.0	5.7	16.0	3°
<b>SAM-08</b>	8.2	10.0	20.0	4.0	5.0	6.4	20.0	2°
<b>SAM-10</b>	10.2	12.0	24.0	4.5	5.5	7.3	24.0	2°
<b>SAM-12</b>	12.2	14.5	30.0	5.0	6.0	7.9	32.0	2°
<b>SAM-16</b>	16.5	19.0	36.0	5.5	6.5	8.5	40.0	2°
<b>SAM-20</b>	20.2	23.0	44.0	6.0	7.0	8.4	45.0	2°

#### Load Data


Part No.	Maximum Static Axial Tensile Strength		Weight (g)
	Short-term (lbs)	Long-term (lbs)	
<b>SAM-05</b>	900	450	0.9
<b>SAM-06</b>	1124	562	1.1
<b>SAM-08</b>	1798	899	2.2
<b>SAM-10</b>	2248	1124	3.4
<b>SAM-12</b>	2698	1349	5.9
<b>SAM-16</b>	3821	1910	8.5
<b>SAM-20</b>	4946	2473	12.8

#### Material:

Housing - igumid G  
Ball stud - iglide® L280


#### Part Number Structure

**SA M - 05**

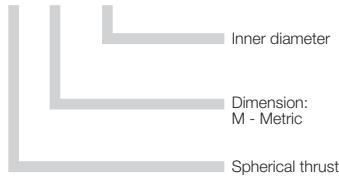


igubal®  
Pivoting Bearings

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)



1.





**igus®**

**igubal® Spherical Bearings  
Pivoting Bearings**

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

igubal®  
Pivoting Bearings

**igus®**



**igubal®**  
**Spherical Balls**



## Available Materials &amp; Features



K Series

E Series

iglide® L280 (standard)  
• extreme wear resistance

## Available Styles

WKM/WKI - metric/inch  
WEM/WEI - metric/inch

Page 60.5



K Series

E Series

iglide® R  
• low cost  
• low friction values

REI - inch  
REM/RKM - metric

Page 60.6



K Series

E Series

iglide® T500  
• for high temperatures  
• resistant to chemicals

TKM - metric  
TEM - metric

Page 60.6



K Series

E Series

iglide® J  
• low friction values  
• low moisture absorption

JKM - metric  
JEM - metric

Page 60.7



E Series

iglide® UW  
• for underwater applications

UWEM - metric

Page 60.7



E Series

iglide® JV  
• pretensioned

J4VEM - metric

Page 60.8



Typical industries and applications

- Plant construction
- Model building
- Furniture/industrial design etc.



Drum bearing in a tumble dryer



igubal® spherical balls in the food industry



Carriage in a crane system



igubal used in an office chair

## Product Range

- Inner diameters:  
Inch sizes from 3/16 to 1"  
Metric sizes from 2 - 30 mm
- 6 different materials available


Each iglide® material has its own special properties, which determines the suitability for your special application and requirements.

igubal® spherical bearings are available made from iglide® materials L280 (standard), R, T500, J, J4, and UW. The maintenance-free igubal® spherical bearings have an inside diameter tolerance of E10. The shaft should fall within a tolerance range of h6 to h9. See page 1.14 for details.

## Part Number Structure

### Part Number Structure

**W E M - 12 - 10**

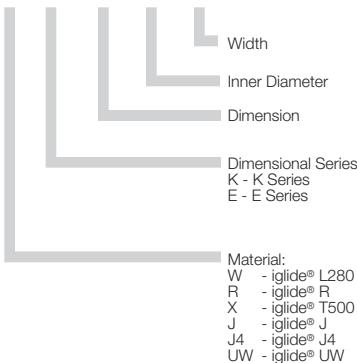

## Advantages





- If maintenance-free material is requested
- If different iglide® materials should be tested
- If high compressive strength is required
- If high elasticity is required



- If temperatures are higher than 492°F
- If dimensions above 1" or 30 mm are necessary
- If rotation speeds higher than 100 fpm are required
- When a plain bearing is required  
(See iglide® plain bearing section)



Standard – iglide® L280; extreme wear resistance

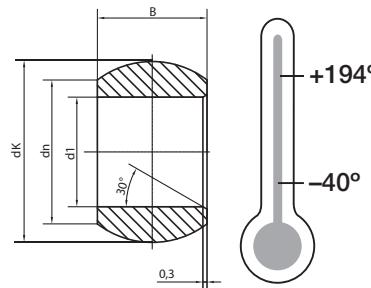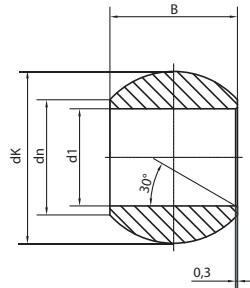

#### Dimensions (inch)

##### igubal® Spherical Balls WKI

Part No.	d1 (E10)	dn	dK	B	Weight (g)
WKI-03	.1900	.307	.444	.312	0.6
WKI-04	.2500	.354	.516	.375	1.0
WKI-05	.3125	.447	.625	.437	1.7
WKI-06	.3750	.504	.718	.500	2.3
WKI-07	.4375	.601	.828	.562	3.5
WKI-08	.5000	.700	.938	.625	5.0
WKI-10	.6250	.838	1.125	.750	8.2
WKI-12	.7500	.978	1.312	.875	12.5
WKI-16	1.0000	1.269	1.750	1.375	31.7

#### Dimensions (inch)

##### igubal® Spherical Balls WEI

Part No.	d1 (E10)	dn	dK	B	Weight (g)
WEI-03	.1900	.354	.402	.1900	0.3
WEI-04	.2500	.314	.402	.2500	0.3
WEI-05	.3125	.415	.520	.3125	0.7
WEI-06	.3750	.506	.630	.3750	1.3
WEI-07	.4375	.581	.709	.4063	1.6
WEI-08	.5000	.581	.709	.4063	2.6
WEI-10	.6250	.802	.945	.5000	3.1
WEI-12	.7500	.951	1.138	.6250	5.9
WEI-16	1.0000	1.180	1.398	.7500	9.2

#### Dimensions (mm)

##### igubal® Spherical Balls WKM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
WKM-02-04	2.00	3.90	5.10	4.00	0.1
WKM-03-06	3.00	5.10	8.10	6.00	0.3
WKM-05-08	5.00	7.70	11.30	8.00	0.6
WKM-06-09	6.00	8.90	12.80	9.00	0.9
WKM-08-12	8.00	10.30	16.00	12.00	1.6
WKM-10-14	10.00	12.90	19.00	14.00	2.7
WKM-12-16	12.00	15.40	22.10	16.00	4.0
WKM-14-19	14.00	16.80	25.40	19.00	6.0
WKM-16-21	16.00	19.30	28.40	21.00	8.2
WKM-18-23	18.00	21.80	31.50	23.00	10.8
WKM-20-25	20.00	24.30	35.10	25.00	14.5
WKM-22-28	22.00	25.80	38.30	28.00	18.7
WKM-25-31	25.00	29.50	42.90	31.00	26.0
WKM-30-37	30.00	34.80	51.20	37.00	44.7

#### Dimensions (mm)



##### igubal® Spherical Balls WEM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
WEM-04-05	4.00	6.25	8.30	5.00	0.2
WEM-05-06	5.00	8.00	10.30	6.00	0.3
WEM-06-06	6.00	8.00	10.30	6.00	0.4
WEM-08-08	8.00	10.00	13.30	8.00	0.7
WEM-10-09	10.00	13.00	16.10	9.00	1.2
WEM-12-10	12.00	15.00	18.10	10.00	1.5
WEM-15-12	15.00	18.00	22.00	12.00	2.4
WEM-16-13	16.00	19.50	24.10	13.00	3.3
WEM-17-14	17.00	20.00	25.10	14.00	3.7
WEM-20-16	20.00	24.00	29.10	16.00	5.3
WEM-25-20	25.00	29.00	35.60	20.00	9.5
WEM-30-22	30.00	34.00	40.90	22.00	12.1

Available from stock

► Tolerance Table, Page 1.14

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)





**igus®**

# igubal® Spherical Bearings

## Spherical Balls - inch, mm - REI, REM, RKM

## Spherical Ball - mm - XKM, XEM




igubal®  
Spherical Balls

Telephone 1-800-521-2747  
Fax 1-401-438-7270

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

## igubal® Spherical Balls - REI, REM, RKM

**Low Cost** – iglide® R, low friction values, low cost, low moisture absorption

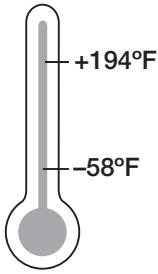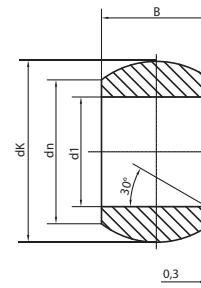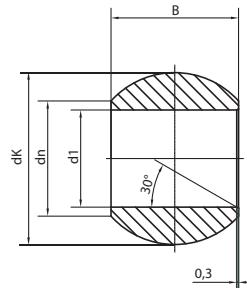

### Dimensions (Inch)

#### igubal® Spherical Bearings REI

Part No.	d1 (E10)	dn	dK	B	Weight (g)
REI-03	.1900	.354	.402	.1900	0.3
REI-04	.2500	.314	.402	.2500	0.3
REI-05	.3125	.415	.520	.3125	0.7
REI-06	.3750	.506	.630	.3750	1.3
REI-07	.4275	.581	.709	.4063	1.6
REI-08	.5000	.581	.709	.4063	2.6
REI-10	.6250	.802	.945	.5000	3.1
REI-12	.7500	.951	1.138	.6250	5.9
REI-16	1.0000	1.180	1.398	.7500	9.2

### Dimensions (mm)

#### igubal® Spherical Bearings REM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
REM-05-06	5.00	8.00	10.20	6.00	0.4
REM-06-06	6.00	8.00	10.20	6.00	0.4
REM-08-08	8.00	10.00	13.20	8.00	0.8
REM-10-09	10.00	13.00	16.00	9.00	1.3
REM-12-10	12.00	15.00	18.00	10.00	1.8




### Dimensions (mm)

#### igubal® Spherical Bearings RKM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
RKM-10-14	10.00	12.90	19.00	14.00	2.9

## igubal® Spherical Balls - XKM, XEM

**High Temperatures** – iglide® T500, resistant to chemicals, high temperatures

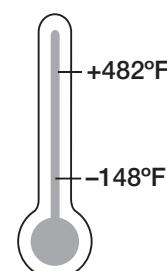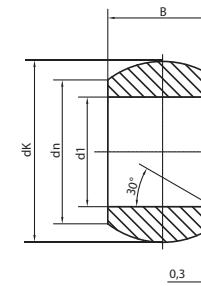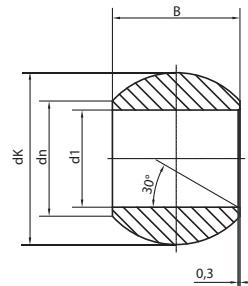

### Dimensions (mm)

#### igubal® Spherical Bearings XKM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
XKM-10-04	10.00	12.90	19.10	14.00	2.9

### Dimensions (mm)

#### igubal® Spherical Bearings XEM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
XEM-05-06	5.00	8.00	10.30	6.00	0.4
XEM-06-06	6.00	8.00	10.20	6.00	0.4
XEM-08-08	8.00	10.00	13.20	8.00	0.8
XEM-10-09	10.00	13.00	16.00	9.00	1.3
XEM-12-10	12.00	15.00	18.00	10.00	1.6



Available for delivery

► Tolerance Table, Page 1.14



## igubal® Spherical Balls - JKM, JEM

Low moisture absorption – iglide® J; low friction values

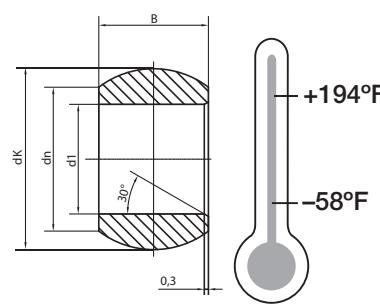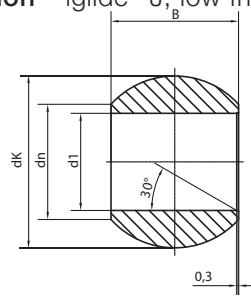

Dimensions (mm)

igubal® Spherical Bearings JKM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
JKM-03-06	3.00	5.10	8.10	6.00	0.3
JKM-05-08	5.00	7.70	11.30	8.00	0.7
JKM-06-09	6.00	8.90	12.80	9.00	1.0
JKM-08-12	8.00	10.30	15.90	12.00	1.9
JKM-10-14	10.00	12.90	19.00	14.00	3.1
JKM-12-16	12.00	15.40	22.10	16.00	4.7
JKM-16-21	16.00	19.30	28.40	21.00	9.4
JKM-20-25	20.00	24.30	35.10	25.00	17.6
JKM-25-31	25.00	29.50	42.80	31.00	31.6
JKM-30-37	30.00	34.80	51.20	37.00	53.0
JKM-40-49	40.00	44.50	66.30	49.00	54.5
JKM-50-60	50.00	56.50	82.40	60.00	92.1


Dimensions (mm)

igubal® Spherical Bearings JEM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
JEM-04-05	4.00	6.25	8.30	5.00	0.3
JEM-05-06	5.00	8.00	10.20	6.00	0.4
JEM-06-06	6.00	8.00	10.20	6.00	0.4
JEM-08-08	8.00	10.00	13.30	8.00	0.8
JEM-10-09	10.00	13.00	16.10	9.00	1.3
JEM-12-10	12.00	15.00	18.10	10.00	1.7
JEM-15-12	15.00	18.00	22.00	12.00	2.9
JEM-16-13	16.00	19.50	24.10	13.00	3.9
JEM-17-14	17.00	20.00	25.20	14.00	4.1
JEM-20-16	20.00	24.00	29.10	16.00	6.4
JEM-25-20	25.00	29.00	35.60	20.00	11.5
JEM-30-22	30.00	34.00	40.90	22.00	14.5

## igubal® Spherical Balls - J4KM, J4EM

Cost-effective – iglide® J4;

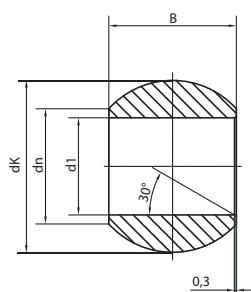

Dimensions (mm)

igubal® Spherical Bearings J4EM



Part No.	d1 (E10)	dn	dK	B	Weight (g)
J4EM-04-05	4.00	6.25	8.25	5.00	0.3
J4EM-05-06	5.00	8.00	10.20	6.00	0.4
J4EM-06-06	6.00	8.00	10.20	6.00	0.4
J4EM-08-08	8.00	10.00	13.20	8.00	0.8
J4EM-10-09	10.00	13.00	16.00	9.00	1.3
J4EM-12-10	12.00	15.00	18.00	10.00	1.7
J4EM-15-12	15.00	18.00	22.00	12.00	2.9
J4EM-16-13	16.00	19.50	24.00	13.00	3.9
J4EM-17-14	17.00	20.00	25.10	14.00	4.1
J4EM-20-16	20.00	24.00	28.90	16.00	6.4
J4EM-25-20	25.00	29.00	35.50	20.00	11.5
J4EM-30-22	30.00	34.00	40.90	22.00	14.5

Dimensions (mm)

igubal® Spherical Bearings J4KM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
J4KM-10-14	10.00	12.90	19.10	14.00	3.1



PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

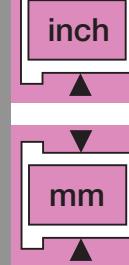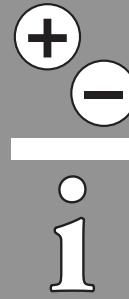



## igubal® Spherical Balls -J4VEM

Low moisture absorption – iglide® J4; clearance-free

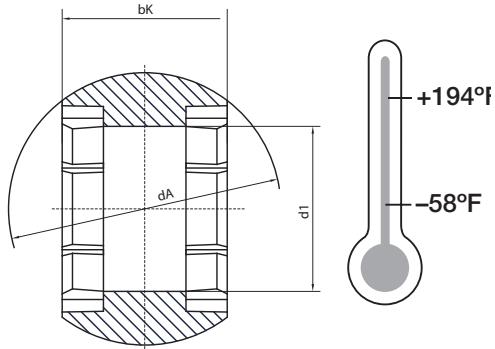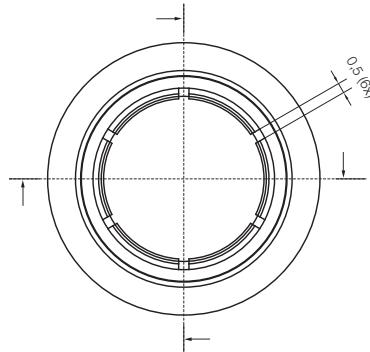

## Special Properties

- Can be combined with all housings from design range E
- Sizes 8 to 20 mm
- Pre-loaded
- Totally free from clearance, even in unloaded state
- Material: iglide® J4

## Dimensions (mm)

## Clearance-free Spherical Bearing

Part No.	d1 (E10)	dA	bK	Weight (g)
J4VEM-08-08	8	13.2	8	0.7
J4VEM-10-09	10	16.1	9	1.2
J4VEM-12-10	12	18.1	10	1.5
J4VEM-16-13	16	24.1	13	3.7
J4VEM-20-16	20	29.1	16	6.2



5 Sizes available: Ø 8, 10, 12, 16, 20 mm

Can be used in combination with:

igubal® Rod End Bearing	EB(L)RM	► Page 35.12
igubal® Rod End Bearing	EA(L)RM	► Page 35.17
igubal® Pillow Block Bearing	ESTM	► Page 37.8
igubal® Flange Bearing	EFOM	► Page 38.6
igubal® Flange Bearing	EFSM	► Page 38.8
igubal® Pressfit Bearing	EGLM	► Page 39.7
igubal® Pressfit Bearing	EGFM	► Page 39.13
igubal® Double Joint	EGZM	► Page 39.15

## igubal® Spherical Balls - UWEM

Underwater applications – iglide® UW

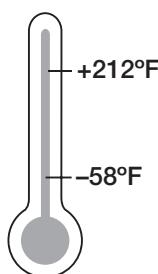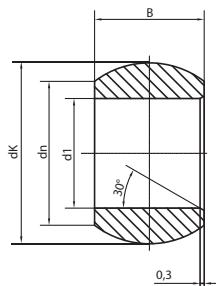

## Dimensions (mm)

## igubal® Spherical Bearings UWEM

Part No.	d1 (E10)	dn	dK	B	Weight (g)
UWEM-16-13	16.00	19.50	23.80	13.00	4.0
UWEM-17-14	17.00	20.00	29.10	14.00	6.5
UWEM-25-20	25.00	29.00	35.50	20.00	11.6
UWEM-30-22	30.00	34.00	40.50	22.00	15.2



igubal®  
Spherical Balls

PDF: [www.igus.com/igubal-pdfs](http://www.igus.com/igubal-pdfs)  
CAD: [www.igus.com/igubal-CAD](http://www.igus.com/igubal-CAD)  
RoHS info: [www.igus.com/RoHS](http://www.igus.com/RoHS)

+

1.

inch

mm

inch

mm

inch



**igus®**

## igubal® Spherical Bearings Spherical Balls

Internet: <http://www.igus.com>  
email: [sales@igus.com](mailto:sales@igus.com)  
QuickSpec: <http://www.igus.com/igubal-quickspec>

Telephone 1-800-521-2747  
Fax 1-401-438-7270

60.10

igubal®  
Spherical Balls

# General Index

## iglide® Design

Plain bearings function	1.2
Base plastics/technical fibers	1.3
Compressive strength	1.3
Pressure and temperature	1.4
Pressure and speed	1.4
Pressure and wear	1.4
Pressure and COF	1.4
Surface speed	1.5
Surface speed and wear	1.5
Surface speed and COF	1.5
P x V value	1.6
Lubrication	1.6
Temperatures	1.7
Temperature and load	1.7
Coefficient of thermal expansion	1.8
Coefficient of friction	1.8
Coefficient of friction and surfaces	1.8
Wear resistance	1.9
Wear and load	1.9
Wear and temperatures	1.9
Wear during abrasive dirt accumulation	1.9
Wear and surfaces	1.10
Shaft materials	1.11
Chemical resistance	1.12
Use in the food industry	1.12
High energy radiation	1.13
UV-radiation	1.13
Vacuum	1.13
Electrical properties	1.13
Tolerances and measuring system	1.14
Machining	1.15
Installation	1.15
Adhesion	1.15
Complete chemical resistance table	1.16
Troubleshooting	1.20

## iglide® Materials

M250	2.1
R	3.1
J	4.1
L280	5.1
G300	6.1
Q	7.1
P	8.1
Q2	9.1
H370	10.1
A180	11.1
A200	12.1

A350	13.1
T500	14.1
X6	15.1
Z	16.1
GLW	17.1
K	18.1
J200	19.1
J260	20.1
J3	21.1
J350	22.1
L250	23.1
D	24.1
H	25.1
H1	26.1
H2	27.1
A500	28.1
A290	29.1
T220	30.1
F	31.1
H4	32.1
N54	33.1
UW	34.1

## Special Bearings

Xiros	35.1
PRT	36.1
Clips	37.1
Clips2	38.1
JV	39.1
Piston Rings	40.1
Bar Stock	41.1
Rollers	42.1
Flange bearing	43.1
Polysorb disc springs	44.1

## DryLin® Design

System comparison	45.2
System properties	45.4
Features & benefits	45.6
Bearing materials	45.7
Wear behavior	45.8
Operating temperatures	45.8
Loading capacity	45.9
Permissible speeds	45.9
The 2:1 Rule	45.9
Chemical resistance	45.10
Corrosion behavior	45.10
Cleanroom suitability	45.10
Fixed & floating mounting instructions	45.12

Application examples	45.14
----------------------	-------

## DryLin® N

DryLin® N overview	46.2
Advantages	46.4
Part number overview	46.5
N17	46.8
N27	46.9
N27 Double Length	46.10
N27 Preloaded	46.11
N40	46.12
N80	46.13
End caps	46.14

## DryLin® W

DryLin® W overview	47.2
Design	47.4
Style options	47.5
Sliding elements	47.6
Mounting instructions	47.6
Technical information	47.7
Design notes	47.8
Design Rules	47.9
Single rail square	47.10
Single rail round	47.12
Double rail square	47.14
Double rail round	47.16
Accessories	47.18
Hybrid linear bearing	47.20
Stainless Steel	47.22

## DryLin® T

DryLin® T overview	48.2
Design	48.4
Load/speed capacity	48.5
Fixed/floating systems	48.6
ESD Compatibility	48.7
Adjustable clearance	48.8
Automatic clearance	48.9
Manual clamping	48.10
Heavy Duty	48.12
Miniature	48.13
Adjusting the clearance	48.14
Calculation variables	48.15
Mounting - horizontal	48.16
Mounting - lateral	48.17
Mounting - vertical	48.18

# General Index

<b>DryLin® R</b>	
Design	49.2
Testing method	49.57
Analysis worksheet	49.68
<b>Linear Bearings - Inch</b>	
Liners	49.9
RJI	49.11
RJUI-01/21	49.12
RJUI-03/23	49.13
TJUI-01/21	49.14
TJUI-03/23	49.15
OJUI-01/21	49.16
OJUI-03/23	49.17
<b>Pillow Blocks - Inch</b>	
RJUI-XX	49.18
OJUI-XX	49.19
RJUI-XX (Twin)	49.20
OJUI-XX (Twin)	49.21
FJUI-XX (Flange)	49.22
FJUIT-XX (Twin flange)	49.22
<b>Shafting - Inch</b>	
AWI (Aluminum)	49.23
AWUI (Aluminum supported)	49.23
<b>Linear Bearings - Metric</b>	
Liners	49.24
RJM	49.27
RJUM-01	49.28
RJUM-21	49.29
RJUM-03	49.30
RJUM-23	49.31
TJUM-01	49.32
TJUM-21	49.33
TJUM-03	49.34
TJUM-23	49.35
OJUM-01	49.36
OJUM-21	49.37
OJUM-03	49.38
OJUM-23	49.39
RJUM-02	49.40
<b>Pillow Blocks - Metric</b>	
RJUM-05	49.41
RJUME-05 (Short)	49.42
RJUM-06 (Long)	49.43
RJUM-06 LL (Floating)	49.44
TJUM-05 (Split)	49.45
OJUM-06 (Open, long)	49.46
OJUME-06 (Open, long adjustable)	49.47
OJUM-06 LL (Open-floating)	49.48
FJUM-01 (Round flange)	49.49
FJUM-02 (Square flange)	49.50
FJUMT-01 (Round twin flange)	49.51
FJUMT-02 (Square twin flange)	49.52
RQA (Quad block-closed)	49.53
OQA (Quad block-closed)	49.53
RTA (Twin-closed)	49.54
OTA (Twin-open)	49.54
RGA (Closed-long)	49.55
OGA (Open-long)	49.55
RGAS (Closed-short)	49.56
OGAS (Open-short)	49.56
<b>Shafting - Metric</b>	
Overview	49.60
AWM (Aluminum)	49.61
AWUM (Aluminum supported)	49.61
SWM	49.62
SWUM/SWUMN	49.63
EWM/EEWM	49.64
EWMR/ EWMS	49.64
EWUM/EWUMN	49.65
WA (Shaft block)	49.66
WAC (Shaft block-compact)	49.66
WAS (Shaft block-narrow)	49.67
TA (Shaft support-moveable)	49.68
TAF (Shaft support-fixed)	49.68
<b>DryLin Drive Technology</b>	
System overview & properties	50.2
Application examples	50.4
Design	50.6
Technical Data	50.10
SAW	50.11
SLW	50.13
SLWE-BB (Ball bearing)	50.14
SLW (High Helix)	50.15
SLWE-PL (Preload)	50.16
SLW-XY	50.17
SLW-ES (Stainless)	50.18
SLW-XY (Stainless)	50.19
HTS (Basic)	50.20
HTS-PL (Adjustable clearance)	50.21
HTS-BB	50.22
HTSS (Fast pitch)	50.23
HTS-FF (Fast forward)	50.24
HTS-PL XY	50.25
HTSC (Compact)	50.26
HTS-HYD (Hygienic design)	50.27
HTSP (Small, low-cost)	50.28
HTSP	50.29
HTSP-FF (Fast forward)	50.30
SET (Easy tube)	50.31
<b>Drive Technology Accessories</b>	
Brackets	50.34
Position indicator	50.35
Rotary knob	50.36
Hand wheel	50.36
HTS-WT V-Drive	50.37
Spacer	50.38
Motor Flange	50.38
Coupling	50.38
<b>Belt Drive</b>	
Design	50.40
ZLW 0630	50.42
ZLW 1040	50.44
ZAW	50.46
<b>Belt Drive Accessories</b>	
Clamp	50.47
Slot Nuts	50.47
Screw connection	50.47
Motor flange	50.47
<b>Trapezoidal Lead Screw Nuts</b>	
Design	51.2
Application examples	51.3
Technical Data	51.4
PTGSG (Threaded spindle)	51.8
JSRM	51.10
JSLM	51.11
JFRM	51.12
JFLM	51.13
JSRM Anti backlash	51.14
WSRM	51.16
WSLM	51.17
WFRM	51.18
WFLM	51.19
PTGSG (High Helix)	51.20
JSRM (Round nut Hi-Helix)	51.21
JFRM/JFLM High Helix	51.22
JFRM Zero backlash	51.23
Lead screw nuts	51.24
Lead screw nuts axial locks	51.25
Split lead screw	51.26
Lead screw blocks	51.27
Quick release nuts	51.28
<b>DryLin® Stainless</b>	
DryLin® W double rail	52.3
DryLin® W block	52.3

# General Index

DryLin® W single rail . . . . .	52.4
DryLin® W block . . . . .	52.4
RJUM-01 . . . . .	52.5
EWM/EEWM Shafting . . . . .	52.6
EWMR/EWMS Shafting . . . . .	52.6
EWUM/EWUMN Shafting . . . . .	52.7
EWUM/EWUMS Supported shafting	52.8
SLW-ES (Stainless) . . . . .	52.9
HTSC-HYD (Hygienic design) . . . . .	52.10
SLW-XY (Stainless) . . . . .	52.11

## DryLin® Specialists

Overview . . . . .	33.2
WJRM . . . . .	53.3
Telescopic systems . . . . .	53.4
Measuring systems . . . . .	53.6
DryLin® Q Square guide . . . . .	52.5

## igubal® Design

System overview . . . . .	54.2
igubal® advantages . . . . .	54.4
Loads . . . . .	54.5
Coefficients of friction . . . . .	54.5
Temperatures . . . . .	54.5
Chemical resistance . . . . .	54.5
Radiation resistance . . . . .	54.6
UV resistance . . . . .	54.6
Mateial tables . . . . .	54.7

## igubal® Rod Ends

Overview . . . . .	55.2
Application examples . . . . .	55.3
Design . . . . .	55.4
KBRI/KBLI . . . . .	55.6
EBRI/EBLI . . . . .	55.7
KBRM/KBML . . . . .	55.8
KBRM CL . . . . .	55.10
KCRM/KCLM . . . . .	55.11
EBRM/EBLM . . . . .	55.12
EBRM/EBLM HT (High Temp) . . . . .	55.13
KARI/KALI . . . . .	55.14
KARM/KALM . . . . .	55.15
KARM CL . . . . .	55.16
EARM/EALM . . . . .	55.17
EARM/EALM HT (High Temp) . . . . .	55.18
PKRM (Adjusting bolt) . . . . .	55.19
WGRM/WGLM . . . . .	55.20
WGRM LC/WGLM LC . . . . .	55.21
AGRM/AGLM . . . . .	55.22
AGRM LC/AGLM LC . . . . .	55.22

## Clevis Joint

Overview . . . . .	56.2
Application examples . . . . .	56.3
Design . . . . .	56.4
GERI/GELI . . . . .	56.5
GERM/GELM . . . . .	56.6
GERIK/GELIK . . . . .	56.7
GERMK/GELMK . . . . .	56.8
GERMKE/GELMKE . . . . .	56.9
GEFM (Spring loaded pin) . . . . .	56.9
GERMF/GELMF . . . . .	56.10
GERMFE/GELMFE . . . . .	56.11
GBI/GBM (Clevis pin) . . . . .	56.12
GSR (Clevis clip) . . . . .	56.12

## igubal® Pillow Block

Overview . . . . .	57.2
Application examples . . . . .	57.3
Design . . . . .	57.4
KSTI . . . . .	57.6
KSTM . . . . .	57.7
ESTM . . . . .	57.8
AD-ESTM . . . . .	57.9
ESTM-GT . . . . .	57.10
ESTM SL . . . . .	57.11
KSTM-GT . . . . .	57.12

## igubal® Flange Bearing

Overview . . . . .	58.2
Application examples . . . . .	58.3
Design . . . . .	58.4
EFOI (Two bolt-inch) . . . . .	58.5
EFOM (Two bolt-metric) . . . . .	58.6
EFSI (Four bolt-inch) . . . . .	58.7
EFSM (Four bolt-metric) . . . . .	58.8
KFSM-GT . . . . .	58.9
EFOM HT (High temperature) . . . . .	58.10
EFSM HT (High temperature) . . . . .	58.11

## Pivoting Bearing

Overview . . . . .	59.2
Application examples . . . . .	59.3
Design . . . . .	59.4
KGLI . . . . .	59.5
KGLM . . . . .	59.6
EGLM . . . . .	59.7
KGLI SL . . . . .	59.8
KGLM SL (Slimline) . . . . .	59.9
KGLM LC (Low-cost) . . . . .	59.10

KGLM H (Split) . . . . .	59.11
ECLM (Clip) . . . . .	59.12
EGFM T . . . . .	59.13
ECLM HD (Clip-Heavy duty) . . . . .	59.14
EGZM (double joint) . . . . .	59.15
KDGM . . . . .	59.16
WDGM . . . . .	59.17
EGXM . . . . .	59.18
SAM . . . . .	59.19

## Spherical Balls

Overview . . . . .	60.2
Application examples . . . . .	60.3
Design . . . . .	60.4
WKI/WEI (L280 material-inch) . . . . .	60.5
WKM/WEM (L280 material, metric) . . . . .	60.5
REI/REM/RKM (R material, metric) . . . . .	60.6
XKM/XEM (T500 Material,metric) . . . . .	60.6
JKM/JEM (J material, metric) . . . . .	60.7
J4KM/J4EM (J4 material, metric) . . . . .	60.7
J4VEM (J4 material, clearance free) . . . . .	60.8
UWEM (UW material, metric) . . . . .	60.8

# North American Locations

**igus®**



## igus USA Headquarters

East Providence, RI  
PHONE: (888) 803-1895  
(401) 438-2200  
FAX: (401) 438-7680

## North American District Offices



### igus CANADA

Concord, Ontario  
PHONE: (800) 965-2496  
(905) 760-8448  
FAX: (905) 760-8688

Blainville, Quebec  
PHONE: (405) 419-6506  
FAX: (405) 419-5742

Cochrane, AB  
PHONE: (403) 604-0627  
FAX: (403) 981-3294



### igus WISCONSIN

Sussex, WI  
PHONE: (888) 803-7235  
(262) 246-0682  
FAX: (262) 246-0689



### igus MEXICO

Nuevo Leon, Mexico  
PHONE/FAX: (818) 105-4276  
Toluca, Mexico  
PHONE: (722) 271-4273  
FAX: (722) 271-4274



### igus OREGON

Portland, OR  
PHONE: (888) 803-7237  
(503) 282-1952  
FAX: (503) 282-5976

Visit [www.igus.com](http://www.igus.com) for a complete list  
of our regional offices.

# igus® worldwide

## igus® offices

## igus® distributors

### USA

igus® inc.  
50 N. Broadway  
P.O. Box 14349  
East Providence, RI 02914  
Phone +1-401-438 22 00  
Fax +1-401-438 72 70  
webmaster@igus.com

### Germany

igus® GmbH  
Spicher Str. 1a  
51147 Köln (Porz-Lind)  
PO Box 90 61 23  
51172 Cologne  
Phone +49-22 03-96 49-0  
Fax +49-22 03-96 49-222  
info@igus.de, www.igus.de

### Australia

Treotham Automation Pty. Ltd.  
Unit 36, 9 Powells Road,  
Brookvale NSW 2100  
Phone +61-2-99 07 17 88  
Fax +61-2-99 07 17 88  
info@treotham.com.au

### Austria

igus® Polymer  
Innovationen GmbH  
Ott 55  
4843 Ampflwang  
Phone +43-76 75-40 05-0  
Fax +43-76 75-32 03  
igus-austria@igus.at

### Argentina

Borimport S.R.L.  
Guevara 275 (C1427BRE)-  
Capital Federal  
Buenos Aires, Argentina  
Phone/Fax +54-11-4556-1000  
igus@borimport.com

### Belgium

igus® B.V.B.A.  
Kolonel Begaultlaan 75  
3012 Wilsele  
Phone +32-16-31 44 31  
Fax +32-16-31 44 39  
info@igus.be

### Brazil

igus® do Brasil Ltda.  
Av. Eng. Alberto de Zagottis 655  
Santo Amaro  
04675-085 São Paulo - SP  
Phone +55-11-35 31 44 87  
Fax +55-11-35 31 44 88  
vendas@igus.com.br

### Bulgaria

Atlas Technik EOOD  
BG-1612 Sofia  
PK 51  
Phone +359-885-23 25 95  
+359-897-98 16 69  
Phone/Fax +359-2-859 7681  
al.popoff@techno-link.com

### Bulgaria

Hennlich OOD, BG  
4000 Plovdiv  
Konstantin Velichkov, 69, Et. 3  
Phone +359-32-511 326  
Phone/Fax +359-32-621 929  
office@hennlich.bg

### Canada

igus® Office Canada  
201 Millway Ave. Unit 25  
Concord  
Ontario L4K 5K8  
Phone +1-905-760 84 48  
Fax +1-905-760 86 88  
webmaster@igus.com

### China

igus® Shanghai Co., Ltd  
No 28 Jiatai Road,  
Waigaoqiao Free Trade Zone  
Shanghai 200021, P.R.C  
Phone +86-21-51 30 31 00  
Fax +86-21-51 30 32 00  
master@igus.com.cn

### China South

igus® China Guangzhou office  
Room 2306, West Tower,  
Yangcheng International Commercial  
Center, Tiyu, East Road,  
Guangzhou 510620, P.R.C  
Phone +86-20-38 87 17 26  
Fax +86-20-38 87 17 68  
guangzhou@igus.com.cn

### Croatia

Hennlich, Industrijska d.o.o.  
Franje Wölfla 4  
10000 Zagreb  
Phone +385-1-387 43 34  
Fax +385-1-387 43 36  
hennlich@hennlich.hr

### Czech Republic

Hennlich Industrietechnik spol. s r.o.  
o.z. Lin-tech  
Českolipská 9  
41201 Litoměřice  
Chains +420-416-71 13 32  
Bearings +420-416-71 13 39  
Fax +420-416-71 19 99  
lin-tech@hennlich.cz

### Denmark

igus® ApS  
Postboks 243  
8800 Viborg  
Phone +45-86-60 33 73  
Fax +45-86-60 32 73  
info@igus.dk

### Denmark – E-Chains®

Solar AS  
Industrievest 43  
6600 Vejen  
Phone +45-76-96 12 00  
Fax +45-75-36 47 59  
solar@solar.dk

### Finland – E-Chains®

SKS-mekaniikka Oy  
Martinkyläntie 50  
01720 Vantaa  
Phone +358-9-85 26 61  
Fax +358-9-85 26 824  
mekaniikka@skks.fi

### Finland – Chainflex®

SKS-automatio Oy  
Martinkyläntie 50  
01720 Vantaa  
Phone +358-9-85 26 61  
Fax +358-9-85 26 820  
automaatio@skks.fi

### France

igus® SARL  
49, avenue des Pépinières  
Parc Médicis  
94832 Fresnes Cedex  
Phone +33-1-49 84 04 04  
Fax +33-1-49 84 03 94  
info@igus.fr

### Greece – Energy Chains®

Chrismotor s.a.  
71, Sp. Patsi str.  
118 55 Athens  
Phone +30-210-34 25 574  
Fax +30-210-34 25 595  
info@chrismotor.gr

### Greece - iglide® Bearings

J. & E. Papadopoulos S.A.  
23, Retsina Street  
185 45 Piraeus  
Phone +30-210-411 31 33  
Fax +30-210-411 6781  
sales@papadopoulos-sa.com

### Hong Kong

Sky Top Enterprises Ltd  
Room 1707, Block C; Wah Tat Ind  
Centre; Wah Sing Street; Kwai  
Chung; Hong Kong  
Phone +852-22 43 42 78  
Fax +852-22 43 42 79  
skytop@ctimail.com

### Hungary

igus® Hungária Kft.  
Mogyoródi u.32.  
1149 Budapest  
Phone +36-1-306-64 86  
Fax +36-1-431-03 74  
info@igus.hu

### Hungary

Tech-Con Kft.  
Véső utca 9-11  
1133 Budapest  
Phone +36-1-412 41 61  
Fax +36-1-412 41 71  
tech-con@tech-con.hu

### India

igus (India) Pvt. Ltd.  
# 199/1, 22 nd Main  
HSR Layout, Agara,  
Bangalore - 560 048  
Phone +91-80-2572 71 06  
Fax +91-80-2572 71 08  
sales-india@igus.de

### Indonesia

Pt. Energi Canggih Indonesia  
Kelapa Gading Selatan  
BJ 08 / 14 Gading Serpong  
Tangerang 15810  
Phone +62-21-547 43 64  
Fax +62-21-547 43 65  
jakarta@energicanggih.com

### Iran

Tameen Ehtijat Fani Tehran  
(TAF CO.)

72, Iranshahr Ave., Unit 5  
15816 Tehran, Iran  
Phone +98-21-8831 78 51  
Fax +98-21-8882 02 68  
info@taf.co.com

### Israel

Conlog LTD  
P.O. Box 35 71  
Petach Tikva 49134  
Phone +972-3-926 95 95  
Fax +972-3-923 33 67  
conlog@conlog.co.il

### Italy

igus® S.r.l.  
Via delle Rovedine, 4  
23899 Robbiate (LC)  
Phone +39-039 5906.1  
Fax +39-039 5906.222  
igusitalia@igus.it

### Japan

igus® k.k.  
Arcarcental 7F, 1-2-1 Kinshi,  
Sumida-ku Tokyo JAPAN, 130-  
0013  
Phone +81 3 58 19 20 30  
Fax +81 3 58 19 20 55  
info@igus.co.jp

### Malaysia

Automation Industry & Systems  
(M) SDN.BHD.  
50, Lorong Nagasari 11,  
Taman Nagasari, 13600 Prai, Penang  
Phone +60-4-390 56 07  
Fax +60-4-399 73 27  
autoind@po.jaring.my

### Mexico

igus® México S. de R.L. de C.V.  
Av. Tecnológico 496 Nte  
Col. Agrícola-Bellavista  
52149 Toluca  
Phone +52-72-27 14 273  
Fax +52-722-27 14 274  
fmarquez@igus.com

### 27 Netherlands

igus® Nederland  
Sterrenbergweg 9  
3769 BS Soesterberg  
Phone +31-346-35 39 32  
Fax +31-346-35 38 49  
igus.nl@igus.de

### Netherlands – Bearings

Elcee Holland BV  
Kamerlingh Onnesweg 28  
NL-3316 GL Dordrecht  
Phone +31-78-654 47 77  
Fax +31-78-654 47 33  
info@elcee.nl

### New Zealand

Automation Equipment Ltd.  
PO. Box 5656 Frankton  
45 Colombo Street  
Frankton, Hamilton  
Phone +64-7-847 20 82  
Fax +64-7-847 71 60  
sales@autoequip.co.nz

### Norway / Iceland

ASI Automatikk AS  
Ingv. Ludvigsensgate 23  
3007 Drammen  
Phone +47-32-82 92 90  
Fax +47-32-82 92 98  
info@asiautomatikk.no

### Poland

igus® Sp z.o.o.  
ul. Parowcowa 10 b  
02-445 Warszawa  
Phone +48-22-863 57 70  
Fax +48-22-863 61 69  
igus.pl@igus.com.pl

### Portugal

igus® Lda.  
R. Eng. Ezequiel Campos, 239  
410012 Porto  
Phone +351-22-610 90 00  
Fax +351-22-832 83 21  
info@igus.pt

### Romania

TechCon Industry SRL  
Calea Crangasi nr. 60  
Bucuresti 060346  
Phone +40-21-2219-640  
Fax +40-21-2219-766  
automatizari@meteoro.ro

### Romania

Hennlich S.R.L.  
Str. Patria, Nr17  
310106 Arad  
Phone +40-257-21 10 19  
Fax +40-257-21 10 21  
stein@hennlich.ro

### Russia

Eka-Service Kompani  
1-aja Dubrowskaja, 2A, k. 35  
109044 Moskva  
Phone +7-495-632 66 23  
Fax +7-495-677 17 78  
info@ekaservice.ru

### Serbia

Hennlich doo Beograd  
Uli. S. Markovica 3/4  
11400 Mladenovac  
Phone +381-11 82 36 002  
Fax +381 11 23 17 815  
office@hennlich.rs

### Singapore – HQ ASEAN

igus® Singapore Pte Ltd.  
15 Shaw Road, #03-02 Singapore  
367953  
Phone +65-64 87 14 11  
Fax +65-64 87 15 11

Malaysia-Hotline +60-12-709 30 41  
Thailand-Hotline +66-9-160 73 69  
asia-sales@igus.de

### Slovakia

Hennlich Industrietechnik s.r.o.  
Košická 52  
821 08 Bratislava

Phone +421-2-50 20 43 08  
Fax +421-2-50 20 43 11  
technik@hennlich.sk

### Slovenia

Hennlich, d.o.o.  
Industrijska tehnika  
Podnart 33  
SI-4244 Podnart

Phone +386-4-532 06 10  
Fax +386-4-532 06 20  
info@hennlich.si

### South Africa

igus® Pty. Ltd.  
Unit 14, Heron Park  
80 Corobrik Road  
PO Box 4214  
4017 Riverhorse Valley  
Phone +27-31-569 6633  
Fax +27-31-569 6636  
sales.sa@igus.de

### South Korea

igus® Korea Co. Ltd.  
25BL 13LT Namdong Ind. Complex  
446-11 Nonhyundong, Namdonggu  
Incheon City, 405-300  
Phone +82-32-821 29 11  
Fax +82-32-821 29 13  
sales-korea@igus.de

### Spain

igus® S.L.  
C/ Llobatona, 6  
Polígono Noi del Sucre  
08840 Viladecans - Barcelona  
Phone +34-93-647 39 50  
Fax +34-93-647 39 51  
igus.es@igus.es

### Sweden

igus® ab  
Knut Pål's väg 8  
256 91 Helsingborg  
Phone +46-42-32 92 70  
Fax +46-42-21 15 85  
info@igusab.se

### Sweden – Energy Chains®

OEM Automatic AB  
Box 1011 Dalagatan 4  
573 28 Tranås  
Phone +46-75-2424100  
Fax +46-75-2424159  
info@aut.oem.se

### Sweden – iglide® Bearings

incl. DryLin®  
Colly Components AB  
P.O. Box 76  
164 94 Kista  
Phone +46-8-7030100  
Fax +46-8-7039841  
info@me.colly.se

### Switzerland

igus® Schweiz GmbH  
Industriestr. 11  
4623 Neuendorf  
Phone +41-62-38 89 797  
Fax +41-62-38 89 799  
info.ch@igus.ch

### Taiwan

igus® Taiwan Company Limited  
2F, No 82, 32nd Road  
Taichung Industrial Park  
40768 Taichung  
Phone +886-4-23 58-1000  
Fax +886-4-23 58-1100  
igus-taiwan@igus.com.tw

### Thailand

Autoflexible Engineering Co., Ltd.  
111 Soi, Sukhumvit, 62/1  
Bangjak, Phakanong  
Bangkok 10260  
Phone +66-2-3112 21 11  
Fax +66-2-332 79 00  
kwanchai@autoflexible.com

### Turkey

HIDREL Hidrolik Elemanlar  
Sanayi ve Ticaret A.S.

Perçemli Sk. No. 7  
Tünel Mevkii

80000 Karaköy / İstanbul

Phone +90-212-249 48 81

Fax +90-212-292 08 50

info@hidrel.com.tr

### United Kingdom

igus® UK Ltd.

51A Caswell Road

Brackmills

Northampton NN4 7PW

Phone +44-1604-67 72 40

Fax Chain +44-01604 67 72 42

Fax Bearing +44-01604 67 72 45

sales\_uk@igus.co.uk

### Ukraine

Cominpro Ltd.

Romena Rollana 12, Office 220


61058 Kharkov

Phone +38-057 717 49 14

Fax +38-057 717 49 14

cominpro@gmail.com

# Also From igus®

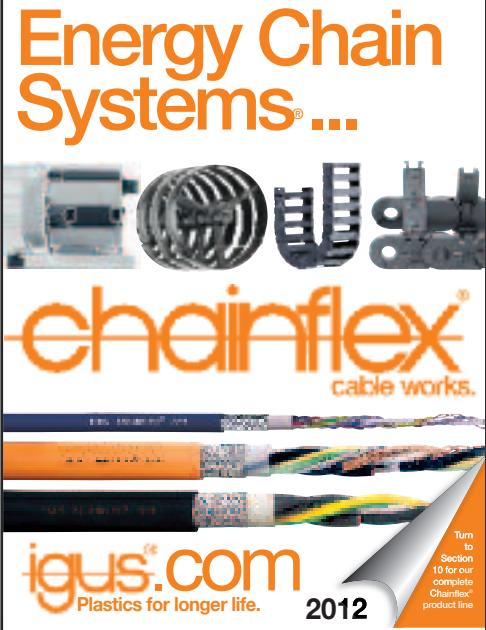

The Energy Chain Systems® catalog features hundreds of all-plastic Energy Chain®/Tube cable carriers for guidance and protection of automated cables and hoses. The complete line of Chainflex® continuous-flex cables, and a broad range of strain relief, mounting brackets, shelving and separation accessories are also included.

## IN THE USA:

P.O. Box 14349  
East Providence, RI 02914  
Customer Service/Sales  
Tel.: 1-888-803-1895  
Fax: 1-401-438-7680

## IN CANADA:

201 Millway Avenue, Units 24 & 25  
Concord, Ontario  
Canada L4K 5K8  
Tel.: 1-800-965-2496  
Fax: 1-905-760-8688

## IN MEXICO

igus Mexico S. de R.L. de C.V.  
Col. Corredor Industrial Toluca Lerma  
Lerma, Estado de Mexico C.P.  
Tel.: (52) 728-284-3185  
Fax: (52) 728-284-3187

**Website:** [www.igus.com](http://www.igus.com)  
**email:** [sales@igus.com](mailto:sales@igus.com)

Or Refer to Your Local Sales Office  
Listed on the Last Two Pages of this Catalog



**ISO 9001:2008  
Certified**